

Search

Advance Search

01

COMPANY

02

PRODUCTS

03

NEWS

04

MEMBERSHIP

05

M.O.P.S


06

INQUIRY BASKET

07

CONTACT US

HOME

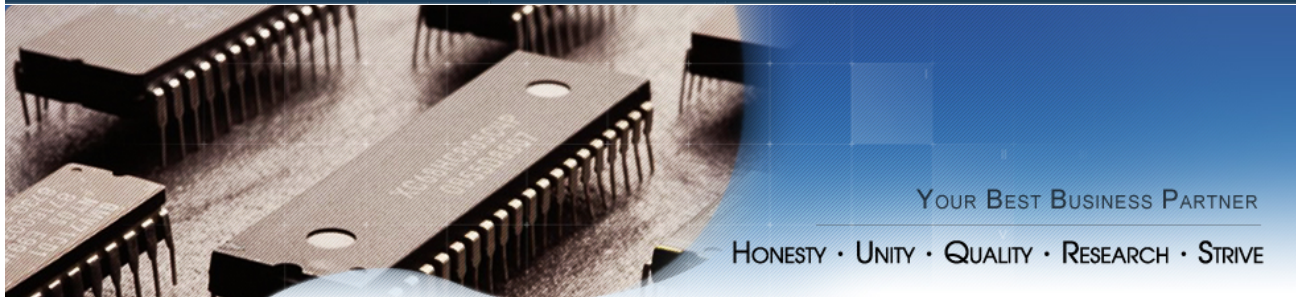

Product List

Products Information

Home > Product Information > Electrical Terminals

Electrical Terminals

NON-INSULATED COPPER TERMINALS

- NON-INSULATED TERMINALS (NB SERIES)
- COPPER TUBULAR LUGS

INSULATED COPPER TERMINALS

- VINYL-INSULATED TERMINALS (V SERIES)
- VINYL-INSULATED(EASY ENTRY)TERMINALS (VE SERIES)
- VINYL-INSULATED(MOLDED EASY ENTRY)TERMINALS (VY SERIES)
- NYLON-INSULATED TERMINALS (NY SERIES)
- PC-INSULATED TERMINALS (NI SERIES)
- VINYL-INSULATED DOUBLE CRIMP DISCONNECTORS TERMINALS (D SERIES)
- NYLON-INSULATED DOUBLE CRIMP DISCONNECTORS TERMINALS(NYD SERIES)
- INSULATED COPPER TUBULAR LUGS

INSULATED QUICK DISCONNECTORS

- VINYL-INSULATED DISCONNECTORS (V SERIES)
- NYLON-INSULATED DISCONNECTORS (NY SERIES)
- PC-INSULATED DISCONNECTORS (NI SERIES)
- VINYL-INSULATED DOUBLE CRIMP TERMINALS (D SERIES)
- NYLON-INSULATED DOUBLE CRIMP TERMINALS (NYD SERIES)
- PC-INSULATED DOUBLE CRIMP DISCONNECTORS (NID SERIES)
- VINYL-INSULATED (MOLDED EASY ENTRY) DOUBLE CRIMP DISCONNECTORS (VYDX SERIES)
- NYLON-INSULATED DOUBLE CRIMP DISCONNECTORS (NYDX SERIES)
- PC-INSULATED DOUBLE CRIMP DISCONNECTORS TERMINALS (NIDX SERIES)

INSULATED COPPER TERMINALS

Product overview

Barrel types


Terminals type

Wire range

Stud size

INSULATED COPPER TERMINALS VINYL-INSULATED TERMINALS (V SERIES)

VINYL-INSULATED RING TERMINALS

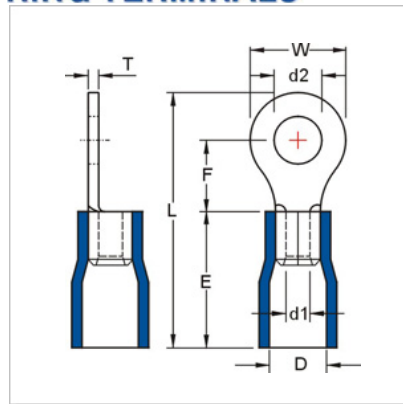

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10	8	6	4	2
AMP.	9	12	17	18	30	35	50	70	95	125	170

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL

INSULATION COLOR:

22-16A.W.G.: RED	16-14A.W.G.: BLUE
14-12A.W.G.: BLACK	12-10A.W.G.: YELLOW
8A.W.G.: RED	6A.W.G.: BLUE
4A.W.G.: YELLOW	2A.W.G.: RED

TERMINAL MATERIAL: COPPER

Add_To_Inquiry

Send_Inquiry


Product in the inquiry

Product List (Total: 118 records)

Data Source Page NO. : P.91, P.92, P.92-1,

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch(mm)								Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	d2	W	F	L	E	D	d1	T			
22-16 A.W.G.	☐ RVB1-2.5 New	☐ RV1-2.5	#2	0.095 2.4	0.217 5.5	0.189 4.8	0.693 17.6	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000	
	☐ RVB1-3.2	☐ RV1-3.2	#4									1000	

[illegible]



12-10 A.W.G.	☐ RVB5-3.7	☐ RV5-3.7	#6	0.146	0.283	0.24	0.894	0.512	0.252	0.134	0.039	500
				3.7	7.2	6.1	22.7	13	6.400	3.4	1	
	☐ RVBL5-3.7 NEW	☐ RVL5.3.7	#6	0.146	0.283	0.327	0.894	0.512	0.252	0.134	0.039	500
				3.7	7.2	8.3	22.7	13	6.400	3.4	1	
	☐ RVBS5-4	☐ RVS5-4	#8	0.169	0.283	0.24	0.894	0.512	0.252	0.134	0.039	500
				4.3	7.2	6.1	22.7	13	6.400	3.4	1	
	☐ RVBL5-4	☐ RVL5-4	#8	0.169	0.374	0.327	1.024	0.512	0.252	0.134	0.039	500
				4.3	9.5	8.3	26	13	6.400	3.4	1	
	☐ RVB5-4.7 NEW	☐ RV5-4.7	#8	0.185	0.374	0.356	1.047	0.512	0.252	0.134	0.039	500
				4.7	9.5	9.05	26.6	13	6.400	3.4	1	
4-6 mm ²	☐ RVB5-5	☐ RV5-5	#10	0.209	0.374	0.327	1.024	0.512	0.252	0.134	0.039	500
				5.3	9.5	8.3	26	13	6.400	3.4	1	
	☐ RVBL5-5 NEW	☐ RVL5-5	#10	0.209	0.488	0.496	1.252	0.512	0.252	0.134	0.039	500
				5.3	12.4	12.6	31.8	13	6.400	3.4	1	
	☐ RVB5-6	☐ RV5-6	1/4	0.252	0.472	0.413	1.161	0.512	0.252	0.134	0.039	500
				6.4	12	10.5	29.5	13	6.400	3.4	1	
	☐ RVBM5-6	☐ RVM5-6	1/4	0.252	0.472	0.512	1.26	0.512	0.252	0.134	0.039	500
				6.4	12	13	32	13	6.400	3.4	1	
	☐ RVB5-7 NEW	☐ RV5-7	5/16	0.291	0.472	0.413	1.154	0.512	0.252	0.134	0.039	500
				7.4	12	10.5	29.3	13	6.400	3.4	1	
	☐ RVB5-8	☐ RV5-8	5/16	0.331	0.591	0.524	1.339	0.512	0.252	0.134	0.039	500
				8.4	15	13.3	34	13	6.400	3.4	1	
	☐ RVB5-10	☐ RV5-10	3/8	0.413	0.591	0.524	1.339	0.512	0.252	0.134	0.039	500
				10.5	15	13.3	34	13	6.400	3.4	1	
	☐ RVB5-11 NEW	☐ RV5-11	7/16	0.453	0.756	0.63	1.52	0.512	0.252	0.134	0.039	500
				11.5	19.2	16	38.6	13	6.400	3.4	1	
	☐ RVB5-12	☐ RV5-12	1/2	0.512	0.756	0.63	1.52	0.512	0.252	0.134	0.039	500
				13	19.2	16	38.6	13	6.400	3.4	1	
	☐ RVB5-14	☐ RV5-14	9/16	0.591	1.26	0.992	2.134	0.512	0.252	0.134	0.039	500
				15	32	25.2	54.2	13	6.400	3.4	1	
	☐ RVB5-16	☐ RV5-16	5/8	0.669	1.26	0.992	2.134	0.512	0.252	0.134	0.039	500
				17	32	25.2	54.2	13	6.400	3.4	1	
	☐ RVB5-20	☐ RV5-20	3/4	0.827	1.26	0.992	2.134	0.512	0.252	0.134	0.039	500
				21	32	25.2	54.2	13	6.400	3.4	1	
	☐ RVB8-3.7 NEW	☐	#6	0.146	0.315	0.366	1.181	0.657	0.335	0.177	0.047	500
				3.7	8	9.3	30	16.7	8.500	4.5	1.2	
	☐ RVBS8-4 NEW	☐	#8	0.169	0.315	0.366	1.181	0.657	0.335	0.177	0.047	500
				4.3	8	9.3	30	16.7	8.500	4.5	1.2	
	☐ RVBL8-4 NEW	☐	#8	0.169	0.472	0.366	1.26	0.657	0.335	0.177	0.047	500
				4.3	12	9.3	32	16.7	8.500	4.5	1.2	
8 A.W.G.	☐ RVBS8-5 NEW	☐	#10	0.209	0.346	0.429	1.244	0.657	0.335	0.177	0.047	500
				5.3	8.8	10.5	31.6	16.7	8.500	4.5	1.2	
	☐ RVBM8-5 NEW	☐	#10	0.209	0.427	0.366	1.26	0.657	0.335	0.177	0.047	500
				5.3	12	9.3	32	16.7	8.500	4.5	1.2	
	☐ RVBL8-5 NEW	☐	#10	0.209	0.591	0.543	1.496	0.657	0.335	0.177	0.047	500
				5.3	15	13.8	38	16.7	8.500	4.5	1.2	
	☐ RVBS8-6 NEW	☐	1/4	0.252	0.472	0.366	1.24	0.657	0.335	0.177	0.047	500
				6.4	12	9.3	31.5	16.7	8.500	4.5	1.2	
	☐ RVBL8-6 NEW	☐	1/4	0.252	0.591	0.535	1.496	0.657	0.335	0.177	0.047	500
				6.4	15	13.6	38	16.7	8.500	4.5	1.2	
8 mm ²	☐ RVB8-8 NEW	☐	5/16	0.331	0.591	0.535	1.496	0.657	0.335	0.177	0.047	500
				8.4	15	13.6	38	16.7	8.500	4.5	1.2	
	☐ RVB8-10 NEW	☐	3/8	0.413	0.591	0.535	1.496	0.657	0.335	0.177	0.047	500
				10.5	15	13.6	38	16.7	8.500	4.5	1.2	
	☐ RVB8-11 NEW	☐	7/16	0.453	0.787	0.591	1.642	0.657	0.335	0.177	0.047	500
				11.5	20	15	41.7	16.7	8.500	4.5	1.2	
	☐ RVB8-12 NEW	☐	1/2	0.512	0.787	0.591	1.642	0.657	0.335	0.177	0.047	500
				13	20	15	41.7	16.7	8.500	4.5	1.2	
	☐ RVB8-14 NEW	☐	9/16	0.591	1.244	1.008	2.272	0.657	0.335	0.177	0.047	500
				15	31.6	25.6	57.7	16.7	8.500	4.5	1.2	
	☐ RVB8-16 NEW	☐	5/8	0.669	1.244	1.008	2.272	0.657	0.335	0.177	0.047	500
6 A.W.G.				17	31.6	25.6	57.7	16.7	8.500	4.5	1.2	
	☐ RVB8-18 NEW	☐	11/16	0.748	1.244	1.008	2.272	0.657	0.335	0.177	0.047	500
				19	31.6	25.6	57.7	16.7	8.500	4.5	1.2	
	☐ RVB8-20 NEW	☐	3/4	0.827	1.244	1.008	2.272	0.657	0.335	0.177	0.047	500
				21	31.6	25.6	57.7	16.7	8.500	4.5	1.2	
	☐ RVB14-4 NEW	☐	#8	0.169	0.472	0.524	1.646	0.886	0.413	0.228	0.059	250
				4.3	12	13.3	41.8	22.5	10.500	5.8	1.5	
	☐ RVB14-5 NEW	☐	#10	0.209	0.472	0.524	1.646	0.886	0.413	0.228	0.059	250
				5.3	12	13.3	41.8	22.5	10.500	5.8	1.5	
	☐ RVBS14-6 NEW	☐	1/4	0.252	0.472	0.524	1.646	0.886	0.413	0.228	0.059	250
14 mm ²				6.4	12	13.3	41.8	22.5	10.500	5.8	1.5	
	☐ RVBL14-6 NEW	☐	1/4	0.252	0.63	0.559	1.752	0.886	0.413	0.228	0.059	250
				6.4	16	14.2	44.5	22.5	10.500	5.8	1.5	
	☐ RVB14-6 NEW	☐	5/16	0.331	0.63	0.559	1.752	0.886	0.413	0.228	0.059	250
				8.4	16	14.2	44.5	22.5	10.500	5.8	1.5	
	☐ RVB14-10 NEW	☐	3/8	0.413	0.63	0.559	1.752	0.886	0.413	0.228	0.059	250
				10.5	16	14.2	44.5	22.5	10.500	5.8	1.5	
	☐ RVB14-11 NEW	☐	7/16	0.453	0.886	0.78	2.087	0.886	0.413	0.228	0.059	250
				11.5	22	19.8	53	22.5	10.500	5.8	1.5	
	☐ RVB14-12 NEW	☐	1/2	0.512	0.886	0.78	2.087	0.886	0.413	0.228	0.059	250
				13	22	19.8	53	22.5	10.500	5.8	1.5	

4 A.W.G 22 mm ²	☐	RVB14-14	NEW	☐	9/16	0.591	1.244	0.966	2.48	0.886	0.413	0.228	0.059	250
	☐	RVB14-16	NEW	☐	5/8	0.669	1.244	0.966	2.48	0.886	0.413	0.228	0.059	250
	☐	RVB14-18	NEW	☐	11/16	0.748	1.244	0.966	2.48	0.886	0.413	0.228	0.059	250
	☐	RVB14-20	NEW	☐	3/4	0.827	1.244	0.966	2.48	0.886	0.413	0.228	0.059	250
	☐	RVB22-4	NEW	☐	#8	0.169	0.48	0.594	1.78	0.945	0.512	0.303	0.067	200
	☐	RVBS22-4	NEW	☐	#8	0.169	0.48	0.594	1.787	0.945	0.512	0.303	0.067	200
	☐	RVBS22-5	NEW	☐	#10	0.209	0.48	0.594	1.78	0.945	0.512	0.303	0.067	200
	☐	RVBL22-5	NEW	☐	#10	0.209	0.65	0.531	1.791	0.945	0.512	0.303	0.067	200
	☐	RVBS22-6	NEW	☐	1/4	0.252	0.48	0.594	1.772	0.945	0.512	0.303	0.067	200
	☐	RVBL22-6	NEW	☐	1/4	0.252	0.65	0.531	1.791	0.945	0.512	0.303	0.067	200
	☐	RVB22-8	NEW	☐	5/16	0.331	0.65	0.531	1.791	0.945	0.512	0.303	0.067	200
	☐	RVBS22-8	NEW	☐	5/16	0.331	0.48	0.594	1.787	0.945	0.512	0.303	0.067	200
	☐	RVB22-10	NEW	☐	3/8	0.413	0.65	0.531	1.799	0.945	0.512	0.303	0.067	200
	☐	RVBL22-10	NEW	☐	3/8	0.413	0.689	0.63	1.917	0.945	0.512	0.303	0.067	200
	☐	RVB22-11	NEW	☐	7/16	0.453	0.866	0.776	2.146	0.945	0.512	0.303	0.067	200
	☐	RVB22-12	NEW	☐	1/2	0.512	0.886	0.776	2.146	0.945	0.512	0.303	0.067	200
	☐	RVB22-14	NEW	☐	9/16	0.591	1.181	0.953	2.48	0.945	0.512	0.303	0.067	200
	☐	RVB22-16	NEW	☐	5/8	0.669	1.181	0.953	2.48	0.945	0.512	0.303	0.067	200
	☐	RVB22-18	NEW	☐	11/16	0.748	1.181	0.953	2.48	0.945	0.512	0.303	0.067	200
	☐	RVB22-20	NEW	☐	3/4	0.827	1.181	0.953	2.48	0.945	0.512	0.303	0.067	200
2 A.W.G 38 mm ²	☐	RVB38-5	NEW	☐	#10	0.209	0.602	0.685	2.047	1.063	0.571	0.37	0.071	100
	☐	RVBS38-6	NEW	☐	1/4	0.252	0.602	0.685	2.047	1.063	0.571	0.37	0.071	100
	☐	RVBL38-6	NEW	☐	1/4	0.252	0.886	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVBS38-8	NEW	☐	5/16	0.331	0.602	0.685	2.047	1.063	0.571	0.37	0.071	100
	☐	RVBL38-8	NEW	☐	5/16	0.331	0.866	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVBS38-10	NEW	☐	3/8	0.413	0.602	0.685	2.047	1.063	0.571	0.37	0.071	100
	☐	RVBL38-10	NEW	☐	3/8	0.413	0.866	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVB38-11	NEW	☐	7/16	0.453	0.866	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVB38-12	NEW	☐	1/2	0.512	0.866	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVB38-13	NEW	☐	9/16	0.551	0.866	0.697	2.193	1.063	0.571	0.37	0.071	100
	☐	RVB38-14	NEW	☐	9/16	0.591	1.181	0.917	2.559	1.063	0.571	0.37	0.071	100
	☐	RVB38-16	NEW	☐	5/8	0.669	1.181	0.917	2.559	1.063	0.571	0.37	0.071	100
	☐	RVB38-18	NEW	☐	11/16	0.748	1.181	0.917	2.559	1.063	0.571	0.37	0.071	100
	☐	RVB38-20	NEW	☐	3/4	0.827	1.181	0.917	2.559	1.063	0.571	0.37	0.071	100

Data Source Page NO. : P.91, P.92, P.92-1,

Add_To_Inquiry

Send_Inquiry

Product in the inquiry

TOP



Copyright © K.S.TERMINALS INC. 8,E.3RD ROAD CHANG PIN IND.PARK, HSIEN
SHI,CHANG HWA,TAIWAN,R.O.C.
TEL: 886-4-7582765 | FAX: 886-4-7582786 | E-MAIL: exp@ksterminals.com.tw



B2B Global-Trade , Global
Machine ,
Global Bicycle , Shopping
HiGo.

... sitemap

[Sitemap](#) [Automotive Connector](#) [Solar Connector](#) [Cord End Terminals](#) [Plastic Cable Tie](#)