







Global Manufacturing for Performance, Functionality and Quality



L-com.com | 800-343-1455

About L-com Global Connectivity

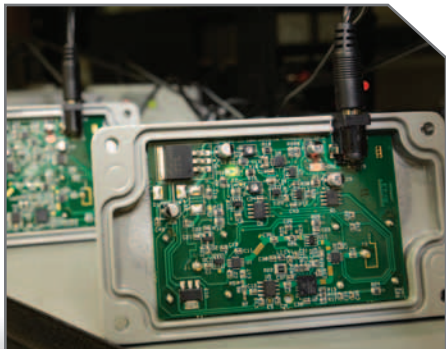

Trusted for over 30 years, L-com Global Connectivity®, a world leader in the manufacture of wired and wireless connectivity products, offers a wide range of solutions and unmatched customer service for the electronics and data communications industries.

The company's product portfolio includes cable assemblies, connectors, adapters, computer networking components, and custom products, as well as its HyperLink® line of wireless products featuring antennas, RF amplifiers, coaxial lightning and surge protectors, and NEMA-rated enclosures. L-com's HyperLink® wireless products are designed for WiFi, WiMAX, SCADA, 802.11a/b/g/n, RFID, and Bluetooth® applications. L-com's other brands include MilesTek®, specialists in military/aeronautics connectivity and Aiconics®, a leading manufacturer of electrical connector products.



Manufacturing Excellence

We manufacture L-com brand network products ourselves. It means that we control product designs, manufacturing processes, and quality control procedures. That's how you know your network components will do what you need them to do.

Product Highlights


**Dual Polarized
Flat Panel
Antennas**



**Cat5e
Ruggedized
Armored Cables**



**2.4 GHz Indoor
Amplifiers**



**D-Subminiature
Y Splitter/
Adapters**



**2-Port Gigabit
PoE Injector/
Midspan**



**USB Shielded Panel
Mount Coupler**



**HyperLink® Surge
Protectors**



**Mil/Aero/
MIL-STD-1553B
Components**



**Mil/Aero
Electrical
Interconnect Products**



**Ethernet Media
Converters**



**Weatherproof
Enclosures**



**Lightning
Protected Cable
Assemblies**



Look for these helpful icons throughout our catalog:



Online video
available



Helpful tip
available



Best selling
product



New product
added



Exclusive
product design
or feature



RoHS status information

listed online for every product @ L-com.com/RoHS

HyperLink, HyperAmp and HyperGain are registered trademarks of L-com, Inc. in the United States.

Online: L-com.com | Toll Free: 800-343-1455 | E-mail: sales@L-com.com | Fax: 978-689-9484

Online Technical Resources	4 - 5
Antennas	6 - 17
WLAN Amplifiers	18 - 21
Wireless CPE/ Access Points / Adapters	22 - 25
RF Filters / Splitters	26 - 27
Weatherproof Enclosures	28 - 33
Lightning Protectors	34 - 37
PoE Products	38 - 39
Telecom / Modular	40 - 79
D-Subminiature	80 - 103
USB	104 - 121
Firewire, DIN, SCSI, SATA, eSATA	122 - 127
IEEE-488 GPIB	128 - 133
Audio / Video	134 - 159
Coaxial	160 - 199
Fiber Optic	200 - 215
Mil/Aero/ MIL-STD-1553B	216 - 223
Mil/Aero Electrical Interconnect Products	224 - 225
Patch Panels, Racks	226 - 245
Ethernet Converters	246 - 249
Ethernet Switches	250 - 255
Security / Surveillance	256 - 259
Serial Products	260 - 263
Test Equipment	264 - 269
Terms and Conditions	270
Product Content / Index	271

Antennas pp. 6 - 17

- Wireless Antennas • Grid • Yagi • Omni • Patch
- Rubber Duck • Panel • Mobile Mount
- Array • Dish

**WLAN Amplifiers** pp. 18 - 21

- Indoor • Outdoor • 900 MHz • 2.4 GHz
- 5.8 GHz

**Wireless CPE / Access Points / Adapters** . . . pp. 22 - 25

- Access Points • Routers • WLAN Adapters

**RF Filters / Splitters** pp. 26 - 27

- Indoor • Outdoor • 900 MHz • 2.4 GHz • 3.5 GHz
- 4.9 GHz • 5.8 GHz • Diplexers

**Weatherproof Enclosures** . . . pp. 28 - 33

- Indoor • Outdoor • 120 VAC • 240 VAC • PoE
- 12 VDC

**Lightning Protectors** pp. 34 - 37

- Coaxial • Data Line • Audio System • Telephone
- Control Line • DSL • T1 • RS232/422/485

**Power over Ethernet** pp. 38 - 39

- Injectors • Splitters • Power Supplies • Hubs
- Taps

**Telecom / Modular** pp. 40 - 79


- Cable Assemblies • Modular Jacks • Wall Plates
- Adapters, Couplers, Splitters • Modular Plugs
- Bulk Cable • Tools

**D-Subminiature** pp. 80 - 103


- Cable Assemblies • Connectors • Bulk Cable
- Adapters, Couplers • Switch Boxes
- Cable Ties, Heat Shrink Tubing, Etc. • Tools

**USB** pp. 104 - 121

- Cable Assemblies • Connectors • Bulk Cable
- Switch Boxes • Adapters, Couplers, Splitters
- USB Hubs, Converters, Cards • USB Extenders

**Firewire, DIN, SCSI, SATA** pp. 122 - 127

- Firewire Hubs, Converters, Cards • SCSI Cables, Adapters, • SATA and eSATA Cable Assemblies
- DIN and Mini DIN Cable Assemblies, Connectors and Adapters

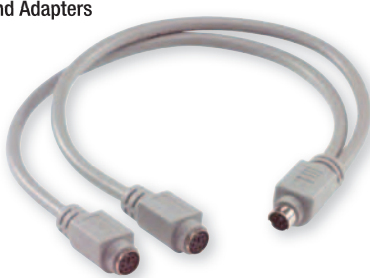**IEEE-488 GPIB** pp. 128 - 133

- Cable Assemblies • Connectors • Switch Boxes
- Adapters, Couplers • 19 Inch Rack Panels




Audio / Video pp. 134 - 159


- Cable Assemblies • Adapters, Couplers
- Connectors • Bulk Cable • Amplifiers
- KVM Switches • DVI/HDMI Extenders, Converters

**Coaxial** pp. 160 - 199


- Cable Assemblies • Connectors • Bulk Cable
- Adapters, Couplers • Baluns • Tools
- Terminators • Test Leads

**Fiber Optic** pp. 200 - 215

- Cable Assemblies • Connectors • Bulk Cable
- Adapters, Couplers • Attenuators • Tools
- Loopbacks • Fiber Termination Enclosures

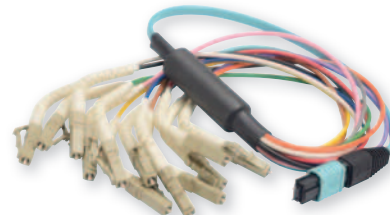**Mil/Aero/
MIL-STD-1553B** pp. 216 - 223

- MIL-STD-1553B Components • Complex Harness Manufacturing • Custom Cable Connectivity Solutions

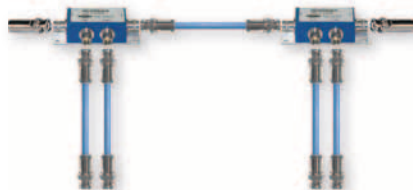**Mil/Aero Electrical Interconnect Products** pp. 224 - 225

- Connectors • Grommets • Electrical Pin and Socket Contacts • Crimping Tools • Connector Maintenance Tools

**Patch Panels, Racks** pp. 226 - 245

- Enclosures • Racks and Cabinets • Populated Rack Panels • Universal Series (Customizable) Rack Panels • Power Strips, Cords and Surge Protectors • UPS Systems

**Ethernet Converters** pp. 246 - 249

- Managed • Unmanaged • Standalone • Chassis Based • 10/100 • 10/100/1000

**Ethernet Switches** pp. 250 - 255


- Rack Mount • Desktop • Managed • Unmanaged
- 10/100 • 10/100/1000 • Fiber Optic Multi-way Switch Boxes

**Security / Surveillance** pp. 256 - 259

- Network Switch Boxes • IP Cameras
- Analog Cameras • Video Servers

**Serial Products** pp. 260 - 263

- Serial Converters • Fiber Optic Line Drivers
- Device Servers

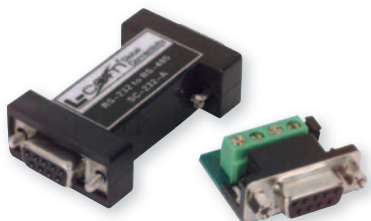**Test Equipment** pp. 264 - 269

- Coaxial • Telecom/Modular • D-Subminiature
- USB • Fiber Optic • Label Printers

**Don't Miss These Special Pages:**

- Terms & Conditions** p. 270
- Product Contents** p. 271
- Connector Chart** pp. 272 - 273

Online Technical Resources

Over 30 years in the wired and wireless connectivity business has given us the expertise to help you solve the tough problems. We offer free technical resources online to help you do your job. Choose from a host of tips, videos, white papers and tools designed to assist you in the planning, design and implementation of your communications network.


Connector Charts

L-com's connector reference charts help you find the exact connector you need. You may not know the name of every connector in the industry, but you know what you want. Compare our detailed images of widely used and not so common connectors to identify the connector you are looking for.

- Audio/Video Connectors
- Fiber Optic Connectors
- Telecom/Modular (Ethernet) Connectors
- Coaxial Connectors
- See more online at L-com.com
- D-Subminiature Connectors
- SATA, eSATA, Centronics, SCSI Connectors
- USB Connectors

Coaxial Connectors

Connector Description	Male	Female
Coaxial 1.6/5.6		
Coaxial BNC 50 Ohm		
Coaxial BNC 75 Ohm		

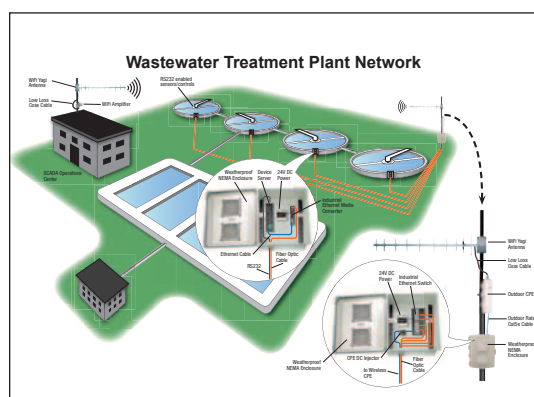

Application Overviews

L-com provides detailed application diagrams depicting common wired and wireless network applications to help you see how all of our products come together to provide a complete solution. Our application diagrams can be used for reference when planning new networks or when adding on to existing networks.

Wired

- Process Automation Network
- Wind Farm Network Application
- Wastewater Treatment Plant Network
- Manufacturing Network Application
- See more online at L-com.com

Wireless

- Campground Wireless Network
- RV Park Wireless Network
- Warehouse Wireless Network
- Marina Wireless Network

White Papers

L-com's white paper library consists of wired and wireless topics ranging from choosing the correct antenna for your application to a detailed overview on Industrial Ethernet. These informative white papers can help you decide which products will work best in your application as well as educate you on the principles of different technologies.


Wired

- Cabling Requirements for Harsh Environments
- Power-Over-Ethernet (PoE)
- Building an Ethernet Network
- Specialized Cabling for Military Applications
- See more online at L-com.com

Wireless

- Antenna Installation Considerations
- Industrial Wireless Mesh Network Architectures
- WiFi Antenna Installation Best Practices

Directional antennas, as the name implies, focus the wireless signal in a specific direction resulting in a limited coverage area. An analogy for the radiation pattern would be how a vehicle head light illuminates the road. Types of Directional antennas include Yagi, Parabolic grid, patch and panel antennas.

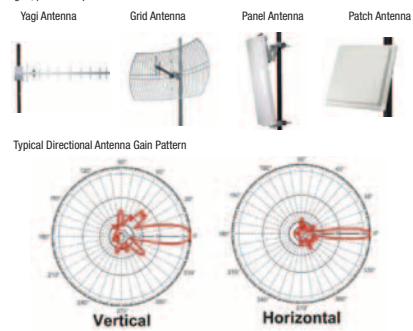

3 Watt to 25 Watt Amplifiers									
Output Power	Input	Connector	Model	Model Number	Model Number	Model Number	Model Number	Model Number	Model Number
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170
3 Watt	✓	✓	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170	Model 170

Product Matrix / Cross Reference Charts

L-com's product matrices and cross reference charts make finding products fast and easy. These easy to use tools are a great resource when trying to narrow down the right product for your application.

- Cable Assembly Cross Reference
- NEMA Enclosure Cross Reference
- Coaxial Adapter Locator
- RF Amplifier Cross Reference
- Surge Protector Cross Reference
- See more online at L-com.com

Technical Briefs and Articles


L-com's technical briefs and articles section is broken down by wired and wireless categories to help you find the information you need faster. Topics in this section range from detailed technical articles to concise application charts.

Wired

- Proper Grounding of Outdoor Lightning Protectors
- D-Subminiature Cable Application Guide
- USB Cable Selection Guide
- D-Sub Connection Technology Today

Wireless

- Designing and Deploying a Wireless Network
- What is a Distributed Antenna System
- Low-Loss Coax Cable Applications
- See more online at L-com.com

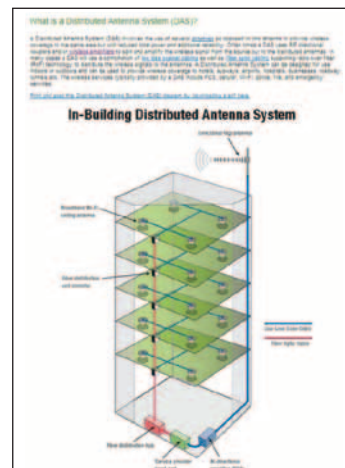

Product Wizards

Our intuitive product wizards lead you to the right product every time. Whether looking for a cable assembly, antenna or connector, our wizards can help. Simply choose from pre-loaded drop downs to find the product you are looking for.

- Connectors
- Antennas
- Enclosures
- RF Amplifiers
- Adapters
- Cable Assemblies
- Surge Protectors
- See more online at L-com.com

Connectors Product Wizard

Looking to terminate your own cable, but you're not sure the connector you need? L-com makes selecting the right connector easy. Follow just 2 steps below and we'll present the most likely connectors for you. Note: Product images are for representational purposes only.

Step 1

Please select the connector 1.

You have selected D-SUB DB15 FEMALE for Step 1

Continue to step 2 or [clear this selection](#)



Step 2

Please select the connector 2.

You have selected D-SUB DB15 MALE for Step 2

Continue to step 3 or [clear this selection](#)



How To Setup An Outdoor WiFi Booster (Video)



Tips, Tutorials and Videos

L-com's tips, tutorials and videos section includes informative how to videos and detailed technical overview tutorials to help you understand different wired and wireless technologies. Our full color tech tips provide insight on common installation and design techniques as well as answers to FAQs.

- Fiber Optic Tutorial
- Coaxial Cable Tutorial
- How to Setup an Indoor WiFi Booster Video
- USB Tutorial
- How to Mount D-Sub Adapters Video
- See more online at L-com.com



L-com Blog

We've created a place to interact with customers, colleagues, fellow techies and engineers just like you. Called "The Engineering Hub", L-com's official blog is the place to get insight, facts and trends on anything and everything wired and wireless. It includes tips, tutorials, and hot topics to keep you informed. We highlight technologies including USB, Ethernet, 802.11 wireless networks, Industrial Networking, Fiber Optics and more.

Join the conversation today at L-com.com/blog



What are Wireless Antennas?

Wireless antennas are the part of a radio communications system that radiate and/or collect radio frequency energy.

How are Wireless Antennas used?

Wireless antennas are typically connected via low loss coaxial cable either to an amplifier, splitter, filter or directly to a wireless access point or router. For outdoor applications wireless

antennas are often attached via mounting clamps to a mast or to the side of a building via mounting brackets. Wireless Antennas used indoors are typically ceiling mounted or sometimes mounted high up on a wall.

Where are Wireless Antennas used?

Wireless antennas are used in many environments and for many applications. Models for both indoor and outdoor use are available as well as specialty antennas such as Marine antennas used in nautical applications.

Wireless antennas are used in both commercial and military/government applications including

small office/home office (SOHO) networks, Enterprise (office) networks, supervisory control and data acquisition (SCADA) networks, homeland security, factory automation, mining, oil processing, wireless cafe "hotspots", energy management and control, police, fire and emergency services networks, radio frequency identification (RFID) applications and industrial science and medical (ISM) networks.

Wireless antennas are used in/on buildings, oil rigs, wind turbines, terrestrial vehicles, boats, aircraft and other mobile and stationary platforms.

There are two main types of WiFi antennas, Omni Directional and Directional





Omni Directional Antennas provide a 360° donut shaped radiation pattern to provide the widest possible signal coverage in indoor and outdoor wireless applications. An analogy for the radiation pattern would be how an un-shaded incandescent light bulb illuminates a room. Types of Omni Directional Antennas include "Rubber Duck" Antennas often found on access points and routers, Omni Antennas found outdoors and Antenna Arrays used on cellular towers.

Omni Directional Antennas

Outdoor Omni Antenna	Rubber Duck Antenna	Sectorial Antenna Array
		
Shown on page 9	Shown on page 14	Shown on page 15



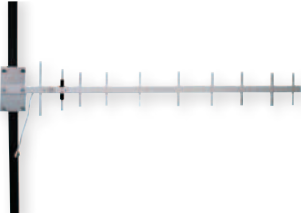









Directional antennas, as the name implies, focus the wireless signal in a specific direction resulting in a limited coverage area. An analogy for the radiation pattern would be how a vehicle head light illuminates the road. Types of Directional Antennas include Yagi, Parabolic Grid, Patch and Panel Antennas.

Directional Antennas

Yagi Antenna	Grid Antenna	Panel Antenna	Patch Antenna
			
Shown on page 10	Shown on page 8	Shown on page 15	Shown on page 12

A Critical Component for Every Wireless Application...

The selection of the correct antenna is paramount to achieving overall wireless system performance. L-com's HyperGain® antennas offer a wide range of frequencies, antenna styles, gain specifications and beamwidth coverage for your wireless system applications and needs. When performance is essential, select the best HyperGain® antenna to fit the application.




Antenna Styles / Characteristics							
Style	*Features	Style	*Features	Style	*Features	Style	*Features
GRID 	<ul style="list-style-type: none"> Die cast construction UV stable light gray powder coat finish Easy to assemble Rugged all weather operation 	RUBBER DUCK 	<ul style="list-style-type: none"> 360° coverage Tilt & swivel design Ideal for access points 	YAGI 	<ul style="list-style-type: none"> All weather operation Can be installed for either vertical or horizontal polarization 	MIMO 	<ul style="list-style-type: none"> Multi-band Broad-band MIMO configurations Dual polarity Spatial diversity
DISH 	<ul style="list-style-type: none"> UV stable polymer finish All weather operation Optional radomes 	ARRAYS 	<ul style="list-style-type: none"> 360° coverage Stainless steel construction All weather operation 	PANEL 	<ul style="list-style-type: none"> All weather operation Sector / directional coverage Mechanical down-tilt 	CEILING 	<ul style="list-style-type: none"> 360° coverage Indoor use Compact size, easy to mount MIMO configurations
OMNI 	<ul style="list-style-type: none"> 360° coverage Indoor & outdoor use Mobile applications Compact models available 	LOG PERIODIC 	<ul style="list-style-type: none"> Ideal for use with multiband access points and routers 2.3 GHz to 6.5 GHz Compact size - low profile 	MARINE 	<ul style="list-style-type: none"> 360° coverage Nautical environments All weather operation 	MOBILE MOUNT 	<ul style="list-style-type: none"> 360° coverage All weather operation

* Product features may vary. See individual antennas for differences.

Line of Site is Critical to the success of your wireless network

The path between two antennas is referred to as the Line of Sight. There are three main categories of Line of Sight, the first being full Line of Sight (LOS) where no obstacles reside between the two antennas, the next is called Near Line of Sight (nLOS) which includes partial obstructions such as tree tops between the two antennas and lastly Non Line of Sight (NLOS) where full obstructions exist between the two antennas. By determining the specific line of sight conditions in the WiFi network area you can then determine the correct type of wireless system to install.

The Fresnel Zone referenced in the diagrams below is an electromagnetic phenomenon, where light waves or radio signals get diffracted or bent from solid objects near their path. The radio waves reflecting off the objects may arrive out of phase with the signals that traveled directly to the receiving antenna thus reducing the power of the received signal.

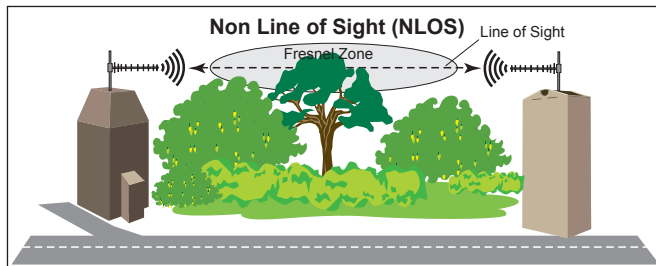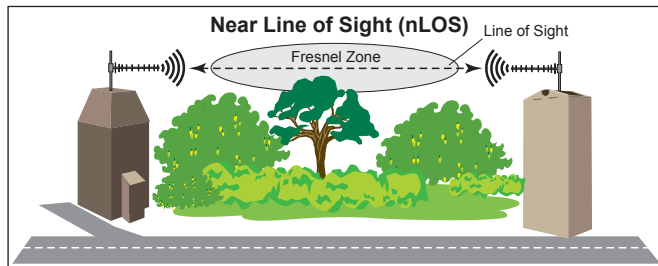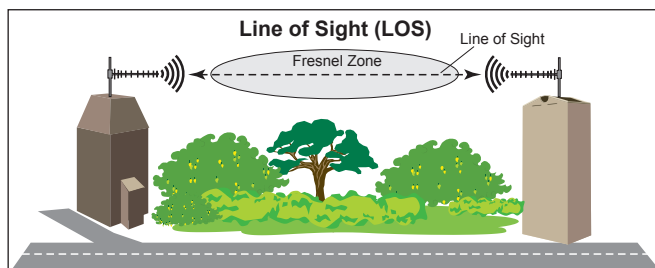

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

698-960/1710-2700 MHz Omnidirectional DAS Antennas

L-com's HyperLink® omnidirectional antennas for Distributed Antenna Systems (DAS) are used to distribute Cellular and WiFi signals throughout a building or area.

HG72704U	M	3/4 dBi with N Female Connector	46.75	43.01	39.27	CALL
HG72107U-PRO	A	4/7 dBi with N Female Connector	151.79	139.65	127.50	CALL

800-900 MHz Omnidirectional Antennas

HGV-903U	A	3 dBi, N Female Connector	57.15	53.72	50.29	CALL
HGV-906U	A	6 dBi, N Female Connector	64.43	60.56	56.70	CALL
HG906U-PRO	A	6 dBi, N Female Connector	98.75	90.85	82.95	CALL
HG908U-PRO	A	8 dBi, N Female Connector	145.55	133.91	122.26	CALL

1.9 GHz Omnidirectional Antenna

HG1911U-PRO	A	11 dBi, N Female Connector (available in 5-Pack)	87.31	80.33	73.34	CALL
-------------	---	--	-------	-------	-------	------

2.4 GHz Omnidirectional Antennas

HG2408U-NF	B	8 dBi, 12" (30.5cm) Pigtail with N Female Connector	77.95	71.71	65.48	CALL
HG2408U-NM	B	8 dBi, 12" (30.5cm) Pigtail with N Male Connector	77.95	71.71	65.48	CALL
HG2408U-RBP	B	8 dBi, 12" (30.5cm) Pigtail with RP-BNC Plug Connector	77.95	71.71	65.48	CALL
HG2408U-RSP	B	8 dBi, 12" (30.5cm) Pigtail with RP-SMA Plug Connector	77.95	71.71	65.48	CALL
HG2408U-RTP	B	8 dBi, 12" (30.5cm) Pigtail with RP-TNC Plug Connector	77.95	71.71	65.48	CALL
HGV-2402U	D	2 dBi, N Female Connector	37.39	35.15	32.90	CALL
HGV-2404U	D	4 dBi, N Female Connector	43.63	41.01	38.39	CALL
HGV-2406U	D	6 dBi, N Female Connector	50.91	47.86	44.80	CALL
HGV-2409U	D	8 dBi, N Female Connector	58.19	54.70	51.21	CALL
HG2405UP-NF	E	5 dBi, N Female Connector	39.47	37.10	34.73	CALL
HG2407UP-NF	E	7 dBi, N Female Connector	46.75	43.95	41.14	CALL
HG2409UP-NF	E	9 dBi, N Female Connector	54.03	50.79	47.55	CALL
HG2409U	A*	8.5 dBi, N Male Connector	58.19	54.70	51.21	CALL
HG2409UM-RSP	B*	8.5 dBi, Marine, 3ft (0.9m) Pigtail with RP-SMA Plug Connector	124.75	117.26	109.78	CALL
HG2409U-PRO	A*	9 dBi, N Female Connector (available in 5-Pack)	75.87	72.84	69.80	CALL
HG2409UDT-PRO	A	9 dBi, 7 Degree Electrical Down-Tilt, N Female Connector (available in 5-Pack)	81.07	77.83	74.58	CALL
HG2411UDT-PRO	A	11 dBi, 8 Degree Electrical Down-Tilt, N Female Connector (available in 5-Pack)	93.55	89.81	86.07	CALL
HG2412U-PRO	A	12 dBi, 12" (30.5cm) Pigtail w/ N Female Connector ANATEL Certified (available in 5-Pack)	116.43	111.77	107.12	CALL
HG2412UP-NF	E	12 dBi, N Female Connector	60.27	56.65	53.04	CALL
HG2415U-PRO	A	15 dBi, N Female Connector (available in 5-Pack)	129.95	122.15	114.36	CALL

* Similar to this style-see online Data Sheet for details.

2.4 GHz Dual Polarized Omnidirectional Antennas

HG2406DPU	G	6 dBi, Dual Polarity with (2) N Female Connectors, MIMO	129.99	119.59	109.19	CALL
HG2410DPU	G	10 dBi, Dual Polarity with (2) N Female Connectors, MIMO	192.35	176.96	161.57	CALL
HG2413DPU	G	13 dBi, Dual Polarity with (2) N Female Connectors, MIMO	259.95	239.15	218.36	CALL

2.4 GHz Horizontal Polarized Waveguide Omni Antennas

HG2409WU	F	9 dBi, Horizontal Waveguide Omni Antenna, N Female Connector	174.67	160.70	146.72	CALL
----------	---	--	--------	--------	--------	------

2.4-5.8 GHz Dual Band Omnidirectional Antennas

HG2458-06U-PRO	A	6 dBi, Dual Band Omni Antenna, N Female Connector (available in 5-Pack)	103.95	97.71	91.48	CALL
HG2458-09U-PRO	A	9 dBi, Dual Band Omni Antenna, N Female Connector (available in 5-Pack)	116.43	109.44	102.46	CALL
HGV-2458-03U	D	3 dBi, Dual Band, N Female Connector	39.47	37.10	34.73	CALL
HGV-2458-05U	D	5 dBi, Dual Band, N Female Connector	46.75	43.95	41.14	CALL
HGV-2458-07U	D	7 dBi, Dual Band, N Female Connector	54.03	50.79	47.55	CALL

2.6 GHz Omnidirectional Antenna

HG2609U	*	8.5 dBi, N Male Connector	69.63	64.06	58.49	CALL
---------	---	---------------------------	-------	-------	-------	------

* See online Data Sheet for style details.

3.5 GHz Omnidirectional Antennas

HG3509U-PRO	B	9 dBi, N Female Connector	93.55	86.07	78.58	CALL
HG3512UP-NF	B	11.5 dBi, N Female Connector	93.55	87.94	82.32	CALL

4.9-5.8 GHz Omnidirectional Antennas

HGV-4958-04U	D	4 dBi, N Female Connector	29.07	27.33	25.58	CALL
HGV-4958-06U	D	6 dBi, N Female Connector	40.51	38.08	35.65	CALL
HGV-4958-09U	D	9 dBi, N Female Connector	62.35	58.61	54.87	CALL
HGV-4958-12U	D	12 dBi, N Female Connector	81.07	76.21	71.34	CALL

5.1-5.8 GHz Omnidirectional Antennas

HG5158-06UP-NF	E	6 dBi, N Female Connector	51.95	47.79	43.64	CALL
HG5158-09UP-NF	E	8.5 dBi, N Female Connector	58.19	53.53	48.88	CALL

5.1-5.8 GHz Dual Polarized Omnidirectional Antennas

HG5158DP-10U	G	10 dBi, Dual Polarity with (2) N Female Connectors	145.55	136.82	128.08	CALL
HG5158DP-13U	G	13 dBi, Dual Polarity with (2) N Female Connectors	192.35	180.81	169.27	CALL

5.3-5.8 GHz Omnidirectional Antennas


HG5310U	C	5.3 GHz, 10 dBi, N Female Connector	83.15	78.16	73.17	CALL
HG5412U	C	5.4 GHz, 12 dBi, N Female Connector	93.55	89.81	86.07	CALL
HG5806U-PRO	A	5.8 GHz, 6 dBi, N Female Connector (available in 5-Pack)	75.87	72.84	69.80	CALL
HG5809U-PRO	A	5.8 GHz, 9 dBi, N Female Connector (available in 5-Pack)	87.31	83.82	80.33	CALL
HG5808U	C	5.8 GHz, 8 dBi, N Female Connector	82.11	78.83	75.54	CALL
HG5812U-PRO	A	5.8 GHz, 12 dBi, N Female Connector (available in 5-Pack)	98.75	94.80	90.85	CALL

5.8 GHz Omnidirectional Down-Tilt Antenna


HG5811UDT-PRO	A	11 dBi, 8 Degree Electrical Down-Tilt with N Female Connector	91.47	87.81	84.15	CALL
---------------	---	---	-------	-------	-------	------

5.8 GHz Omnidirectional Wireless LAN Antenna

HG5810U	E	10 dBi, Wireless LAN, N Female Connector	93.55	89.81	86.07	CALL
---------	---	--	-------	-------	-------	------

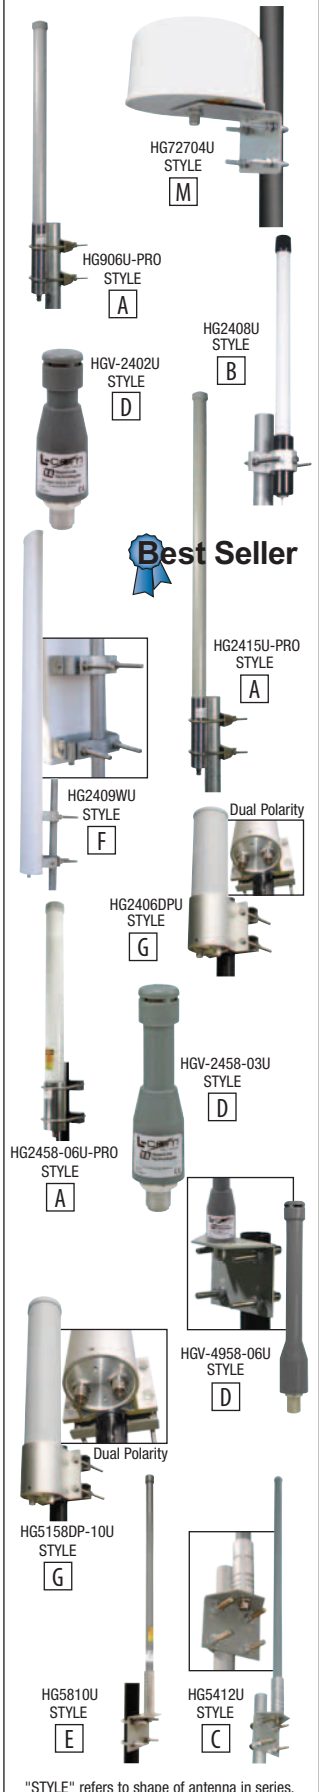

"STYLE" refers to shape of antenna in series.

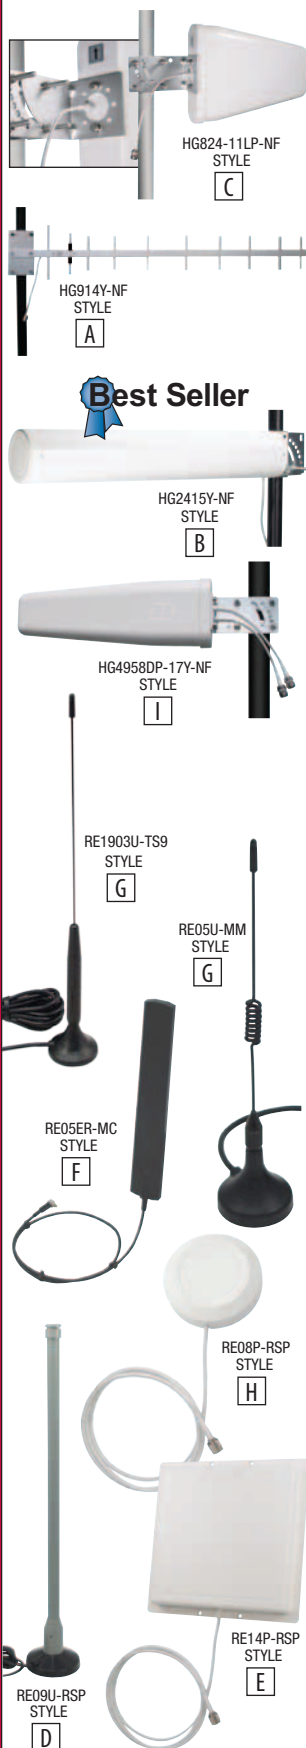

"STYLE" refers to shape of antenna in series.

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

HyperLink® Log Periodic Antennas

L-com's HyperLink® Log Periodic Antennas feature high gain with multi-band performance. The radome enclosed antennas are ideal for all weather operation.

800 MHz - 2.5 GHz Log Periodic DAS Antennas

HG824-09LP-NF	C	9 dBi, Radome Enclosed, Log Periodic, 12" (30.5cm) Pigtail with N Female Connector	62.35	57.36	52.37	CALL
HG824-11LP-NF	C	11 dBi, Radome Enclosed, Log Periodic, 12" (30.5cm) Pigtail with N Female Connector	67.55	62.15	56.74	CALL

2.4 - 5.8 GHz Log Periodic Antenna

HG2458-08LP-NF	C	8 dBi, Radome Enclosed, 9" (22.9cm) Pigtail with N Female Connector	75.87	69.80	63.73	CALL
----------------	---	---	-------	-------	-------	------

HyperLink® Yagi Antennas

HyperLink® offers both radome enclosed and non-radome enclosed long range directional Yagi antennas. These rugged antennas are ideal for all weather operation.

900 MHz Yagi Antennas

HG903YE-NF	A	3 dBi, Aluminum, 15" (38.1cm) Pigtail with N Female Connector	31.15	28.66	26.17	CALL
HG906YE-NF	A	6 dBi, Aluminum, 15" (38.1cm) Pigtail with N Female Connector	34.27	31.53	28.79	CALL
HG909YE-NF	A	9 dBi, Aluminum, 15" (38.1cm) Pigtail with N Female Connector	38.43	35.36	32.28	CALL
HG912YE-NF	A	12 dBi, Aluminum, 15" (38.1cm) Pigtail with N Female Connector	40.51	37.27	34.03	CALL
HG914YE-NF	A	14 dBi, Aluminum, 15" (38.1cm) Pigtail with N Female Connector	48.83	44.92	41.02	CALL
HG909Y-NF	A	9 dBi, Stainless Steel, 18" (45.7cm) Pigtail with N Female Connector	41.55	38.23	34.90	CALL
HG913Y-NF	A	13 dBi, Stainless Steel, 18" (45.7cm) Pigtail with N Female Connector	62.35	57.36	52.37	CALL
HG914Y-NF	A	14 dBi, Aluminum, 12" (30.5cm) Pigtail with N Female Connector	140.35	129.12	117.89	CALL

1.9 GHz Yagi Antenna

HG1912SY-NF	A	12 dBi, Stainless Steel, 7" (17.8cm) Pigtail with N Female Connector	51.95	47.79	43.64	CALL
-------------	---	--	-------	-------	-------	------

2.4 GHz Yagi Antennas

HG2409Y-NF	B	9 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Female Connector	51.95	47.79	43.64	CALL
HG2409Y-NM	B	9 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Male Connector	51.95	47.79	43.64	CALL
HG2412SY-NF	A	12 dBi, Stainless Steel, 7" (17.8cm) Pigtail with N Female Connector	51.95	47.79	43.64	CALL
HG2412Y-NF	B	12 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Female Connector	57.15	52.58	48.01	CALL
HG2412Y-NM	B	12 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Male Connector	57.15	52.58	48.01	CALL
HG2415Y-NF	B	14.5 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Female Connector	62.35	57.36	52.37	CALL
HG2415Y-NM	B	14.5 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with N Male Connector	62.35	57.36	52.37	CALL

4.9 - 5.8 GHz Dual Polarized Yagi Antenna

HG4958DP-17Y-NF	I	17 dBi, Radome Enclosed, 12" (30.5cm) Pigtail with (2) N Female Connectors	174.67	160.70	146.72	CALL
-----------------	---	--	--------	--------	--------	------

5.8 GHz Yagi Antenna

HG5817Y-NF	I	16.5 dBi, Radome Enclosed, 10" (25.4cm) Pigtail with N Female Connector	82.11	75.54	68.97	CALL
------------	---	---	-------	-------	-------	------

HyperLink® Range Extender Antennas

L-com's HyperLink® range extender antennas can be used to achieve greater range than standard Rubber Duck antennas or a PC card's internal antenna. Full 360° coverage is provided by the Omni-Directional antennas and the Patch style range extender antennas feature directional operation. This series supports various applications including 2.4 GHz IEEE 802.11b/g/n wireless LANs, 800-1800 MHz ISM, GSM and RFID.

800-900 MHz Range Extender Antennas

RE905U-NM	G	5 dBi, MAG Mount Omni 4ft (1.2m) Cable N Male Connector	25.95	23.87	21.80	CALL
RE905U-RSP	G	5 dBi, MAG Mount Omni 4ft (1.2m) Cable RP-SMA Plug Connector	25.95	23.87	21.80	CALL
RE905U-SM	G	5 dBi, MAG Mount Omni 4ft (1.2m) Cable SMA Male Connector	25.95	23.87	21.80	CALL
RE905U-TM	G	5 dBi, MAG Mount Omni 4ft (1.2m) Cable TNC Male Connector	25.95	23.87	21.80	CALL

900 / 1800-1900 MHz Range Extender Antennas

RE1903U-MC	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable MC-Card Connector	25.95	23.87	21.80	CALL
RE1903U-NM	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable N Male Connector	25.95	23.87	21.80	CALL
RE1903U-SM	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable SMA Male Connector	25.95	23.87	21.80	CALL
RE1903U-SNP	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable SMA Nano Connector	25.95	23.87	21.80	CALL
RE1903U-TM	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable TNC Male Connector	25.95	23.87	21.80	CALL
RE1903U-TS9	G	3 dBi, MAG Mount Omni 4ft (1.2m) Cable TS9-Plug Connector	25.95	23.87	21.80	CALL

1.2 GHz Range Extender Antenna

RE1208P-SM	E	8 dBi, 8" (20.3cm) Sq., 3ft (0.9m) Pigtail with SMA Male Connector	36.35	33.44	30.53	CALL
------------	---	--	-------	-------	-------	------

2.4 GHz Range Extender Antennas

RE05ER-MC	F	5 dBi, 19" (22.9cm) Cable with MC-Card Connector	16.59	15.26	13.94	CALL
RE05ER-MM	F	5 dBi, 19" (22.9cm) Cable with MMCX Connector	16.59	15.26	13.94	CALL
RE05ET-RSP	F	5 dBi, MAG Mount, 4ft (1.2m) Cable with RP-SMA Plug Connector	25.95	23.87	21.80	CALL
RE05U-MM	G	5 dBi, MAG Mount, 4ft (1.2m) Cable with MMCX Connector	15.55	14.93	14.31	CALL
RE05U-RSP	G	5 dBi, MAG Mount, 4ft (1.2m) Cable with RP-SMA Plug Connector	15.55	14.93	14.31	CALL
RE05U-RTP	G	5 dBi, MAG Mount, 4ft (1.2m) Cable with RP-TNC Plug Connector	15.55	14.93	14.31	CALL
RE07U-RSP	G	7 dBi, MAG Mount, 4ft (1.2m) Cable with RP-SMA Plug Connector	17.63	16.92	16.22	CALL
RE07U-RTP	G	7 dBi, MAG Mount, 4ft (1.2m) Cable with RP-TNC Plug Connector	17.63	16.92	16.22	CALL
RE08P-RSP	H	8 dBi, 4" (10.2cm) Round, 4ft (1.2m) Cable with RP-SMA Plug Connector	36.35	33.44	30.53	CALL
RE08P-RTP	H	8 dBi, 4" (10.2cm) Round, 4ft (1.2m) Cable with RP-TNC Plug Connector	36.35	33.44	30.53	CALL
RE09U-RSP	D	9 dBi, MAG Mount, 4ft (1.2m) Cable with RP-SMA Plug Connector	83.15	78.16	73.17	CALL
RE09U-RTP	D	9 dBi, MAG Mount, 4ft (1.2m) Cable with RP-TNC Plug Connector	83.15	78.16	73.17	CALL
RE09P-RSP	E	8 dBi, 4" (10.2cm) Sq., 4ft (1.2m) Cable with RP-SMA Plug Connector	41.55	38.23	34.90	CALL
RE09P-RTP	E	8 dBi, 4" (10.2cm) Sq., 4ft (1.2m) Cable with RP-TNC Plug Connector	41.55	38.23	34.90	CALL
RE11DP-RSP	E	11 dBi, 8" (20.3cm) Sq., Dual Polarized, 3ft (0.9m) Cables w/RP-SMA Plug Connectors	41.55	38.23	34.90	CALL
RE11DP-RTP	E	11 dBi, 8" (20.3cm) Sq., Dual Polarized, 3ft (0.9m) Cables w/RP-TNC Plug Connectors	41.55	38.23	34.90	CALL
RE11DS-RSP	E	11 dBi, 8" (20.3cm) Sq., Dual Spatial, 3ft (0.9m) Cables w/RP-SMA Plug Connectors	41.55	38.23	34.90	CALL
RE11DS-RTP	E	11 dBi, 8" (20.3cm) Sq., Dual Spatial, 3ft (0.9m) Cables w/RP-TNC Plug Connectors	41.55	38.23	34.90	CALL
RE14P-RSP	E	14 dBi, 8" (20.3cm) Sq., 3ft (0.9m) Cable with RP-SMA Plug Connector	46.75	43.01	39.27	CALL
RE14P-RTP	E	14 dBi, 8" (20.3cm) Sq., 3ft (0.9m) Cable with RP-TNC Plug Connector	46.75	43.01	39.27	CALL

To see our full line of Range Extender Antennas go to L-com.com.

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

Parabolic Dish Antennas - Superior Strength Design Ensures Durability

HyperLink® WiFi parabolic dish antennas feature a high quality aluminum reflector dish for superior strength. The dish is coated in a light gray UV-inhibited polymer for durability and aesthetics. These directional dish antennas can be used in point to point as well as point to multipoint applications.

Built to withstand the elements, HyperLink® dish antennas offer high performance at competitive prices. When designing these WiFi parabolic dish antennas, our design team factored in requirements such as location usage and environmental extremes. From versatile mounting options to features such as perforated reflectors, these antennas were built to withstand the test of time while maintaining optimal performance.

2.4 GHz Dish Antenna

HG2414D	D	14 dBi, 260mm Dia, N Female Connector	41.55	38.23	34.90	CALL
---------	---	---------------------------------------	-------	-------	-------	------

2.4 GHz Dual Polarized Dish Antennas

HG2418DPD	B	18 dBi, 400mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	135.15	124.34	113.53	CALL
HG2422DPD	B	22 dBi, 600mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	161.15	148.26	135.37	CALL
HG2425DPD	B	25 dBi, 900mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	291.15	267.86	244.57	CALL

4.9 GHz Dish Antenna

HG4931D	B	30.5 dBi, 900mm Dia, N Female Connector	291.15	267.86	244.57	CALL
---------	---	---	--------	--------	--------	------

4.9-5.8 GHz Dual Polarized Dish Antennas

Because of its superb electrical performance and mechanical stability, the parabolic dish antenna can be used in a wide variety of high performance 4.9 GHz and 5 GHz range (5.1/5.3/5.4/5.8 GHz) wireless applications. The wide band design of this antenna eliminates the need to purchase different antennas for each frequency. This simplifies installations since the same antenna can be used for a wide array of wireless applications. This antenna features 25-34 dBi of gain with a 4.8° horizontal beam-width and 4.9° vertical beam-width.

HG4958DP-25D	B	25 dBi, 400mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	145.55	133.91	122.26	CALL
HG4958DP-30D	B	30 dBi, 600mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	171.55	157.83	144.10	CALL
HG4958DP-34D	B	34 dBi, 900mm Dia, Dual Polarity, with (2) N Female Connectors, MIMO	301.55	277.43	253.30	CALL

5.1-5.8 GHz Dual Polarized Dish Antennas

HG5158DP-29D	B	28.5 dBi, 600mm Dia, Dual Polarized, (2) N Female Connectors, MIMO	171.55	161.26	150.96	CALL
HG5158DP-32D	B	32 dBi, 900mm Dia, Dual Polarized, (2) N Female Connectors, MIMO	301.55	283.46	265.36	CALL

5.1-5.8 GHz Dish Antennas

HG5158-23D	B	23 dBi, 400mm Dia, N Female Connector	161.15	148.26	135.37	CALL
HG5158-28D	B	28 dBi, 600mm Dia, N Female Connector	197.55	181.75	165.94	CALL
HG5158-31D	B	31 dBi, 900mm Dia, N Female Connector	291.15	267.86	244.57	CALL

5.4 GHz Dish Antennas

HG5423D	B	23 dBi, 400mm Dia, N Female Connector	151.79	145.72	139.65	CALL
HG5432D	B	32 dBi, 900mm Dia, N Female Connector	279.71	268.52	257.33	CALL

5.8 GHz Dish Antennas

HG5817D	A	17 dBi, 246mm Dia, N Female Connector	48.83	44.92	41.02	CALL
HG5833D	B	33 dBi, 900mm Dia, N Female Connector	291.15	267.86	244.57	CALL
HG5824D	B	24 dBi, 400mm Dia, N Female Connector	161.15	148.26	135.37	CALL
HG5829D	B	29 dBi, 600mm Dia, N Female Connector	197.55	181.75	165.94	CALL

Radome Cover Kits

HyperLink® radome covers are an ideal way to provide additional protection to our parabolic dish antennas. These lightweight radome kits feature fiberglass construction and UV stable gray finish. Drain holes are provided on the radome cover to help prevent moisture build-up inside the dish antenna.

HGR-04	Radome Cover Kit for 400mm Dia Dish	49.95	48.95	47.95	CALL
HGR-06	Radome Cover Kit for 600mm Dia Dish	63.95	62.67	61.39	CALL
HGR-09	Radome Cover Kit for 900mm Dia Dish	74.95	73.45	71.95	CALL

Dish Antenna Replacement Hardware

L-com offers replacement parts for your parabolic dishes. These spare part kits consist of the dish, pole mounting bracket and all of the hardware.

HGDH-400	Replacement Hardware for 400mm Dia Dish	94.95	94.00	93.05	CALL
HGDH-600	Replacement Hardware for 600mm Dia Dish	119.95	118.75	117.55	CALL
HGDH-900	Replacement Hardware for 900mm Dia Dish	234.95	232.60	230.25	CALL

Dish Antenna Replacement Feedhorns

L-com offers replacement feedhorns for your parabolic dishes. These kits consists of only the feedhorn. Mast mounting hardware not included.

2.4 GHz Dish Replacement Feedhorns

HGFH-218DPD	18 dBi Dual Polarity Dish Replacement Feedhorn	59.95	59.35	58.75	CALL
HGFH-222DPD	22 dBi Dual Polarity Dish Replacement Feedhorn	64.95	64.30	63.65	CALL
HGFH-225DPD	25 dBi Dual Polarity Dish Replacement Feedhorn	99.95	98.95	97.95	CALL

4.9/5.8 GHz Dual Polarity Replacement Dish Feedhorns

HGFH-525DPD	25 dBi Dual Polarity Dish Replacement Feedhorn	74.95	74.20	73.45	CALL
HGFH-530DPD	30 dBi Dual Polarity Dish Replacement Feedhorn	84.95	84.10	83.25	CALL
HGFH-534DPD	34 dBi Dual Polarity Dish Replacement Feedhorn	124.95	123.70	122.45	CALL

5.8 GHz Dish Replacement Feedhorns

HGFH-524D	24 dBi Parabolic Dish Replacement Feedhorn	64.95	64.30	63.65	CALL
HGFH-529D	29 dBi Parabolic Dish Replacement Feedhorn	74.95	74.20	73.45	CALL
HGFH-533D	33 dBi Parabolic Dish Replacement Feedhorn	94.95	94.00	93.05	CALL



HG2414PEV
STYLE
[E]HG8909P
STYLE
[D]HG908PCL
STYLE
[A]HG2408P-NF
STYLE
[C]HG2409XP
STYLE
[A]HG2412P
STYLE
[B]HG2416DP
STYLE
[D]

"STYLE" refers to shape of antenna in series.

HyperLink® Patch and Panel Antennas - Compact and Lightweight

These high performance directional patch and panel antennas are available for indoor and outdoor applications covering multiple popular frequencies. Our patch antennas are lightweight and feature aesthetic UV-stable, UL flame rated plastic radomes which can also be painted to match the room or building structure. Designed to be installed for horizontal or vertical polarization, they can be wall or ceiling mounted, as well as mast mounted using U-bolts.

Designed specifically as cost-effective solutions for today's demanding wireless applications, HyperLink® patch and panel antenna products offer a unique combination of superior all-weather performance, durability and aesthetics. Applications include IEEE 802.11b/g/n, 900 MHz cellular, RFID, 802.16, 802.20 and WiMAX.

Mast Mounting:

L-com's patch antennas offer several unique mounting options. They can be mounted flat against a wall, or to a mast using a pair of 2 inch U-bolts. The antennas also accept most tilt-and-swivel security camera brackets equipped with standard 1/4-20 threads.

HG2414P
Rear viewHG2408P-NF
Rear view

Flush Mount:

The HG2408P-NF can be mounted flat against the wall or ceiling. Its unique design allows the cable to exit out of the side or from the back of the unit which is ideal for mounting in locations that require the cable to be hidden.

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

HyperLink® Patch and Panel Antennas

These are low cost high gain antennas that come with their own enclosure space within the antenna radome. Mount your wireless card radio behind the antenna and seal the radome. All come with quick connect Cat5/6 connections. Antenna pigtail cable options are RP-SMA Plug, RP-TNC Plug, MMCX and UFL (with others available).

HyperLink® 2.4 GHz and 5.1 - 5.8 GHz Panel Enclosure Antennas

HG2414PEV	E	2.4 GHz 14 dBi Panel Enclosure Antenna	35.31	34.60	33.90	CALL
HG2414PEV-MMCX	E	2.4 GHz 14 dBi Panel Enclosure Antenna, MMCX Antenna Cable	35.31	34.60	33.90	CALL
HG2414PEV-RSP	E	2.4 GHz 14 dBi Panel Enclosure Antenna, RP-SMA Plug Antenna Cable	35.31	34.60	33.90	CALL
HG2414PEV-RTP	E	2.4 GHz 14 dBi Panel Enclosure Antenna, RP-TNC Plug Antenna Cable	35.31	34.60	33.90	CALL
HG2414PEV-UFL	E	2.4 GHz 14 dBi Panel Enclosure Antenna, UFL Antenna Cable	35.31	34.60	33.90	CALL
HG5158PEV	E	5.1 GHz to 5.8 GHz 18 dBi Panel Enclosure Antenna	62.35	61.10	59.86	CALL
HG5158PEV-MMCX	E	5.1 GHz to 5.8 GHz 18 dBi Panel Enclosure Antenna, MMCX Antenna Cable	67.55	66.20	64.85	CALL
HG5158PEV-RSP	E	5.1 GHz to 5.8 GHz 18 dBi Panel Enclosure Antenna, RP-SMA Antenna Plug Cable	67.55	66.20	64.85	CALL
HG5158PEV-RTP	E	5.1 GHz to 5.8 GHz 18 dBi Panel Enclosure Antenna, RP-TNC Plug Antenna Cable	67.55	66.20	64.85	CALL
HG5158PEV-UFL	E	5.1 GHz to 5.8 GHz 18 dBi Panel Enclosure Antenna, UFL Antenna Cable	67.55	66.20	64.85	CALL

900 MHz Patch/Panel Antennas

HG8909P	D	9 dBi, Heavy Duty Flat Panel with N Female Connector	57.15	52.58	48.01	CALL
HG908P-NF	A	8 dBi, Flat Patch, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	57.15	52.58	48.01	CALL
HG908P-SM	A	8 dBi, Flat Patch, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with SMA Male Connector	57.15	52.58	48.01	CALL

900 MHz Circular Polarized Patch Antennas

HG908PCL-NF	A	8 dBi, Left Hand, Circular Polarized, 12" (30.5cm) Pigtail with N Female Connector	51.95	49.87	47.79	CALL
HG908PCL-NM	A	8 dBi, Left Hand, Circular Polarized, 12" (30.5cm) Pigtail with N Male Connector	51.95	49.87	47.79	CALL
HG908PCL-RTP	A	8 dBi, Left Hand, Circular Polarized, 12" (30.5cm) Pigtail with RP-TNC Plug Connector	51.95	49.87	47.79	CALL
HG908PCL-RSP	A	8 dBi, Left Hand, Circular Polarized, 12" (30.5cm) Pigtail with RP-SMA Plug Connector	51.95	49.87	47.79	CALL
HG908PCL-SM	A	8 dBi, Left Hand, Circular Polarized, 12" (30.5cm) Pigtail with SMA Male Plug Connector	51.95	49.87	47.79	CALL
HG908PCR-NF	A	8 dBi, Right Hand, Circular Polarized, 12" (30.5cm) Pigtail with N Female Connector	51.95	49.87	47.79	CALL
HG908PCR-NM	A	8 dBi, Right Hand, Circular Polarized, 12" (30.5cm) Pigtail with N Male Connector	51.95	49.87	47.79	CALL
HG908PCR-RTP	A	8 dBi, Right Hand, Circular Polarized, 12" (30.5cm) Pigtail with RP-TNC Plug Connector	51.95	49.87	47.79	CALL
HG908PCR-RSP	A	8 dBi, Right Hand, Circular Polarized, 12" (30.5cm) Pigtail with RP-SMA Plug Connector	51.95	49.87	47.79	CALL
HG908PCR-SM	A	8 dBi, Right Hand, Circular Polarized, 12" (30.5cm) Pigtail with SMA Male Plug Connector	51.95	49.87	47.79	CALL

1.9 GHz Patch Antennas

HG1908P-NF	A	8 dBi, 4" (10.2cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	46.75	43.01	39.27	CALL
HG1912P-NF	A	12 dBi, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	58.19	53.53	48.88	CALL

2.4 GHz Patch/Panel Antennas

HG2408P-NF	C	8 dBi, 4" (10.2cm) Round, 10" (25.4cm) Pigtail with N Female Connector	35.31	32.49	29.66	CALL
HG2409PCL-NF	A	8 dBi, 4" (10.2cm) Sq., LH Cir Polarized, 12" (30.5cm) Pigtail with N Female Connector	35.31	32.49	29.66	CALL
HG2409PCR-NF	A	8 dBi, 4" (10.2cm) Sq., RH Cir Polarized, 12" (30.5cm) Pigtail with N Female Connector	35.31	32.49	29.66	CALL
HG2409P-NF	A	8 dBi, 4" (10.2cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	34.27	31.53	28.79	CALL
HG2409XP	A	9 dBi, 8" (20.3cm) Sq., Cross Polarized, (2) N Female Connectors, MIMO	46.75	43.01	39.27	CALL
HG2410DP	B	10 dBi, 4" (10.2cm) Sq., (2) N Female Connectors, MIMO	34.27	31.53	28.79	CALL
HG2412P	B	12 dBi, 4" (10.2cm) Sq., N Female Connector	31.15	28.66	26.17	CALL
HG2414DP-3NF	D	14 dBi, 12" (30.5cm) Sq., Dual Polarized, (3) N Female Connectors, MIMO	116.43	107.12	97.80	CALL
HG2414P	A	14 dBi, 8" (20.3cm) Sq., N Female Connector	41.55	38.23	34.90	CALL
HG2414P-NF	A	14 dBi, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	51.95	47.79	43.64	CALL
HG2416DP	D	16 dBi, 12" (30.5cm) Sq., Dual Polarized, (2) N Female Connectors, MIMO	116.43	107.12	97.80	CALL
HG2416P	A	15.5 dBi, 8" (20.3cm) Sq., N Female Connector	56.11	51.62	47.13	CALL
HG2418P	D	18 dBi, Flat Panel with N Female Connector	62.35	59.86	57.36	CALL

Call for special connectors and cable lengths

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

2.4 GHz Wide Angle Patch Antennas

These compact 2.4 GHz WiFi antennas provide 5 dBi Gain with broad horizontal beam width of 135 degrees. They are ideally suited for applications requiring coverage of a wide area such as an office, public hotspot, industrial or warehouse use. These antennas are lightweight and feature an aesthetic UV-stable, white ABS UL Flame Rated radome and can also be painted to match the room or building structure. The HG2405P-135 can be installed for horizontal or vertical polarization.

HG2405P-135-NF	C*	5 dBi, Wide Angle, 12" (30.5cm) N Female Connector	38.43	35.36	32.28	CALL
HG2405P-135-NM	C*	5 dBi, Wide Angle, 4ft (1.2m) N Male Connector	38.43	35.36	32.28	CALL
HG2405P-135-RSP	C*	5 dBi, Wide Angle, 4ft (1.2m) RP-SMA Plug Connector	38.43	35.36	32.28	CALL
HG2405P-135-RTP	C*	5 dBi, Wide Angle, 4ft (1.2m) RP-TNC Plug Connector	38.43	35.36	32.28	CALL
HG2405SD-135-NF	C	5 dBi, Wide Angle Spatial Diversity, 12" (30.5cm) Dual N Female Connectors	46.75	43.01	39.27	CALL
HG2405SD-135-NM	C	5 dBi, Wide Angle Spatial Diversity, 4ft (1.2m) Dual N Male Connectors	46.75	43.01	39.27	CALL
HG2405SD-135-RSP	C	5 dBi, Wide Angle Spatial Diversity, 4ft (1.2m) Dual RP-SMA Plug Connectors	46.75	43.01	39.27	CALL
HG2405SD-135-RTP	C	5 dBi, Wide Angle Spatial Diversity, 4ft (1.2m) Dual RP-TNC Plug Connectors	46.75	43.01	39.27	CALL

*Similar to this antenna, but with one antenna lead.

2.4-5.8 GHz Wide Angle Patch Antennas

These compact 2.4-5.8 GHz WiFi antennas provide Dual Frequency diversity to improve connectivity and data throughput. They provide wide angle pattern to give the provider excellent area coverage from one antenna site.

HG2458-5P-135-NF	B	5 dBi, Wide Angle, 12" (30.5cm) N Female Connector	48.83	44.92	41.02	CALL
HG2458-5P-135-NM	B	5 dBi, Wide Angle, 4ft (1.2m) N Male Connector	48.83	44.92	41.02	CALL
HG2458-5P-135-RSP	B	5 dBi, Wide Angle, 4ft (1.2m) RP-SMA Plug Connector	48.83	44.92	41.02	CALL
HG2458-5P-135-RTP	B	5 dBi, Wide Angle, 4ft (1.2m) RP-TNC Plug Connector	48.83	44.92	41.02	CALL

2.4-5.8 GHz Panel Antennas

HG2458-09P	A	9 dBi, 8" (20.3) Sq., N Female Connector	81.07	74.58	68.10	CALL
HG2458-10DP	B	10 dBi, 8" (20.3) Sq., Dual Polarized, (2) N Female Connectors, MIMO	40.51	37.27	34.03	CALL
HG2458-11XP	A	8/11 dBi, 8" (20.3) Sq., Dual Polarized, (2) N Female Connectors, MIMO	46.75	43.01	39.27	CALL
HG2458-11P	A	9/11 dBi, 8" (20.3) Sq., N Female Connector	62.35	57.36	52.37	CALL
HG2458-20P	A	20 dBi, 12" (30.5cm) Sq., N Female Connector	145.55	136.82	128.08	CALL
HG2458-10DP-6NF	A	10 dBi, 12" (30.5cm) Sq., Dual Polarized, (6) N Female Connectors, MIMO	155.95	143.47	131.00	CALL
HG2458-14DP-3NF	A	14 dBi, 12" (30.5cm) Sq., Dual Polarized, (3) N Female Connectors, MIMO	145.55	133.91	122.26	CALL
HG2458-14DP-4NF	A	14 dBi, 12" (30.5cm) Sq., Dual Polarized, (4) N Female Connectors, MIMO	150.75	138.69	126.63	CALL

2.6 GHz Patch Antenna

HG2614P-NF	A	14 dBi, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	51.95	47.79	43.64	CALL
------------	---	---	-------	-------	-------	------

4.9-5.8 GHz Dual Polarized Panel Antennas

The HyperLink's Flat Panel Antennas combine vertical and horizontal polarization with high gain over multiple frequencies in a single enclosure. It is a professional quality antenna designed primarily for MIMO point-to-multipoint and point-to-point applications in the 4.9 GHz and 5.8 GHz frequency.

HG4958-17DP-3NF	A	17 dBi, 4.9/5.8 GHz, Dual Polarized Panel with (3) N Female Connectors	145.55	133.91	122.26	CALL
HG4958-19DP	A	19 dBi, 4.9/5.8 GHz, Dual Polarized Panel with (2) N Female Connectors	98.75	90.85	82.95	CALL



Custom Manufacturing

L-com is unique among most WiFi antenna vendors by also being an antenna manufacturer. Being a manufacturer allows us to provide custom variations of all the antennas we manufacture in house or resell. A typical custom request may be to change the length of an antenna lead or pigtail to accommodate a specific installation of the antenna. Another may be a change to the connector or connectors required for a specific radio connection. In most cases we can ship out a large custom order in less than a week. Small custom orders are usually shipped on the same day they are received. L-com offers a broad range of antenna types covering 800 – 6000 MHz. Learn more at L-com.com.

3.5 GHz, 4.9 GHz, 5.3 GHz, 5.4 GHz, 5.8 GHz and 4.9-5.8 GHz Patch/Panel Antennas

L-com's extensive line of patch antennas that cover frequencies from 3.5 to 5.8 GHz are ideal for applications such as WiMAX and public safety. Several of the patch antennas are broadband/multi-band antennas that eliminate the need to purchase different antennas for each frequency being used. This simplifies installations since the same antenna can be used for a wide array of wireless applications.

3.5 GHz Patch/Panel Antennas

HG3509P-NF	A	8 dBi, 4" (10.2cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	46.75	43.01	39.27	CALL
HG3514P-NF	A	14 dBi, 8" (20.3cm) Sq., 12" (30.5cm) Pigtail with N Female Connector	57.15	52.58	48.01	CALL
HG3516DP	A	16 dBi, Dual Polarized Panel Antenna with (2) N Female Connectors	145.55	133.91	122.26	CALL

4.9 GHz Patch Antennas

HG4953P	A	8 dBi, 4" (10.2cm) Sq., Broadband, SMA Male Connector	58.19	53.53	48.88	CALL
HG4911P	A	11 dBi, 4" (10.2cm) Sq., SMA Female Connector	58.19	53.53	48.88	CALL

5.3 GHz Patch Antenna

HG5311P	A	11 dBi, 4" (10.2cm) Sq., SMA Female Connector	58.19	54.70	51.21	CALL
---------	---	---	-------	-------	-------	------

5.4 GHz Patch/Panel Antennas

HG5411P	A	11 dBi, Flat Patch, 4" (10.2cm) Sq., SMA Female Connector	58.19	54.70	51.21	CALL
HG5419P	A	19 dBi, Broadband Panel, 7" (17.8cm) Sq., N Female Connector	58.19	55.86	53.53	CALL

5.8 GHz Patch Antennas

HG5811P	A	11 dBi, 4" (10.2cm) Sq., SMA Female Connector	58.19	53.53	48.88	CALL
HG5819P	A	19 dBi, 7" (17.8cm) Sq., N Female Connector	58.19	53.53	48.88	CALL
HG5158P	A	8 dBi, 4" (10.2cm) Sq., Broadband, SMA Female Connector	58.19	54.70	51.21	CALL

4.9-5.8 GHz Broadband Patch Antennas

HG4958-23P	A	23 dBi, 12" (30.5cm) Sq., Broadband, N Female Connector	96.67	88.94	81.20	CALL
HG4958-07PCL	A	7 dBi, Left Hand Circular Polarized Flat Patch Antenna, SMA Female Connector	72.75	66.93	61.11	CALL
HG4958-07PCR	A	7 dBi, Right Hand Circular Polarized Flat Patch Antenna, SMA Female Connector	72.75	66.93	61.11	CALL

Call for special connectors and cable lengths



"STYLE" refers to shape of antenna in series.

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

Sectorial Omnidirectional Antennas

HyperLink's sector antennas are designed for Cell Site installations and include a variety of gain, frequency and radiation patterns. These WiFi antennas feature our unique heavy-duty mounting systems that allow installation from level to over 20° down-tilt. In addition, 90, 120 and 180° arrays are available supporting a wide range of applications. These antennas feature stainless steel construction for all-weather operation.

900 MHz Sectorial Antenna Arrays

HK911HSP-120	A	11 dBi Multi-Feed, Includes (3) 120° Antenna with Mounting Array	686.35	645.17	603.99	CALL
HK911HSP-120NF	A	11 dBi Single-Feed, Includes (3) 120° Antenna with Mounting Array, Splitter, 3 Cables	831.95	782.03	732.12	CALL
HK913-120	A	13 dBi, Multi-Feed, Includes (3) 120° Antenna with Mounting Array	935.95	879.79	823.64	CALL
HK913-120NF	A	13 dBi, Single-Feed, Includes (3) 120° Antenna with Mounting Array, Splitter, 3 Cables	1039.95	977.55	915.16	CALL

2.4 GHz Sectorial Antenna Arrays

HK2414-090	C	14 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	753.95	708.71	663.48	CALL
HK2414-090NF	C	14 dBi, Single-Feed, Includes (4) 90° Antenna with Mounting Array, Splitter, 4 Cables	931.79	875.88	819.98	CALL
HK2414-120	A	14 dBi, Multi-Feed, Includes (3) 120° Antenna with Mounting Array	582.35	547.41	512.47	CALL
HK2414-120NF	A	14 dBi, Single-Feed, Includes (3) 120° Antenna with Mounting Array, Splitter, 3 Cables	727.95	684.27	640.60	CALL
HK2414DP-090	C	14 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	883.95	830.91	777.88	CALL
HK2414H-090	C	14 dBi, Multi-Feed, Includes (4) 90° H-Pol Antenna with Mounting Array	754.99	709.69	664.39	CALL
HK2414H-090NF	C	14 dBi, Single-Feed, Includes (4) 90° H-Pol Antenna with Mounting Array, Splitter, 4 Cables	931.79	875.88	819.98	CALL
HK2415-180	B	15 dBi, Multi-Feed, Includes (2) 180° Antenna with Mounting Array	1164.75	1094.87	1024.98	CALL
HK2415-180NF	B	15 dBi, Single-Feed, Includes (2) 180° Antenna with Mounting Array, Splitter, 2 Cables	1279.15	1202.40	1125.65	CALL
HK2417-090	C	17 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	863.15	811.36	759.57	CALL
HK2417-090NF	C	17 dBi, Single-Feed, Includes (4) 90° Antenna with Mounting Array, Splitter, 4 Cables	1039.95	977.55	915.16	CALL
HK2417-120	A	17 dBi, Multi-Feed, Includes (3) 120° Antenna with Mounting Array	665.55	625.62	585.68	CALL
HK2417-120NF	A	17 dBi, Single-Feed, Includes (3) 120° Antenna with Mounting Array, Splitter, 3 Cables	811.15	762.48	713.81	CALL
HK2420-090	C	20 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	1871.95	1759.63	1647.32	CALL
HK2420-090NF	C	20 dBi, Single-Feed, Includes (4) 90° Antenna with Mounting Array, Splitter, 4 Cables	2079.95	1955.15	1830.36	CALL
HK2420-120	A	20 dBi, Multi-Feed, Includes (3) 120° Antenna with Mounting Array	1414.35	1329.49	1244.63	CALL
HK2420-120NF	A	20 dBi, Single-Feed, Includes (3) 120° Antenna with Mounting Array, Splitter, 3 Cables	1559.95	1466.35	1372.76	CALL

5.4 GHz Sectorial Antenna Arrays

HK5417-090	C	17 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	753.95	708.71	663.48	CALL
HK5417-090NF	C	17 dBi, Single-Feed, Includes (4) 90° Antenna with Mounting Array, Splitter, 4 Cables	1039.95	977.55	915.16	CALL

5.8 GHz Sectorial Antenna Arrays

HK5817-090	C	17 dBi, Multi-Feed, Includes (4) 90° Antenna with Mounting Array	753.95	708.71	663.48	CALL
HK5817-090NF	C	17 dBi, Single-Feed, Includes (4) 90° Antenna with Mounting Array, Splitter, 4 Cables	1039.95	977.55	915.16	CALL
HK5817H-090	C	17 dBi, Multi-Feed, Includes (4) 90° H-Pol Antenna with Mounting Array	753.95	708.71	663.48	CALL
HK5817H-090NF	C	17 dBi, Single-Feed, Includes (4) 90° H-Pol Antenna with Mounting Array, Splitter, 4 Cables	1039.95	977.55	915.16	CALL
HK5817H-120	A	17 dBi, Multi-Feed, Includes (3) 120° H-Pol Antenna with Mounting Array	623.95	586.51	549.08	CALL

Sectorial Panel Antennas

HyperLink's sectorial panel antennas are available in multiple frequencies, gain and 65-180°. They can be used stand alone or in circular groups to maximize coverage and feature heavy-duty plastic radome for all-weather operation, with mounting systems that adjust to pinpoint direction.

698 - 960 / 1710 - 2700 Sector DAS Antennas

HG72710XP-065	F	10 dBi, 65°, 1710-2700 MHz, Cross Polarized, (2) N Female Connectors, MIMO	207.95	191.31	174.68	CALL
HG72712P-120	D	12 dBi, 120°, 1710-2700 MHz, N Female Connector	311.95	286.99	262.04	CALL
HG72714P-090	D	13 dBi, 90°, 1710-2700 MHz, N Female Connector	317.15	291.78	266.41	CALL

900 MHz Sectorial Panel Antennas

HG911HSP-120	D	11 dBi, 120°, Horizontal Polarized, N Female Connector	207.95	191.31	174.68	CALL
HG913P-120	D	13 dBi, 120°, N Female Connector	291.15	267.86	244.57	CALL
HG913DPSP-120	D	13 dBi, 120°, Dual Polarized, (2) 7-16 DIN Female Connectors, MIMO (NF Adapter Available)	415.95	390.99	366.04	CALL
HG913HSP-120	D	13 dBi, 120°, Horizontal Polarized, N Female Connector	244.35	229.69	215.03	CALL

2.4 GHz Sectorial Panel Antennas

HG2412P-180	D	12 dBi, 180°, Sector Panel Antenna, N Female Connector	174.67	160.70	146.72	CALL
HG2414SP-120	D	14 dBi, 120°, N Female Connector	174.67	160.70	146.72	CALL
HG2415P-180	E	15 dBi, 180°, N Female Connector	327.55	301.35	275.14	CALL
HG2417P-120	D	17 dBi, 120°, N Female Connector	197.55	181.75	165.94	CALL
HG2420P-120	D	20 dBi, 120°, N Female Connector	415.95	382.67	349.40	CALL
HG2412SXP-120	F	12 dBi, 120°, Spatial Diversity / Cross Polarized, (4) N Female Connectors, MIMO	363.95	334.83	305.72	CALL
HG2416SXP-090	F	16 dBi, 90°, Spatial Diversity / Cross Polarized, (4) N Female Connectors, MIMO	395.15	363.54	331.93	CALL

90 degree versions are available for most Sectorial Panel Antennas. Call your customer service representative for information.

3.5 GHz Sectorial Panel Antennas

HG3517DP-090	D	17 dBi, 90°, Dual Polarized, (2) N Female Connectors, MIMO	311.95	286.99	262.04	CALL
--------------	---	--	--------	--------	--------	------

5 GHz Sectorial Cross Polarized Antenna

HG5158-16XP-090	D	16 dBi, 90°, Cross Polarized, Dual Polarity, (2) N Female Connectors, MIMO	129.95	119.55	109.16	CALL
-----------------	---	--	--------	--------	--------	------

5 GHz Spatial Diversity Cross Polarized Antenna

HG5816SXP-090	F	16 dBi, 90°, Cross Polarized, Spatial Diversity (4) N Female Connectors, MIMO	415.95	382.67	349.40	CALL
---------------	---	---	--------	--------	--------	------

5.4 GHz Sectorial Panel Antenna

HG5417P-090	D	17 dBi, 90°, N Female Connector	176.75	169.68	162.61	CALL
-------------	---	---------------------------------	--------	--------	--------	------

5.8 GHz Sectorial Panel Antennas

HG5817P-090	D	17 dBi, 90°, N Female Connector	176.75	162.61	148.47	CALL
HG5817HSP-090	D	17 dBi, 90°, Horizontal Polarized, N Female Connector	174.67	160.70	146.72	CALL
HG5817HSP-120	D	17 dBi, 120°, Horizontal Polarized, N Female Connector	192.35	176.96	161.57	CALL

2.4/4.9 - 5.8 GHz Dual Feed / Dual Band Sectorial Panel Antenna

HG2458-14P-090	D	14 dBi, 90°, (2) N Female Connectors, MIMO	218.35	200.88	183.41	CALL
----------------	---	--	--------	--------	--------	------

4.9 - 5.8 GHz Dual Polarity Sectorial Panel Antenna


HG4958-17DP-090	D	17 dBi, 90°, (2) N Female Connectors, MIMO	116.43	111.77	107.12	CALL
-----------------	---	--	--------	--------	--------	------

5.1 - 5.8 GHz Dual Polarity Sectorial Panel Antenna

HG5158-19DP-090	D	19 dBi, 90°, (2) N Female Connectors, MIMO	176.75	169.68	162.61	CALL
-----------------	---	--	--------	--------	--------	------



"STYLE" refers to shape of antenna in series.

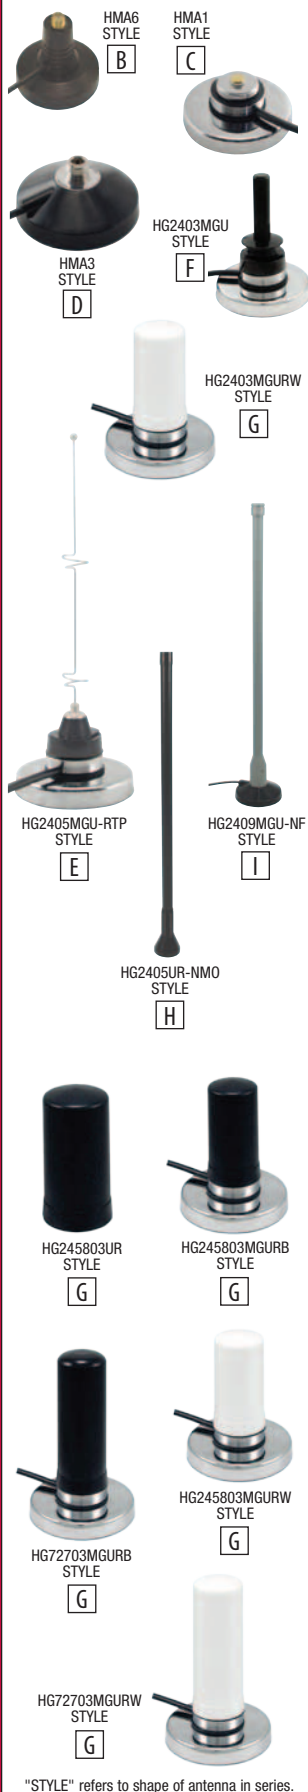

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

2.4 GHz Mobile Mount Antennas - Built for Demanding Mobile Applications

Our extensive line of magnetic mount and mast mount mobile Omnidirectional antennas are perfect for demanding mobile applications including law enforcement, construction vehicles, and mobile metering. Several styles are offered with many frequency and gain choices supporting IEEE 802.11b/g/n.

- All weather construction
- IEEE 802.11b/g/n
- Bluetooth® and WiFi
- Magnetic and mast mount options
- RoHS compliant

Magnetic Mobile Mounts

HMA6-RSP05	B	RP-SMA Jack to RP-SMA Plug, 5ft (1.5m) 100-Series	19.95	18.35	16.76	CALL
HMA6-RSP10	B	RP-SMA Jack to RP-SMA Plug, 10ft (3.0m) 100-Series	29.95	27.55	25.16	CALL
HMA6-RTP05	B	RP-SMA Jack to RP-TNC Plug, 5ft (1.5m) 100-Series	19.95	18.35	16.76	CALL
HMA6-RTP10	B	RP-SMA Jack to RP-TNC Plug, 10ft (3.0m) 100-Series	29.95	27.55	25.16	CALL
HMA1-NFA10	C	NMO to N Female, 10ft (3.0m) 195-Series	24.95	22.95	20.96	CALL
HMA1-NMA10	C	NMO to N Male, 10ft (3.0m) 195-Series	24.95	22.95	20.96	CALL
HMA1-RSPA10	C	NMO to RP-SMA Plug, 10ft (3.0m) 195-Series	24.95	22.95	20.96	CALL
HMA1-RTPA10	C	NMO to RP-TNC Plug, 10ft (3.0m) 195-Series	24.95	22.95	20.96	CALL
HMA3-NFA10	D	N Female to N Female, 10ft (3.0m) 195-Series	27.95	25.71	23.48	CALL
HMA3-NMA10	D	N Female to N Male, 10ft (3.0m) 195-Series	27.95	25.71	23.48	CALL
HMA3-RSPA10	D	N Female to RP-SMA Plug, 10ft (3.0m) 195-Series	27.95	25.71	23.48	CALL
HMA3-RTPA10	D	N Female to RP-TNC Plug, 10ft (3.0m) 195-Series	27.95	25.71	23.48	CALL

2.4 GHz Antennas with Magnetic Mobile Mounts

HG2403MGU-NM	F	3 dBi, Dual Band, 10ft (3.0m) Cable with N Male Connector	41.55	38.23	34.90	CALL
HG2403MGU-RSP	F	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-SMA Plug Connector	41.55	38.23	34.90	CALL
HG2403MGU-RTP	F	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-TNC Plug Connector	41.55	38.23	34.90	CALL
HG2403MGURW-NM	G	3 dBi, White Radome, 10ft (3.0m) Cable with N Male Connector	44.67	41.10	37.52	CALL
HG2403MGURW-RSP	G	3 dBi, White Radome, 10ft (3.0m) Cable with RP-SMA Plug Connector	44.67	41.10	37.52	CALL
HG2403MGURW-RTP	G	3 dBi, White Radome, 10ft (3.0m) Cable with RP-TNC Plug Connector	44.67	41.10	37.52	CALL
HG2403MGURB-NM	G	3 dBi, Black Radome, 10ft (3.0m) Cable with N Male Connector	44.67	41.10	37.52	CALL
HG2403MGURB-RSP	G	3 dBi, Black Radome, 10ft (3.0m) Cable with RP-SMA Plug Connector	44.67	41.10	37.52	CALL
HG2403MGURB-RTP	G	3 dBi, Black Radome, 10ft (3.0m) Cable with RP-TNC Plug Connector	44.67	41.10	37.52	CALL
HG2405MGU-NM	E	5 dBi, 10ft (3.0m) Cable with N Male Connector	51.95	48.83	45.72	CALL
HG2405MGU-RSP	E	5 dBi, 10ft (3.0m) Cable with RP-SMA Plug Connector	51.95	48.83	45.72	CALL
HG2405MGU-RTP	E	5 dBi, 10ft (3.0m) Cable with RP-TNC Plug Connector	51.95	48.83	45.72	CALL
HG2409MGU-NF	I	8.5 dBi, 10ft (3.0m) Cable with N Female Connector	81.07	76.21	71.34	CALL
HG2409MGU-NM	I	8.5 dBi, 10ft (3.0m) Cable with N Male Connector	81.07	76.21	71.34	CALL
HG2409MGU-RSP	I	8.5 dBi, 10ft (3.0m) Cable with RP-SMA Plug Connector	81.07	76.21	71.34	CALL

2.4 GHz Mobile Mount Antennas

HG2403U-NMO	F	3 dBi, Dual Band, NMO Connector	34.27	31.53	28.79	CALL
HG2403UR-NMOW	G	3 dBi, White Radome, NMO Connector	32.19	29.61	27.04	CALL
HG2403UR-NMOB	G	3 dBi, Black Radome, NMO Connector	32.19	29.61	27.04	CALL
HG2405U-NMO	E	5 dBi, NMO Connector	23.87	21.96	20.05	CALL
HG2405UR-NMO	H	5 dBi, Black Radome, Flex-Base, NMO Connector	98.75	90.85	82.95	CALL
HG2408UR-NM	H	8 dBi, Black Radome, Flex-Base, N Male Connector	98.75	92.82	86.90	CALL
HG2409U	I	8.5 dBi, N Male Connector	58.19	54.70	51.21	CALL

2.4 - 5.8 GHz Antennas with Magnetic Mobile Mounts

HG245803UR-NMOB	G	3 dBi, Dual band, Black Radome, NMO Connector	36.35	33.44	30.53	CALL
HG245803UR-NMOW	G	3 dBi, Dual band, White Radome, NMO Connector	36.35	33.44	30.53	CALL
HG245803MGURB-NF	G	3 dBi, Dual Band, 10ft (3.0m) Cable with N Female Connector	48.83	44.92	41.02	CALL
HG245803MGURB-NM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with N Male Connector	48.83	44.92	41.02	CALL
HG245803MGURB-RSP	G	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-SMA PLUG Connector	48.83	44.92	41.02	CALL
HG245803MGURB-RTP	G	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-TNC PLUG Connector	48.83	44.92	41.02	CALL
HG245803MGURB-SM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with SMA Male Connector	48.83	44.92	41.02	CALL
HG245803MGURB-TM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with TNC Male Connector	48.83	44.92	41.02	CALL
HG245803MGURW-NF	G	3 dBi, Dual Band, 10ft (3.0m) Cable with N Female Connector	48.83	44.92	41.02	CALL
HG245803MGURW-NM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with N Male Connector	48.83	44.92	41.02	CALL
HG245803MGURW-RSP	G	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-SMA PLUG Connector	48.83	44.92	41.02	CALL
HG245803MGURW-RTP	G	3 dBi, Dual Band, 10ft (3.0m) Cable with RP-TNC PLUG Connector	48.83	44.92	41.02	CALL
HG245803MGURW-SM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with SMA Male Connector	48.83	44.92	41.02	CALL
HG245803MGURW-TM	G	3 dBi, Dual Band, 10ft (3.0m) Cable with TNC Male Connector	48.83	44.92	41.02	CALL

700 - 2700 MHz DAS Mobile Mount Antennas

This HyperLink® series are very compact omnidirectional antennas specifically designed for DAS (Distributed Antenna Systems). They combine several different frequency bands to allow multi-user options. They feature standard TAD/NMO Motorola-type connection that allows for ease of installation to similar TAD/NMO mounting systems.

HG72703UR-NMOB	G	3 dBi, Multi Band, Black Radome, NMO Connector	36.35	33.44	30.53	CALL
HG72703UR-NMOW	G	3 dBi, Multi Band, white Radome, NMO Connector	36.35	33.44	30.53	CALL
HG72703MGURB-NF	G	3 dBi, Multi Band, 10ft (3.0m) Cable with N Female Connector	48.83	44.92	41.02	CALL
HG72703MGURB-NM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with N Male Connector	48.83	44.92	41.02	CALL
HG72703MGURB-RSP	G	3 dBi, Multi Band, 10ft (3.0m) Cable with RP-SMA PLUG Connector	48.83	44.92	41.02	CALL
HG72703MGURB-RTP	G	3 dBi, Multi Band, 10ft (3.0m) Cable with RP-TNC PLUG Connector	48.83	44.92	41.02	CALL
HG72703MGURB-SM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with SMA Male Connector	48.83	44.92	41.02	CALL
HG72703MGURB-TM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with TNC Male Connector	48.83	44.92	41.02	CALL
HG72703MGURW-NF	G	3 dBi, Multi Band, 10ft (3.0m) Cable with N Female Connector	48.83	44.92	41.02	CALL
HG72703MGURW-NM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with N Male Connector	48.83	44.92	41.02	CALL
HG72703MGURW-RSP	G	3 dBi, Multi Band, 10ft (3.0m) Cable with RP-SMA PLUG Connector	48.83	44.92	41.02	CALL
HG72703MGURW-RTP	G	3 dBi, Multi Band, 10ft (3.0m) Cable with RP-TNC PLUG Connector	48.83	44.92	41.02	CALL
HG72703MGURW-SM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with SMA Male Connector	48.83	44.92	41.02	CALL
HG72703MGURW-TM	G	3 dBi, Multi Band, 10ft (3.0m) Cable with TNC Male Connector	48.83	44.92	41.02	CALL

Item #	Style	Description	1-9	10-24	25-99	100+
700 - 2700 MHz DAS Ceiling Mount Antennas						
The HyperLink® high performance broadband / multi-band ceiling mount DAS antennas are designed to operate from 700 MHz to 3 GHz. These high performance antennas are specifically designed to distribute Cellular and WiFi signals throughout a building or area. The Multi-Band design of this antenna eliminates the need to purchase different antennas for each frequency.						
HG2404CU-NF	L	800 MHz-3.0 GHz, 3.5 dBi, Ceiling Mount DAS Antenna, N Female Connector	25.95	24.39	22.84	CALL
HG2404CU-RSP	L	800 MHz-3.0 GHz, 3.5 dBi, Ceiling Mount DAS Antenna, RP-SMA Plug Connector	25.95	24.39	22.84	CALL
HG2404CU-RTP	L	800 MHz-3.0 GHz, 3.5 dBi, Ceiling Mount DAS Antenna, RP-TNC Plug Connector	25.95	24.39	22.84	CALL
HG72704CU-NF	L	700 MHz-3/4 dBi, Ceiling Mount DAS Antenna, N Female Connector	36.35	33.44	30.53	CALL
HG72704CU-RSP	L	700 MHz-3/4 dBi, Ceiling Mount DAS Antenna, RP-SMA Plug Connector	36.35	33.44	30.53	CALL
HG72704CU-RTP	L	700 MHz-3/4 dBi, Ceiling Mount DAS Antenna, RP-TNC Plug Connector	36.35	33.44	30.53	CALL

2.4 GHz / 2.4-5.8 GHz Ceiling Antennas - Indoor Single Band / Dual Band / MIMO Antennas

HyperLink® offers a number of Ceiling Antennas in 2.4 GHz and 2.4/5.8 GHz frequencies for many indoor applications. The coverage is 360° and operating with single feed (1 X 1) as well as the new MIMO Multiple feeds (3 X 3 and 6 X 6). MIMO antennas provide the user with a single antenna to couple with the many multiple feed wireless radios operating in 802.11a/b/g/n.

2.4 GHz MIMO Spatial Diversity Ceiling Antennas

HG2403-SDC-3NF	J	3 dBi, Spatial Diversity Ceiling Antenna, (3) N Female Connectors	58.19	55.86	53.53	CALL
HG2403-SDC-3NM	J	3 dBi, Spatial Diversity Ceiling Antenna, (3) N Male Connectors	58.19	55.86	53.53	CALL
HG2403-SDC-3RSP	J	3 dBi, Spatial Diversity Ceiling Antenna, (3) RP-SMA Plug Connectors	58.19	55.86	53.53	CALL
HG2403-SDC-3RTP	J	3 dBi, Spatial Diversity Ceiling Antenna, (3) RP-TNC Plug Connectors	58.19	55.86	53.53	CALL

2.4 - 5.8 GHz Dual Band MIMO Spatial Diversity Ceiling Antennas

HG2458-3SDC-3NF	J	3 dBi, Dual Band Spatial Diversity, (3) N Female Connectors	58.19	54.70	51.21	CALL
HG2458-4SDC-6NF	K	4 dBi, Dual Band Spatial Diversity, (6) N Female Connectors	87.31	82.07	76.83	CALL
HG2458-4SDC-6NM	K	4 dBi, Dual Band Spatial Diversity, (6) N Male Connectors	87.31	82.07	76.83	CALL
HG2458-4SDC-6RSP	K	4 dBi, Dual Band Spatial Diversity, (6) RP-SMA Plug Connectors	87.31	82.07	76.83	CALL
HG2458-4SDC-6RTP	K	4 dBi, Dual Band Spatial Diversity, (6) RP-TNC Plug Connectors	87.31	82.07	76.83	CALL

2.4 - 5.8 GHz Dual Band Ceiling Antennas

HG2458CU-NF	L	3 dBi, Dual Band Ceiling Antenna, N Female Connector	46.75	43.01	39.27	CALL
HG2458CU-RTP	L	3 dBi, Dual Band Ceiling Antenna, RP-TNC Plug Connector	46.75	43.01	39.27	CALL

Mounting Brackets for Antennas, Amplifiers and Surge Protectors

L-com offers an extensive line of mounting bracket options for its antennas, amplifiers, and surge protectors. Options include wall mount, window mount, mast mount and more. Visit us online at L-com.com for complete bracket dimensions and specifications.

HGX-LPMOUNT01	ALQ2-NMNFBS Surge Protector Mounting Bracket	5.99	5.51	5.03	CALL
HGX-PMT02	Indoor Antenna Mounting Kit, Small Metal Tilt & Swivel	11.99	11.03	10.07	CALL
HGX-PMT03	Indoor Antenna Mounting Kit, Medium Plastic Tilt & Swivel	13.99	12.87	11.75	CALL
HGX-PMT04	Large Metal Tilt & Swivel Mounting Bracket for Wall or Mast Mounting	22.99	21.15	19.31	CALL
HGX-PMT06	60° Tilt & Swivel Mounting Kit for Mounting to 1.25" to 2" Dia. Masts	10.95	10.07	9.20	CALL
HGX-PMT07	Stationary Mounting Kit for Mounting to 1.25" to 2" Dia. Masts	6.99	6.43	5.87	CALL
HGX-PMT08	Suction Cup Window Mounting Kit for Select HyperLink Antennas	11.99	11.03	10.07	CALL
HGX-PMT11	Heavy Duty Stationary Mast Mounting Kit for Mounting to 1.25" to 2" Dia. Masts	12.99	11.95	10.91	CALL
HGX-PMT14	Mast Mount Kit for Outdoor Filters/Splitters 1.25" to 2" Dia. Masts	14.95	13.75	12.56	CALL
HGX-PMT15	Indoor Antenna Mounting Kit - Compact Metal Tilt & Swivel	11.99	11.03	10.07	CALL
HGX-PMT23	Heavy Duty Angled Mast Antenna Mount	10.95	10.07	9.20	CALL
HGX-PMT26	Antenna Array Pole Mount Kit for 120 Degree Sectorial Antennas	129.95	119.55	109.16	CALL
HGX-PMT27	Antenna Array Pole Mount Kit for 90 Degree Sectorial Antennas	149.95	137.95	125.96	CALL
HGX-PMT31	Sector Panel Antenna Replacement Mounting Hardware	54.95	50.55	46.16	CALL
HGX-MMOUNT01	Ratchet Style Marine Antenna Mount	14.95	13.75	12.56	CALL
HGX-UMOUNT	Powder Coated Galvanized Steel "DSS-style" Arm-Outdoor Wall Mounting 21"	17.99	17.27	16.55	CALL
HGX-UMOUNT-10PK	Powder Coated Galvanized Steel "DSS-style" Arm-Outdoor Wall Mounting 10 Pack	137.99	132.47	126.95	CALL
HGX-UMOUNT01	Powder Coated Galvanized Steel "DSS-style" Arm-Outdoor Wall Mounting 26.7"	18.99	18.23	17.47	CALL
HGX-UMOUNT01-10PK	Powder Coated Galvanized Steel "DSS-style" Arm-Outdoor Wall Mounting 10 Pack	149.99	143.99	137.99	CALL
HGX-UMOUNT02	Ceiling/Wall Mount for 4.5" Sq. and 8.5" Sq. Patch Antennas	17.99	17.27	16.55	CALL
HGX-UMOUNT04	Universal Corner Mounting Bracket	28.99	27.83	26.67	CALL
HGX-UMOUNT07	Universal Tube Antenna/Satellite Dish Mount	26.99	25.91	24.83	CALL

RET/AISG 8-Pin FS1 Type Male or Female Connectors

Remote Electrical Tilt (RET) antenna systems are designed so that wireless providers can make adjustments remotely to their antenna systems. The Antenna Interface Standards Group (AISG) has created specifications for the control interface for these types of systems. L-com now offers these FS1 type connectors for AISG applications as well as industrial control applications.


AISGM-2000	RET/AISG 8-Pin FS1 Type Connector, Male	13.99	13.43	12.87	CALL
AISGF-2000	RET/AISG 8-Pin FS1 Type Connector, Female	13.99	13.43	12.87	CALL

RET/AISG 6-Conductor Control Cable Assemblies

L-com's 6-Conductor Remote Electrical Tilt (RET)/AISG compatible control cable assemblies are terminated with Male and Female FS1 type DIN connectors. The connectors on these cable assemblies are interchangeable with Amphenol C 901 A/B/C and Binder 423 series connectors.

CA-AISG6MFM01	RET/AISG 6-Conductor Control Cable, Male/Female, 1.0m	59.00	57.23	55.46	CALL
CA-AISG6MFM02	RET/AISG 6-Conductor Control Cable, Male/Female, 2.0m	62.90	61.01	59.13	CALL
CA-AISG6MFM03	RET/AISG 6-Conductor Control Cable, Male/Female, 3.0m	66.80	64.80	62.79	CALL
CA-AISG6MFM04	RET/AISG 6-Conductor Control Cable, Male/Female, 4.0m	71.90	69.74	67.59	CALL
CA-AISG6MFM05	RET/AISG 6-Conductor Control Cable, Male/Female, 5.0m	75.70	73.43	71.16	CALL
CA-AISG6MFM06	RET/AISG 6-Conductor Control Cable, Male/Female, 6.0m	79.60	77.21	74.82	CALL
CA-AISG6MFM09	RET/AISG 6-Conductor Control Cable, Male/Female, 9.0m	92.60	89.82	87.04	CALL
CA-AISG6MFM10	RET/AISG 6-Conductor Control Cable, Male/Female, 10.0m	97.65	94.72	91.79	CALL
CA-AISG6MFM15	RET/AISG 6-Conductor Control Cable, Male/Female, 15.0m	117.00	113.49	109.98	CALL
CA-AISG6MFM20	RET/AISG 6-Conductor Control Cable, Male/Female, 20.0m	136.30	132.21	128.12	CALL
CA-AISG6MFM30	RET/AISG 6-Conductor Control Cable, Male/Female, 30.0m	176.30	171.01	165.72	CALL
CA-AISG6MFM40	RET/AISG 6-Conductor Control Cable, Male/Female, 40.0m	214.90	208.45	202.01	CALL
CA-AISG6MFM50	RET/AISG 6-Conductor Control Cable, Male/Female, 50.0m	254.80	247.16	239.51	CALL
CA-AISG6MFM60	RET/AISG 6-Conductor Control Cable, Male/Female, 60.0m	293.50	284.69	275.89	CALL

Item #	Description	List Price
6-Conductor RET/AISG Control Cable by the Meter		
L-com now offers 6-Conductor Remote Electrical Tilt (RET) control cable, by the meter.		
CA-AISG6-METER	6-Conductor Control Cable, per Meter	3.99

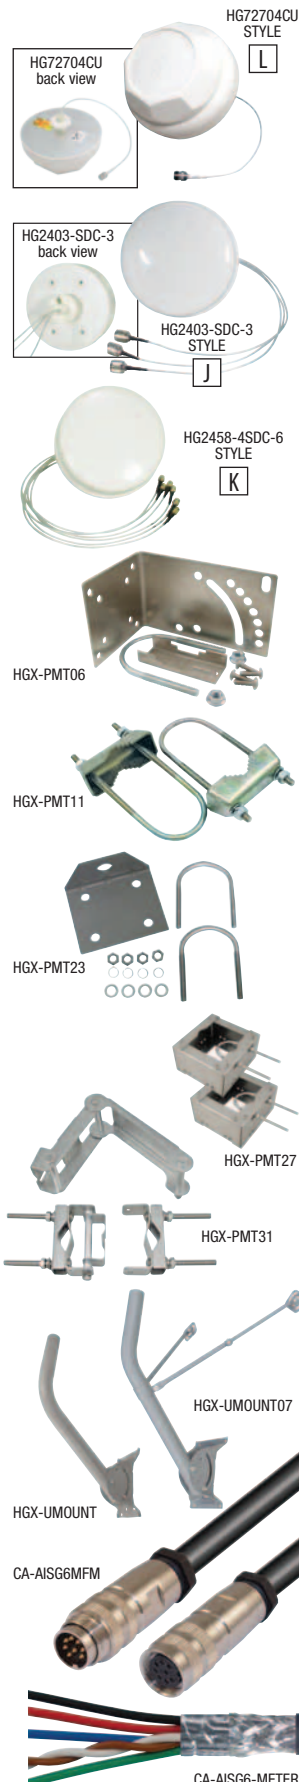



What are Amplifiers?

Wireless LAN Amplifiers are a type of electronic amplifier used to convert a low-power radio-frequency signal into a larger signal of significant power, typically used for driving the antenna of a transmitter.


How are Amplifiers used?

Wireless LAN Amplifiers are typically connected via low loss coaxial cable to a radio on one end and then to either a splitter or filter and then to an antenna. Sometimes they're connected directly to an antenna when a filter or splitter is not required.

Where are Amplifiers used?

Wireless LAN Amplifiers are used in wireless communications networks for public, private, military and government applications. Amplifiers can be used indoors and outdoors exposed to the elements or used in an equipment enclosure.


Typical Amplifier Connections

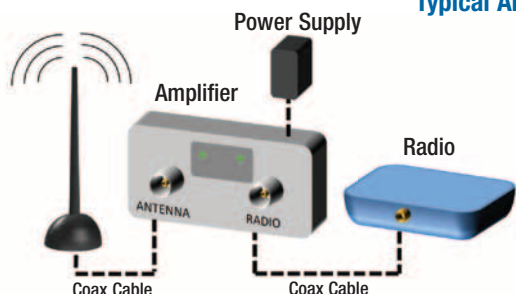

Indoor Amplifier Connection Diagram



See the video at L-com.com/Videos/A30

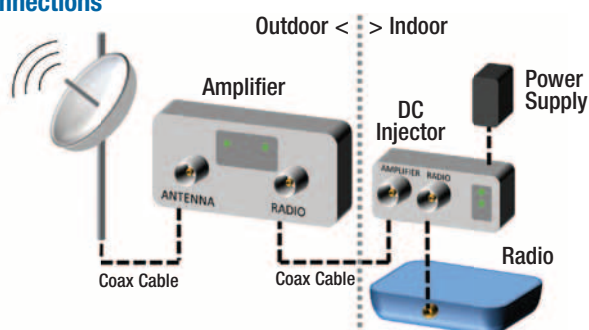

Outdoor Amplifier Connection Diagram




See the video at L-com.com/Videos/A31

Automatic Power Control (APC)

The key requirements of bi-directional amplifiers for use with the new high data rate 802.11a/g/n radios is Automatic Power Control (APC), fast switching speed and good linearity. A 802.11a/g/n radio is very sensitive to signal distortion. Older amplifiers designed for use with 802.11b radios will not function properly with the newer radios. In 2002, we were the first company to

offer an 802.11g bi-directional amplifier with APC. The use of a competitor's fixed gain amplifier with the new rate 802.11a/g/n radio is guaranteed to degrade radio or range performance. L-com's APC will hold transmit power constant regardless of data rate. **Note:** Automatic Power Control (APC) is also known as Automatic Gain Control (AGC).

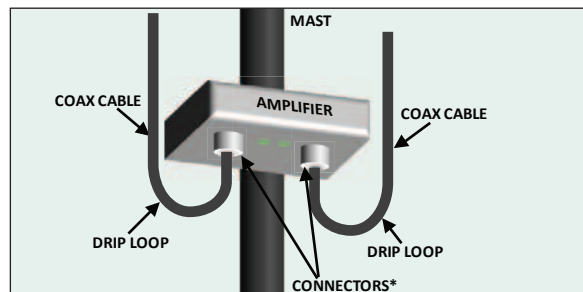

Outdoor WiFi Amplifier installation best practices

To protect your amplifier and attached equipment we recommend the use of coaxial surge and lightning protectors ([pages 34-37](#)). Also make sure to leave drip loops on your cables and use moldable weatherproof tape on all connectors that reside outdoors.

For added protection, moldable or self-healing weatherproof tape is recommended to be put on connectors after cable is attached.

***Note:** Do not install with connectors facing up. This may lead to amplifier damage and void warranty.

Amplifier products are available for export, military, licensed amateur radio (ham radio) and OEM component sales only and as part of complete FCC Certified Systems. Individual amplifier products are not offered for sale in the USA. Please note that additional documentation may be required to purchase a HyperLink® brand amplifier. In those cases an L-com sales associate will contact you to complete your order.

Item #	Style	Description	1-4	5-9	10-24	25+
--------	-------	-------------	-----	-----	-------	-----

HyperAmp® WLAN and WiFi Amplifiers/Boosters - Upgrade Your Operating Range and Performance

HyperLink® is the leader in bi-directional amplifiers/boosters for WiFi and wireless LAN applications. Consisting of a low-noise receive amplifier and a transmit power amplifier, they offer significant improvement in operating range and performance. A key feature of HyperLink® amplifiers is the Active Power Control circuit (also known as Automatic Gain Control - AGC). This automatically adjusts the amplifier's gain to provide a constant output power regardless of cable length.

HyperLink® 2.4 GHz Indoor Amplifiers with Power Supply

HA2401MG-100	A	100 mW, Compact Series, 802.11b/g/n, Type N Female Connectors	125.00	118.75	112.50	CALL
HA2401MG-250	A	250 mW, Compact Series, 802.11b/g/n, Type N Female Connectors	135.00	128.25	121.50	CALL
HA2401MG-500	A	500 mW, Compact Series, 802.11b/g/n, Type N Female Connectors	145.00	137.75	130.50	CALL
HA2401MG-1000	A	1 Watt, Compact Series, 802.11b, Type N Female Connectors	145.00	137.75	130.50	CALL
HA2401RTMG-100*	A	100 mW, Compact Series, 802.11b/g/n, RP-TNC Jack Connectors	125.00	118.75	112.50	CALL
HA2401RTMG-250*	A	250 mW, Compact Series, 802.11b/g/n, RP-TNC Jack Connectors	135.00	128.25	121.50	CALL
HA2401RTMG-500*	A	500 mW, Compact Series, 802.11b/g/n, RP-TNC Jack Connectors	145.00	137.75	130.50	CALL
HA2401RTMG-1000*	A	1 Watt, Compact Series, 802.11b, RP-TNC Jack Connectors	145.00	137.75	130.50	CALL
HA2401GI-100	E	100 mW, 802.11b/g/n, Type N Female Connectors	150.00	142.50	135.00	CALL
HA2401GI-250	E	250 mW 802.11b/g/n, Type N Female Connectors	160.00	152.00	144.00	CALL
HA2401GI-500	E	500 mW 802.11b/g/n, Type N Female Connectors	170.00	161.50	153.00	CALL
HA2401GI-1000	E	1 Watt, 802.11b, Type N Female Connectors	170.00	161.50	153.00	CALL
HA2401GXI-1000	B	1 Watt, 802.11b/g/n, Type N Female Connectors	200.00	190.00	180.00	CALL
HA2401RTGI-100*	E	100 mW, 802.11b/g/n, RP-TNC Jack Connectors	150.00	142.50	135.00	CALL
HA2401RTGI-250*	E	250 mW, 802.11b/g/n, RP-TNC Jack Connectors	160.00	152.00	144.00	CALL
HA2401RTGI-500*	E	500 mW, 802.11b/g/n, RP-TNC Jack Connectors	170.00	161.50	153.00	CALL
HA2401RTGI-1000	E	1 Watt, 802.11b, RP-TNC Jack Connectors	170.00	161.50	153.00	CALL
HA2401RTGXI1000*	B	1 Watt, 802.11b/g/n, RP-TNC Jack Connectors	200.00	190.00	180.00	CALL
HA2402GX-NF	B	2 Watt, 802.11b/g/n, Type N Female Connectors	250.00	237.50	225.00	CALL
HA2401DX-XL3000	B	3 Watt, 802.11b, Type N Female Connectors	265.00	251.75	238.50	CALL
HA2403GTI-NF	G	3 Watt, 802.11b/g/n, Type N Female Connectors	595.00	565.25	535.50	CALL
HA2404GTI-NF	G	4 Watt, 802.11b/g/n, Type N Female Connectors	645.00	612.75	580.50	CALL
HA2405GTI-NF	G	5 Watt, 802.11b/g/n, Type N Female Connectors	700.00	665.00	630.00	CALL
HA2406TI-NF	G	6 Watt, 802.11b, Type N Female Connectors	700.00	665.00	630.00	CALL
HA2408TI-NF	G	8 Watt, 802.11b, Type N Female Connectors	750.00	712.50	675.00	CALL
HA2408GTI-NF	G	8 Watt, 802.11b/g/n, Type N Female Connectors	1700.00	1615.00	1530.00	CALL
HA2410GTI-NF	G	10 Watt, 802.11b/g/n, Type N Female Connectors	1900.00	1805.00	1710.00	CALL
HA2420TI-NF	G	20 Watt, 802.11b, Type N Female Connectors	2400.00	2280.00	2160.00	CALL
HA2425TI-NF	G	25 Watt, 802.11b, Type N Female Connectors	2500.00	2375.00	2250.00	CALL
HA240105GAI-NF	G	1/5 Watt, Switchable 802.11b/g/n, Type N Female Connectors	950.00	902.50	855.00	CALL
HA240510GAI-NF	G	5/10 Watt, Switchable 802.11b & 802.11b/g/n, Type N Female Connectors	850.00	807.50	765.00	CALL
HA2401025GAI-NF	G	10/25 Watt, Switchable 802.11b & 802.11b/g/n, Type N Female Connectors	2600.00	2470.00	2340.00	CALL

*These models also available in FCC Certified Amplifier Kits

HyperLink® 2.4 GHz Outdoor Amplifiers with DC Injector and Power Supply

HA2401G-100	C	100 mW, 802.11b/g/n, Type N Female Connectors	170.00	161.50	153.00	CALL
HA2401G-250	C	250 mW, 802.11b/g/n, Type N Female Connectors	180.00	171.00	162.00	CALL
HA2401G-500	C	500 mW, 802.11b/g/n, Type N Female Connectors	190.00	180.50	171.00	CALL
HA2401G-1000	C	1 Watt, 802.11b, Type N Female Connectors	190.00	180.50	171.00	CALL
HA2401GX-1000	D	1 Watt, 802.11b/g/n, Type N Female Connectors	220.00	209.00	198.00	CALL
HA2401RTG-100*	C	100 mW, 802.11b/g/n, RP-TNC Jack Connectors	170.00	161.50	153.00	CALL
HA2401RTG-250*	C	250 mW, 802.11b/g/n, RP-TNC Jack Connectors	180.00	171.00	162.00	CALL
HA2401RTG-500*	C	500 mW, 802.11b/g/n, RP-TNC Jack Connectors	190.00	180.50	171.00	CALL
HA2401RTG-1000	C	1 Watt, 802.11b, RP-TNC Jack Connectors	190.00	180.50	171.00	CALL
HA2401RTGX-1000*	D	1 Watt, 802.11b/g/n, RP-TNC Jack Connectors	220.00	209.00	198.00	CALL
HA2402GX-NF	D	2 Watt, 802.11b/g/n, Type N Female Connectors	270.00	256.50	243.00	CALL
HA2401-XL3000	D	3 Watt, 802.11b, Type N Female Connectors	270.00	256.50	243.00	CALL
HA2403GT-NF	G	3 Watt, 802.11b/g/n, Type N Female Connectors	670.00	636.50	603.00	CALL
HA2404GT-NF	G	4 Watt, 802.11b/g/n, Type N Female Connectors	725.00	688.75	652.50	CALL
HA2405GT-NF	G	5 Watt, 802.11b/g/n, Type N Female Connectors	775.00	736.25	697.50	CALL
HA2406T-NF	G	6 Watt, 802.11b, Type N Female Connectors	775.00	736.25	697.50	CALL
HA2408T-NF	G	8 Watt, 802.11b, Type N Female Connectors	825.00	783.75	742.50	CALL
HA2408GT-KIT	G	8 Watt, 802.11b/g/n, Type N Female Connectors, Includes NEMA Enclosure	2100.00	1995.00	1890.00	CALL
HA2410GT-KIT	G	10 Watt, 802.11b/g/n, Type N Female Connectors, Includes NEMA Enclosure	2300.00	2185.00	2070.00	CALL
HA2420T-KIT	G	20 Watt, 802.11b, Type N Female Connectors, Includes NEMA Enclosure	2800.00	2660.00	2520.00	CALL
HA2425T-KIT	G	25 Watt, 802.11b, Type N Female Connectors, Includes NEMA Enclosure	2900.00	2755.00	2610.00	CALL

*These models also available in FCC Certified Amplifier Kits

HyperLink® 2.4 GHz Indoor PoE Amplifiers

HyperLink® PoE amplifier models feature a built-in Power over Ethernet interface. This allows the amplifier to receive its power by the same Cat5 cable used to pass Data and Power to an additional PoE device. This eliminates the need for an additional DC Injector and coax cable, simplifying installation.

HA2401GE-250	E	250 mW, 802.11b/g/n, Type N Female Connectors (Power Supply Not Included)	190.00	180.50	171.00	CALL
HA2401GE-500	E	500 mW, 802.11b/g/n, Type N Female Connectors (Power Supply Not Included)	200.00	190.00	180.00	CALL
HA2401GXE-1000	B	1 Watt, 802.11b/g/n, Type N Female Connectors (Power Supply Not Included)	225.00	213.75	202.50	CALL
HA2401GXE-KIT02	B	1 Watt, 802.11b/g/n, Type N Female Connectors (Includes Pwr Supply/PoE Injector)	255.00	242.25	229.50	CALL
HA2401GXE-2000	B	2 Watt, 802.11b/g/n, Type N Female Connectors (Power Supply Not Included)	275.00	261.25	247.50	CALL
HA2401GXE-3000	B	3 Watt, 802.11b, Type N Female Connectors (Power Supply Not Included)	275.00	261.25	247.50	CALL
HA2401RTGE-100*	E	100 mW, 802.11b/g/n, RP-TNC Jack Connectors (Power Supply Not Included)	175.00	166.25	157.50	CALL
HA2401RTGE-250*	E	250 mW, 802.11b/g/n, RP-TNC Jack Connectors (Power Supply Not Included)	185.00	175.75	166.50	CALL
HA2401RTGE-500*	E	500 mW, 802.11b/g/n, RP-TNC Jack Connectors (Power Supply Not Included)	195.00	185.25	175.50	CALL
HA2401RTGXE1000*	B	1 Watt, 802.11b/g/n, RP-TNC Jack Connectors (Power Supply Not Included)	225.00	213.75	202.50	CALL


*These models also available in FCC Certified Amplifier Kits



HA2401MG-1000
STYLE
A



HA2401GXI-1000
STYLE
B



HA241025GAI-NF
STYLE
G



HA2401G-100
STYLE
C



HA2402GX-NF
STYLE
D



HA2405GT-NF
STYLE
G



HA2401GXE-KIT02
STYLE
B



HA2401RTGE-100
STYLE
E

Setup an Indoor WiFi Booster



Online Video

L-com.com/Videos/A30

HAKIT-RTGIU-100

STYLE

E



HAKIT-RTGXIU-1000

STYLE

B



HAKIT-RTGXU-1000

STYLE

D



HAKIT-RTMG-100

STYLE

A



HAKIT-GE-100

STYLE

F



AXA-RTPRSJ



CA-RSPRTC19



BPF24-806



Item #	Style	Description	1-4	5-9	10-24	25+
--------	-------	-------------	-----	-----	-------	-----

HyperLink® 2.4 GHz FCC Certified Amplifier / Booster Kits

L-com makes it easy to boost your performance with our 2.4 GHz 802.11b/g FCC certified WiFi amplifier/booster kits. Available to our customers in the USA, these kits can be purchased without any special FCC licenses or FCC forms to fill out. Each kit includes:

- 2.4 GHz WiFi amplifier with RP-TNC connectors
- Removable 2 dBi rubber duck antenna
- DC Injector (with outdoor kits)
- 802.11g USB wireless Ethernet adapter
- Power supply (except for PoE kits)
- Installation CD with drivers and wireless utility

How to Setup a Laptop WiFi Booster Kit (Indoor Use)



See the video at L-com.com/Videos/A32



HyperLink® 2.4 GHz FCC Certified Indoor Amplifier Kits / Booster Kits

HAKIT-RTGIU-100	E	100 mW 802.11g, Amplifier Kit, RP-TNC Connectors	150.00	142.50	135.00	CALL
HAKIT-RTGIU-250	E	250 mW 802.11g, Amplifier Kit, RP-TNC Connectors	160.00	152.00	144.00	CALL
HAKIT-RTGIU-500	E	500 mW 802.11g, Amplifier Kit, RP-TNC Connectors	170.00	161.50	153.00	CALL
HAKIT-RTGXIU-1000	B	1 Watt 802.11g, Amplifier Kit, RP-TNC Connectors	200.00	190.00	180.00	CALL

HyperLink® 2.4 GHz FCC Certified Outdoor Amplifier Kits / Booster Kits

HAKIT-RTGU-100	E	100 mW 802.11g, Amplifier Kit, RP-TNC Connectors	170.00	161.50	153.00	CALL
HAKIT-RTGU-250	E	250 mW 802.11g, Amplifier Kit, RP-TNC Connectors	180.00	171.00	162.00	CALL
HAKIT-RTGU-500	E	500 mW 802.11g, Amplifier Kit, RP-TNC Connectors	190.00	180.50	171.00	CALL
HAKIT-RTGXU-1000	D	1 Watt 802.11g, Amplifier Kit, RP-TNC Connectors	220.00	209.00	198.00	CALL

HyperLink® 2.4 GHz FCC Certified Economy Indoor Amplifier / Booster Kits

HAKIT-RTMG-100	A	100 mW 802.11g Indoor Economy Amplifier Kit, RP-TNC Connectors	125.00	118.75	112.50	CALL
HAKIT-RTMG-250	A	250 mW 802.11g Indoor Economy Amplifier Kit, RP-TNC Connectors	135.00	128.25	121.50	CALL
HAKIT-RTMG-500	A	500 mW 802.11g Indoor Economy Amplifier Kit, RP-TNC Connectors	145.00	137.75	130.50	CALL
HAKIT-RTMG-1000	A	1 Watt 802.11b Indoor Economy Amplifier Kit, RP-TNC Connectors	145.00	137.75	130.50	CALL

HyperLink® 2.4 GHz FCC Certified Indoor PoE Amplifier / Booster Kits


HAKIT-GE-100	F	100 mW 802.11g Indoor PoE Amplifier Kit, RP-TNC Connectors	175.00	166.25	157.50	CALL
HAKIT-GE-250	F	250 mW 802.11g Indoor PoE Amplifier Kit, RP-TNC Connectors	185.00	175.75	166.50	CALL
HAKIT-GE-500	F	500 mW 802.11g Indoor PoE Amplifier Kit, RP-TNC Connectors	195.00	185.25	175.50	CALL
HAKIT-GXE-1000	F	1 Watt 802.11b Indoor PoE Amplifier Kit, RP-TNC Connectors	225.00	213.75	202.50	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------


HyperLink® FCC Certified Amplifier Kit Accessories

AXA-RTPRSJ	RP-TNC Plug to RP-SMA Jack Adapter	4.83	4.44	4.06	CALL
CA-RSPRTC19	RP-SMA Plug to RP-TNC Plug Pigtail, 19in (48.3cm), 100-Series Cable	16.20	15.23	14.26	CALL
CA-RSJRTPA002	RP-SMA Jack to RP-TNC Plug Pigtail, 2.0ft (0.6m), 195-Series Cable	17.00	15.30	13.60	CALL
BPF24-806	2.4 GHz 8-Pole Indoor Bandpass Filter, Channel 6	104.95	98.65	92.36	CALL
BPF24-806A	2.4 GHz 8-Pole Outdoor Bandpass Filter, Channel 6	146.95	138.13	129.32	CALL

Typical Amplifier Connections

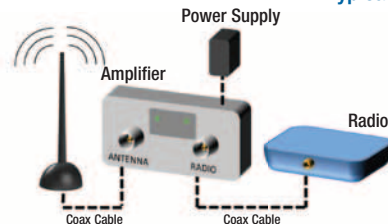

Indoor Amplifier Connection Diagram

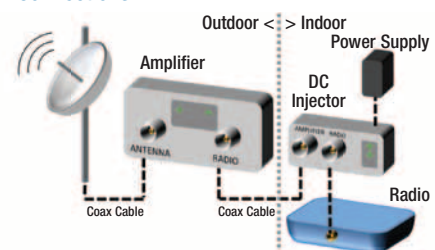

Outdoor Amplifier Connection Diagram

Item #	Style	Description	1-4	5-9	10-24	25+
--------	-------	-------------	-----	-----	-------	-----

5.8 GHz Bi-Directional Amplifiers

L-com's HyperLink® 5.8 GHz WLAN amplifiers are compatible with IEEE 802.11a/n OFDM radios as well as radios using Direct Sequence or Frequency Hopping Spread Spectrum modulation and can be used for 5.8 GHz UNII, ISM IEEE 802.11a, and MESH wireless network applications.

HyperLink® 5.8 GHz Indoor Amplifiers with Power Supply

HA5801I-500	E	500 mW, 802.11a/n, Fixed Gain, Type N Female Connectors	170.00	161.50	153.00	CALL
HA5801I-1000SMA	F	1 Watt, 802.11a/n, Fixed Gain, SMA Female Connectors	220.00	209.00	198.00	CALL
HA5803I	G	3 Watt, 802.11a/n, Type N Female Connectors	1350.00	1282.50	1215.00	CALL
HA5805I	G	5 Watt, 802.11a/n, Type N Female Connectors	1450.00	1377.50	1305.00	CALL

HyperLink® 5.8 GHz Outdoor Amplifiers with DC Injector and Power Supply

HA5801-500	C	500 mW, 802.11a/n, Fixed Gain, Type N Female Connectors	220.00	209.00	198.00	CALL
HA5801-1000	F	1 Watt, 802.11a/n, Fixed Gain, Type N Female Connectors	270.00	256.50	243.00	CALL
HA5803	G	3 Watt, 802.11a/n, Type N Female Connectors	1400.00	1330.00	1260.00	CALL
HA5805	G	5 Watt, 802.11a/n, Type N Female Connectors	1500.00	1425.00	1350.00	CALL

3.5 GHz WiMAX Amplifiers

The HyperLink® HA3501X-1000 series are 1 Watt 3.5 GHz amplifiers ideal for 802.16e WiMAX wireless applications. These fixed gain amplifiers are available in both indoor (includes power supply) and outdoor (includes DC injector and power supply) models.

HyperLink® 3.5 GHz Indoor Amplifier

HA3501I-1000	F	1 Watt Indoor, 802.16e, Fixed Gain, Type N Female Connectors	220.00	209.00	198.00	CALL
--------------	---	--	--------	--------	--------	------

HyperLink® 3.5 GHz Outdoor Amplifier

HA3501-1000	F	1 Watt Outdoor, 802.16e, Fixed Gain, Type N Female Connectors	175.00	166.25	157.50	CALL
-------------	---	---	--------	--------	--------	------

4.9 GHz Bi-Directional Amplifiers

L-com's HyperLink® 4.9 GHz amplifiers are perfect for use in public safety and homeland security networks. Additionally these 4.9 GHz amplifiers are compatible with OFDM radios as well as radios using Direct Sequence or Frequency Hopping Spread Spectrum modulation.

HyperLink® 4.9 GHz Indoor Amplifiers with Power Supply

HA4903I	G	3 Watt, Type N Female Connectors	1650.00	1567.50	1485.00	CALL
HA4905I	G	5 Watt, Type N Female Connectors	1850.00	1757.50	1665.00	CALL

HyperLink® 4.9 GHz Outdoor Amplifiers with DC Injector Power Supply

HA4903	G	3 Watt, Type N Female Connectors	1700.00	1615.00	1530.00	CALL
HA4905	G	5 Watt, Type N Female Connectors	1900.00	1805.00	1710.00	CALL

900 MHz Bi-Directional Amplifiers

L-com's HyperLink® HA900 series WLAN amplifiers are compatible with 900 MHz wireless LAN equipment including the new generation 2.75 Mbit CCK (Complementary Code Keying) spread spectrum radios.

HyperLink® 900 MHz Indoor Amplifiers with Power Supply




HA900I-APC500	B	500 mW, Type N Female Connectors	325.00	308.75	292.50	CALL
HA901I-APC	B	1 Watt, Type N Female Connectors	355.00	337.25	319.50	CALL
HA903I-APC	B	3 Watt, Type N Female Connectors	405.00	384.75	364.50	CALL
HA905I-APC	G	5 Watt, Type N Female Connectors	475.00	451.25	427.50	CALL
HA910I-APC	G	10 Watt, Type N Female Connectors	675.00	641.25	607.50	CALL
HA925DX-XXX	H	25 Watt, Type N Female Connectors	775.00	736.25	697.50	CALL
HA905I-DM	G	5 Watt, OFDM Compatible, Type N Female Connectors	675.00	641.25	607.50	CALL

HyperLink® 900 MHz Outdoor Amplifiers with DC Injector and Power Supply

HA900-APC500	D	500 mW, Type N Female Connectors	375.00	356.25	337.50	CALL
HA901-APC	D	1 Watt, Type N Female Connectors	405.00	384.75	364.50	CALL
HA903-APC	D	3 Watt, Type N Female Connectors	455.00	432.25	409.50	CALL
HA905-APC	G	5 Watt, Type N Female Connectors	525.00	498.75	472.50	CALL
HA910-APC	G	10 Watt, Type N Female Connectors	725.00	688.75	652.50	CALL
HA925SE-XXX	H	25 Watt, Type N Female Connectors	825.00	783.75	742.50	CALL
HA905-DM	G	5 Watt, OFDM Compatible, Type N Female Connectors	725.00	688.75	652.50	CALL

Amplifier Accessories

- 0-3 GHz Coaxial Lightning Protectors - See [Page 37](#)
- Bandpass Channel Filters - See [Page 27](#)
- 0-6 GHz Coaxial Lightning Protectors - See [Page 37](#)




Setup an Outdoor
WiFi Booster



Online Video

L-com.com/Videos/A31



Wireless CPE, Access Points, Adapters

Wireless Networking Tutorial

What is a Wireless Network?

A wireless network is very similar to a wired network, the only thing that's missing are the cables that are used in a wired network that connect PCs and laptops to the switch (or Access Point/CPE/WiFi router in the case of a wireless network). Like wired Ethernet networks, 802.11x based wireless networks communicate via the Internet Protocol (IP). The end result is the same, PC and laptop access to the internet, printers, and servers. Additionally, 802.11 networks provide wireless access for devices such as smart phones and tablets.

Access Point/CPE Overview

An access point or Customer Premise Equipment (CPE) performs the function of connecting wireless users (and other wireless networks) to a wired router or wired WLAN controller. Most modern access points or CPEs can be configured for several modes of operation.

Access Point (AP) Mode:

Allows wireless equipment such as a Smart Phone or Laptop to be connected to a wired network. In this mode the

CPE unit is typically connected to a router on a wired network. The CPE unit provides security features that allow only select wireless devices to connect to it.

Wireless Client Mode:

In this mode the CPE unit connects to another active access point as if it were a wireless device like a Laptop. Once connected it can provide network/internet connectivity to wired devices without wireless functionality via the CPE's Ethernet port.

Bridge Mode:

Wireless bridge mode is used to connect two or more network segments that are physically separated. Using the WDS settings, only the selected CPEs can communicate with each other and will deny access to other wireless devices trying to access them. Bridges can be used in Point-to-Point (connecting two commercial buildings) or Point-to-Multipoint (connecting multiple buildings on a college campus) applications.

Repeater Mode:

This mode is used to extend the range of an existing access point. This mode is also ideal when an obstruction is preventing wireless connectivity within a select area. Repeaters are commonly used when providing wireless connectivity to multi-story buildings and large homes.

L-com Wireless CPE Features

2.4 GHz 802.11b/g/n CPE



5 GHz 802.11a/n MIMO CPE



802.11 Wireless Standards

IEEE Standard	802.11a	802.11b	802.11g	802.11n	802.11ac (Draft)
Year Released	1999	1999	2003	2009	2011 (Draft)
Frequency	5 GHz	2.4 GHz	2.4 GHz	2.4 / 5 GHz	5 GHz
Max. Data Rate	54 Mbps	11 Mbps	54 Mbps	600 Mbps	>1 Gbps
Typical Range Indoors*	100 ft.	100 ft.	125 ft.	225 ft.	TBD
Typical Range Outdoors*	400 ft.	450 ft.	450 ft.	825 ft.	TBD

*Range estimates are typical and require line of sight.

Wireless Network Design Resources

L-com offers an online library of wireless network application diagrams to show how our products work together to support various WiFi applications. Additionally we offer free technical design documents and calculators to help you with your wireless network applications.

See more online at L-com.com/resources

Item #	Description	List Price
--------	-------------	------------

L-com Brand CPE Wireless Access Points

Today's wireless market, more specifically the outdoor wireless market, continues to demand higher transmit power, greater dependability and advanced feature sets, all while keeping the client-side cost down. L-com brand CPEs are all-in-one cost effective weatherproof wireless devices featuring high output power as well as all the essential features for both operating as an Access Point or a CPE Client. This dual approach offers greater flexibility and reduced inventory stock as these units can perform all that is required for establishing reliable wireless networks.

WLAN-LCCPE28-1	L-com 2.4 GHz 802.11b/g/n Outdoor CPE	70.00
WLAN-LCCPE516-1	L-com 5 GHz 802.11a/n Outdoor CPE	85.00

L-com Brand USB Series Wireless Adapter

ARK-2404U-3	L-com 2.4 GHz 802.11b/g/n Outdoor USB Wireless Adapter Kit with 4 dBi Antenna - FCC/IC Certified	83.15
WLAN-LCUSB-01	L-com USB 2.0 Wireless 802.11g Adapter with 2 dBi Antenna	20.00
WLAN-LCUSB2458	L-com USB 2.0 Wireless 802.11a/b/g/n Adapter with 5 dBi Antenna	40.00

HyperLink® Dual Polarity Antenna Kits

L-com's 5.8 GHz ARK series combine a high gain antenna, high power L-com Wireless Access Point/CPE and the required cables into one cost savings package. Customers can enjoy the cost savings of these kits compared to purchasing components separately. Ideal for IEEE 802.11a/n WiFi applications, these 5.8 GHz ARK series kits are the perfect solution for WISP installers.

ARK4958DP-17Y-2	HyperLink 17 dBi Yagi Antenna/L-com Outdoor CPE/AP Kit	225.63
ARK4958DP-25D-2	HyperLink 25 dBi Dish Antenna/L-com Outdoor CPE/AP Kit	202.79
ARK4958DP-30D-2	HyperLink 30 dBi Dish Antenna/L-com Outdoor CPE/AP Kit	225.63
ARK4958DP-34D-2	HyperLink 34 dBi Dish Antenna/L-com Outdoor CPE/AP Kit	340.07
ARK5158DP-10U-2	HyperLink 10 dBi Omni Antenna/L-com Outdoor CPE/AP Kit	202.79
ARK5158DP-13U-2	HyperLink 13 dBi Omni Antenna/L-com Outdoor CPE/AP Kit	239.19
ARK5158DP-29D-2	HyperLink 28.5 dBi Dish Antenna/L-com Outdoor CPE/AP Kit	326.55
ARK5158DP-32D-2	HyperLink 32 dBi Dish Antenna/L-com Outdoor CPE/AP Kit	399.35

HyperLink® Dual Polarity Antenna Kits

L-com's 5.8 GHz ARK series combines a high gain antenna, high power Ubiquiti Wireless Access Point/CPE and the required cables into one cost savings package. Customers can enjoy the cost savings of these kits compared to purchasing these components separately. Ideal for IEEE 802.11a/n WiFi applications, these 5.8 GHz ARK series kits are the perfect solution for WISP installers.

ARK4958DP-17Y-1	HyperLink 17 dBi Yagi Antenna/Ubiquiti Rocket RM5 Radio Kit	223.59
ARK4958DP-25D-1	HyperLink 25 dBi Dish Antenna/Ubiquiti Rocket RM5 Radio Kit	201.75
ARK4958DP-30D-1	HyperLink 30 dBi Dish Antenna/Ubiquiti Rocket RM5 Radio Kit	223.59
ARK4958DP-34D-1	HyperLink 34 dBi Dish Antenna/Ubiquiti Rocket RM5 Radio Kit	333.83
ARK5158DP-10U-1	HyperLink 10 dBi Omni Antenna/Ubiquiti Rocket RM5 Radio Kit	201.75
ARK5158DP-13U-1	HyperLink 13 dBi Omni Antenna/Ubiquiti Rocket RM5 Radio Kit	237.11
ARK5158DP-29D-1	HyperLink 28.5 dBi Dish Antenna/Ubiquiti Rocket RM5 Radio Kit	321.35
ARK5158DP-32D-1	HyperLink 32 dBi Dish Antenna/Ubiquiti Rocket RM5 Radio Kit	392.07

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

HyperLink® MIMO Antennas with Ubiquiti® RocketM2/M5 Mounting Kit

These ARK Series kits feature HyperLink MIMO Dual Polarized 2.4 GHz and 5 GHz antennas available in Dish, Omni and Sector models. Included with each antenna is a unique mounting bracket that allows the Ubiquiti® RocketM2 or RocketM5 radio to be attached directly to the antenna. Also included are a pair of cable assemblies to connect the Rocket to the antenna. Customers can enjoy the cost saving of these kits compared to purchasing an Ubiquiti® antenna to use with the RocketM2 or M5 radio.

ARK2406DP-U-0	2.4 GHz 6 dBi Dual Polarized Omni Antenna w/Ubiquiti RocketM2 Mounting Kit	140.30	129.08	117.85	CALL
ARK2410DP-U-0	2.4 GHz 10 dBi Dual Polarized Omni Antenna w/Ubiquiti RocketM2 Mounting Kit	202.70	186.48	170.27	CALL
ARK2413DP-U-0	2.4 GHz 13 dBi Dual Polarized Omni Antenna w/Ubiquiti RocketM2 Mounting Kit	270.35	248.72	227.09	CALL
ARK5158DP-10U-0	5 GHz 10 dBi Dual Polarized Omni Antenna w/Ubiquiti RocketM5 Mounting Kit	155.95	146.59	137.24	CALL
ARK5158DP-13U-0	5 GHz 13 dBi Dual Polarized Omni Antenna w/Ubiquiti RocketM5 Mounting Kit	202.75	190.58	178.42	CALL
ARK2422DPD-0	2.4 GHz 22 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM2 Mounting Kit	171.55	157.83	144.10	CALL
ARK2425DPD-0	2.4 GHz 25 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM2 Mounting Kit	301.55	277.43	253.30	CALL
ARK4958DP-25D-0	5 GHz 25 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM5 Mounting Kit	155.95	143.47	131.00	CALL
ARK5158DP-29D-0	5 GHz 29 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM5 Mounting Kit	181.95	171.03	160.12	CALL
ARK4958DP-30D-0	5 GHz 30 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM5 Mounting Kit	181.95	167.39	152.84	CALL
ARK5158DP-32D-0	5 GHz 32 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM5 Mounting Kit	311.95	293.23	274.52	CALL
ARK4958DP-34D-0	5 GHz 34 dBi Dual Polarized Dish Antenna w/Ubiquiti RocketM5 Mounting Kit	311.95	286.99	262.04	CALL
ARK2414DP-090-0	2.4 GHz 14 dBi Dual Polarized 90° Sector Antenna w/Ubiquiti RocketM2 Mounting Kit	218.35	200.88	183.41	CALL
ARK5158-16DP-120-0	5 GHz 16 dBi Dual Polarized 120° Sector Antenna w/Ubiquiti RocketM5 Mounting Kit	140.35	134.74	129.12	CALL
ARK4958-17DP-090-0	5 GHz 17 dBi Dual Polarized 90° Sector Antenna w/Ubiquiti RocketM5 Mounting Kit	126.83	121.76	116.68	CALL
ARK5158-19DP-090-0	5 GHz 19 dBi Dual Polarized 90° Sector Antenna w/Ubiquiti RocketM5 Mounting Kit	187.15	179.66	172.18	CALL

Item #	Description	List Price
--------	-------------	------------

Ubiquiti® Access Points

As a distributor of Ubiquiti® WLAN products, L-com can now provide a complete wireless solution to our customers. **Note: Part numbers ending with -US are for use in the US only. Some models are not available on L-com.com, please call to place an order. For international models and part numbers, please see L-com.com.**

Ubiquiti® NanoStation, Loco and WiFiStation Access Points

The NanoStation, Loco and WiFiStation series product provide lower cost while maintaining the reliability and performance associated with the Ubiquiti line of wireless radios.

UB-NSM2	Ubiquiti NanoStation M2 802.11b/g/n/AirMAX Access Point	90.00
UB-NSM2-US	Ubiquiti NanoStation M2 802.11b/g/n/AirMAX Access Point-US Version	90.00
UB-WS-EXT	Ubiquiti WiFi Station USB 1000mW, 802.11g/n External Antenna	30.00



ARK4958DP-17Y-2



ARK5158DP-10U-0



ARK2425DPD-0



ARK5158-19DP-090-0



EN-ECB-600



EN-EAP-350



EN-EAP1750H



EN-EUB-1200AC



EN-ENH210




EN-ENH1750EXT



EN-ENS200

EN-ENS500EXT

Item #	Description	List Price
EnGenius® Access Points/Routers/Bridges/Clients		
L-com offers a broad line of EnGenius® access points, routers and wireless bridges.		
EnGenius® ECB Series Access Points		
With the quality and functionality expected of an EnGenius® product, the ECB series provides up to 800mW of high wireless output power and also adds advanced features such as SNMP management, Wireless Distribution System (WDS), and Power over Ethernet (PoE) capability.		
EN-ECB-300	EnGenius 802.11b/g/n Wireless-N, N300 Indoor Access Point/Client Bridge/WDS/Repeater	99.00
EN-ECB-350	EnGenius 802.11b/g/n Wireless-N, N300 Indoor Access Point/Client Bridge/WDS/Repeater	129.00
EN-ECB-600	EnGenius 802.11b/g/n Wireless-N, N600 Indoor Access Point/Client Bridge/WDS/Repeater	199.00

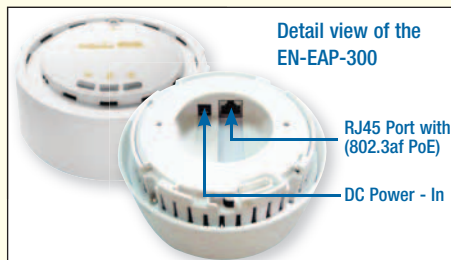Detail view of the
EN-EAP-300RJ45 Port with
(802.3af PoE)
DC Power - In**Aesthetic "Smoke Detector" Design**

- Minimal footprint and no protruding antennas
- Designed to blend in to various business environments
- Unobtrusive design prevents tampering to protect your investment

High 800mW Wireless Power

- Ensures robust signal to overcome long distances
- Offers superior WiFi coverage than leading brands

Multiple Wireless Names

- Broadcast multiple WiFi networks with one device
- Permits different levels of network access (VLAN Tagging)

Power over Ethernet (802.3af Compliant)

- Power and data over one cable to ease deployment

EnGenius® EAP and ESR Series A/P Routers Indoor

These series of A/P routers include "smoke detector" versions, mini routers and high power A/P routers. Some have integral antennas while others permit external and detachable antennas to be deployed for better coverage. The EAP Series are smoke detector looking Wireless Access Point / Universal Repeater that operates seamlessly in the 2.4 GHz frequency spectrum supporting the 802.11b (2.4 GHz, 11Mbps) standard and SuperG 108Mbps high speed feature. It's the best way to add wireless capability to your existing wired network or to add bandwidth to your wireless installation. The EnGenius XtraRange ESR series is a 2.4 GHz, 4-Port Wireless-N Router with wireless speeds range from 150Mbps up to 300Mbps. This sleek, cost-effective Wireless-N router is designed to offer robust wired and wireless connectivity and performance for computers, smartphones, tablet PCs in a home or small office.

EN-EAP-300	EnGenius 802.11b/g/n 29dBm WDS Bridge, VLAN Access Point	99.00
EN-EAP-350	EnGenius 800mW, 300Mbps, 802.11b/g/n Indoor Access Point	119.00
EN-EAP-900H	EnGenius 450Mbps, Wireless N900, 802.11b/g/n Indoor Access Point, Dual-Band	279.00
EN-EAP1750H	EnGenius 1750Mbps Wireless 802.11ac Indoor Access Point Dual-Band	399.00
EN-ESR-350	EnGenius 2.4 GHz Wireless N300 Cloud Gigabit Router with USB Port	50.00
EN-ESR-600	EnGenius 2.4/5 GHz Wireless N600 Cloud Gigabit Router, Dual-Band with USB Port	70.00

EnGenius® EUB Series 802.11b/g High Power USB Adapter

The EnGenius® EUB series USB WLAN adapters are designed for users who require maximum range and performance in their wireless networks. The EUB series offers a rich feature set including security features such as WPA and 802.1x.

EN-EUB-600	EnGenius Dual-Band Wireless N600 USB Adapter	40.00
EN-EUB-1200AC	EnGenius Dual-Band Wireless AC1200 USB Adapter	80.00
EN-EUB-9603H	EnGenius 802.11b/g/n High Power USB Adapter	45.00

EnGenius® ENH Series

The ENH series Business-Class Long-Range Wireless-N Outdoor Client Bridge/Access Point is an affordable, high-performance, secure wireless networking solution. Designed for outdoor deployments that require secure and robust wireless coverage, the ENH series is a great fit for demanding applications including high-speed IP camera and video streaming applications.


EN-ENH200	EnGenius 802.11b/g/n 500mW Integrated 10 dBi Antenna	89.00
EN-ENH200EXT	EnGenius Wireless Outdoor 500mW Long-range AP/Bridge w/ External Antenna Ports	89.00
EN-ENH900EXT	EnGenius 802.11b/g/n Dual-Band 3 x 3 Ruggedized Outdoor AP	749.00
EN-ENH202	EnGenius Wireless Outdoor 500mW Long-range AP/Bridge	99.00
EN-ENH210	EnGenius 802.11n 2.4GHz Wireless Out AP Bridge	269.00
EN-ENH500	EnGenius Long Range 11n 5GHz Wireless Bridge/AP	99.00
EN-ENH1750EXT	EnGenius 802.11ac Dual-Band 3 x 3 Ruggedized Outdoor AP	999.00
EN-ENH700EXT	EnGenius Long-Range Dual Radio 802.11n 500mW Outdoor AP	500.00

EnGenius® ENS Series

The ENS series is a long-range Wireless N Outdoor Client Bridge operating in the 2.4/5 GHz frequency bands at data rates from 150 to 300Mbps. ENS high power output of up to 400mW is ideal for high-speed wireless connection for building-to-building deployments or IP security camera wireless applications in parking lots or parking structures.


EN-ENS200	EnGenius High-Powered, Long-Range 2.4 GHz Wireless N150 Outdoor Client Bridge	60.00
EN-ENS200EXT	EnGenius High-Powered, Long-Range 2.4 GHz Wireless N150 Outdoor Access Point	60.00
EN-ENS202	EnGenius High-Powered, Long-Range 2.4 GHz Wireless N300 Outdoor Client Bridge	80.00
EN-ENS202EXT	EnGenius High-Powered, Long-Range 2.4 GHz Wireless N300 Outdoor Access Point	90.00
EN-ENS500	EnGenius High-Powered, Long-Range 5 GHz Wireless N300 Outdoor Client Bridge	80.00
EN-ENS500EXT	EnGenius High-Powered, Long-Range 5 GHz Wireless N300 Outdoor Access Point	90.00

Marina Wireless Network

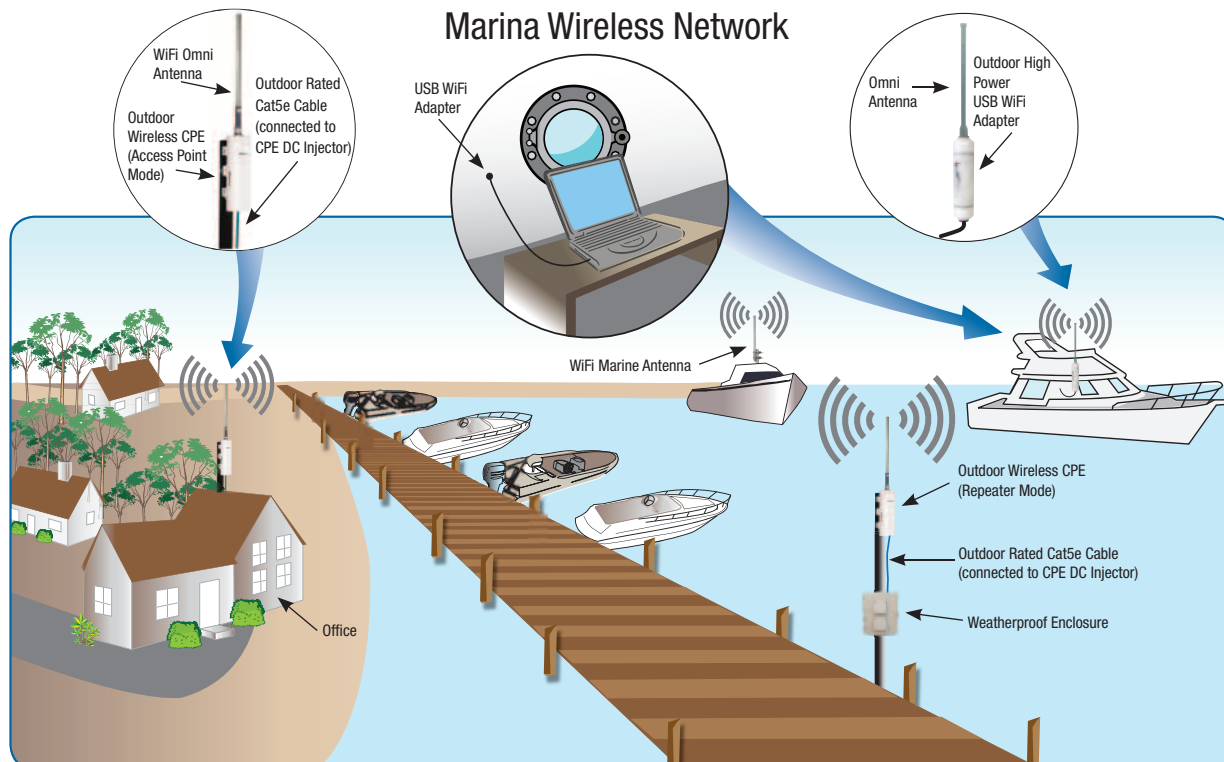

This diagram is representational only and depicts a typical Marina WiFi application. Each wireless installation is unique and results can vary due to many different environmental factors. For outdoor wireless networks Line of Sight (LOS) must be considered. You will need a clear unobstructed view of the antenna from the remote point in the link. Trees and leaves are obstructions to 802.11 frequencies so they will partially or entirely block the signal.

Campground Wireless Network

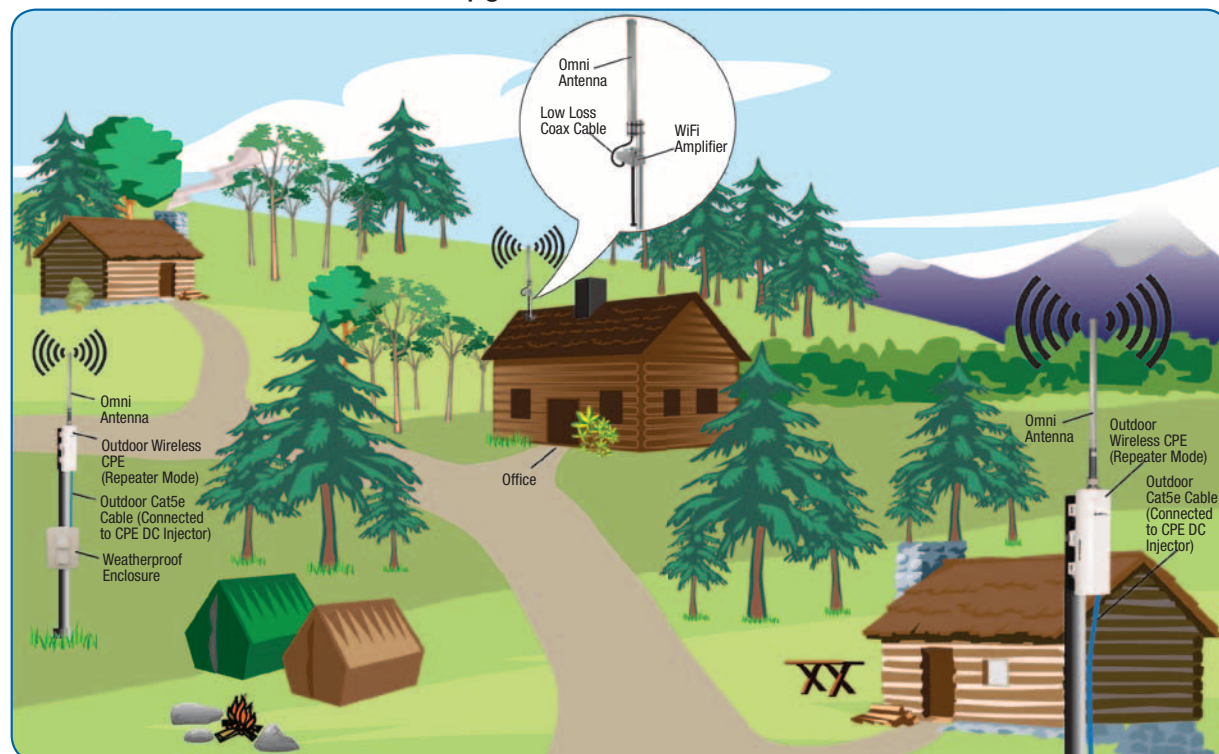

This diagram is representational only and depicts a typical campground WiFi application. Each wireless installation is unique and results can vary due to many different environmental factors. For outdoor wireless networks Line of Sight (LOS) must be considered. Basically that means you will need a clear unobstructed view of the antenna from the remote point in the link. Trees and leaves are obstructions to 802.11 frequencies so they will partially or entirely block the signal.




RF Filters / Splitters Tutorial

What are RF Filters?

RF Filters reduce out of band interference and improve performance of co-located equipment. An RF Filter will only pass the frequency and channel you are transmitting or receiving and reduce the interference of signals outside your channel. Interference is usually caused by transmission sources near the channel you are transmitting on.

L-com's RF Filters are available in full band versions or fixed channel versions and provide excellent channel rejection. All filters feature rugged aluminum construction and are available for indoor or outdoor applications.

Typical RF Filter Application

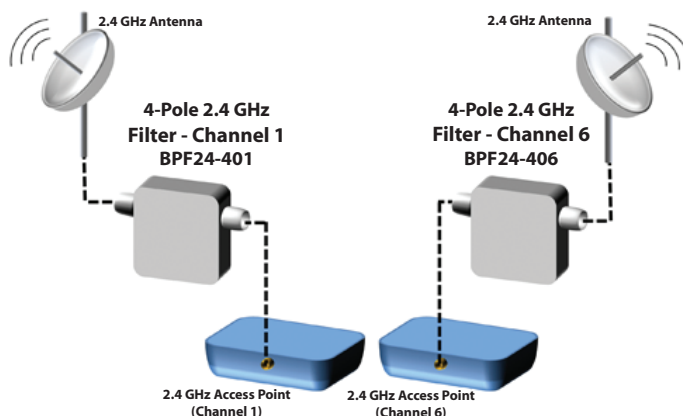


2.4 GHz Bandpass Channel Filter Application

What are RF Splitters / Combiners?

An RF Splitter/Combiner is a transmission component which divides or sums power between two or more ports. Typically they are used for connecting more than one antenna to a single radio and can also be used to connect multiple radios to a single antenna using the same frequency.

Typical RF Splitter Application

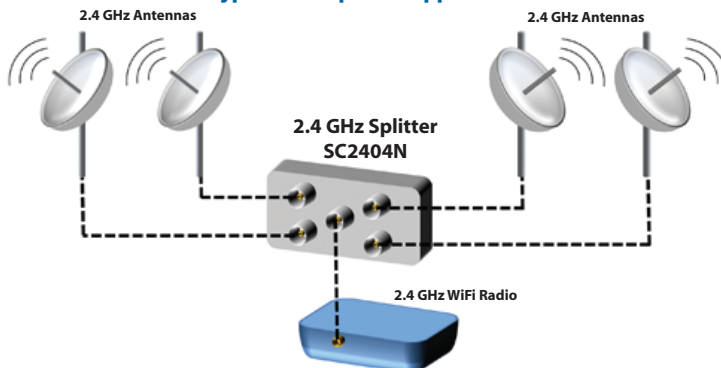

4-Way Signal Splitter Application




For more useful information go to....
L-com.com/Resources


What are RF Diplexers?

An RF Diplexer is a device that combines two signals onto a single transmission line. In general the two signals operate at different frequencies. L-com's Diplexers are designed to split 2.4 GHz and 5 GHz from a single radio feed to separate 2.4 GHz and 5 GHz antennas. Many dual-band 802.11a/b/g radios share a single antenna. These devices split these signals so that two separate 2.4 GHz and 5 GHz antennas can be used to improve performance. In addition, L-com Diplexers can also be used to combine 2.4 GHz or 5 GHz signals onto a single cable.

Typical RF Diplexer Applications

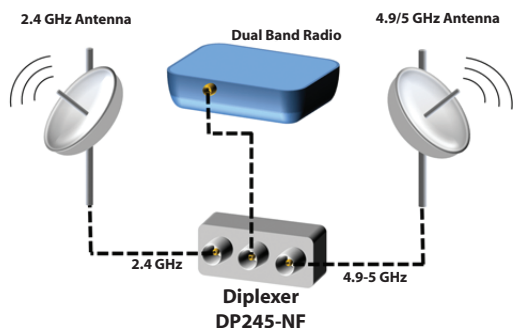

Dual Band Radio Application

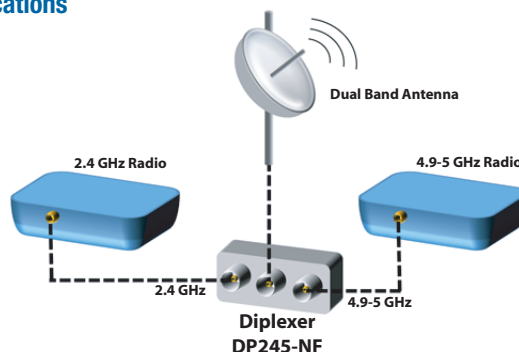

Dual Band Antenna Application

Item #	Description	1-9	10-24	25-99	100+
HyperLink® 800 MHz, 900 MHz, 2.4 GHz, 3.5 GHz and 5.8 GHz Signal Splitters/Signal Combiners					
L-com's signal splitters/signal combiners are used for connecting more than one antenna to a single radio. They feature weatherproof construction and can be installed indoors or outdoors. These flexible splitters can be used with amplified systems since they will pass DC power to all ports.					
800-2600 MHz Broadband Signal Splitters					
SCW02N	2-Way, Type N Female Connectors	47.20	43.42	39.65	CALL
SCW03N	3-Way, Type N Female Connectors	68.20	62.74	57.29	CALL
SCW04N	4-Way, Type N Female Connectors	89.20	82.06	74.93	CALL

900 MHz Signal Splitters

SC902N	2-Way, Type N Female Connectors	57.70	53.08	48.47	CALL
SC903N	3-Way, Type N Female Connectors	68.20	62.74	57.29	CALL

2.4 GHz Signal Splitters

SC2402N	2-Way, Type N Female Connectors	57.70	53.08	48.47	CALL
SC2402RTM	2-Way, RP-TNC Jack Connectors	57.70	53.08	48.47	CALL
SC2403N	3-Way, Type N Female Connectors	68.20	62.74	57.29	CALL
SC2403RTM	3-Way, RP-TNC Jack Connectors	68.20	62.74	57.29	CALL
SC2404N	4-Way, Type N Female Connectors	78.70	72.40	66.11	CALL

3.5 GHz Signal Splitters

SC3502N	2-Way, Type N Female Connectors	47.20	43.42	39.65	CALL
SC3504N	4-Way, Type N Female Connectors	78.70	72.40	66.11	CALL

5.8 GHz Signal Splitters

SC5802N	2-Way, Type N Female Connectors	110.20	101.38	92.57	CALL
SC5804N	4-Way, Type N Female Connectors	178.45	164.17	149.90	CALL

900 MHz, 2.4 GHz, 4.9 GHz and 5.8 GHz Ultra High Q WiFi Bandpass Channel Filters

L-com's 900 MHz, 2.4 GHz, 4.9 GHz, 5.8 GHz 4-Pole and 8-Pole Ultra-High Q WiFi channel filters are ideal for co-located equipment installations. Available in full band versions or fixed channel versions, they provide excellent channel rejection. All filters listed in this section feature N Female connectors.

900 MHz Indoor and Outdoor Filters

L-com's 900 MHz 4-Pole ultra-high Q full band filters are designed for full band applications. By reducing interference outside the 915 MHz band such as from cellular and paging signals, improved performance in noisy environments can be achieved.

BPF900	4-Pole, Indoor, Full Band	115.45	108.52	101.60	CALL
BPF900A	4-Pole, Outdoor, Full Band	173.20	162.81	152.42	CALL

2.4 GHz Indoor Filters

BPF24-401	4-Pole, Indoor, Channel 1	82.90	77.93	72.95	CALL
BPF24-403	4-Pole, Indoor, Channel 3	82.90	77.93	72.95	CALL
BPF24-406	4-Pole, Indoor, Channel 6	82.90	77.93	72.95	CALL
BPF24-409	4-Pole, Indoor, Channel 9	82.90	77.93	72.95	CALL
BPF24-411	4-Pole, Indoor, Channel 11	82.90	77.93	72.95	CALL
BPF2400	4-Pole, Indoor, Full Band	115.45	108.52	101.60	CALL

BPF24-801	8-Pole, Indoor, Channel 1	104.95	98.65	92.36	CALL
BPF24-803	8-Pole, Indoor, Channel 3	104.95	98.65	92.36	CALL
BPF24-806	8-Pole, Indoor, Channel 6	104.95	98.65	92.36	CALL
BPF24-809	8-Pole, Indoor, Channel 9	104.95	98.65	92.36	CALL
BPF24-811	8-Pole, Indoor, Channel 11	104.95	98.65	92.36	CALL
BPF24-813	8-Pole, Indoor, Channel 13	104.95	98.65	92.36	CALL
BPF24-814	8-Pole, Indoor, Channel 14	104.95	98.65	92.36	CALL

2.4 GHz Outdoor Filters

BPF2400A	4-Pole, Outdoor, Full Band	173.20	162.81	152.42	CALL
BPF24-801A	8-Pole, Outdoor, Channel 1	146.95	138.13	129.32	CALL
BPF24-806A	8-Pole, Outdoor, Channel 6	146.95	138.13	129.32	CALL
BPF24-809A	8-Pole, Outdoor, Channel 9	146.95	138.13	129.32	CALL
BPF24-811A	8-Pole, Outdoor, Channel 11	146.95	138.13	129.32	CALL
BPF24-813A	8-Pole, Outdoor, Channel 13	146.95	138.13	129.32	CALL

4.9 GHz Indoor/Outdoor Filters

BPF4900A	4-Pole, Outdoor/Indoor, Full Band	173.20	162.81	152.42	CALL
----------	-----------------------------------	--------	--------	--------	------

5.8 GHz Indoor/Outdoor Filters

BPF5800A	4-Pole, Outdoor/Indoor, Full Band	173.20	162.81	152.42	CALL
----------	-----------------------------------	--------	--------	--------	------


2.4/5 GHz Diplexers

HyperLink® 2.4/5 GHz diplexers are designed to split 2.4 GHz and 5 GHz from a single radio feed to separate 2.4 GHz and 5 GHz antennas. They can also be used to combine those frequencies into a single cable. HyperLink® diplexers are available for indoor and outdoor applications and feature Type N Female connectors.

DP245-NF	2.4/5.8 GHz, Outdoor, Type N Female Connectors	57.70	53.08	48.47	CALL
DP2458-NF	2.4/5.8 GHz, Indoor, Type N Female Connectors	157.45	144.85	132.26	CALL

Accessories

ANM-TERM1	Type N-Male, 50 Ohm Terminator, 0-6 GHz	9.61	8.84	8.07	CALL
HGX-PMT14	Splitter Mast Mount Kit, 1-1/4in (3.2cm) to 2in (5.1cm) Diameter	14.95	13.75	12.56	CALL
HGX-AMOUNT02	Splitter Wall/Enclosure Mounting Kit	12.00	11.04	10.08	CALL

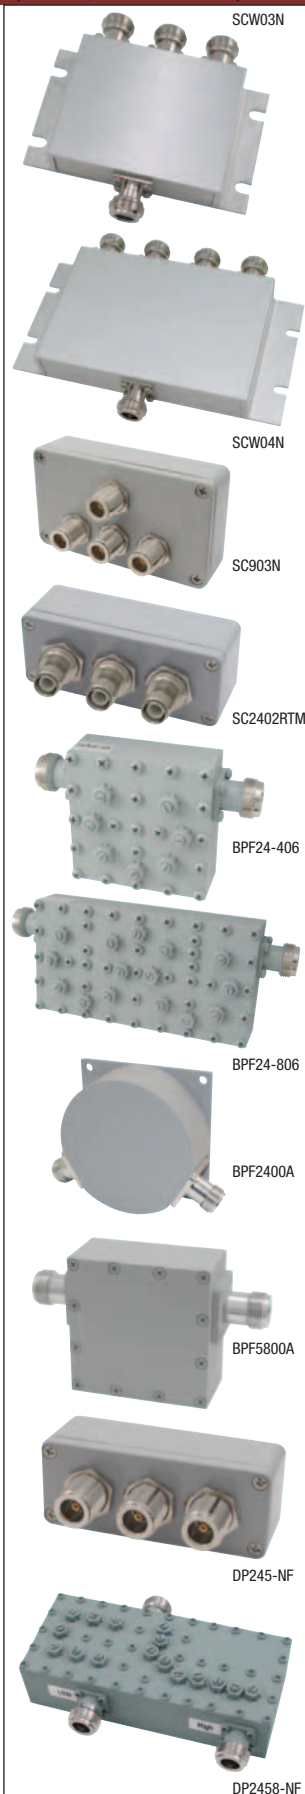




Weatherproof Industrial Enclosures Tutorial

Ideal for wired and wireless applications

L-com's HyperLink® Weatherproof Industrial Enclosures are ideal for Municipal/State/Federal wired and remote sensor applications (Water Management, Traffic controls, Utility monitoring stations, etc.); secure WLAN WiFi equipment installations; Industrial Data and Control Systems in factories and manufacturing plants; SCADA applications and field installations; indoor and outdoor or hot and cold

temperature environments where equipment and critical systems need power, connectivity, protection and security for the system operator. They are also great for solar powered applications, use in corrosive environments, sub-zero installations for monitoring and reporting, hotspot applications and protection of equipment from theft or damage. Available with the widest range of enclosure options including heat, cooling and Power over Ethernet interfaces of anyone in the industry. In addition to our standard enclosure products listed below, we can custom manufacture enclosures based on customer requirements for large-scale projects. L-com enclosures offer the quality built, professionally integrated NEMA Enclosures for the systems user with the largest "OFF-THE-SHELF" configured enclosures product offerings of any supplier in the world.

Enclosure Features

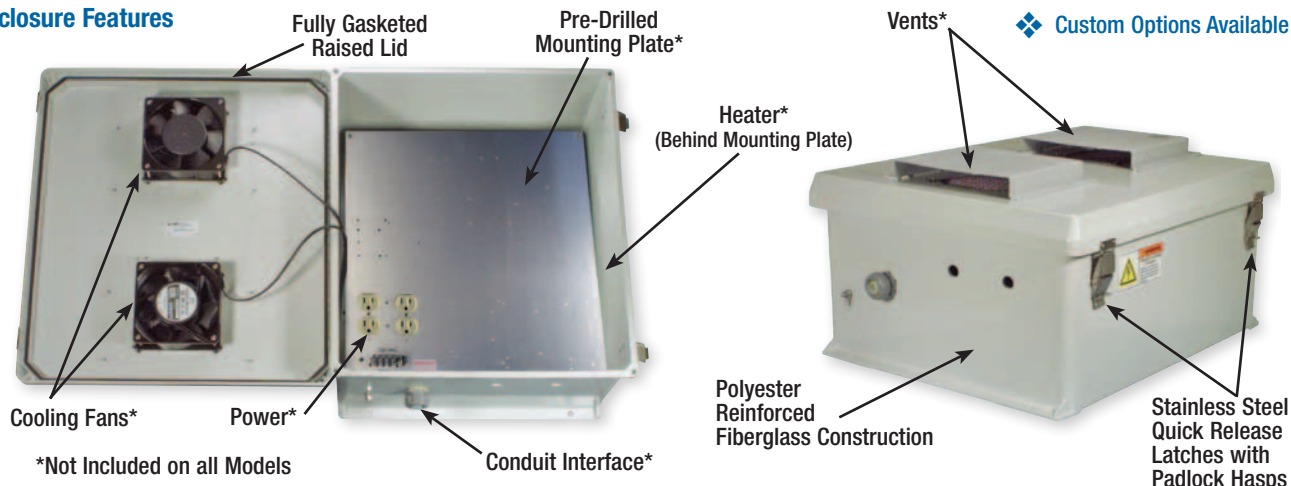

L-com Industrial Enclosures - Designed to Address all your Wired and Wireless Networking Applications

The examples below show just two of the many ways these enclosures can be utilized.

Model: NBW181608-00DR



18x16x8 Inch Windowed Enclosure with DIN Rails

This model features a lid with a Lexan window which provides visibility of the internal equipment inside the enclosure. The DIN rails provide mounting points for DIN mountable equipment, such as the Ethernet equipment shown in this example.


Model: NB141207-10F

14x12x7 Inch Enclosure with Cooling Fan

This model features four standard surge protected 120 VAC outlets and a terminal strip to supply power to internal equipment. The thermostat-controlled cooling fan provides high airflow and allows air to be pushed or pulled through the enclosure. This helps prevent overheating of the internal equipment mounted in the enclosure, such as the wireless Access Point shown in this example.

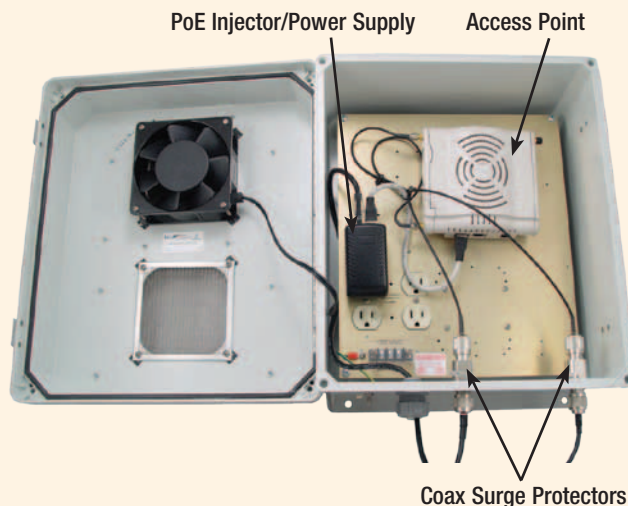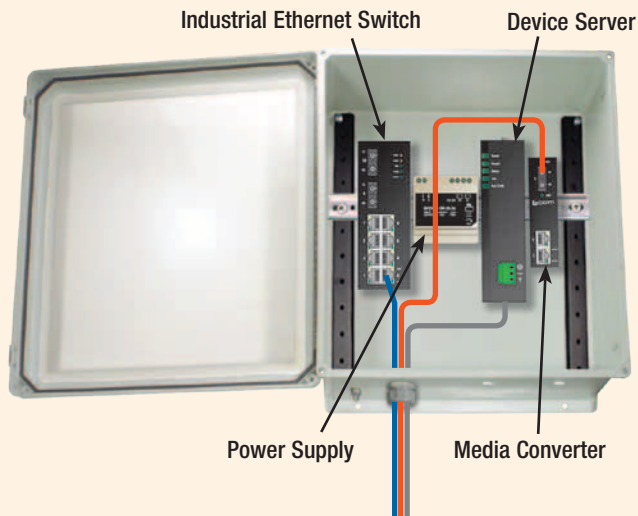

Weatherproof Industrial Enclosures Tutorial

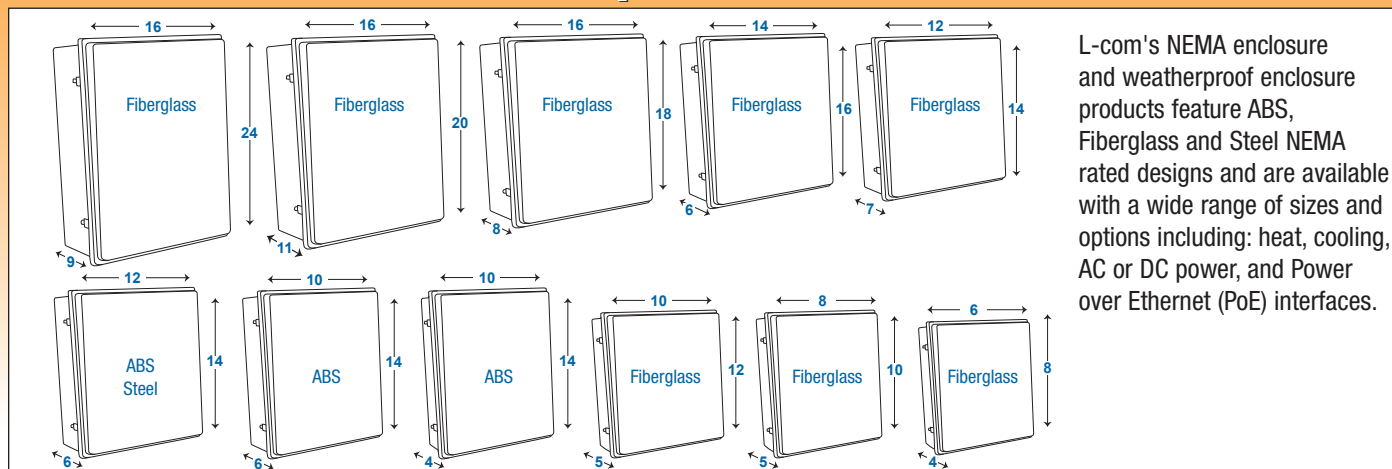

L-com's NEMA enclosure and weatherproof enclosure products feature ABS, Fiberglass and Steel NEMA rated designs and are available with a wide range of sizes and options including: heat, cooling, AC or DC power, and Power over Ethernet (PoE) interfaces.

Additional Enclosure Options

No Suffix	Unmodified Enclosure only
-KIT	Unmodified Enclosure w/Blank Aluminum Mounting Plate
-KIT01	Unmodified Enclosure w/Non-Metallic "Starboard" Mounting Plate
-KIT02	Unmodified Enclosure w/Blank Aluminum Mounting Plate and Installed Front Swing Plate
-01	Modified Enclosure with Blank Modified Plate
-02	Modified Enclosure only
-03V	Modified Vented Enclosure only

Default Temperature Setting

	ON	OFF
UL Solid State Fan Controller Temp Range	93°F / 34°C	84°F / 29°C
UL Model Solid State Heater Controller Temp Range	16°F / -9°C	25°F / -4°C
PoE & Non-UL Fan only Solid State Fan Controller Temp Range	90°F / 32°C	81°F / 27°C
Power Saver Model Fan# 2 Solid State Fan Controller Temp Range	100°F / 38°C	91°F / 33°C
Heater only Solid State Heater Controller Temp Range	15°F / -10°C	24°F / -5°C
Mechanical Fan Thermostat Controller Temp Range	120°F / 49°C	90°F / 32°C
Mechanical Heater Thermostat Controller Temp Range	40°F / 4°C	60°F / -15°C

NEMA/IEC

NEMA, (National Electrical Manufacturers Association) and the IEC (International Electrotechnical Commission) are two standards groups, which have devised two different rating systems for enclosures, which define the enclosures resistance to dust, moisture, water immersion and ice. The IEC's rating is referred to as the IP or Ingress Protection rating. The table below outlines NEMA and IEC IP enclosure ratings. This chart only works in one direction from NEMA to IEC. An IP rating only considers protection against ingress of solid foreign objects and ingress of water.

NEMA enclosure type no.	Enclosure Construction Definitions	IEC enclosure class
1	General-purpose. Protects against dust, light and indirect splashing but is not dust-tight; primarily prevents contact with live parts; used indoors and under normal atmospheric conditions.	IP20
2	Drip-tight. Similar to Type 1 but with addition of drip shields; used where condensation may be severe (as in cooling rooms and laundries).	IP22
3 and 3S	Weather-resistant. Protects against weather hazards such as rain and sleet; used outdoors on ship docks, in construction work and in tunnels and subways.	IP54
3R	Intended for outdoor use. Provides a degree of protection against falling rain and ice formation. Meets rod entry, rain, external icing and rust-resistance design tests.	IP14
4 and 4X	Watertight (weatherproof). Must exclude at least 65 GPM of water from 1 inch nozzle delivered from a distance not less than 10 ft for 5 minutes. Used outdoors on ship docks, in dairies and in breweries.	IP56
5	Dust-tight. Provided with gaskets or equivalent to exclude dust; used in steel mills and cement plants.	IP52
6 and 6P	Submersible. Design depends on specified conditions of pressure and time; submersible in water; used in quarries, mines and manholes.	IP67
7	Hazardous. For indoor use in Class I, Groups A, B, C and D environments as defined in the NEC.	—
8	Hazardous. For indoor and outdoor use in locations classified as Class I, Groups A, B, C and D as defined in the NEC.	—
9	Hazardous. For indoor and outdoor use in locations classified as Class II, Groups E, F or G as defined in the NEC.	—
10	MSHA. Meets the requirements of the Mine Safety and Health Administration, 30 CFR Part 18 (1978).	—
11	General-purpose. Protects against the corrosive effects of liquids and gases. Meets drip and corrosion-resistance tests.	—
12 and 12K	General-purpose. Intended for indoor use, provides some protection against dust, falling dirt and dripping noncorrosive liquids. Meets drip, dust and rust resistance tests.	IP52
13	General-purpose. Primarily used to provide protection against dust, spraying of water, oil and noncorrosive coolants. Meets oil exclusion and rust resistance design tests.	IP54

Best Seller



NBP141004-E00



NB141207-E0F



NBP141004-40F



NB181608-40FSAF



NBP141004-100



NB121005-10V



NB141207-100



NB181608-10FSX

Item #	Size	Description	1-9	10-24	25-99	100+
--------	------	-------------	-----	-------	-------	------

Industrial Enclosures with Universal Duplex AC Power Outlets

Designed for North American and European 120-240 VAC applications, these enclosures feature a universal duplex AC power outlet.

ABS Enclosures with Cable Glands and Velcro Pad

NBP141004-E00	14x10x4"	120-240 VAC	66.50	63.84	61.18	CALL
NBP141004-E00-4	14x10x4"	120-240 VAC, 4-Pack	241.50	231.84	222.18	CALL
NBP141004-E0F	14x10x4"	200-240 VAC, Vented Lid (No Rain Shields), Cooling Fan	111.50	107.04	102.58	CALL
NBP141004-E0FW	14x10x4"	200-240 VAC, Vented Lid, Cooling Fan	126.50	121.44	116.38	CALL
NBP141004-E0V	14x10x4"	120-240 VAC, Vented Lid (No Rain Shields)	91.50	87.84	84.18	CALL
NBP141004-E0VW	14x10x4"	120-240 VAC, Vented Lid	116.50	111.84	107.18	CALL

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-E00	14x12x7"	120-240 VAC	203.00	194.88	186.76	CALL
NB141207-E0F	14x12x7"	120-240 VAC, Vented Lid, Cooling Fan	233.00	223.68	214.36	CALL
NB141207-E0V	14x12x7"	120-240 VAC, Vented Lid	228.00	218.88	209.76	CALL
NB141207-EH0	14x12x7"	200-240 VAC, Heated	228.00	218.88	209.76	CALL
NB141207-EHF	14x12x7"	200-240 VAC, Vented Lid, Heat & Cooling Fan	253.00	242.88	232.76	CALL
NB181608-E00	18x16x8"	120-240 VAC	290.25	278.64	267.03	CALL
NB181608-E0F	18x16x8"	120-240 VAC, Vented Lid, Dual Cooling Fans	380.25	365.04	348.83	CALL
NB181608-E0V	18x16x8"	120-240 VAC, Vented Lid	310.25	297.84	285.43	CALL
NB181608-EH0	18x16x8"	200-240 VAC, Heated	330.25	317.04	303.83	CALL
NB181608-EHF	18x16x8"	200-240 VAC, Vented Lid, Heat & Dual Cooling Fans	395.25	379.44	363.63	CALL

Industrial Enclosures with PoE Interface

These enclosures feature an integrated Power-over-Ethernet (PoE) interface making them ideal for use with PoE enabled devices.

ABS Enclosures with Cable Glands and Velcro Pad

NBP141004-40F	14x10x4"	Vented Lid (No Rain Shields), Cooling Fan	136.50	131.04	125.58	CALL
NBP141004-40FW	14x10x4"	Vented Lid, Cooling Fan	146.50	140.64	134.78	CALL
NBP141004-40V	14x10x4"	Vented Lid (No Rain Shields)	86.50	83.04	79.58	CALL
NBP141004-40VW	14x10x4"	Vented Lid	101.50	97.44	93.38	CALL

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-400	14x12x7"	802.3af Compatible, Cat5 Surge Protection	188.00	180.48	172.96	CALL
NB141207-40F	14x12x7"	Vented Lid, Cooling Fan	213.00	204.48	195.96	CALL
NB141207-40FS	14x12x7"	Vented Lid, Solid State Controlled Cooling Fan	243.00	233.28	223.56	CALL
NB141207-40V	14x12x7"	802.3af Compatible, Cat5 Surge Protection, Vented Lid	206.00	197.76	189.52	CALL
NB141207-40FAF	14x12x7"	802.3af Compatible, Vented Lid, Cooling Fan	228.00	218.88	209.76	CALL
NB141207-40FSAF	14x12x7"	802.3af Compatible, Vented Lid, Solid State Controlled Cooling Fan	253.00	242.88	232.76	CALL
NB141207-40HON	14x12x7"	Sub-zero Insulated Enclosure, Heated	328.00	314.88	301.76	CALL
NB181608-400	18x16x8"	802.3af Compatible, Cat5 Surge Protection	275.25	264.24	253.23	CALL
NB181608-40F	18x16x8"	Vented Lid, Dual Cooling Fans	315.25	302.64	290.03	CALL
NB181608-40FS	18x16x8"	Vented Lid, Dual Solid State Controlled Cooling Fans	345.25	331.44	317.63	CALL
NB181608-40V	18x16x8"	802.3af Compatible, Cat5 Surge Protection, Vented Lid	295.25	283.44	271.63	CALL
NB181608-40FAF	18x16x8"	802.3af Compatible, Vented Lid, Dual Cooling Fans	330.25	317.04	303.83	CALL
NB181608-40FSAF	18x16x8"	802.3af Compatible, Vented Lid, Dual Solid State Controlled Cooling Fans	355.25	341.04	326.83	CALL

Industrial Enclosures with 120 VAC Duplex Power Outlets

L-com's 120 VAC NEMA rated enclosures offer 120 Volt AC power to accommodate access points, routers, and other communications equipment that require 120 Volt AC power.

ABS Enclosure with Cable Glands and Velcro Pad

NBP141004-100	14x10x4"	120 VAC	51.50	49.44	47.38	CALL
NBP141004-100-4	14x10x4"	120 VAC, 4 Pack	181.50	174.24	166.98	CALL
NBP141004-10F	14x10x4"	120 VAC, No Rain Shields, Cooling Fan	106.50	102.24	97.98	CALL
NBP141004-10FW	14x10x4"	120 VAC, Cooling Fan	116.50	111.84	107.18	CALL

ABS Enclosure with Cable Gland, D-Cut Holes, Ground Lug, Vented Lid and Aluminum Mounting Plate

NBE141006-100	14x10x6"	120 VAC	121.20	116.35	111.50	CALL
---------------	----------	---------	--------	--------	--------	------

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB121005-100	12x10x5"	120 VAC	167.70	160.99	154.28	CALL
NB121005-10F	12x10x5"	120 VAC, Cooling Fan	197.70	189.79	181.88	CALL
NB121005-10V	12x10x5"	120 VAC, Vented Lid	187.70	180.19	172.68	CALL
NB121005-1H0	12x10x5"	120 VAC, Heated	187.70	180.19	172.68	CALL
NB121005-1HF	12x10x5"	120 VAC, Heat / Cooling Fan	217.70	208.99	200.28	CALL
NB121005-1HFS	12x10x5"	120 VAC, Solid State Controlled Heat / Cooling Fan	262.70	252.19	241.68	CALL
NB141207-100	14x12x7"	120 VAC	193.00	185.28	177.56	CALL
NB141207-10F	14x12x7"	120 VAC, Cooling Fan	223.00	214.08	205.16	CALL
NB141207-10FS	14x12x7"	120 VAC, Solid State Controlled Cooling Fan	248.00	238.08	228.16	CALL
NB141207-10FSD	14x12x7"	120 VAC, Dual Solid State Controlled Cooling Fans	258.00	247.68	237.36	CALL
NB141207-1H0	14x12x7"	120 VAC, Heated	213.00	204.48	195.96	CALL
NB141207-1H0S	14x12x7"	120 VAC, Solid State Controlled Heater	243.00	233.28	223.56	CALL
NB141207-1HF	14x12x7"	120 VAC, Heat / Cooling Fan	243.00	233.28	223.56	CALL
NB141207-1HFS	14x12x7"	120 VAC, Solid State Controlled Heat / Cooling Fan	288.00	276.48	264.96	CALL
NB181608-100	18x16x8"	120 VAC	280.25	269.04	257.83	CALL
NB181608-10F	18x16x8"	120 VAC, Dual Cooling Fans	330.25	317.04	303.83	CALL
NB181608-10FS	18x16x8"	120 VAC, Dual Solid State Controlled Cooling Fans	350.25	336.24	322.23	CALL
NB181608-10FSX	18x16x8"	120 VAC, Dual Individually Controlled Cooling Fans with Solid State Controllers	360.25	345.84	331.43	CALL
NB181608-1H0	18x16x8"	120 VAC, Heated	315.25	302.64	290.03	CALL
NB181608-1H0S	18x16x8"	120 VAC, Solid State Controlled Heater	345.25	331.44	317.63	CALL
NB181608-1HF	18x16x8"	120 VAC, Heat / Dual Cooling Fans	370.25	355.44	340.63	CALL
NB181608-1H0S	18x16x8"	120 VAC, Solid State Controlled Heat / Dual Cooling Fans	345.25	331.44	317.63	CALL

Item #	Size	Description	1-9	10-24	25-99	100+
--------	------	-------------	-----	-------	-------	------

Industrial Enclosures with 240 VAC Screw Terminal Strip

Specially designed for 240 Volt applications, the L-com NEMA enclosures are perfect for use with 240 Volt communications and control equipment.

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-20F	14x12x7"	240 VAC, Cooling Fan	203.00	194.88	186.76	CALL
NB141207-2H0	14x12x7"	240 VAC, Heated	210.00	201.60	193.20	CALL
NB141207-2HF	14x12x7"	240 VAC, Heated, Cooling Fan	233.00	223.68	214.36	CALL
NB181608-20F	18x16x8"	240 VAC, Dual Cooling Fans	325.25	312.24	299.23	CALL
NB181608-2H0	18x16x8"	240 VAC, Heated	280.25	269.04	257.83	CALL
NB181608-2HF	18x16x8"	240 VAC, Heated, Dual Cooling Fans	370.25	355.44	340.63	CALL



NB141207-2HF

Industrial Enclosures with 12 VDC Screw Terminal Strip

L-com's DC Voltage NEMA enclosures feature pre-drilled mounting plates. These enclosures can be used with equipment such as alarms, solar panels and other control and sensor equipment.

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-500	14x12x7"	12 VDC	153.00	146.88	140.76	CALL
NB141207-50F	14x12x7"	12 VDC, Cooling Fan	208.00	199.68	191.36	CALL
NB141207-50V	14x12x7"	12 VDC, Vented Lid	168.00	161.28	154.56	CALL
NB181608-500	18x16x8"	12 VDC	250.25	240.24	230.23	CALL
NB181608-50F	18x16x8"	12 VDC, Dual Cooling Fan	310.25	297.84	285.43	CALL
NB181608-50V	18x16x8"	12 VDC, Vented Lid	260.25	249.84	239.43	CALL



NB181608-50F

UL Listed Non-Powered Industrial Enclosures

These Non-Powered Industrial Enclosures are approved and listed with UL, meeting the stringent requirements for Communication Enclosure System 40xx. Use this enclosure when UL Listed products are required by the project. These Non-Powered UL Listed Industrial Enclosures are ideal for custom applications, which may require special modifications to the enclosure. Mounting stand-offs inside the enclosure can be used for mounting plates. Blank mounting plates are available from L-com.

FRP Enclosures with no Mounting Plate

NB080604	8x6x4"	Non-Powered, No Mounting Plate	82.40	79.10	75.81	CALL
NB100805	10x8x5"	Non-Powered, No Mounting Plate	87.55	84.05	80.55	CALL
NB121005	12x10x5"	Non-Powered, No Mounting Plate	92.70	88.99	85.28	CALL
NB141207	14x12x7"	Non-Powered, No Mounting Plate	103.00	98.88	94.76	CALL
NB161406	16x14x6"	Non-Powered, No Mounting Plate	159.65	153.26	146.88	CALL
NB181608	18x16x8"	Non-Powered, No Mounting Plate	180.25	173.04	165.83	CALL
NB201611	20x16x11"	Non-Powered, No Mounting Plate	412.00	395.52	379.04	CALL



NB201611

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-01-UL	14x12x7"	Non-Powered, Aluminum Mounting Plate	188.00	180.48	172.96	CALL
----------------	----------	--------------------------------------	--------	--------	--------	------

UL Listed 120 VAC Powered Industrial Enclosures

L-com's UL Listed, 120 VAC powered, NEMA weatherproof rated industrial enclosures offer 120 Volt AC power to accommodate access points, routers, and other communications equipment that require 120 Volt AC power.

FRP Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NB141207-100-UL	14x12x7"	120 VAC Duplex Power Outlets	288.00	276.48	264.96	CALL
NB141207-100T-UL	14x12x7"	120 VAC Terminal Block	203.00	194.88	186.76	CALL
NB141207-10FS-UL	14x12x7"	120 VAC Duplex Power Outlets, Solid State Controlled Cooling Fan	302.00	289.92	277.84	CALL
NB141207-1HFS-UL	14x12x7"	120 VAC Duplex Power Outlets, Solid State Controlled Heat/Cooling Fan	343.00	329.28	315.56	CALL



NB141207-100-UL

Windowed Industrial Enclosures with Bonded Window in Lid

The enclosures in this section feature a bonded Lexan window in the lid. This is ideal for communication and control equipment that requires visual monitoring, but also protection from the outside elements and theft.

FRP Windowed Enclosures with no Mounting Plate


NBW121005	12x10x5"	Windowed Lid, No Mounting Plate	139.05	133.49	127.93	CALL
NBW141207	14x12x7"	Windowed Lid, No Mounting Plate	164.80	158.21	151.62	CALL
NBW181608	18x16x8"	Windowed Lid, No Mounting Plate	262.65	252.14	241.64	CALL



NBW121005

FRP Windowed Enclosures with Mounting Plate

NBW121005-KIT	12x10x5"	Windowed Lid, Blank Aluminum Mounting Plate	154.05	147.89	141.73	CALL
NBW121005-KIT01	12x10x5"	Windowed Lid, Blank Starboard Mounting Plate	164.05	157.49	150.93	CALL
NBW141207-KIT	14x12x7"	Windowed Lid, Blank Aluminum Mounting Plate	184.80	177.41	170.02	CALL
NBW141207-KIT01	14x12x7"	Windowed Lid, Blank Starboard Mounting Plate	184.80	177.41	170.02	CALL
NBW181608-KIT	18x16x8"	Windowed Lid, Blank Aluminum Mounting Plate	287.65	276.14	264.64	CALL
NBW181608-KIT01	18x16x8"	Windowed Lid, Blank Starboard Mounting Plate	292.65	280.94	269.24	CALL



NBW141207-KIT

FRP Windowed Enclosures with Cable Gland, D-Cut Holes, Ground Lug and Aluminum Mounting Plate

NBW141207-100	14x12x7"	120 VAC Duplex Power Outlets, Windowed Lid	249.80	239.81	229.82	CALL
NBW141207-1H0	14x12x7"	120 VAC Duplex Power Outlets, Heated, Windowed Lid	269.80	259.01	248.22	CALL
NBW181608-100	18x16x8"	120 VAC Duplex Power Outlets, Windowed Lid	357.65	343.34	329.04	CALL
NBW181608-1H0	18x16x8"	120 VAC Duplex Power Outlets, Heated, Windowed Lid	387.65	372.14	356.64	CALL

FRP Windowed Enclosures with DIN 3 Rail Mounting Brackets

NBW141207-000DR	14x12x7"	Windowed Lid, DIN 3 Rail Mounting Brackets	199.80	191.81	183.82	CALL
NBW181608-000DR	18x16x8"	Windowed Lid, DIN 3 Rail Mounting Brackets	302.65	290.54	278.44	CALL



Item #	Size	Description	1-9	10-24	25-99	100+
--------	------	-------------	-----	-------	-------	------

Non-Powered Industrial Enclosures

L-com's non-powered NEMA rated enclosures are perfect for housing both wired and wireless communications equipment.

ABS Enclosure with no Mounting Plate

NBE141006	14x10x6"	Non-Powered, No Mounting Plate	41.20	39.55	37.90	CALL
NBE141006-KIT	14x10x6"	Non-Powered, Blank Aluminum Mounting Plate	56.20	53.95	51.70	CALL
NBE141006-KIT01	14x10x6"	Non-Powered, Blank Starboard Mounting Plate	66.20	63.55	60.90	CALL

FRP Enclosures with no Mounting Plate

NB080604	8x6x4"	Non-Powered, No Mounting Plate, UL Listed	82.40	79.10	75.81	CALL
NB100805	10x8x5"	Non-Powered, No Mounting Plate, UL Listed	87.55	84.05	80.55	CALL
NB121005	12x10x5"	Non-Powered, No Mounting Plate, UL Listed	92.70	88.99	85.28	CALL
NB141207	14x12x7"	Non-Powered, No Mounting Plate, UL Listed	103.00	98.88	94.76	CALL
NB161406	16x14x6"	Non-Powered, No Mounting Plate, UL Listed	159.65	153.26	146.88	CALL
NB181608	18x16x8"	Non-Powered, No Mounting Plate, UL Listed	180.25	173.04	165.83	CALL
NB201611	20x16x11"	Non-Powered, No Mounting Plate, UL Listed	412.00	395.52	379.04	CALL
NBG241609	24x16x9"	Non-Powered, No Mounting Plate, UL Listed	515.00	494.40	473.80	CALL

FRP Black Enclosures with no Mounting Plate

NBB141207	14x12x7"	Black Non-Powered, No Mounting Plate, UL Listed	144.20	138.43	132.66	CALL
NBB181608	18x16x8"	Black Non-Powered, No Mounting Plate, UL Listed	221.45	212.59	203.73	CALL

FRP Enclosures with Mounting Plate

NB080604-KIT	8x6x4"	Non-Powered, Blank Aluminum Mounting Plate	102.40	98.30	94.21	CALL
NB080604-KIT01	8x6x4"	Non-Powered, Blank Starboard Mounting Plate	102.40	98.30	94.21	CALL
NB100805-KIT	10x8x5"	Non-Powered, Blank Aluminum Mounting Plate	112.55	108.05	103.55	CALL
NB100805-KIT01	10x8x5"	Non-Powered, Blank Starboard Mounting Plate	112.55	108.05	103.55	CALL
NB121005-KIT	12x10x5"	Non-Powered, Blank Aluminum Mounting Plate	107.70	103.39	99.08	CALL
NB121005-KIT01	12x10x5"	Non-Powered, Blank Starboard Mounting Plate	117.70	112.99	108.28	CALL
NB141207-KIT	14x12x7"	Non-Powered, Blank Aluminum Mounting Plate	123.00	118.08	113.16	CALL
NB141207-KIT01	14x12x7"	Non-Powered, Blank Starboard Mounting Plate	123.00	118.08	113.16	CALL
NB161406-KIT	16x14x6"	Non-Powered, Blank Aluminum Mounting Plate	189.65	182.06	174.48	CALL
NB161406-KIT01	16x14x6"	Non-Powered, Blank Starboard Mounting Plate	189.65	182.06	174.48	CALL
NB181608-KIT	18x16x8"	Non-Powered, Blank Aluminum Mounting Plate	205.25	197.04	188.83	CALL
NB181608-KIT01	18x16x8"	Non-Powered, Blank Starboard Mounting Plate	205.25	197.04	188.83	CALL
NBG241609-KIT	24x16x9"	Non-Powered, Blank Aluminum Mounting Plate	565.00	542.40	519.80	CALL
NBG241609-KIT01	24x16x9"	Non-Powered, Blank Starboard Mounting Plate	565.00	542.40	519.80	CALL

FRP Enclosures with Aluminum Mounting Plate and Front Swing Plate

NBG241609-KIT02	24x16x9"	Non-Powered, Aluminum Mounting Plate and Front Swing Plate	715.00	686.40	657.80	CALL
-----------------	----------	--	--------	--------	--------	------

FRP Enclosures with Non-Metallic Hinges and Corner Lid Screws, no Mounting Plate

NBN060604	6x6x4"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	108.15	103.82	99.50	CALL
NBN080604	8x6x4"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	113.30	108.77	104.24	CALL
NBN100805	10x8x5"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	118.45	113.71	108.97	CALL
NBN121005	12x10x5"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	133.90	128.54	123.19	CALL
NBN141206	14x12x6"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	154.50	148.32	142.14	CALL
NBN161406	16x14x6"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	180.25	173.04	165.83	CALL
NBN181608	18x16x8"	Non-Powered, Non-Metallic Hinges, No Mounting Plate	236.90	227.42	217.95	CALL

FRP Enclosures with Non-Metallic Hinges and Corner Lid Screws, with Mounting Plate

NBN060604-KIT	6x6x4"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	123.15	118.22	113.30	CALL
NBN060604-KIT01	6x6x4"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	123.15	118.22	113.30	CALL
NBN080604-KIT	8x6x4"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	128.30	123.17	118.04	CALL
NBN080604-KIT01	8x6x4"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	128.30	123.17	118.04	CALL
NBN100805-KIT	10x8x5"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	138.45	132.91	127.37	CALL
NBN100805-KIT01	10x8x5"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	138.45	132.91	127.37	CALL
NBN121005-KIT	12x10x5"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	148.90	142.94	136.99	CALL
NBN121005-KIT01	12x10x5"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	148.90	142.94	136.99	CALL
NBN141206-KIT	14x12x6"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	174.50	167.52	160.54	CALL
NBN141206-KIT01	14x12x6"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	174.50	167.52	160.54	CALL
NBN161406-KIT	16x14x6"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	210.25	201.84	193.43	CALL
NBN161406-KIT01	16x14x6"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	210.25	201.84	193.43	CALL
NBN181608-KIT	18x16x8"	Non-Powered, Non-Metallic Hinges, Blank Aluminum Mounting Plate	266.90	256.22	245.55	CALL
NBN181608-KIT01	18x16x8"	Non-Powered, Non-Metallic Hinges, Blank Starboard Mounting Plate	266.90	256.22	245.55	CALL

FRP Enclosures with Removable Lid and Corner Screws, no Mounting Plate

NBC060604	6x6x4"	Non-Powered, Removable Lid, No Mounting Plate	82.40	79.10	75.81	CALL
NBC080604	8x6x4"	Non-Powered, Removable Lid, No Mounting Plate	87.55	84.05	80.55	CALL
NBC100805	10x8x5"	Non-Powered, Removable Lid, No Mounting Plate	97.85	93.94	90.02	CALL
NBC121005	12x10x5"	Non-Powered, Removable Lid, No Mounting Plate	118.45	113.71	108.97	CALL
NBC141206	14x12x6"	Non-Powered, Removable Lid, No Mounting Plate	139.05	133.49	127.93	CALL
NBC161406	16x14x6"	Non-Powered, Removable Lid, No Mounting Plate	164.80	158.21	151.62	CALL

FRP Enclosures with Removable Lid and Corner Screws, with Mounting Plate

NBC060604-KIT	6x6x4"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	97.40	93.50	89.61	CALL
NBC060604-KIT01	6x6x4"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	97.40	93.50	89.61	CALL
NBC080604-KIT	8x6x4"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	102.55	98.45	94.35	CALL
NBC080604-KIT01	8x6x4"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	102.55	98.45	94.35	CALL
NBC100805-KIT	10x8x5"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	117.85	113.14	108.42	CALL
NBC100805-KIT01	10x8x5"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	117.85	113.14	108.42	CALL
NBC121005-KIT	12x10x5"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	133.45	128.11	122.77	CALL
NBC121005-KIT01	12x10x5"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	133.45	128.11	122.77	CALL
NBC141206-KIT	14x12x6"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	159.05	152.69	146.33	CALL
NBC141206-KIT01	14x12x6"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	159.05	152.69	146.33	CALL
NBC161406-KIT	16x14x6"	Non-Powered, Removable Lid, Blank Aluminum Mounting Plate	194.80	187.01	179.22	CALL
NBC161406-KIT01	16x14x6"	Non-Powered, Removable Lid, Blank Starboard Mounting Plate	194.80	187.01	179.22	CALL

Item #	Size	Description	1-9	10-24	25-99	100+
--------	------	-------------	-----	-------	-------	------

Non-Powered Industrial Enclosures

FRP Enclosures with Cable Gland, D-Cut Holes and Ground Lug

NB141207-00V	14x12x7"	Non-Powered, Vented Lid, Aluminum Mounting Plate	158.00	151.68	145.36	CALL
NB141207-01	14x12x7"	Non-Powered, Aluminum Mounting Plate	138.00	132.48	126.96	CALL
NB141207-02	14x12x7"	Non-Powered, No Mounting Plate	113.00	108.48	103.96	CALL
NB141207-03V	14x12x7"	Non-Powered, Vented Lid, No Mounting Plate	133.00	127.68	122.36	CALL
NB181608-00V	18x16x8"	Non-Powered, Vented Lid, Aluminum Mounting Plate	240.25	230.64	221.03	CALL
NB181608-01	18x16x8"	Non-Powered, Aluminum Mounting Plate	210.25	201.84	193.43	CALL
NB181608-02	18x16x8"	Non-Powered, No Mounting Plate	185.25	177.84	170.43	CALL
NB181608-03V	18x16x8"	Non-Powered, Vented Lid, No Mounting Plate	205.25	197.04	188.83	CALL

Non-Metallic, Non-Powered Miniature Industrial Enclosures

The NBV series are UL/CSA® listed small electrical enclosures featuring a continuous gasketed lid secured by four non-metallic molded screws that ensure optimal integrity.

NBV533	5x3x3"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	36.05	34.61	33.17	CALL
NBV553	5x5x3"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	42.23	40.54	38.85	CALL
NBV554	5x5x4"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	44.29	42.52	40.75	CALL
NBV733	7x3x3"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	54.59	52.41	50.22	CALL
NBV753	7x5x3"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	50.47	48.45	46.43	CALL
NBV755	7x5x5"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	52.53	50.43	48.33	CALL
NBV773	7x7x3"	Non-Metallic Enclosure, Removable Cover with Non-Metallic Screws	64.89	62.29	59.70	CALL

Steel Industrial Enclosures

These enclosures feature hot rolled steel construction with a polyester powder coating. 120 VAC models included Cable Gland, D-Cut Hole and Grounding Lug in the enclosure.

NBS141206	14x12x6"	No Mounting Plate	206.00	197.76	189.52	CALL
NBS141206-100	14x12x6"	120 VAC Duplex Power Outlet, Aluminum Mounting Plate	296.00	284.16	272.32	CALL
NBS141206-1H0	14x12x6"	120 VAC Duplex Power Outlet, Aluminum Mounting Plate, Heated	346.00	332.16	318.32	CALL

DIN Rail Industrial Enclosures

L-com's NID enclosure offers mounting options inside the enclosure where a NID can be mounted. This enclosure can be used with interface products such as Ethernet connections and junctions, wireless connections, switches, terminal blocks and fiber optic connections.

FRP Enclosures with Cable Gland, D-Cut Holes and Ground Lug

NB141207-000DR	14x12x7"	Aluminum Mounting Rails	143.00	137.28	131.56	CALL
NB141207-00VDR	14x12x7"	Vented Lid, Aluminum Mounting Rails	193.00	185.28	177.56	CALL
NBW141207-000DR	14x12x7"	Windowed Lid, DIN 3 Rail Mounting Brackets	199.80	191.81	183.82	CALL
NB181608-000DR	18x16x8"	Aluminum Mounting Rails	225.25	216.24	207.23	CALL
NB181608-00VDR	18x16x8"	Vented Lid, Aluminum Mounting Rails	275.25	264.24	253.23	CALL
NBW181608-000DR	18x16x8"	Windowed Lid, DIN 3 Rail Mounting Brackets	302.65	290.54	278.44	CALL

NID (Network Interface Device) Enclosure

L-com's NID enclosure offers mounting options inside the enclosure where a NID can be mounted. This enclosure can be used with interface products such as Ethernet connections and junctions, wireless connections, switches, terminal blocks and fiber optic connections.

NID331-11	3 x 3 x 1"	Small NID Enclosure	8.24	7.58	6.92	CALL
-----------	------------	---------------------	------	------	------	------

Enclosure Mounting Plates and Mounting Brackets for Amplifiers, Enclosures and Surge Protectors

L-com offers an extensive line of mounting plates for industrial enclosures along with mounting bracket options for amplifiers, industrial enclosures and surge protectors. Visit us online at L-com.com for complete bracket dimensions and specifications.

HGX-AMOUNT02	Mounting Bracket for HyperLink® Amplifiers, PoE Products, Power Supplies	12.00	11.04	10.08	CALL
HGX-LPMOUNT01	ALQ2-NMNF Surge Protector Mounting Bracket	5.99	5.51	5.03	CALL
HGX-MMOUNT01	Ratchet Style Marine Antenna Mount	14.95	13.75	12.56	CALL
HGX-NMOUNT03	Universal Equipment Shelf, Mounts to Pre-drilled NEMA Plate	20.00	18.40	16.80	CALL
HGX-NMOUNT04	Universal Equipment Shelf, Mounts to Pre-drilled NEMA Plate	33.00	30.36	27.72	CALL
HGX-NPLATE01	Blank Aluminum Mounting Plate, for NB141207 Series Enclosure	23.00	22.08	21.16	CALL
HGX-NPLATE08	Blank Non-Metallic Mounting Plate for NB141207 Series Enclosure	23.00	22.08	21.16	CALL
HGX-NPLATE09	Blank Non-Metallic Mounting Plate for NB181608 Series Enclosure	35.00	33.60	32.20	CALL
HGX-NPLATE14	Blank Aluminum Mounting Plate for NB241609 Series Enclosure	69.00	66.24	63.48	CALL
HGX-NPLATE15	Blank Non-Metallic Mounting Plate for NB241609 Series Enclosure	69.00	66.24	63.48	CALL
HGX-NPLATE20	Blank Aluminum Mounting Plate for NBE141006/NB121005 Series Enclosure	17.00	16.32	15.64	CALL
HGX-NPLATE21	Blank Non-Metallic Mounting Plate for NBE141006/NB121005 Series Enclosure	29.00	27.84	26.68	CALL
HGX-NPLATE22	Blank Aluminum Mounting Plate for NB080604 Series Enclosure	23.00	22.08	21.16	CALL
HGX-NPLATE23	Blank Non-Metallic Mounting Plate for NB080604 Series Enclosure	23.00	22.08	21.16	CALL
HGX-NPLATE24	Blank Aluminum Mounting Plate for NB100805 Series Enclosure	27.00	25.92	24.84	CALL
HGX-NPLATE25	Blank Non-Metallic Mounting Plate for NB100805 Series Enclosure	27.00	25.92	24.84	CALL
HGX-NPLATE26	Blank Aluminum Mounting Plate for NB161406 Series Enclosure	31.00	29.76	28.52	CALL
HGX-NPLATE27	Blank Non-Metallic Mounting Plate for NB161406 Series Enclosure	31.00	29.76	28.52	CALL

Universal Pole Mounting Kits (See L-com.com for more Mounting and Accessory Options)

The HGX-PMT13 is used to mount NB141207 or NB181608 series weatherproof enclosures from 3" to 4" diameter poles. For larger diameter poles, slots are provided in the rails for .5" wide worm drive clamps. Use the HGX-PMT16 for 1.25" to 2" diameter poles.

HGX-PMT13	Universal Pole Mounting Kit, 3" to 4" Diameter Poles	46.00	42.32	38.64	CALL
HGX-PMT16	Universal Pole Mounting Kit, 1.25" to 2" Diameter Poles	44.00	40.48	36.96	CALL
HGX-PMT17	Universal Pole Mounting Kit, NBP141004, 3" to 12" Diameter Poles	42.00	38.64	35.28	CALL
HGX-PMT28	Universal Pole Mounting Kit, 4" to 7" Diameter Poles	55.00	50.60	46.20	CALL
HGX-PMT29	Universal Pole Mounting Kit, 7" to 9" Diameter Poles	55.00	50.60	46.20	CALL
HGX-PMT30	Universal Pole Mounting Kit, 9" to 11" Diameter Poles	55.00	50.60	46.20	CALL
DIN-35-NB14	35mm DIN Rail for NB14 Enclosures	3.25	3.12	2.99	CALL
DIN-35-NB18	35mm DIN Rail for NB18 Enclosures	3.25	3.12	2.99	CALL

PoE Enclosure Accessory

L-com's 12-Port Rack Mount DC Injector is used to supply heating system power to multiple NB141207-4H0N Series Sub-zero Heated Enclosures. The BT-CAT5-NB12 and NB141207-4H0N enclosure uses a proprietary wiring pin out. The RJ45 connectors on the BT-CAT5-NB12 enclosure or the NB141207-4H0N should never be connected to any other manufacturers equipment.

BT-CAT5-NB12	12-Port Rack Mount DC Injector for NB141207-4H0N Series Enclosures	1955.00	1837.70	1720.40	CALL
--------------	--	---------	---------	---------	------



NB181608-03V




NBV753



NB141207-00VDR



NID331-11



HGX-AMOUNT02 shown with 4-way splitter (not included)



HGX-NMOUNT03 Universal Equipment Shelf - (AirStation not included)



HGX-PMT16



BT-CAT5-NB12



Lightning / Surge Protectors Tutorial

What are Lightning and Surge Protectors?

Lightning and surge protectors are devices whose purpose is to eliminate transients on a conductor which are induced by nearby lightning activity. They are used to prevent damage to valuable electronic equipment from these high-voltage surges and spikes.

How are Lightning and Surge Protectors used?

A lightning and surge protector is used inline between devices such as antennas and amplifiers and radios or between connections on Ethernet switches and routers. They are connected via copper cabling (Coaxial, UTP etc.).

Where are Lightning and Surge Protectors used?

Lightning and surge protectors are used in many different applications including outdoor wireless networks, indoor Ethernet network installations and in any instance where the potential for a power surge could damage or destroy communications equipment.



Don't let lightning destroy your network!


A single bolt of lightning carrying up to 100 million volts of electricity has the power to rip through roofs, explode brick walls and destroy electronic networking/communications equipment as well as industrial equipment. Don't be fooled into a false sense of security if you never receive direct strikes. Indirect lightning strikes on telephone and power lines can be just as catastrophic! Protect your valuable communications equipment with L-com's HyperLink® brand surge protectors.

Coaxial Lightning and Surge Protectors

L-com's HyperLink® coaxial lightning and surge protectors are available in two types, Quarter Wave and Gas Discharge models.

Quarter Wave coaxial protectors are designed to pass the desired frequency while suppressing lightning surges, much like a signal filter. Lightning strike electrical surges which operate at low frequencies are diverted through the protector's short-circuit to the ground.

Gas Discharge coaxial protectors are a type of lightning arrestor which employs a replaceable gas discharge tube, which is a component containing a small amount of gas. The gas tube dumps extremely high amounts of surge energy directly to the ground of the protector. HyperLink® coaxial lightning protectors are available for 0-3 GHz operation or 0-6 GHz operation.

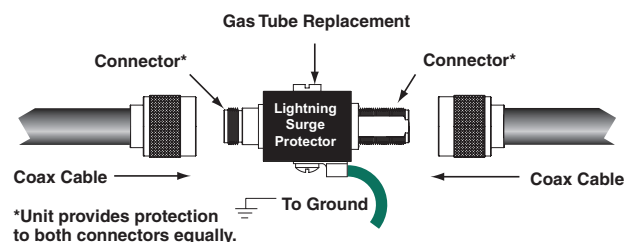



Data Line Lightning and Surge Protectors

The use of surge protectors to protect sensitive equipment from lightning strikes and surges on Ethernet data lines has become more important than ever with the advent of faster standards like 100 and 1000 Base-T Ethernet. The faster data speeds have required equipment manufacturers to use fragile high speed components.

Designed for Cat5, Cat5e and Cat6 applications, L-com's HyperLink® data line protectors are available in different power levels. From low power models for typical hub or client installations to high-power, 3-stage protectors designed for maximum surge protection.

Weatherproof Analog Pan-Tilt-Zoom (PTZ) Video Camera Lightning and Surge Protectors

Outdoor video security equipment is often mounted on top of buildings and light poles, areas more vulnerable to lightning strikes. This can damage not only the video cameras, but the controllers as well. The AL-VDP series is designed to provide lightning and surge protection for analog PTZ video cameras. These protectors incorporate individual protection circuits for the analog video line, RS485 control line and AC/DC power lines.

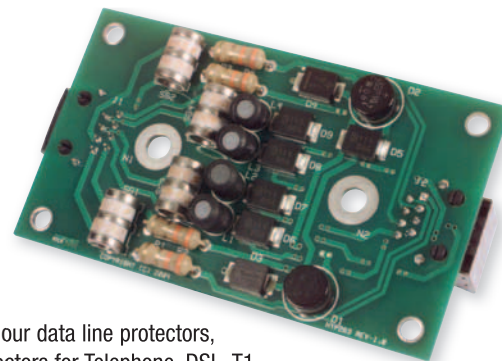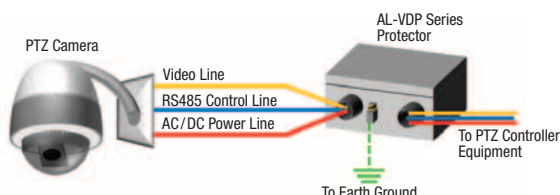

Three Stage Data Line Protector

In addition to our data line protectors, we offer protectors for Telephone, DSL, T1, RS422/485, RS232, 4-20 mA Current Loop, AC/DC and Video applications.

Grounding Note:

Proper grounding of lightning and surge protectors is required to ensure proper operation. Connecting the ground lug on the protectors to an earth ground is the recommended method. Please refer to the National Electric Code (or your local codes) for additional information or contact a licensed electrician for assistance.

Item #	Power Rating	Description	1-9	10-24	25-99	100+
--------	--------------	-------------	-----	-------	-------	------

HyperLink® Data Line Lightning and Surge Protectors

L-com's HyperLink® Cat5/5e/6 lightning protectors are designed to protect expensive wired and wireless 10/100 and 10/100/1000 Base-T Ethernet systems. These robust lightning protectors are also great to use in Power over Ethernet (PoE) camera installations.

Category 5 Data Line 10/100 Base-T Protectors

HGLN-CAT5-2	✓	Indoor, Shielded RJ45	42.59	40.03	37.48	CALL
AL-CAT5VW-1	✓	Weather Resistant, RJ45	41.55	39.06	36.56	CALL
HGLN-CAT5J	✓✓✓	Indoor, Shielded RJ45	41.55	39.06	36.56	CALL
HGLND-CAT5J	✓✓✓	Indoor DIN Mount, Shielded RJ45	46.75	43.95	41.14	CALL
CMSP-CAT5-2	✓✓✓	Indoor Wall Mount, 2-Port, Shielded RJ45	51.95	47.79	43.64	CALL
CMSP-CAT5-4	✓✓✓	Indoor Wall Mount, 4-Port, Shielded RJ45	93.55	86.07	78.58	CALL
CMSP-CAT5-8	✓✓✓	Indoor Wall Mount, 8-Port, Shielded RJ45	155.95	149.71	143.47	CALL
AL-CAT5JW	✓✓✓	Weather Resistant, RJ45	36.35	34.17	31.99	CALL
AL-CAT5JW	✓✓✓	Weather Resistant, Shielded RJ45	38.43	36.12	33.82	CALL
AL-CAT5PW	✓✓✓	Weather Resistant, Punch Down Terminal Block	36.35	34.17	31.99	CALL
AL-CAT5SW	✓✓✓	Weather Resistant, Screw Terminal Block	36.35	34.17	31.99	CALL
AL-CAT5W	✓✓✓✓	Weatherproof, RJ45/Screw Terminal Block	51.95	48.83	45.72	CALL
ALS-CAT5W	✓✓✓✓	Compact Weatherproof, Shielded RJ45	51.95	48.83	45.72	CALL
AL-CAT5W-4	✓✓✓✓	Weatherproof, 4-Port, Shielded RJ45	129.95	122.15	114.36	CALL
HGLN-CAT5-HP	✓✓✓✓✓	Indoor, High Power, Shielded RJ45	67.55	63.50	59.44	CALL
HGLND-CAT5-HP	✓✓✓✓✓	Indoor DIN Mount, High Power, Shielded RJ45	74.83	70.34	65.85	CALL
AL-CAT5HPJW	✓✓✓✓✓	Weather Resistant, High Power, Shielded RJ45	57.15	53.72	50.29	CALL
AL-CAT5HPW	✓✓✓✓✓	Weatherproof, High Power, Shielded RJ45	72.75	68.38	64.02	CALL
ALW-CAT5HPJ	✓✓✓✓✓	Weatherproof Metal Enclosure, High Power, Shielded RJ45	80.03	73.63	67.23	CALL
AL-CAT5HPW-4	✓✓✓✓✓	Weatherproof, 4-Port, High Power, Screw Terminal Block	207.95	195.47	183.00	CALL

Category 5e Data Line 10/100 Base-T Protectors

AL-CAT5EW	✓✓	Weatherproof, Screw Terminal Block	46.75	43.95	41.14	CALL
HGLN-CAT5EJW	✓✓✓✓	Indoor, Shielded RJ45	51.95	48.83	45.72	CALL
HGLND-CAT5EJW	✓✓✓✓	Indoor DIN Mount, Shielded RJ45	57.15	53.72	50.29	CALL
AL-CAT5EPW	✓✓✓✓	Weather Resistant, Punch Down Terminals	46.75	43.95	41.14	CALL
AL-CAT5EJW	✓✓✓✓	Weather Resistant, Shielded RJ45	46.75	43.95	41.14	CALL
ALS-CAT5EJWP	✓✓✓✓	Compact Weatherproof, Shielded RJ45	65.47	61.54	57.61	CALL
ALW-CAT5EJ	✓✓✓✓	Weatherproof Metal Enclosure, Shielded RJ45	72.75	66.93	61.11	CALL
ALW-CAT5EP	✓✓✓✓	Weatherproof Metal Enclosure, Punch Down Terminals	72.75	66.93	61.11	CALL
AL-CAT5EHPW	✓✓✓✓✓	Weatherproof, High Power, Screw Terminal Block	71.71	67.41	63.10	CALL

Category 6 Data Line 10/100/1000 Base-T Protectors

HGLN-CAT6	✓	Indoor, Shielded RJ45	46.75	43.95	41.14	CALL
HGLN-CAT6J	✓✓	Indoor, Shielded RJ45, PoE Compatible	46.75	43.95	41.14	CALL
HGLND-CAT6J	✓✓	Indoor DIN Mount, Shielded RJ45	51.95	48.83	45.72	CALL
CMSP-CAT6-2	✓✓	Indoor Wall Mount, 2-Port, Shielded RJ45	72.75	66.93	61.11	CALL
CMSP-CAT6-4	✓✓	Indoor, 4-Port, Shielded RJ45	103.95	95.63	87.32	CALL
AL-CAT6JW	✓✓	Weather Resistant, RJ45	38.43	36.12	33.82	CALL
AL-CAT6PW	✓✓	Weather Resistant, Punch Down Terminal Block	38.43	36.12	33.82	CALL
AL-CAT6W	✓✓	Weatherproof, Screw Terminal Block	57.15	53.72	50.29	CALL
HGLND-CAT6-HP	✓✓✓✓	Indoor DIN Mount, High Power, Shielded RJ45	76.91	72.30	67.68	CALL
HGLN-CAT6-HP	✓✓✓✓	Indoor, High Power, Shielded RJ45	71.71	67.41	63.10	CALL
AL-CAT6HPJW	✓✓✓✓	Weather Resistant, High Power, Shielded RJ45	60.27	56.65	53.04	CALL
ALS-CAT6HPW	✓✓✓✓	Compact Weatherproof, High Power, Shielded RJ45	72.75	68.38	64.02	CALL
ALW-CAT6HPJ	✓✓✓✓	Weatherproof Metal Enclosure, High Power, Shielded RJ45	80.03	73.63	67.23	CALL
HGLN-CAT6JT	✓✓✓✓✓	Indoor, Differential Gas Tube, Shielded RJ45	55.07	51.77	48.46	CALL
ALS-CAT6JT	✓✓✓✓✓	Compact Weatherproof, Differential Gas Tube, Shielded RJ45	62.35	58.61	54.87	CALL
CMSP-CAT6T-2	✓✓✓✓✓	Indoor Wall Mount, 2-Port Differential Gas Tube, Shielded RJ45	77.95	71.71	65.48	CALL
CMSP-CAT6T-4	✓✓✓✓✓	Indoor, 4-Port, Differential Gas Tube, Shielded RJ45	135.15	124.34	113.53	CALL

15V and 24V PoE Compatible Data Line Lightning and Surge Protectors

The lightning protectors in this section are designed to be compatible with PoE equipment requiring 15V and 24V. Note, these protectors are not intended for use with standard 48V PoE equipment.

HGLN-CAT5J24	✓✓✓	Indoor, Cat5, 15V/24V PoE, Shielded RJ45	43.63	41.01	38.39	CALL
AL-CAT5SJW24	✓✓✓	Weather Resistant, Cat5, 15V/24V PoE, Shielded RJ45	41.55	39.06	36.56	CALL
AL-CAT5W-4-24	✓✓✓✓	Weatherproof, 4-Port, Cat5, 15V/24V PoE, Shielded RJ45	135.15	127.04	118.93	CALL
HGLN-CAT5EJW24	✓✓✓✓	Indoor, Cat5e, 15V/24V PoE, Shielded RJ45	55.07	51.77	48.46	CALL
AL-CAT5EJW24	✓✓✓✓	Weather Resistant, Cat5e, 15V/24V PoE, Shielded RJ45	49.87	46.88	43.89	CALL
ALW-CAT5EJ24	✓✓✓✓	Weatherproof Metal Enclosure, Cat5e 15V/24V PoE, Shielded RJ45	72.75	66.93	61.11	CALL

Rack Mount Ethernet and Telephone/DSL Protectors

The RMSPP series lightning and surge protectors provides multiple line protection in a standard 19" rack panel. Available in 4/12/28 port versions, the RMSPP series mounts into any standard 19" (48.3cm) rack system and may be installed in the rear of the rack where they are normally required of line in and out.

RMSPP-CAT5S-4	✓✓✓✓	Category 5 10/100 Base-T, 19in (48.3cm) 1U Panel, 4-Port	83.00	79.68	76.36	CALL
RMSPP-CAT5S-12	✓✓✓✓	Category 5 10/100 Base-T, 19in (48.3cm) 2U Panel, 12-Port	190.00	182.40	174.80	CALL
RMSPP-CAT5-24	✓✓✓✓	Category 5 10/100 Base-T, 19in (48.3cm) 1U Panel, 24-Port	405.55	389.33	373.11	CALL
RMSPP-CAT6-4	✓✓✓✓	Category 6 10/100/1000 Base-T, 19in (48.3cm) 1U Panel, 4-Port	99.00	95.04	91.08	CALL
RMSPP-CAT6-12	✓✓✓✓	Category 6 10/100/1000 Base-T, 19in (48.3cm) 2U Panel, 12-Port	250.00	240.00	230.00	CALL
RMSPP-CAT6T-4	✓✓✓✓✓	Category 6 10/100/1000 Base-T, 19in (48.3cm) 1U Panel, Hi-Power, 4-Port	132.00	126.72	121.44	CALL
RMSPP-CAT6T-12	✓✓✓✓✓	Category 6 10/100/1000 Base-T, 19in (48.3cm) 2U Panel, Hi-Power, 12-Port	260.00	249.60	239.20	CALL
RMSPP-DT-4	✓✓✓✓	Telephone/DSL, 19in (48.3cm) 1U Panel, Hi-Power, 4-Port	155.95	149.71	143.47	CALL
RMSPP-DT-12	✓✓✓✓	Telephone/DSL, 19in (48.3cm) 2U Panel, Hi-Power, 12-Port	467.95	449.23	430.51	CALL

Wall Plate Series Lightning and Surge Protectors

The WP series lightning protectors feature stainless steel wall plates designed to mount to standard in-wall conduit boxes. These units are ideal for providing lightning and surge protection in homes and offices with existing in-wall telephone and network wiring. The stainless steel wall plates make these protectors also ideal for use in high EMI/RFI environments.

WPCAT5	✓✓✓	Wall Plate, Cat5, Shielded RJ45/RJ45	29.07	27.91	26.74	CALL
WPCAT6	✓✓	Wall Plate, Cat6, Shielded RJ45/RJ45	29.07	27.91	26.74	CALL
WPDTJ	✓✓✓✓	Wall Plate, Telephone/DSL, RJ11/RJ11	29.07	27.91	26.74	CALL
WPOTP	✓✓✓✓	Wall Plate, Telephone/DSL, RJ11/Punch Terminal	29.07	27.91	26.74	CALL

CMSP-CAT5-8

ALS-CAT5W

AL-CAT5W-4

AL-CAT5HPW

HGLND-CAT6-HP

CMSP-CAT6T-2

AL-CAT5EJW24

RMSPP-CAT6-4

Rear view detail

RMSPP-DT-12

WPCAT5

WPDTJ


The lightning bolts next to the part numbers indicate Power Rating.
 ✓ = Low Power
 ✓✓✓✓ = High Power



HGLND-D1-DT



RMSPT-DT-4



Rear view detail




ALW-DSLS



HGLND-D1-05



AL-D15P1228AW



ALS-D25P12DW



AL-CL2-12



HGLN-AISG1



AL-D8-12AC

The lightning bolts next to the part numbers indicate Power Rating.
 ⚡ = Low Power
 ⚡⚡⚡⚡ = High Power

Item #	Power Rating	Description	1-9	10-24	25-99	100+
Telephone/DSL/T1 Protectors						
L-com's HyperLink® Telephone, DSL and T1 lightning and surge protectors are perfect for indoor and outdoor installations. There are multiple styles to choose from including screw terminal, punch down and RJ11.						
AL-D4W-DT	⚡⚡⚡	Weather Resistant, Phone/DSL, T1/E1/J1, Screw Terminal	46.75	43.95	41.14	CALL
AL-D4W-DP	⚡⚡⚡	Weather Resistant, Phone/DSL, T1/E1/J1, Punch Down Terminal	46.75	43.95	41.14	CALL
HGLN-D1-DT	⚡⚡⚡⚡	Indoor, High Power Single Line Phone/DSL, Screw Terminal	46.75	43.95	41.14	CALL
HGLND-D1-DT	⚡⚡⚡⚡	Indoor DIN Mount, High Power Single Line Phone/DSL, Screw Terminal	51.95	48.83	45.72	CALL
HGLN-DT	⚡⚡⚡⚡	Indoor, High Power Single Line Phone/DSL, RJ11	46.75	43.95	41.14	CALL
HGLN-D2T	⚡⚡⚡⚡	Indoor, High Power Dual Line Phone/DSL, RJ11	46.75	43.95	41.14	CALL
CMSPT-DT-4	⚡⚡⚡⚡	Indoor, 4-Port High Power Phone/DSL, RJ11	135.15	124.34	113.53	CALL
RMSPT-DT-4	⚡⚡⚡⚡	19 inch (48.3cm) Rack Panel, 4-Port High Power Phone/DSL, RJ11	155.95	149.71	143.47	CALL
HGLN-DSL	⚡⚡⚡⚡	Indoor, Phone/DSL, 3-Stage, RJ11	57.15	53.72	50.29	CALL
AL-DSLJW	⚡⚡⚡⚡	Weather Resistant, Phone/DSL, 3-Stage, RJ11	57.15	53.72	50.29	CALL
ALW-DSLJ	⚡⚡⚡⚡	Weatherproof Metal Enclosure, Phone/DSL, 3-Stage, RJ11	75.87	69.80	63.73	CALL
HGLN-D2-DT	⚡⚡⚡⚡	Indoor, Phone/DSL, 3-Stage, Screw Terminal	57.15	53.72	50.29	CALL
HGLND-D2-DT	⚡⚡⚡⚡	Indoor DIN Mount, Phone/DSL, 3-Stage, Screw Terminal	62.35	58.61	54.87	CALL
AL-DSLW	⚡⚡⚡⚡	Weather Resistant, Phone/DSL, 3-Stage, Screw Terminal	57.15	53.72	50.29	CALL
ALW-DSL	⚡⚡⚡⚡	Weatherproof Metal Enclosure, Phone/DSL, 3-Stage, Screw Terminal	75.87	69.80	63.73	CALL
AL-D3W-DT	⚡⚡⚡⚡	Weather Resistant, Phone/DSL, 3-Stage, Screw Terminal	64.43	60.56	56.70	CALL

RS422/RS485/RS232 Protectors

L-com's HyperLink® lightning and surge protectors in this section are ideal for RS422, RS485, RS232 lines as well as providing protection for sensors and control lines. All protectors in this section feature screw terminals.

AL-D4W-05	⚡⚡⚡	Weather Resistant, 4-Line RS422/485	46.75	43.95	41.14	CALL
AL-D8W-12	⚡⚡⚡	Weather Resistant, 8-Line RS232	46.75	43.95	41.14	CALL
HGLN-D1-05	⚡⚡⚡⚡	Indoor, 1-Line RS485, 3-Stage	41.55	39.06	36.56	CALL
HGLND-D1-05	⚡⚡⚡⚡	Indoor DIN Mount, RS485, 3-Stage	46.75	43.95	41.14	CALL
HGLN-D2-05	⚡⚡⚡⚡	Indoor, RS422/485, RTDs, T1/E1/J1, 3-Stage	57.15	53.72	50.29	CALL
HGLND-D2-05	⚡⚡⚡⚡	Indoor DIN Mount, RS422/485, RTDs, T1/E1/J1, 3-Stage	62.35	58.61	54.87	CALL
AL-D2W-05	⚡⚡⚡⚡	Weather Resistant, RS422/485, RTDs, T1/E1/J1, 3-Stage	57.15	53.72	50.29	CALL
ALW-D2-05	⚡⚡⚡⚡	Weatherproof Metal Enclosure, RS422/485, 3-Stage	72.75	66.93	61.11	CALL
AL-D3W-05	⚡⚡⚡⚡	Weather Resistant, RS485	64.43	60.56	56.70	CALL
HGLN-D2-12	⚡⚡⚡⚡	Indoor, 2-Line RS232, 3-Stage	57.15	53.72	50.29	CALL
AL-D2W-12	⚡⚡⚡⚡	Weather Resistant, 2-Line RS232, 3-Stage	57.15	53.72	50.29	CALL
ALW-D2-12	⚡⚡⚡⚡	Weatherproof Metal Enclosure, 2-Line RS232, 3-Stage	72.75	66.93	61.11	CALL
AL-D4-05W	⚡⚡⚡⚡	Weatherproof, 4-Line RS422/485	64.43	60.56	56.70	CALL

RS422/RS485 Control Lines with AC/DC Supply Voltage Protectors

L-com's HyperLink® AL-D15P and ALS-D25P protectors incorporate individual protection circuits for RS422/485 control lines and AC/DC power lines. These protectors are ideal for RS422/485 lines with AC/DC supply voltage, analog or IP video surveillance cameras, pool/spa controllers and Pan-Tilt-Zoom (PTZ) camera controllers.

AL-D15P05DW	⚡⚡⚡⚡	5VDC, RS485, Weather Resistant, Screw Terminal	36.35	34.17	31.99	CALL
AL-D15P12DW	⚡⚡⚡⚡	12VDC, RS485, Weather Resistant, Screw Terminal	36.35	34.17	31.99	CALL
AL-D15P15DW	⚡⚡⚡⚡	15VDC, RS485, Weather Resistant, Screw Terminal	36.35	34.17	31.99	CALL
AL-D15P24DW	⚡⚡⚡⚡	24VDC, RS485, Weather Resistant, Screw Terminal	36.35	34.17	31.99	CALL
AL-D15P1228AW	⚡⚡⚡⚡	12-28VAC, RS485, Weather Resistant, Screw Terminal	36.35	34.17	31.99	CALL
ALS-D25P12DW	⚡⚡⚡⚡	12VDC, RS422/RS485, Weatherproof, Screw Terminal	57.15	53.72	50.29	CALL
ALS-D25P15DW	⚡⚡⚡⚡	15VDC, RS422/RS485, Weatherproof, Screw Terminal	57.15	53.72	50.29	CALL
ALS-D25P24DW	⚡⚡⚡⚡	24VDC, RS422/RS485, Weatherproof, Screw Terminal	57.15	53.72	50.29	CALL
ALS-D25P1228AW	⚡⚡⚡⚡	12-28VAC, RS422/RS485, Weatherproof, Screw Terminal	57.15	53.72	50.29	CALL

4-20 mA Current Loop Protectors

L-com's HyperLink® brand 4-20 mA protectors are ideal for sensors and controllers as well as industrial control lines, HART street light controllers, toll booths, drawbridges, railroad crossing gates and signals. Available in three voltages: 12V, 15V and 24V.

AL-CL4-12	⚡⚡⚡	12V Weather Resistant, 4-Channel, Screw Terminal	46.75	43.95	41.14	CALL
HGLN-CL1-12	⚡⚡⚡⚡	12V Indoor, 1-Channel, Screw Terminal	49.87	46.88	43.89	CALL
HGLND-CL1-12	⚡⚡⚡⚡	12V Indoor DIN Mount, 1-Channel, Screw Terminal	56.11	52.74	49.38	CALL
HGLN-CL2-12	⚡⚡⚡⚡	12V Indoor, 2-Channel, Screw Terminal	51.95	48.83	45.72	CALL
HGLND-CL2-12	⚡⚡⚡⚡	12V Indoor DIN Mount, 2-Channel, Screw Terminal	57.15	53.72	50.29	CALL
AL-CL2-12	⚡⚡⚡⚡	12V Weather Resistant, 2-Channel, Screw Terminal	46.75	43.95	41.14	CALL
AL-CL3W-12	⚡⚡⚡⚡	12V Weatherproof, 3-Channel, Screw Terminal	65.47	61.54	57.61	CALL
AL-CL4W-12	⚡⚡⚡⚡	12V Weatherproof, 4-Channel, Screw Terminal	67.55	63.50	59.44	CALL

See web site for 15V and 24V models.

Remote Electrical Tilt (RET)/AISG Protector

L-com's HyperLink® RET/AISG protector is compatible with AISG 5, 6 and 8-conductor control lines and provides individual protection of the power and RS485 lines within the control cable.

HGLN-AISG1	⚡⚡⚡⚡	Weatherproof, RET/AISG Compatible, 8-Pin	103.95	97.71	91.48	CALL
------------	------	--	--------	-------	-------	------

AC and DC Control Line Protectors

L-com offers a full line of AC and DC Control Line lightning and surge protectors. Available in 12V, 24V and 48V in either AC or DC models.

AL-D8-12ACW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 12VAC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-24ACW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 24VAC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-48ACW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 48VAC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-12AC	⚡⚡⚡⚡	Weatherproof, 12VAC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
AL-D8-24AC	⚡⚡⚡⚡	Weatherproof, 24VAC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
AL-D8-48AC	⚡⚡⚡⚡	Weatherproof, 48VAC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
AL-D8-05DCW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 5VDC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-12DCW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 12VDC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-24DCW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 24VDC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-48DCW	⚡⚡⚡⚡	Weather Resistant, Single Stage, 48VDC, 8-Wire, Screw Terminal	57.15	53.72	50.29	CALL
AL-D8-12DC	⚡⚡⚡⚡	Weatherproof, 12VDC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
AL-D8-24DC	⚡⚡⚡⚡	Weatherproof, 24VDC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
AL-D8-48DC	⚡⚡⚡⚡	Weatherproof, 48VDC, 8-Wire, Screw Terminal	68.59	64.47	60.36	CALL
HGLN-DC-12	⚡⚡⚡⚡	Indoor, 12VDC, 1-Line, Screw Terminal	43.63	41.01	38.39	CALL

Item #	Power Rating	Description	1-9	10-24	25-99	100+
--------	--------------	-------------	-----	-------	-------	------

Load Cell/RTD/Strain Gauge Sensor Protectors

The AL-LC series lightning and surge protectors that provide superior protection for devices such as load cells, weighbridges, resistance temperature detectors (RTD) and strain gauge sensors.

AL-LC-30	*****	Weatherproof 3-Stage Load Cell/RTD Lightning Surge Protector	68.59	64.47	60.36	CALL
AL-LC	*****	Weatherproof Single Stage Load Cell/RTD Lightning Surge Protector	46.75	43.95	41.14	CALL

Audio System Protectors

L-com's HyperLink® outdoor speaker and public address system lightning protectors offer protection of valuable PA equipment at an affordable price.

AL-D2-AW	*****	Weatherproof, 4/8 Ohm Audio Systems, Screw Terminal	57.15	53.72	50.29	CALL
AL-D2-PAW	*****	Weatherproof, 70.7/100V Public Address Systems, Screw Terminals	57.15	53.72	50.29	CALL

Coaxial Video Protectors

L-com's HyperLink® Coaxial Video protectors are ideal for protecting surveillance and CCTV cameras, DVRs, surveillance PCs and video monitors.

CMSP-VIDEO-2	***	Indoor, 2-Port Video, BNC Connectors	51.95	47.79	43.64	CALL
CMSP-VIDEO-2I	***	Indoor, 2-Port Video, Isolated BNC Connectors	51.95	47.79	43.64	CALL
CMSP-VIDEO-4	***	Indoor, 4-Port Video, BNC Connectors	93.55	86.07	78.58	CALL
CMSP-VIDEO-4I	***	Indoor, 4-Port Video, Isolated BNC Connectors	93.55	86.07	78.58	CALL

Analog Pan-Tilt-Zoom (PTZ) Video Camera Surge Protectors

The L-com's HyperLink® AL-VDP series are designed to provide superior lightning and surge protection for analog PTZ video cameras. These protectors incorporate individual protection circuits for the analog video line, RS485 control line and AC/DC power lines.

AL-VDP012DW	*****	12VDC Weatherproof, Grounded BNC Connectors	129.95	119.55	109.16	CALL
AL-VDP112DW	*****	12VDC Weatherproof, Isolated BNC Connectors	129.95	119.55	109.16	CALL
AL-VDP024DW	*****	24VDC Weatherproof, Grounded BNC Connectors	129.95	119.55	109.16	CALL
AL-VDP124DW	*****	24VDC Weatherproof, Isolated BNC Connectors	129.95	119.55	109.16	CALL
AL-VDP01228AW	*****	12-28VAC Weatherproof, Grounded BNC Connectors	129.95	119.55	109.16	CALL
AL-VDP11228AW	*****	12-28VAC Weatherproof, Isolated BNC Connectors	129.95	119.55	109.16	CALL

Tripp-Lite In-Line Surge Suppressors

Tripp-Lite's In-Line data and telephone surge suppressors help protect valuable equipment from electrical surge. These low cost suppressors easily connect in-line with existing data and telephone connections.

TL-DNET1		Network Surge Suppressor, RJ45 Jacks	29.07	27.91	26.74	CALL
----------	--	--------------------------------------	-------	-------	-------	------

USB Lightning and Surge Protectors, Panel Mountable

The L-com AL-ECF504 series USB surge protectors are commercial quality devices designed to protect a computer's sensitive USB ports from surges and spikes from attached devices. To ensure USB 2.0 speeds, the device uses ultra-low capacitance diodes to protect the data lines. In addition, a protection device clamps the power lines to safe levels. These panel mount protectors are available with or without a pigtail cable.

AL-ECF504-AB		USB Type A Female Bulkhead/Type B Female	18.71	17.59	16.46	CALL
AL-ECF504-AA12		USB Type A Female Bulkhead/Type A Male, 12in (30.5cm) Pigtail*	20.79	19.54	18.30	CALL
AL-ECF504-AB12		USB Type A Female Bulkhead/Type B Male, 12in (30.5cm) Pigtail*	20.79	19.54	18.30	CALL

*Also available in lengths of 24in (61.0cm), 36in (91.4cm), 48in (121.9cm) and 72in (182.9cm). See web site for details.

HyperLink® Coaxial Lightning and Surge Protectors

L-com's HyperLink® coaxial lightning and surge protectors feature replaceable gas tubes (except for 1/4 wave models), multi-strike capability and bi-directional protection.

0-3 GHz Coaxial Protectors

AL-NFNFB-9		Type N Female to Type N Female Bulkhead, 90V	21.79	20.05	18.30	CALL
AL-NFNFBHP-9		Type N Female to Type N Female Bulkhead, Indoor, High Power, 90V	29.07	26.74	24.42	CALL
AL-NMNF-9		Type N Male to Type N Female Bulkhead, 90V	21.79	20.05	18.30	CALL
AL-BMBFB-9		BNC Male to BNC Female Bulkhead, 90V	17.63	16.22	14.81	CALL
AL-TMTFB-9		TNC Male to TNC Female Bulkhead, 90V	28.03	25.79	23.55	CALL
AL-UUFUB-6		UHF Female to UHF Female Bulkhead, 600V	17.63	16.22	14.81	CALL
AL-RBPRJB-9		RP-BNC Plug to RP-BNC Jack Bulkhead, 90V	17.63	16.22	14.81	CALL
AL-RTPRJB-9		RP-TNC Plug to RP-TNC Jack Bulkhead, 90V	28.03	25.79	23.55	CALL
AL-FFFF-9		Type F Female to Type F Female, 90V	28.03	25.79	23.55	CALL
AL-F		Type F Male to Type F Female, 50V	9.31	8.57	7.82	CALL

0-6 GHz Coaxial Protectors

AL6-NFNFBW-9		Type N Female to Type N Female Bulkhead, 90V	41.55	38.23	34.90	CALL
AL6-NMNF-9		Type N Male to Type N Female Bulkhead, 90V	41.55	38.23	34.90	CALL
AL6-RSPRSJBW-9		RP-SMA Plug to RP-SMA Jack Bulkhead, 90V	36.35	33.44	30.53	CALL

0-6 GHz In-line Crimp Type Coaxial Protectors

L-com's crimp type coaxial protectors are designed to be attached directly onto a 400-series low-loss coax cable via the solderless crimp end of the protector. This helps improve insertion loss since a cable connector is eliminated. These protectors are also available on pre-made 400-series cable assemblies. See page 198 for details.

AL6-NF-14-9		Type N Female Bulkhead to Crimp End, 90V	35.31	32.49	29.66	CALL
AL6-NM-14-9		Type N Male to Crimp End, 90V	35.31	32.49	29.66	CALL

Quarter Wave Coaxial Protectors

ALQ2-NMNF		2300-2700 MHz Type N Male to Type N Female Bulkhead	41.55	38.23	34.90	CALL
ALQ2-DMDFB		800-2250 MHz 7/16 DIN Male to 7/16 DIN Female Bulkhead	93.55	86.07	78.58	CALL
ALQ2-DFDFB		800-2250 MHz 7/16 DIN Female to 7/16 DIN Female Bulkhead	93.55	86.07	78.58	CALL

Replacement Gas Tubes

LPX090G		0-6 GHz, 90V, Replacement Gas Tube	12.43	11.19	9.94	CALL
LPX090-6		0-6 GHz, 90V, Replacement Gas Tube For AL-NMNF-9	7.23	6.51	5.78	CALL
LPX090		0-3 GHz, 90V, Replacement Gas Tube	6.19	5.57	4.95	CALL
LPX230		0-3 GHz, 230V, Replacement Gas Tube	6.19	5.57	4.95	CALL
LPX350		0-3 GHz, 350V, Replacement Gas Tube	6.19	5.57	4.95	CALL
LPX600		0-3 GHz, 600V, Replacement Gas Tube	6.19	5.57	4.95	CALL

Accessories

HGX-LPMOUNT01		ALQ2 Mounting Bracket	5.99	5.51	5.03	CALL
---------------	--	-----------------------	------	------	------	------

Grounding Kits and Clamps

L-com's coax cable grounding kits are designed to withstand the damaging effects of lightning currents in excess of 200kA as well as meet the MIL-STD-188-124A protection requirements. Our grounding pipe clamp fits around existing conduit pipes or water pipes for a secure ground.

HT-GK400		Grounding Kit for LMR400 Series Cable	19.95	19.15	18.35	CALL
HT-GK600		Grounding Kit for LMR600 Series Cable	19.95	19.15	18.35	CALL
HT-GK900		Grounding Kit for LMR900 Series Cable	19.95	19.15	18.35	CALL
HT-GCLAMP01		Grounding Pipe Clamp	1.95	1.87	1.79	CALL

The lightning bolts next to the part numbers indicate Power Rating.

⚡ = Low Power


***** = High Power



AL-LC-30



CMSP-VIDEO-2



AL-VDP124DW



AL-ECF504-AA12



AL-NFNFB-9



AL6-NMNF-9

AL6-RSPRSJBW-9



AL6-NF-14-9



ALQ2-DFDFB



HT-GK400



HT-GCLAMP01



Item #	Description	1-9	10-24	25-99	100+
Power over Ethernet (PoE) Midspan/Injectors					
L-com offers a wide range of PoE Midspan/Injectors styles including reverse polarity and 4-port models. These PoE Midspan/Injectors can be used to supply power as well as data to PoE compliant devices such as access points, CPEs, IP phone and wireless routers over a single Ethernet cable.					
All-In-One Midspan/Injector with Integral Power Supply					
L-com's HyperLink® All-In-One Midspan/Injectors are completely self-contained. A separate Power Supply and Injector is not required. These units are available in desktop or wall mount versions for 12 VDC, 24 VDC and 48 VDC PoE applications. Note, some desktop models require purchase of power cords which are available in different lengths. Please see the L-com web site for more information.					
PSW1212-POE	12 VDC, 12W, Wall Mount, RJ45	17.00	15.98	14.96	CALL
PS1212-POE	12 VDC, 12W, Desktop, RJ45, Requires PSCORD2 Power Cord	25.00	23.50	22.00	CALL
PSW2424-POE	24 VDC, 24W, Wall Mount, RJ45	17.00	15.98	14.96	CALL
PS2424-POE	24 VDC, 24W, Desktop, RJ45, Requires PSCORD3 Power Cord	25.00	23.50	22.00	CALL
PSW4824-POE	48 VDC, 24W, Wall Mount, RJ45	17.00	15.98	14.96	CALL
PS4820-POE-1	48 VDC, 20W, Dual RJ45	25.00	23.50	22.00	CALL
PS4834GB-POE-2	48 VDC, 34W, Gigabit, 2-Port RJ45	55.00	51.70	48.40	CALL
PS4860-POE	48 VDC, 60W, Dual RJ45, Requires PSCORD3	80.00	75.20	70.40	CALL
Cat5 Midspan/Injectors					
BT-CAT5-E1	Compact Single Port, 5-48 VDC	6.00	5.64	5.28	CALL
BT-CAT5-E1-4848	BT-CAT5-E1 with 48VDC/48W Power Supply	27.00	25.38	23.76	CALL
BT-CAT5-E1-4870	BT-CAT5-E1 with 48VDC/70W Power Supply	49.00	46.06	43.12	CALL
BT-CAT5-P1	Single Port, 5-48 VDC	25.00	23.50	22.00	CALL
BT-CAT5-P1-4848	BT-CAT5-P1 with 48VDC/48W Power Supply	41.00	38.54	36.08	CALL
BT-CAT5-P1-4870	BT-CAT5-P1 with 48VDC/70W Power Supply	63.00	59.22	55.44	CALL
BTD-CAT5-P1	DIN Mount Single Port, 5-48 VDC	30.00	28.20	26.40	CALL
BTD-CAT5-P14848	BTD-CAT5-P1 with 48VDC/48W Power Supply	46.00	43.24	40.48	CALL
BTD-CAT5-P14870	BTD-CAT5-P1 with 48VDC/70W Power Supply 0.00	68.00	63.92	59.84	CALL
BT-CAT5-P1J	Single Port, 5-48 VDC with Cat5 Surge Protection	38.00	35.72	33.44	CALL
BT-CAT5-P1J-4848	BT-CAT5-P1J with 48VDC/48W Power Supply	54.00	50.76	47.52	CALL
BT-CAT5-P1J-4870	BT-CAT5-P1J with 48VDC/70W Power Supply	75.00	70.50	66.00	CALL
BTD-CAT5-P1J	DIN Mount Single Port, 5-48 VDC w/ Cat5 Surge Protection	43.00	40.42	37.84	CALL
BTD-CAT5-P1J4848	BTD-CAT5-P1J with 48VDC/48W Power Supply	59.00	55.46	51.92	CALL
BTD-CAT5-P1J4870	BTD-CAT5-P1J with 48VDC/70W Power Supply	80.00	75.20	70.40	CALL
BT-CAT5-P1R	Single Port, 5-48 VDC, Reverse Polarity	33.00	31.02	29.04	CALL
BT-CAT5-P1R4848	BT-CAT5-P1R with 48VDC/48W Power Supply	49.00	46.06	43.12	CALL
BT-CAT5-P1R4870	BT-CAT5-P1R with 48VDC/70W Power Supply	70.00	65.80	61.60	CALL
BTD-CAT5-P1R	DIN Mount Single Port, 5-48 VDC, Reverse Polarity	38.00	35.72	33.44	CALL
BTD-CAT5P1R4848	BTD-CAT5-P1R with 48VDC/48W Power Supply	54.00	50.76	47.52	CALL
BTD-CAT5P1R4870	BTD-CAT5-P1R with 48VDC/70W Power Supply	75.00	70.50	66.00	CALL
BT-CAT5-P4	Four Port, 5-48 VDC	54.00	50.76	47.52	CALL
BT-CAT5-P4-4848	BT-CAT5-P4 with 48VDC/48W Power Supply	70.00	65.80	61.60	CALL
BT-CAT5-P4-4870	BT-CAT5-P4 with 48VDC/70W Power Supply	92.00	86.48	80.96	CALL
BTD-CAT5-P4	DIN Mount Four Port, 5-48 VDC	59.00	55.46	51.92	CALL
BTD-CAT5-P44848	BTD-CAT5-P4 with 48VDC/48W Power Supply	75.00	70.50	66.00	CALL
BTD-CAT5-P44870	BTD-CAT5-P4 with 48VDC/70W Power Supply	97.00	91.18	85.36	CALL
BT-CAT5-P4J	Four Port, 5-48 VDC with Cat5 Surge Protection	60.00	56.40	52.80	CALL
BT-CAT5-P4J-4848	BT-CAT5-P4J with 48VDC/48W Power Supply	75.00	70.50	66.00	CALL
BT-CAT5-P4J-4870	BT-CAT5-P4J with 48VDC/70W Power Supply	97.00	91.18	85.36	CALL
BTD-CAT5-P4J	DIN Mount Four Port, 5-48 VDC w/ Cat5 Surge Protection	67.00	62.98	58.96	CALL
BTD-CAT5-P4J-4848	BTD-CAT5-P4J with 48VDC/48W Power Supply	82.00	77.08	72.16	CALL
BTD-CAT5-P4J-4870	BTD-CAT5-P4J with 48VDC/70W Power Supply	104.00	97.76	91.52	CALL
Cat5e Midspan/Injectors					
BT-CAT5E-P1-HP	Single Port, 5-60 VAC/DC with High Power Cat5e Surge Protection	50.00	47.00	44.00	CALL
BT-CAT5E-P1-HP-4848	BT-CAT5E-P1-HP with 48VDC/48W Power Supply	65.00	61.10	57.20	CALL
BT-CAT5E-P1-HP-4870	BT-CAT5E-P1-HP with 48VDC/70W Power Supply	86.00	80.84	75.68	CALL
BTD-CAT5E-P1-HP	DIN Mount Single Port, 5-60 VAC/DC w/High Power Cat5e Surge Protection	55.00	51.70	48.40	CALL
BTD-CAT5EP1HP48W	BT-CAT5E-P1-HP with 48VDC/48W Power Supply	70.00	65.80	61.60	CALL
BTD-CAT5EP1HP70W	BT-CAT5E-P1-HP with 48VDC/70W Power Supply	91.00	85.54	80.08	CALL
BT-CAT5E-P1-HPW	Single Port, Weather Resistant, 5-60 VAC/DC with High Power Cat5e Surge Protection	49.00	46.06	43.12	CALL
BT-CAT5E-P1-HPW4848	BT-CAT5E-P1-HPW with 48VDC/48W Power Supply	65.00	61.10	57.20	CALL
BT-CAT5E-P1-HPW4870	BT-CAT5E-P1-HPW with 48VDC/70W Power Supply	87.00	81.78	76.56	CALL
Cat6 Gigabit Midspan/Injectors					
BT-CAT6-P1	Single Port, 5-60 VAC/DC	43.00	40.42	37.84	CALL
BT-CAT6-P1-4848	BT-CAT6-P1 with 48VDC/48W Power Supply	60.00	56.40	52.80	CALL
BT-CAT6-P1-4870	BT-CAT6-P1 with 48VDC/70W Power Supply	81.00	76.14	71.28	CALL
BTD-CAT6-P1	DIN Mount Single Port, 5-60 VAC/DC	48.30	45.40	42.50	CALL
BTD-CAT6-P1-4848	BTD-CAT6-P1 with 48VDC/48W Power Supply	65.00	61.10	57.20	CALL
BTD-CAT6-P1-4870	BTD-CAT6-P1 with 48VDC/70W Power Supply	86.00	80.84	75.68	CALL
BT-CAT6-P1-HP	Single Port, 5-60 VAC/DC with High Power Cat6 Surge Protection	65.00	61.10	57.20	CALL
BT-CAT6P1HP-48W	BT-CAT6-P1-HP with 48VDC/48W Power Supply	81.00	76.14	71.28	CALL
BT-CAT6P1HP-70W	BT-CAT6-P1-HPW with 48VDC/70W Power Supply	100.00	94.00	88.00	CALL
BT-CAT6-P1-HPW	Single Port, Weather Resistant, 5-60 VAC/DC with High Power Cat6 Surge Protection	65.00	61.10	57.20	CALL
BT-CAT6P1HPW48W	BT-CAT6-P1-HPW with 48VDC/48W Power Supply	81.00	76.14	71.28	CALL
BT-CAT6P1HPW70W	BT-CAT6-P1-HPW with 48VDC/70W Power Supply	100.00	94.00	88.00	CALL
BTD-CAT6-P1-HP	DIN Mount Single Port, 5-60 VAC/DC w/High Power Cat6 Surge Protection	65.00	62.40	59.80	CALL
BTD-CAT6P1HP48W	BTD-CAT6-P1-HP with 48VDC/48W Power Supply	86.00	82.56	79.12	CALL
BTD-CAT6P1HP70W	BTD-CAT6-P1-HPW with 48VDC/70W Power Supply	108.00	103.68	99.36	CALL
BT-CAT6-P4	Four Port, 5-60 VAC/DC	75.00	70.50	66.00	CALL
BT-CAT6-P4-4848	BT-CAT6-P4 with 48VDC/48W Power Supply	90.00	84.60	79.20	CALL
BT-CAT6-P4-4870	BT-CAT6-P4 with 48VDC/70W Power Supply	113.00	106.22	99.44	CALL
Cat5 Splitter/Tap with Adjustable DC Output					
The BT-CAT5-R0512 PoE Splitter/Tap delivers both data and DC power to non-PoE equipped Ethernet devices using a single Cat5 cable. It features a user adjustable output voltage selector which can be set for 5VDC, 7.5VDC, 9VDC or 12VDC allowing it to be used with a wide range of non-PoE devices.					
BT-CAT5-R0512	100/1000 Base-T PoE Splitter/Tap with Adjustable DC Output	31.00	29.14	27.28	CALL

Item #	Description	1-9	10-24	25-99	100+
Switching Power Supplies					
PS909-21R	9 VDC @ 1A (9W), 2.1mm DC Plug	10.30	9.89	9.48	CALL
PS1212-21R	12 VDC @ 1A (12W), 2.1mm Right Angle DC Plug	13.40	12.86	12.33	CALL
PS1224-21R	12 VDC @ 2A (24W), 2.1mm Right Angle DC Plug	15.00	14.40	13.80	CALL
PS1240-21R	12 VDC @ 3.33A (40W), 2.1mm Right Angle DC Plug	22.00	21.12	20.24	CALL
PS1566	15 VDC @ 4.4A (66W), 2.1mm DC Plug	90.00	86.40	82.80	CALL
PS4848-25R	48 VDC @ 1A (48W), 2.5mm Right Angle DC Plug	24.95	24.45	23.95	CALL
PS4870-25R	48 VDC @ 1.5A (70W), 2.5mm Right Angle DC Plug	60.80	58.37	55.94	CALL

Lighter Plug to 2.1mm Right Angle DC Plug, 3A Fuse

PS-LIGHTER-06	Cigarette Plug to 2.1mm Right Angle DC Plug, 3A Fuse, 6ft (1.8m)	10.00	9.60	9.20	CALL
---------------	--	-------	------	------	------

Accessories

PSX-EU1	US Flat or Euro Round to Euro 4.8mm Round A/C Adapter	4.00	3.60	3.20	CALL
PSX-EU2	EU 4/4.8mm Round to US NEMA 6-15R Flat A/C Adapter	4.00	3.60	3.20	CALL
PSCORD2	2 Conductor Plug, USA/AC Power Cord, 1.0ft (0.3m)	4.00	3.84	3.68	CALL
PSCORD3	3 Conductor Plug, USA/AC Power Cord, 1.0ft (0.3m)	3.48	3.34	3.20	CALL

Item #	Description	List Price
--------	-------------	------------

PLANET 802.3at/af PoE Extenders

PLANET's POE-PTE101 and POE-PTE201 are simple devices designed to extend both the reach of Ethernet Data and IEEE 802.3at/802.3af Power over Ethernet over the standard 100m (328ft.) Cat5e/6 UTP cable to 200m, 300m or more. The POE-PTE101 is for use with standard Ethernet while the POE-PTE201 is designed for use with Gigabit applications.

POE-PTE101	IEEE 802.3af Power over Ethernet Extender	60.00
POE-PTE201	IEEE 802.3at/af Power over Gigabit Ethernet Extender	81.00

PLANET 151 Series PoE Injector and Splitters

The PLANET POE-PT151 is an IEEE 802.3af Power over Ethernet Injector that provides DC 48V over Ethernet Cat5 cables. This provides power to 802.3af PoE capable devices. For non-PoE capable devices, the POE-PT151S splits the power and data from the Cat5 cable allowing these devices to operate within a PoE based network. The POE-PT151S ships with two power cables with 2.0mm and 2.5mm female power connectors.

POE-PT151	48 VDC, PoE Injector, Includes Power Supply	42.00
POE-PT151S	5V/12V, PoE Splitter, Includes Power Cables	31.00


PLANET 12 and 24 Port PoE Injector Hubs

The PLANET POE-PT1200 and POE-PT2400 are 12-port and 24-port IEEE 802.3af Power over Ethernet injector hubs that comply with IEEE 802.3, IEEE 802.3u and IEEE 802.3af standards. Equipped with 12 or 24 10/100BASE-TX Fast Ethernet ports, the products support full 48 VDC power for any remote IEEE802.3af powered devices. These hubs feature Web and Console management interfaces to allow administrators easy management access. **NOTE: CANNOT BE USED WITH CISCO PoE PRODUCTS.**

POE-PT1200	48 VDC, 12 Port PoE Injector Hub	280.00
POE-PT2400	48 VDC, 24 Port PoE Injector Hub	430.00



Typical PoE Midspan/Injector and Splitter Applications

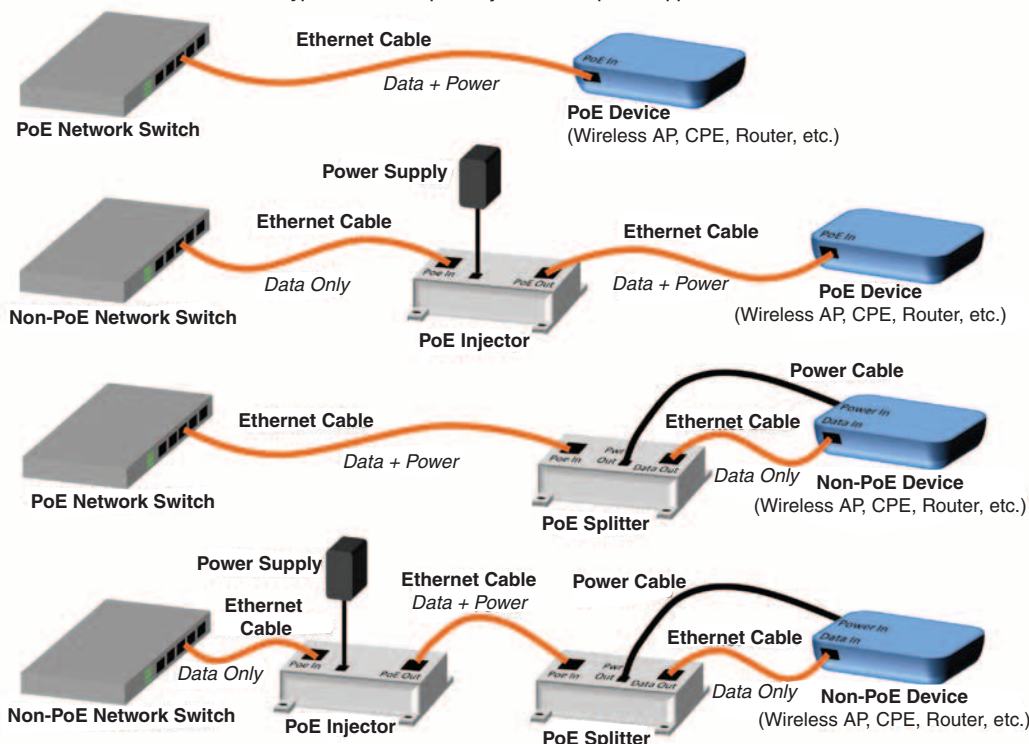

Telecom / Modular - Premise Wiring Tutorial

What is Premise Wiring?

Premise Wiring is the cabling, connectors and accessories that are used to connect LAN (Local Area Network) and phone equipment inside a commercial building.

How is Premise Wiring used?

Premise Wiring is made up of vertical and horizontal cable runs from a central location throughout buildings to individual desktops.


Where is Premise Wiring used?

Premise wiring can be found in just about all public and private buildings, including educational and government buildings as well as in many newer homes.


Typical LAN Premise Wiring

Wiring Notes:

1. Category 5e/6 unshielded twisted pair is the norm. Use 4 pair solid conductor inside the walls, 4 pair stranded for patch cords. Plenum rated cabling may be necessary depending upon fire codes in your area.
2. Maximum distance for a horizontal run is 90m plus an additional 10m for patching.
3. Fiber is the common choice for backbone wiring. It is also recommended for horizontal runs over 100m.

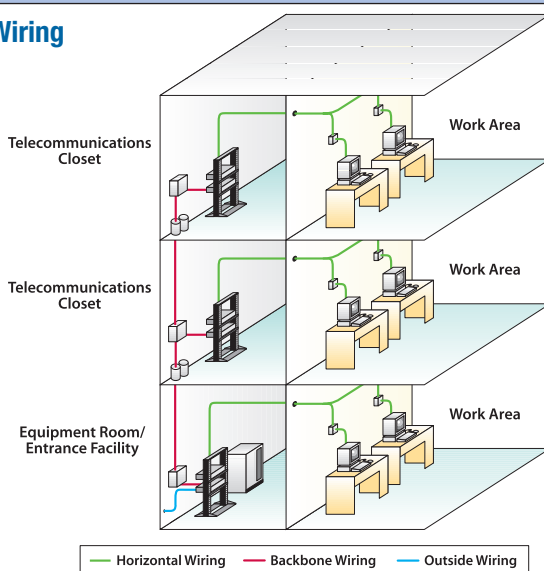


Typical Telecommunications Closet

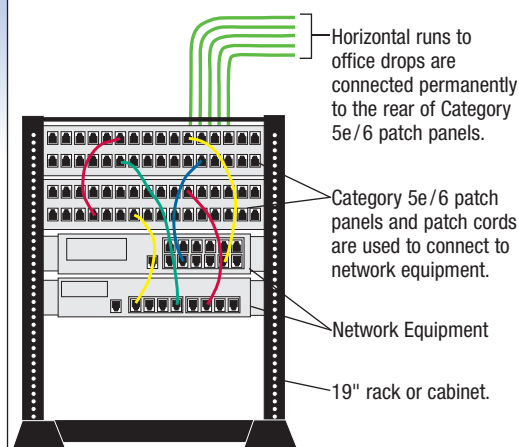


Approximately 70% of network downtime is due to faulty cables

Quality Components are the building blocks of a reliable network

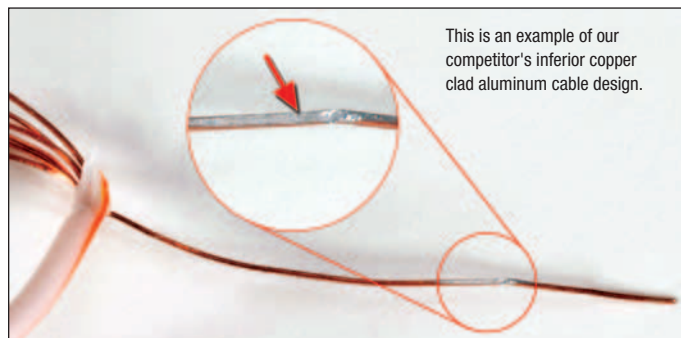


Cable

Many low cost telecom/modular cables use copper clad aluminum or copper clad steel. Aluminum and steel have much higher resistance than copper, resulting in increased data loss and low transmission speeds. L-com uses only pure copper conductors on its cables. Additionally, cable jackets can be made with less fireproofing materials than claimed and in some cases the writing on the jacket might state 24 AWG but is actually made from 25 or 26 AWG wire.

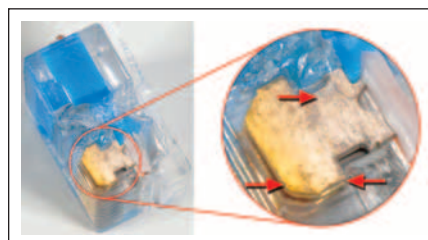

Gold flash on competitors RJ45 contact has deteriorated, degrading connectivity.

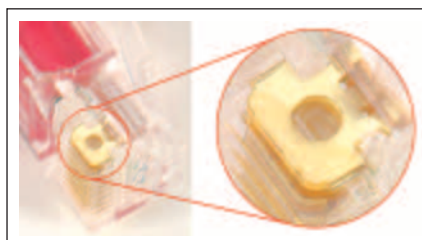

L-com connectors with 50 microinches (1.27µm) of gold do not degrade.

Connectors

Some competitor's connectors use only a gold flash where L-com ensures 50 microinches (1.27µm) or better of gold flash on our connectors.

Gold flash on connectors quickly rubs off, especially for patch cables. This can result in a measurably slower network and even dropped connectivity.

To view the entire article concerning counterfeit and low quality telecom/modular cables visit our website: L-com.com/CableTest

Telecom / Modular - Premise Wiring Tutorial

Ethernet Cable Applications

Download this helpful chart at L-com.com/EthernetCableGuide

CONSTRUCTION

UTP

Used in controlled environments with very little to no EMI/RFI. Used in home, small office and Enterprise business networks.



Shown on page 45

Shielded

For environments where EMI/RFI is present, such as near motors, generators and other "noise" generating machines.



Shown on page 43

Double Shielded

Used in extremely high EMI/RFI environments such as factories and processing plants where "noise" generating equipment including generators, power transmission lines, and electric motors are present.



Shown on page 44

High Flex

Used in continuous motion applications such as a robot arm control cable in a manufacturing environment.



Shown on page 49

MATERIAL

PVC

Very common jacket and over mold compound used in basic small office/home office (SOHO), small to medium business (SMB) and Enterprise network applications. PVC burns rapidly and releases hazardous gases when burned. Applications consist of general open space connectivity (not used in walls or ceilings).



Shown on page 72

LSZH

Low Smoke Zero Halogen cables produce very little smoke when burned and release no halogen compounds including Fluorine, Chlorine, and Bromine. This type of cabling is typically used in confined spaces where human lives and expensive communications equipment reside. LSZH is used on ships, submarines, aircraft, terrestrial vehicles etc.



Shown on page 71

Plenum

Plenum cabling is used in buildings in the plenum air space usually above ceiling tiles or in the plenum airspace under the flooring in a server room or data closet. Plenum cables will self extinguish and not re-ignite.



Shown on page 72

PUR

PUR or Polyurethane cabling is typically used in harsh or Industrial Ethernet networking applications where the presence of petroleum based contaminants, UV rays, and physical impacts occur. Applications include oil refineries, factory floor, manufacturing, processing industries (food and chemical) etc.



Shown on page 71

Telecom / Modular Connectors

MALE PLUGS



Modular (6x2)



Modular (8x2)



Modular (8x4)



Modular (8x6)



Modular 10 Pos. (10x10)



Modular RJ11 (6x4)



Modular RJ12 (6x6)



Modular RJ45 (8x8)









Modular RJ45 (8x8 Keyed)



Modular MMJ (6x6)

FEMALE JACKS



Common Wiring Standards for Data Communications

There are two common wiring standards for LAN wiring. When buying components such as jacks or patch panels, be sure to specify if you need EIA568A or EIA568B.




EIA/TIA568A WIRING

RJ45 Jack (8x8)



EIA/TIA568B AT&T 258A WIRING



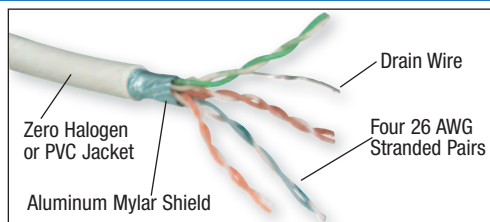

Premium Category 6 RJ45 to RJ45 Shielded Patch Cords

Category 6 has become the de facto standard when installing new network cabling. With high bandwidth applications on the rise and Ethernet network deployments venturing into new areas such as factory environments, the need for shielded Category 6 cable assemblies has also increased. L-com has stepped up to this new demand and created a line of high performance Category 6 patch cords that feature a 100% foil shield and the option of either a PVC or Zero Halogen jacket.

Category 6 Patch Cords




Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

Category 6 Stranded 4 Pair Cable



Ordering is easy, add the desired color code to the part number. Ex: TRD695DSZ-BLK-1.
*Note: No suffix necessary for Gray TRD695SZ assemblies.

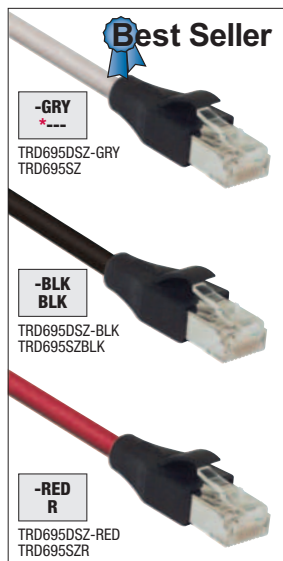


Item #	Description	Length	1-9	10-24	25-99	100+
Category 6 Double Shielded LSZH 26 AWG Stranded Patch Cords						
TRD695DSZ-__-1	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	1.0ft (0.3m)	12.89	12.37	11.86	CALL
TRD695DSZ-__-2	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	2.0ft (0.6m)	13.99	13.43	12.87	CALL
TRD695DSZ-__-3	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	3.0ft (0.9m)	15.09	14.49	13.88	CALL
TRD695DSZ-__-5	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	5.0ft (1.5m)	17.29	16.60	15.91	CALL
TRD695DSZ-__-7	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	7.0ft (2.1m)	19.49	18.71	17.93	CALL
TRD695DSZ-__-10	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	10.0ft (3.0m)	22.79	21.88	20.97	CALL
TRD695DSZ-__-15	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	15.0ft (4.6m)	28.29	27.16	26.03	CALL
TRD695DSZ-__-25	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	25.0ft (7.6m)	39.29	37.72	36.15	CALL
TRD695DSZ-__-50	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	50.0ft (15.2m)	66.79	64.12	61.45	CALL
TRD695DSZ-__-75	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	75.0ft (22.9m)	94.29	90.52	86.75	CALL
TRD695DSZ-__-100	Double Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	100.0ft (30.4m)	121.79	116.92	112.05	CALL

Category 6 Shielded Patch Cords with LSZH Jacket

This series features a LSZH jacket and a 100% foil shield. The four pair 26 AWG stranded Cat6 cable is terminated with L-com's unique shielded Cat6 plugs, with a fully crimped shield termination that doubles as a strain relief.

TRD695SZ-__-1	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	1.0ft (0.3m)	8.89	8.62	8.36	CALL
TRD695SZ-__-2	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	2.0ft (0.6m)	10.19	9.88	9.58	CALL
TRD695SZ-__-3	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	3.0ft (0.9m)	11.59	11.24	10.89	CALL
TRD695SZ-__-5	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	5.0ft (1.5m)	14.29	13.86	13.43	CALL
TRD695SZ-__-7	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	7.0ft (2.1m)	16.99	16.48	15.97	CALL
TRD695SZ-__-10	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	10.0ft (3.0m)	20.99	20.36	19.73	CALL
TRD695SZ-__-15	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	15.0ft (4.6m)	27.79	26.96	26.12	CALL
TRD695SZ-__-25	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	25.0ft (7.6m)	41.29	40.05	38.81	CALL
TRD695SZ-__-50	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	50.0ft (15.2m)	74.99	72.74	70.49	CALL
TRD695SZ-__-75	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	75.0ft (22.9m)	108.79	105.53	102.26	CALL
TRD695SZ-__-100	Shielded Cat6 LSZH Patch Cord, RJ45/RJ45	100.0ft (30.4m)	142.49	138.22	133.94	CALL

Category 6 Shielded Patch Cords with PVC Jacket

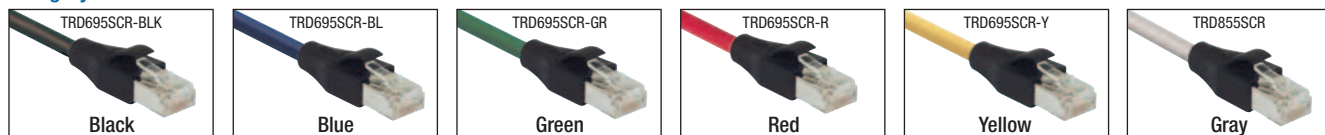

BLK	BL	GR	R	Y	*---
-----	----	----	---	---	------

Ordering is easy, add the desired color code to the part number. Ex: TRD695SCR-BLK-3


*Note: No suffix necessary for Gray assemblies.

Item #	Description	Length	1-9	10-24	25-99	100+
Category 6 Shielded Patch Cords with PVC Jacket						
TRD695SCR-__-1	Shielded Category 6 Patch Cord, RJ45/RJ45	1.0ft (0.3m)	7.99	7.75	7.51	CALL
TRD695SCR-__-2	Shielded Category 6 Patch Cord, RJ45/RJ45	2.0ft (0.6m)	8.79	8.53	8.26	CALL
TRD695SCR-__-3	Shielded Category 6 Patch Cord, RJ45/RJ45	3.0ft (0.9m)	9.49	9.21	8.92	CALL
TRD695SCR-__-5	Shielded Category 6 Patch Cord, RJ45/RJ45	5.0ft (1.5m)	10.99	10.66	10.33	CALL
TRD695SCR-__-7	Shielded Category 6 Patch Cord, RJ45/RJ45	7.0ft (2.1m)	12.49	12.12	11.74	CALL
TRD695SCR-__-10	Shielded Category 6 Patch Cord, RJ45/RJ45	10.0ft (3.0m)	14.79	14.35	13.90	CALL
TRD695SCR-__-15	Shielded Category 6 Patch Cord, RJ45/RJ45	15.0ft (4.6m)	18.49	17.94	17.38	CALL
TRD695SCR-__-25	Shielded Category 6 Patch Cord, RJ45/RJ45	25.0ft (7.6m)	25.99	25.21	24.43	CALL
TRD695SCR-__-50	Shielded Category 6 Patch Cord, RJ45/RJ45	50.0ft (15.2m)	44.79	43.45	42.10	CALL
TRD695SCR-__-75	Shielded Category 6 Patch Cord, RJ45/RJ45	75.0ft (22.9m)	63.49	61.59	59.68	CALL
TRD695SCR-__-100	Shielded Category 6 Patch Cord, RJ45/RJ45	100.0ft (30.4m)	82.29	79.82	77.35	CALL

Premium Category 6 RJ45 Hi-Speed Network Patch Cords with PVC Jacket

Competitive pricing and high quality is what makes L-com's Category 6 patch cords the right choice. Made with high performance 4-pair Category 6 cable and snagless plugs, these cables are ready to be installed in your network.

Affordability and peace of mind are assured when choosing L-com's patch cords. Large volume OEM requests are welcomed with this series. Contact us today for all your patch cord needs.

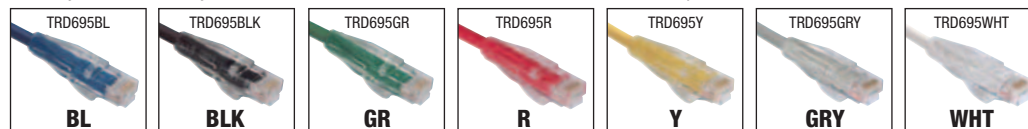

TRD695-__-1	Category 6 Patch Cord, RJ45/RJ45	1.0ft (0.3m)	6.29	6.16	5.91	CALL
TRD695-__-3	Category 6 Patch Cord, RJ45/RJ45	3.0ft (0.9m)	7.39	7.24	6.95	CALL
TRD695-__-5	Category 6 Patch Cord, RJ45/RJ45	5.0ft (1.5m)	8.49	8.32	7.98	CALL
TRD695-__-7	Category 6 Patch Cord, RJ45/RJ45	7.0ft (2.1m)	9.59	9.40	9.01	CALL
TRD695-__-10	Category 6 Patch Cord, RJ45/RJ45	10.0ft (3.0m)	11.69	11.46	10.99	CALL
TRD695-__-14	Category 6 Patch Cord, RJ45/RJ45	14.0ft (4.3m)	13.89	13.61	13.06	CALL
TRD695-__-25	Category 6 Patch Cord, RJ45/RJ45	25.0ft (7.6m)	19.29	18.90	18.13	CALL
TRD695-__-50	Category 6 Patch Cord, RJ45/RJ45	50.0ft (15.2m)	32.19	31.55	30.26	CALL
TRD695-__-75	Category 6 Patch Cord, RJ45/RJ45	75.0ft (22.9m)	45.19	44.29	42.48	CALL
TRD695-__-100	Category 6 Patch Cord, RJ45/RJ45	100.0ft (30.4m)	58.19	57.03	54.70	CALL

Category 6




Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8.

Category 6 4 Pair Stranded Cable



Premium Category 6a RJ45 10-Gig Shielded Patch Cords



L-com's TRD695A Category 6a cable assemblies offer true 10 Gigabit Ethernet speeds at frequencies up to 500 MHz. These robust Category 6a cables are perfect for high speed computing applications often found in data centers. Category 6a cable color options include Blue, Black, Red, and Gray.

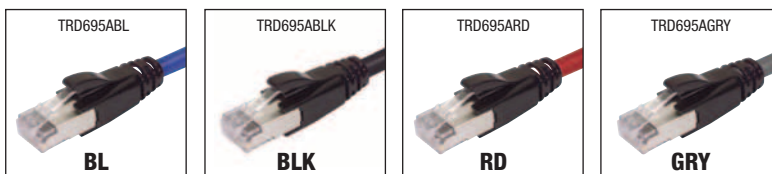

Item #	Description	Length	1-9	10-24	25-99	100+
Ordering is easy, add the desired color code to the part number Ex: TRD695ABLK-1						
TRD695A ___-1	Shielded Category 6a Patch Cord, RJ45/RJ45	1.0ft (0.3m)	11.50	11.04	10.58	CALL
TRD695A ___-2	Shielded Category 6a Patch Cord, RJ45/RJ45	2.0ft (0.6m)	12.55	12.05	11.55	CALL
TRD695A ___-3	Shielded Category 6a Patch Cord, RJ45/RJ45	3.0ft (0.9m)	13.10	12.58	12.05	CALL
TRD695A ___-5	Shielded Category 6a Patch Cord, RJ45/RJ45	5.0ft (1.5m)	14.65	14.06	13.48	CALL
TRD695A ___-7	Shielded Category 6a Patch Cord, RJ45/RJ45	7.0ft (2.1m)	16.75	16.08	15.41	CALL
TRD695A ___-10	Shielded Category 6a Patch Cord, RJ45/RJ45	10.0ft (3.0m)	18.85	18.10	17.34	CALL
TRD695A ___-15	Shielded Category 6a Patch Cord, RJ45/RJ45	15.0ft (4.6m)	23.05	22.13	21.21	CALL
TRD695A ___-25	Shielded Category 6a Patch Cord, RJ45/RJ45	25.0ft (7.6m)	31.45	30.19	28.93	CALL
TRD695A ___-50	Shielded Category 6a Patch Cord, RJ45/RJ45	50.0ft (15.2m)	52.45	50.35	48.25	CALL

Category 5e Shielded Patch Cords - 4 Pair For EIA568 Wiring

For protection against EMI/RFI interference, L-com's economical shielded patch cables are ideal. With a 100% foil shield covering and 4-Pair 26 AWG stranded conductors, your data is protected from interference. This series is designed to perform to EIA568 standards.

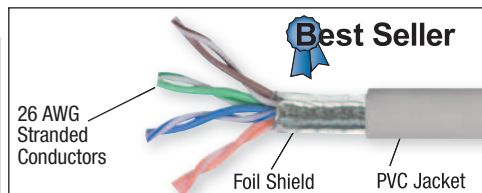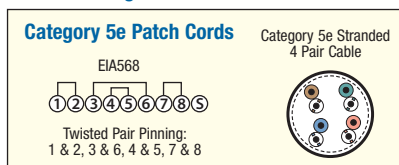

Item #	Description	Color	1-9	10-24	25-99	100+
Category 5e Double Shielded LSZH 26 AWG Stranded Patch Cords						
This series features 26 AWG stranded conductors that are flexible and easy to install even in tight spaces. L-com stocks lengths up to 300ft (91.4m) and can ship most orders the same day.						
Ordering is easy, add the desired color code to the part number. Ex: TRD855DSZBLK-1.						
*Note: No suffix necessary for Gray assemblies.						
TRD855DSZ ___-1	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 1.0ft (0.3m)		11.49	11.03	10.57	CALL
TRD855DSZ ___-2	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 2.0ft (0.6m)		13.19	12.66	12.13	CALL
TRD855DSZ ___-3	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 3.0ft (0.9m)		14.89	14.29	13.70	CALL
TRD855DSZ ___-5	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 5.0ft (1.5m)		18.29	17.56	16.83	CALL
TRD855DSZ ___-7	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 7.0ft (2.1m)		21.69	20.82	19.95	CALL
TRD855DSZ ___-10	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 10.0ft (3.0m)		26.79	25.72	24.65	CALL
TRD855DSZ ___-15	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 15.0ft (4.6m)		35.29	33.88	32.47	CALL
TRD855DSZ ___-25	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 25.0ft (7.6m)		52.29	50.20	48.11	CALL
TRD855DSZ ___-50	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 50.0ft (15.2m)		94.79	91.00	87.21	CALL


Category 5e Shielded LSZH 26 AWG Stranded Patch Cords

This series features 26 AWG stranded conductors and a 100% foil shield. The LSZH jacket is perfect for environments where PVC's combustive toxicity is restricted. **Note:** TRD855SZ line is only available in Black.

TRD855SZ-1	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 1.0ft (0.3m)	Black only	10.89	10.45	10.02	CALL
TRD855SZ-2	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Black only	12.79	12.28	11.77	CALL
TRD855SZ-3	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Black only	14.69	14.10	13.51	CALL
TRD855SZ-5	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Black only	18.49	17.75	17.01	CALL
TRD855SZ-7	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Black only	22.29	21.40	20.51	CALL
TRD855SZ-10	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Black only	27.99	26.87	25.75	CALL
TRD855SZ-15	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Black only	37.49	35.99	34.49	CALL
TRD855SZ-25	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Black only	56.49	54.23	51.97	CALL
TRD855SZ-50	Shielded Cat5e LSZH Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Black only	103.99	99.83	95.67	CALL

Category 5e Shielded 26 AWG Stranded Patch Cords

For protection against EMI/RFI interference L-com's economical shielded patch cables are ideal. With a 100% foil shield covering 4-Pair 26 AWG stranded conductors, your data is protected from interference. This series is designed to perform to EIA568 standards.

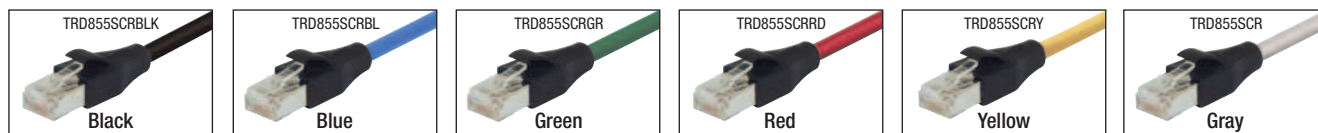



BLK	BL	GR	RD	Y	*---
------------	-----------	-----------	-----------	----------	-------------

Ordering is easy, add the desired color code to the part number. Ex: TRD855SCRBLK-3.

***Note: No suffix necessary for Gray assemblies.**

Item #	Description	Length	1-9	10-24	25-99	100+
TRD855SCR ___-1	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	1.0ft (0.3m)	6.89	6.61	6.34	CALL
TRD855SCR ___-2	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	2.0ft (0.6m)	7.49	7.19	6.89	CALL
TRD855SCR ___-3	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	3.0ft (0.9m)	8.09	7.77	7.44	CALL
TRD855SCR ___-5	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	5.0ft (1.5m)	9.29	8.92	8.55	CALL
TRD855SCR ___-7	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	7.0ft (2.1m)	10.49	10.07	9.65	CALL
TRD855SCR ___-10	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	10.0ft (3.0m)	12.29	11.80	11.31	CALL
TRD855SCR ___-15	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	15.0ft (4.6m)	15.29	14.68	14.07	CALL
TRD855SCR ___-25	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	25.0ft (7.6m)	21.29	20.44	19.59	CALL
TRD855SCR ___-50	Shielded Cat5e EIA568 Patch Cord, RJ45/RJ45	50.0ft (15.2m)	36.29	34.84	33.39	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8.

Best Seller


SHIELDED CATEGORY 5e

- 4 pair 24 AWG solid
- Plenum rated
- Foil shielding




SHIELDED CATEGORY 5e

- 2 pair 26 AWG stranded
- PVC jacket
- Foil shielding



SHIELDED CATEGORY 5e

- 4 pair crossover wired
- 26 AWG stranded conductors
- PVC jacket
- Foil shielding



Item #	Description	Length	Color	1-9	10-24	25-99	100+
--------	-------------	--------	-------	-----	-------	-------	------

Category 5e Double Shielded LSZH 24 AWG Solid Patch Cords

The TRD855SIG series features 24 AWG solid conductors allowing easy termination to IDC connectors. L-com stocks lengths up to 300ft (91.4m) and can ship most orders the same day.

Ordering is easy, add the desired color code to the part number. Ex: TRD855SIGBLK-1.

*Note: No suffix necessary for Gray assemblies.

TRD855SIG _-1	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	1.0ft (0.3m)		11.39	10.93	10.48	CALL
TRD855SIG _-2	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	2.0ft (0.6m)		12.99	12.47	11.95	CALL
TRD855SIG _-3	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	3.0ft (0.9m)		14.59	14.01	13.42	CALL
TRD855SIG _-5	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	5.0ft (1.5m)		17.79	17.08	16.37	CALL
TRD855SIG _-7	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	7.0ft (2.1m)		20.99	20.15	19.31	CALL
TRD855SIG _-10	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	10.0ft (3.0m)		25.79	24.76	23.73	CALL
TRD855SIG _-15	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	15.0ft (4.6m)		33.79	32.44	31.09	CALL
TRD855SIG _-25	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	25.0ft (7.6m)		49.79	47.80	45.81	CALL
TRD855SIG _-50	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	50.0ft (15.2m)		89.79	86.20	82.61	CALL
TRD855SIG _-75	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	75.0ft (22.9m)		129.79	124.60	119.41	CALL
TRD855SIG _-100	Double Shielded Cat5e LSZH Patch Cord, RJ45/RJ45	100.0ft (30.4m)		169.79	163.00	156.21	CALL

Shielded Category 5e Patch Cords with RJ45 (8x8) and RJ11 (6x4) Connectors

These screened (shielded) patch cords are great for use in electrically noisy environments where EMI is an issue. They utilize two or four pair cabling covered by a foil or foil+braided shield. Now available in flexible PVC and plenum jacket formulations. Assemblies are 100% tested and individually bagged.

Category 5e Shielded RJ45 to RJ45 Plenum Patch Cords - 4 Pair Solid for EIA568 Wiring

TRD815SPL-1	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	1.0ft (0.3m)	Blue	28.09	27.53	26.40	CALL
TRD815SPL-2	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	2.0ft (0.6m)	Blue	29.79	29.19	28.00	CALL
TRD815SPL-3	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	3.0ft (0.9m)	Blue	31.39	30.76	29.51	CALL
TRD815SPL-5	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	5.0ft (1.5m)	Blue	34.79	34.09	32.70	CALL
TRD815SPL-7	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	7.0ft (2.1m)	Blue	38.19	37.43	35.90	CALL
TRD815SPL-10	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	10.0ft (3.0m)	Blue	43.19	42.33	40.60	CALL
TRD815SPL-15	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	15.0ft (4.6m)	Blue	51.59	50.56	48.49	CALL
TRD815SPL-25	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	25.0ft (7.6m)	Blue	68.39	67.02	64.29	CALL
TRD815SPL-50	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	50.0ft (15.2m)	Blue	110.39	108.18	103.77	CALL
TRD815SPL-75	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	75.0ft (22.9m)	Blue	152.39	149.34	143.25	CALL
TRD815SPL-100	Shielded Cat5e Plenum Patch Cord, RJ45/RJ45	100.0ft (30.4m)	Blue	194.39	190.50	182.73	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

Category 5e Shielded Ethernet Cable - RJ11 2 Pair Voice and Data Patch Cable

These screened (shielded) patch cords are great for use in electrically noisy environments where EMI is an issue. They utilize two pair cabling covered by a foil shield. Available in flexible PVC jacket formulations. Assemblies are 100% tested and individually bagged.

Category 5e Shielded RJ11 to RJ11 Patch Cords - 2 Pair USOC Wiring

TRDU45SCR-2	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	2.0ft (0.6m)	Beige	5.19	4.88	4.57	CALL
TRDU45SCR-3	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	3.0ft (0.9m)	Beige	5.69	5.35	5.01	CALL
TRDU45SCR-5	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	5.0ft (1.5m)	Beige	6.59	6.19	5.80	CALL
TRDU45SCR-7	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	7.0ft (2.1m)	Beige	7.59	7.13	6.68	CALL
TRDU45SCR-10	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	10.0ft (3.0m)	Beige	8.99	8.45	7.91	CALL
TRDU45SCR-15	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	15.0ft (4.6m)	Beige	11.39	10.71	10.02	CALL
TRDU45SCR-25	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	25.0ft (7.6m)	Beige	16.19	15.22	14.25	CALL
TRDU45SCR-50	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	50.0ft (15.2m)	Beige	28.19	26.50	24.81	CALL
TRDU45SCR-100	Shielded Cat5e USOC-4 Patch Cord, RJ11/RJ11	100.0ft (30.4m)	Beige	52.19	49.06	45.93	CALL

Twisted Pair Pinning: 2 & 5, 3 & 4


Category 5e RJ45 to RJ45 Crossover Patch Cords

TRD855XCR-2	Cat5e Crossover Patch Cord, RJ45/RJ45	2.0ft (0.6m)	Lt. Gray	8.69	7.99	7.30	CALL
TRD855XCR-3	Cat5e Crossover Patch Cord, RJ45/RJ45	3.0ft (0.9m)	Lt. Gray	9.29	8.55	7.80	CALL
TRD855XCR-5	Cat5e Crossover Patch Cord, RJ45/RJ45	5.0ft (1.5m)	Lt. Gray	10.49	9.65	8.81	CALL
TRD855XCR-7	Cat5e Crossover Patch Cord, RJ45/RJ45	7.0ft (2.1m)	Lt. Gray	11.69	10.75	9.82	CALL
TRD855XCR-10	Cat5e Crossover Patch Cord, RJ45/RJ45	10.0ft (3.0m)	Lt. Gray	13.49	12.41	11.33	CALL
TRD855XCR-15	Cat5e Crossover Patch Cord, RJ45/RJ45	15.0ft (4.6m)	Lt. Gray	16.49	15.17	13.85	CALL
TRD855XCR-25	Cat5e Crossover Patch Cord, RJ45/RJ45	25.0ft (7.6m)	Lt. Gray	22.49	20.69	18.89	CALL
TRD855XCR-50	Cat5e Crossover Patch Cord, RJ45/RJ45	50.0ft (15.2m)	Lt. Gray	37.49	34.49	31.49	CALL
TRD855XCR-75	Cat5e Crossover Patch Cord, RJ45/RJ45	75.0ft (22.9m)	Lt. Gray	52.49	48.29	44.09	CALL
TRD855XCR-100	Cat5e Crossover Patch Cord, RJ45/RJ45	100.0ft (30.4m)	Lt. Gray	67.49	62.09	56.69	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8


Types of Shielded Cabling

SINGLE SHIELDED

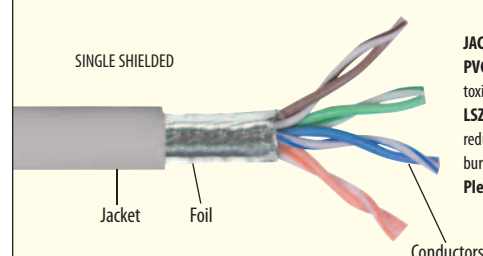**JACKET TYPES:**

- PVC** - Non fire retardant, releases toxic gases when burned.
- LSZH** - Fire retardant, greatly reduced toxic emissions when burned.
- Plenum** - Fire retardant.


DOUBLE SHIELDED

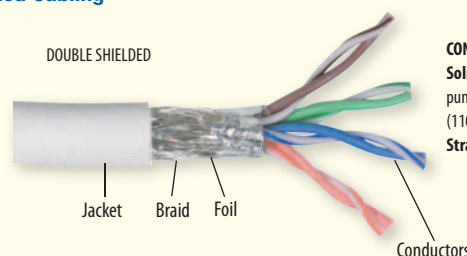**CONDUCTOR TYPES:**

- Solid** - Less flexible, can be punched into IDC connectors (110, 66, Krone).
- Stranded** - Most flexible.

Premium Category 5e RJ45 Molded Ethernet Patch Cords

Designed for today's high-density patch panels, these unique Category 5e molded patch cords feature an easy to depress "shark fin" snagless molded boot that makes connecting cables easier. The clear boot also allows the color of each cable to be easily seen on each port for easy cable identification. Each cable is tested for Category 5e performance to ensure maximum network throughput.

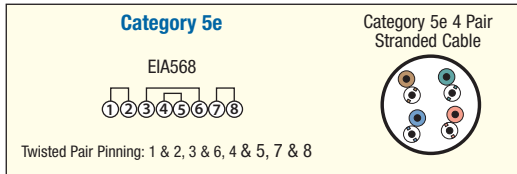

Best Seller

Fully Molded Strain relief

50 microinches Gold plated contacts

Category 5e 4 pair stranded cable 24 AWG

UL 94V-0 Polycarbonate body

"Shark Fin" Snagless Boot



BL	BLK	GR	R	Y	GRY	WHT	OR	V
----	-----	----	---	---	-----	-----	----	---

Ordering is easy, add the desired color code to the part number. Ex: TRD815BL-3

Item #	Description	Length	1-9	10-24	25-99	100+
TRD815 __-3	Category 5e Patch Cord, RJ45/RJ45	3.0ft (0.9m)	4.29	3.86	3.43	CALL
TRD815 __-5	Category 5e Patch Cord, RJ45/RJ45	5.0ft (1.5m)	5.29	4.76	4.23	CALL
TRD815 __-7	Category 5e Patch Cord, RJ45/RJ45	7.0ft (2.1m)	6.39	5.75	5.11	CALL
TRD815 __-10	Category 5e Patch Cord, RJ45/RJ45	10.0ft (3.0m)	7.39	6.65	5.91	CALL
TRD815 __-14	Category 5e Patch Cord, RJ45/RJ45	14.0ft (4.3m)	9.49	8.54	7.59	CALL
TRD815 __-25	Category 5e Patch Cord, RJ45/RJ45	25.0ft (7.6m)	14.79	13.31	11.83	CALL
TRD815 __-50	Category 5e Patch Cord, RJ45/RJ45	50.0ft (15.2m)	26.29	23.66	21.03	CALL
TRD815 __-75	Category 5e Patch Cord, RJ45/RJ45	75.0ft (22.9m)	37.89	34.10	30.31	CALL
TRD815 __-100	Category 5e Patch Cord, RJ45/RJ45	100.0ft (30.4m)	49.39	44.45	39.51	CALL

Premium Category 5e RJ45 Molded Crossover Ethernet Patch Cords

Also designed for today's high-density patch panels, these unique Category 5e molded patch cords feature an easy to depress "shark fin" snagless molded boot that makes connecting cables effortless. The clear boot also allows the color of each cable to be easily seen up to


each port for easy cable identification. Each cable is crossover wired (EIA568A/B) for usage as either uplink connections or for direct connecting of two computers. Contact us today for all your patch cord needs.



Ordering is easy, add the desired color code to the part number Ex: TRD815CRBL-3

TRD815CR __-3	Cat5e 10/100Base-T Crossover Patch Cord, RJ45/RJ45	3.0ft (0.9m)	4.39	4.04	3.69	CALL
TRD815CR __-7	Cat5e 10/100Base-T Crossover Patch Cord, RJ45/RJ45	7.0ft (2.1m)	6.59	6.06	5.54	CALL
TRD815CR __-10	Cat5e 10/100Base-T Crossover Patch Cord, RJ45/RJ45	10.0ft (3.0m)	7.59	6.98	6.38	CALL
TRD815CR __-15	Cat5e 10/100Base-T Crossover Patch Cord, RJ45/RJ45	15.0ft (4.6m)	9.79	9.01	8.22	CALL

10/100Base-T Crossover Patch Cords



Item #	Description	Length	Color	1-9	10-24	25-99	100+
--------	-------------	--------	-------	-----	-------	-------	------


Category 5e RJ45 to RJ45 Plenum Patch Cords - 4 Pair Solid for EIA568 Wiring

Designed for environments where PVC's combustible toxicity is restricted, L-com's Plenum Ethernet Cables provide the ideal alternative. The Category 5E rated plug and cable is designed for high-speed network systems. Ensure the protection of your investment by utilizing these L-com exclusive Plenum cables.

TRD855PL-1	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	1.0ft (0.3m)	White	12.69	12.44	11.93	CALL
TRD855PL-2	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	2.0ft (0.6m)	White	13.29	13.02	12.49	CALL
TRD855PL-3	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	3.0ft (0.9m)	White	13.99	13.71	13.15	CALL
TRD855PL-5	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	5.0ft (1.5m)	White	15.29	14.98	14.37	CALL
TRD855PL-7	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	7.0ft (2.1m)	White	16.59	16.26	15.59	CALL
TRD855PL-10	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	10.0ft (3.0m)	White	18.49	18.12	17.38	CALL
TRD855PL-15	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	15.0ft (4.6m)	White	21.79	21.35	20.48	CALL
TRD855PL-25	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	25.0ft (7.6m)	White	28.29	27.72	26.59	CALL
TRD855PL-50	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	50.0ft (15.2m)	White	44.49	43.60	41.82	CALL
TRD855PL-75	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	75.0ft (22.9m)	White	60.79	59.57	57.14	CALL
TRD855PL-100	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	100.0ft (30.4m)	White	76.99	75.45	72.37	CALL
TRD855PL-150	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	150.0ft (45.7m)	White	109.49	107.30	102.92	CALL
TRD855PL-200	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	200.0ft (60.9m)	White	141.99	139.15	133.47	CALL
TRD855PL-250	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	250.0ft (76.2m)	White	174.49	171.00	164.02	CALL
TRD855PL-300	Cat5e EIA568 Plenum Patch Cord, RJ45/RJ45	300.0ft (91.4m)	White	206.99	202.85	194.57	CALL

TRD855PL

CATEGORY 5e
• 4 pair 24 AWG solid
• Plenum jacket



What is the difference between stranded and solid cable?



Online Video

L-com.com/Videos/A19

Premium Category 5e RJ45 Right Angle Ethernet Patch Cords


L-com's unique, patent pending, right angle patch cables provide true Category 5e performance at an affordable price. These newly designed right angle Ethernet patch cables feature a specialized channel separator and load bar to achieve Category 5e performance while maintaining a right angle bend. L-com's right angle cables are superior to competitor's right angle assemblies.

We've tested it ourselves and the competitor's right angle cables do not pass Category 5e testing for NEXT or Return Loss since the twists of the individual pairs are not maintained through the strain relief and into the connector body. These industry first cables are perfect for use in tight fit applications and dense connectivity applications commonly found in data centers.

Choosing the correct orientation Right Angle for your specific need:

DIRECTION - Add Code

	Straight	Down	Up	Right	Left
Straight	N/A	RA1	RA2	RA7	RA6
Down	RA1	RA3	RA4	RA10	RA11
Up	RA2	RA4	RA5	RA12	RA13
Right	RA7	RA10	RA12	RA14	RA8
Left	RA6	RA11	RA13	RA8	RA9

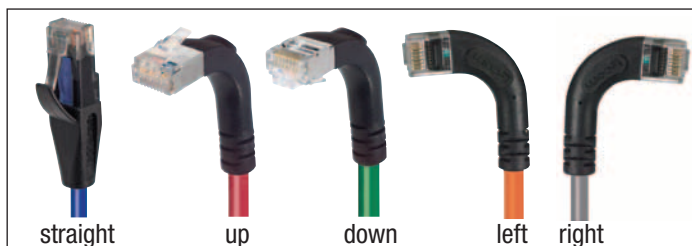

Right Angle Direction

TRD815SRA10BLK-1

Series

Category


815 = Cat5e
695 = Cat6

JACKET/SHIELDING - Add Code

PVC: Industry standard jacket
LSZH: Free of harmful halogens if burned to protect people and valuable equipment.



Unshielded



Shielded

PVC Unshielded = no S
PVC Shielded = **S**

LSZH Unshielded = **Z***
LSZH Shielded = **SZ***

COLORS - Add Code



LENGTHS - Add Code

Available off the shelf lengths in feet:
1, 2, 3, 5, 7, 10, 15, 20, 25 & 30

*LSZH types are only available in BLK, RD or GRV

	5E Unshielded (add color & length)	5E Shielded (add color & length)	5E Unshielded LSZH (add color* & length)	5E Shielded LSZH (add color* & length)	6 Unshielded (add color & length)	6 Shielded (add color & length)	6 Unshielded LSZH (add color* & length)	6 Shielded LSZH (add color* & length)
1 = Down-Straight	Blank	Blank	TRD815ZRA1_ _	TRD815SZRA1_ _	TRD695RA1_ _	TRD695SRA1_ _	TRD695ZRA1_ _	TRD695SZRA1_ _
2 = Up-Straight	TRD815RA2_ _	TRD815SRA2_ _	TRD815ZRA2_ _	TRD815SZRA2_ _	TRD695RA2_ _	TRD695SRA2_ _	TRD695ZRA2_ _	TRD695SZRA2_ _
3 = Down-Down	TRD815RA3_ _	TRD815SRA3_ _	TRD815ZRA3_ _	TRD815SZRA3_ _	TRD695RA3_ _	TRD695SRA3_ _	TRD695ZRA3_ _	TRD695SZRA3_ _
4 = Down-Up	TRD815RA4_ _	TRD815SRA4_ _	TRD815ZRA4_ _	TRD815SZRA4_ _	TRD695RA4_ _	TRD695SRA4_ _	TRD695ZRA4_ _	TRD695SZRA4_ _
5 = Up-Up	TRD815RA5_ _	TRD815SRA5_ _	TRD815ZRA5_ _	TRD815SZRA5_ _	TRD695RA5_ _	TRD695SRA5_ _	TRD695ZRA5_ _	TRD695SZRA5_ _
6 = Left-Straight	TRD815RA6_ _	TRD815SRA6_ _	TRD815ZRA6_ _	TRD815SZRA6_ _	TRD695RA6_ _	TRD695SRA6_ _	TRD695ZRA6_ _	TRD695SZRA6_ _
7 = Right-Straight	TRD815RA7_ _	TRD815SRA7_ _	TRD815ZRA7_ _	TRD815SZRA7_ _	TRD695RA7_ _	TRD695SRA7_ _	TRD695ZRA7_ _	TRD695SZRA7_ _
8 = Left-Right	TRD815RA8_ _	TRD815SRA8_ _	TRD815ZRA8_ _	TRD815SZRA8_ _	TRD695RA8_ _	TRD695SRA8_ _	TRD695ZRA8_ _	TRD695SZRA8_ _
9 = Left-Left	TRD815RA9_ _	TRD815SRA9_ _	TRD815ZRA9_ _	TRD815SZRA9_ _	TRD695RA9_ _	TRD695SRA9_ _	TRD695ZRA9_ _	TRD695SZRA9_ _
10 = Down-Right	TRD815RA10_ _	TRD815SRA10_ _	TRD815ZRA10_ _	TRD815SZRA10_ _	TRD695RA10_ _	TRD695SRA10_ _	TRD695ZRA10_ _	TRD695SZRA10_ _
11 = Down-Left	TRD815RA11_ _	TRD815SRA11_ _	TRD815ZRA11_ _	TRD815SZRA11_ _	TRD695RA11_ _	TRD695SRA11_ _	TRD695ZRA11_ _	TRD695SZRA11_ _
12 = Up-Right	TRD815RA12_ _	TRD815SRA12_ _	TRD815ZRA12_ _	TRD815SZRA12_ _	TRD695RA12_ _	TRD695SRA12_ _	TRD695ZRA12_ _	TRD695SZRA12_ _
13 = Up-Left	TRD815RA13_ _	TRD815SRA13_ _	TRD815ZRA13_ _	TRD815SZRA13_ _	TRD695RA13_ _	TRD695SRA13_ _	TRD695ZRA13_ _	TRD695SZRA13_ _
14 = Right-Right	TRD815RA14_ _	TRD815SRA14_ _	TRD815ZRA14_ _	TRD815SZRA14_ _	TRD695RA14_ _	TRD695SRA14_ _	TRD695ZRA14_ _	TRD695SZRA14_ _
15 = Up-Straight	TRD815RA15_ _**	TRD815SRA15_ _**	CALL	CALL	TRD695RA15_ _**	TRD695SRA15_ _**	CALL	CALL

**Special deep port reach designed for hard to reach jacks or where an overlap of the next port exists. See L-com.com for more detail.

Exclusive
Patent Pending

*Right Angle Cable
Options To Consider*



Online Video

L-com.com/Videos/A33

Family List Prices - All colors and boot direction same price within each family.

Length	TRD695RA	TRD695SRA	TRD695ZRA	TRD695SZRA	TRD815RA	TRD815SRA	TRD815ZRA	TRD815SZRA
1 = 1.0ft (0.3m)	8.59	9.59	14.99	18.99	5.29	10.29	13.49	16.29
2 = 2.0ft (0.6m)	8.89	10.19	16.39	21.19	5.59	10.89	14.59	18.09
3 = 3.0ft (0.9m)	9.59	10.99	17.99	23.19	5.99	11.29	15.99	19.99
5 = 5.0ft (1.5m)	10.49	12.29	20.79	27.39	6.59	12.39	18.69	23.69
7 = 7.0ft (2.1m)	11.49	13.69	23.59	31.59	7.29	13.39	21.39	27.39
10 = 10.0ft (3.0m)	12.79	15.79	27.99	37.79	8.59	14.89	25.39	32.89
15 = 15.0ft (4.6m)	15.09	19.29	35.19	48.19	10.19	17.49	32.09	42.19
20 = 20.0ft (6.1m)	17.69	22.79	42.39	58.59	11.89	19.99	38.79	51.39
25 = 25.0ft (7.6m)	19.99	26.19	49.59	68.99	13.49	22.49	45.29	60.69
30 = 30.0ft (9.1m)	22.59	29.69	56.79	79.39	15.09	25.19	52.09	69.89

Premium Category 5e RJ45 45° Angle Ethernet Patch Cords

L-com's unique, patent pending, 45 degree angle patch cables provide true Category 5e performance at an affordable price. These newly designed angled Ethernet patch cables feature a specialized channel separator and load bar to achieve Cat 5e performance while

maintaining a smooth bend. These industry first cables are perfect for use in data centers or high density patching applications. Add a professional look to your patch panels with neatly organized cable exits to the sides of a patch panel.



SHIELDING - Add Code

unshielded

shielded



(blank for unshielded)

S = Shielded

Category

845 = Category 5e
645 = Category 6

TRD845LSBLK-1


Series

LENGTHS - Add Code

Available off the shelf lengths in feet:
1, 3, 5, 7, 10

DIRECTION - Add Code

L = Left-Straight R = Right-Straight



straight

right

left

COLORS - Add Code



	5e Unshielded (add color & length)	5e Shielded (add color & length)	6 Unshielded (add color & length)	6 Shielded (add color & length)
L = Left-Straight	TRD845L_	TRD845LS_	TRD645L_	TRD645LS_
R = Right-Straight	TRD845R_	TRD845RS_	TRD645R_	TRD645RS_

Right Angle Cable Options To Consider



Online Video

L-com.com/Videos/A33



TRD845RSGRY



TRD845LRED

Family List Prices - All colors and boot direction same price within each family.

Length	TRD845L	TRD845LS	TRD845R	TRD845RS	TRD645L	TRD645LS	TRD645R	TRD645RS
1 = 1.0ft (0.3m)	7.99	9.49	7.99	9.49	8.99	10.99	8.99	10.99
3 = 3.0ft (0.9m)	8.49	10.49	8.49	10.49	9.49	11.99	9.49	11.99
5 = 5.0ft (1.5m)	8.99	11.49	8.99	11.49	10.49	12.99	10.49	12.99
7 = 7.0ft (2.1m)	9.49	11.99	9.49	11.99	10.99	14.49	10.99	14.49
10 = 10.0ft (3.0m)	10.49	13.49	10.49	13.49	11.99	15.99	11.99	15.99




What makes L-com's Right Angle Category 5e cable design superior?


Our competitors' right angle cable designs are inferior as they do not maintain the proper pair twists as the cable enters the right angle. These cables have no mechanism for controlling the twisted pairs as they travel through the right angle strain relief. We tested these cables ourselves

and they do not pass Cat5e testing for NEXT or Return Loss. L-com's unique patent pending design utilizes a specialized channel separator and load bar to maintain the twists through the right angle. L-com's right angle cables are truly Cat5e rated.

Competitors' Design




Competitor's
No control of twists
entering right angle



Competitor's
Conductors have long
sections with no twist

L-com's Patent Pending Design





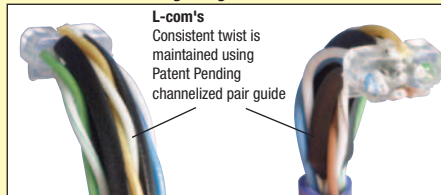


L-com's
Consistent twist is
maintained using
Patent Pending
channelized pair guide



L-com's
Cables pass
Category 5e testing

Unshielded Patch Cords



Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Unshielded Twisted Pair Patch Cords - Category 5e, For Most Network Environments

L-com offers the high quality Category 5e patch cords for use in today's rapidly changing network environments. Category 5e calls for 100 MHz bandwidth @ 100 Mbps data rate which is currently more than adequate for standard Ethernet environments. Unshielded assemblies are manufactured with UL Listed 24 AWG stranded cable with PVC jacket. Plugs have 50 microinches (1.27µm) of gold; assemblies tested 100% prior to shipping.

Category 5e RJ11 to RJ11 Patch Cords - 2 Pair Stranded for 4 and 16 Mb Token Ring

TRDU45-2	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 2.0ft (0.6m)	Beige	3.49	3.28	3.07	CALL
TRDU45-3	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 3.0ft (0.9m)	Beige	3.79	3.56	3.34	CALL
TRDU45-5	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 5.0ft (1.5m)	Beige	4.29	4.03	3.78	CALL
TRDU45-7	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 7.0ft (2.1m)	Beige	4.79	4.50	4.22	CALL
TRDU45-10	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 10.0ft (3.0m)	Beige	5.49	5.16	4.83	CALL
TRDU45-15	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 15.0ft (4.6m)	Beige	6.79	6.38	5.98	CALL
TRDU45-25	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 25.0ft (7.6m)	Beige	9.29	8.73	8.18	CALL
TRDU45-50	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 50.0ft (15.2m)	Beige	15.49	14.56	13.63	CALL
TRDU45-100	Cat5e USOC-4 Patch Cord, RJ11/RJ11, 100.0ft (30.4m)	Beige	27.99	26.31	24.63	CALL

Twisted Pair Pinning: 2 & 5, 3 & 4.

Category 5e RJ45 to RJ45 Patch Cords - 2 Pair Stranded 24 AWG for Ethernet

TRD450-2	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Beige	5.29	4.97	4.66	CALL
TRD450-3	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Beige	5.59	5.25	4.92	CALL
TRD450-5	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Beige	6.09	5.72	5.36	CALL
TRD450-7	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Beige	6.59	6.19	5.80	CALL
TRD450-10	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Beige	7.29	6.85	6.42	CALL
TRD450-15	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Beige	8.59	8.07	7.56	CALL
TRD450-25	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Beige	11.09	10.42	9.76	CALL
TRD450-50	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Beige	17.99	16.91	15.83	CALL
TRD450-100	Cat5e 10Base-T Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Beige	31.39	29.51	27.62	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6.

Category 5e RJ45 to RJ45 Crossover Patch Cords - 2 Pair Stranded for Ethernet Hub Stacking

TRD450CR-2	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Beige	5.29	4.97	4.66	CALL
TRD450CR-3	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Beige	5.59	5.25	4.92	CALL
TRD450CR-5	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Beige	6.09	5.72	5.36	CALL
TRD450CR-7	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Beige	6.59	6.19	5.80	CALL
TRD450CR-10	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Beige	7.29	6.85	6.42	CALL
TRD450CR-15	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Beige	8.59	8.07	7.56	CALL
TRD450CR-25	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Beige	11.09	10.42	9.76	CALL
TRD450CR-50	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Beige	17.99	16.91	15.83	CALL
TRD450CR-100	Cat5e 10Base-T Crossover Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Beige	31.39	29.51	27.62	CALL

1 & 2, 3 & 6 Crossover allows Ethernet Hub Stacking.



Which patch cords are best for a 10 / 100 Mbps Ethernet network?

Any of the TRD815 series patch cords found on [page 45](#) will work effectively for ethernet networks. Choosing different colors for separate network segments in your wiring closet makes troubleshooting quick and easy.



Category 5e RJ45 to RJ45 Patch Cords - 4 Pair Stranded for EIA568 Wiring

TRD855-1	Cat5e EIA568 Patch Cord, RJ45/RJ45, 1.0ft (0.3m)	Beige	1.99	1.93	1.87	CALL
TRD855-2	Cat5e EIA568 Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Beige	2.29	2.22	2.15	CALL
TRD855-3	Cat5e EIA568 Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Beige	2.69	2.61	2.53	CALL
TRD855-5	Cat5e EIA568 Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Beige	3.29	3.19	3.09	CALL
TRD855-7	Cat5e EIA568 Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Beige	3.99	3.87	3.75	CALL
TRD855-10	Cat5e EIA568 Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Beige	4.99	4.84	4.69	CALL
TRD855-15	Cat5e EIA568 Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Beige	6.69	6.49	6.29	CALL
TRD855-25	Cat5e EIA568 Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Beige	9.99	9.69	9.39	CALL
TRD855-50	Cat5e EIA568 Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Beige	18.39	17.84	17.29	CALL
TRD855-100	Cat5e EIA568 Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Beige	35.09	34.04	32.98	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

Category 5e RJ45 to RJ45 Flat Patch Cords - 4 Pair for Ethernet

L-com's flat Category 5e cable assemblies allow network runs in small places where traditional cables would not fit. Built with 30 AWG conductors, they are perfect for running under carpet or other tight spots.

TRD855FLAT-1	Cat5e Flat Patch Cord, RJ45/RJ45, 1.0ft (0.3m)	Black	2.89	2.77	2.66	CALL
TRD855FLAT-3	Cat5e Flat Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Black	3.69	3.54	3.39	CALL
TRD855FLAT-5	Cat5e Flat Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Black	4.49	4.31	4.13	CALL
TRD855FLAT-7	Cat5e Flat Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Black	5.29	5.08	4.87	CALL
TRD855FLAT-10	Cat5e Flat Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Black	6.49	6.23	5.97	CALL
TRD855FLAT-15	Cat5e Flat Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Black	8.49	8.15	7.81	CALL
TRD855FLAT-20	Cat5e Flat Patch Cord, RJ45/RJ45, 20.0ft (6.1m)	Black	10.49	10.07	9.65	CALL
TRD855FLAT-25	Cat5e Flat Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Black	12.49	11.99	11.49	CALL
TRD855FLAT-30	Cat5e Flat Patch Cord, RJ45/RJ45, 30.0ft (9.1m)	Black	14.49	13.91	13.33	CALL
TRD855FLAT-40	Cat5e Flat Patch Cord, RJ45/RJ45, 40.0ft (12.2m)	Black	18.49	17.75	17.01	CALL
TRD855FLAT-50	Cat5e Flat Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Black	22.49	21.59	20.69	CALL
TRD855FLAT-75	Cat5e Flat Patch Cord, RJ45/RJ45, 75.0ft (22.9m)	Black	32.49	31.19	29.89	CALL
TRD855FLAT-100	Cat5e Flat Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Black	42.49	40.79	39.09	CALL

Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

Comparing Industrial/Outdoor Category Rated Bulk Cables

Item #	Rating	AWG	Jacket Material	Jacket Color	UTP	Foil + Braid Shield	Hi-Flex	UV Res.	Oil Res.	Halogen Free	Nominal Cable Diameter	OD of Conductor Insulation	Special Notes	List Price (1K Ft Spool)
TOAC2004	C5e	24 sld	PE	Black	•			•			.246" / 6.2mm	.039" / 0.99mm	Gel-Filled, Aerial Lashed	259.00
TOBC2004	C5e	24 sld	PE	Black	•			•			.380" / 9.7mm	.039" / 0.99mm	Gel-Filled, Armored, Direct Burial	549.00
CA5NF4-REEL	C5e	24 sld	PE	Black	•			•			.240" / 6.1mm	.040" / 1.0mm	Flooded, Direct Burial	269.00
CA-5EF4-R1K	C5e	24 sld	PE	Black	•			•			.240" / 6.1mm	.040" / 1.0mm	Flooded	129.00
TOAC2005	C6	24 sld	PE	Black	•			•			.246" / 6.2mm	.039" / 0.99mm	Gel-Filled, Aerial Lashed	439.00
TOC35911	C6	23 sld	PE	Black	•			•			.260" / 6.6mm	.040" / 1.0mm	Gel-Filled	289.00
TC5700	C5e	24 str	PUR	Black	•		•	•			.228" / 5.8mm	.039" / 0.99mm		589.00
TC5750	C5e	24 str	FR-TPE	Black	•		•	•	•		.227" / 5.8mm	.039" / 0.99mm	CMX Flame Rating	589.00
TFPCUR5730	C5e	26 str	PUR	Black		•		•	•		.220" / 5.6mm	.039" / 0.99mm		949.00
TFCHF2004	C5e	26 str	PUR	Teal		•	•		•	•	.248" / 6.3mm	.040" / 1.01mm	CMG Flame Rating	2999.00
TFCLS2005	C5e	26 str	PUR	Teal		•	•		•	•	.244" / 6.2mm	.037" / 0.94mm	CMX Flame Rating	1449.00
TFCLS5075	C5e	26 str	PUR	Black		•	•		•	•	.244" / 6.2mm	.037" / 0.94mm	CMX Flame Rating	1449.00
TFC5734	C5e	26 str	FR-TPE	Black		•		•	•		.237" / 6.1mm	.039" / 0.99mm	CMX Flame Rating	799.00
TFDL5083	C5e	26 str	FR-TPE	Black		•	•	•	•		.244" / 6.2mm	.037" / 0.94mm	CMX Flame Rating	1095.00
TFDL5088	C5e	26 str	FR-TPE	Teal		•	•	•	•		.244" / 6.2mm	.037" / 0.94mm	CMX Flame Rating	1129.95
TFDL5089	C5e	24 str	FR-TPE	Black		•	•	•	•		.301" / 7.6mm	.046" / 1.2mm	CMX Flame Rating, 600V	1129.95
TFDL5026	C6a	26 str	FR-TPE	Teal		•	•	•	•		.275" / 7.0mm	.036" / 0.91mm	CMX Flame Rating	1199.00



Understanding Industrial Cables

L-com's industrial cables are made to take a beating and keep on transmitting. They are able to accomplish this by utilizing special jackets and materials in their construction. Please use the following reference for a quick guide to understanding Industrial cables:

PUR cables are made using a Polyurethane jacket. They are tough, flexible, and resilient. This material can be stretched, smashed or scratched while remaining fairly indestructible. It can also be deformed over and over again and return to its original shape.

FR-TPE means Flame-retardant Thermoplastic Elastomer. It is a material similar to PUR that is strong when struck, hard if scratched and is resistant to various forms of chemical corrosion. It makes an excellent dense and protective jacket while remaining highly flexible.


Halogen-free cables, as the name implies, are free of harmful halogens if burned. This protects valuable equipment and resources from the potentially harmful toxic or acidic smoke that can be found in other cable jackets.

UV Resistant cables are resistant to ultraviolet light and sunlight, as such, they will not weaken, be destroyed by or faded by light exposure.

Oil Resistant cables are made from materials that will not corrode or breakdown when exposed to most chemicals and oils found in industrial environments.

PE cables have jackets made of Polyethylene material. They have very low water absorption and are generally used in outdoor installations. However, PE cables are stiffer than PUR or FR-TPE cables and are less resistant to abrasion.

Hi-Flex cables utilize a combination of flexible jackets with specialized stranded conductors which allow the cables to be flexed over and over again, literally millions of times, before the performance of the cable will suffer.



An Industrial Bulk Cable Undergoing Flex Testing

Item #	Description	Color	1-9	10-24	25-99	100+
Extreme Hi-Flex Oil Resistant Category 5e Patch Cords						
This series features 26 AWG stranded conductors and a braid and foil shield. The outer jacket is low-friction halogen-free PUR. This cable has been tested to 10 million flex cycles.						
TRD877HF-1	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 1.0ft (0.3m)	Teal	40.29	38.68	37.07	CALL
TRD877HF-2	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Teal	43.99	42.23	40.47	CALL
TRD877HF-3	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Teal	47.79	45.88	43.97	CALL
TRD877HF-5	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Teal	55.29	53.08	50.87	CALL
TRD877HF-7	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Teal	62.79	60.28	57.77	CALL
TRD877HF-10	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Teal	73.99	71.03	68.07	CALL
TRD877HF-15	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Teal	92.79	89.08	85.37	CALL
TRD877HF-25	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Teal	130.29	125.08	119.87	CALL
TRD877HF-50	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Teal	223.99	215.03	206.07	CALL
TRD877HF-75	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 75.0ft (22.9m)	Teal	317.79	305.08	292.37	CALL
TRD877HF-100	Shielded Cat5e Extreme Hi-Flex Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Teal	411.49	395.03	378.57	CALL
Hi-Flex Oil Resistant Category 5e Patch Cords						
This series features 26 AWG stranded conductors and a braided shield. The outer jacket is low-friction halogen-free PUR that is perfect for cable track applications.						
TRD855HFX-1	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 1.0ft (0.3m)	Teal	40.49	38.87	37.25	CALL
TRD855HFX-2	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 2.0ft (0.6m)	Teal	43.99	42.23	40.47	CALL
TRD855HFX-3	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 3.0ft (0.9m)	Teal	47.49	45.59	43.69	CALL
TRD855HFX-5	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 5.0ft (1.5m)	Teal	54.49	52.31	50.13	CALL
TRD855HFX-7	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 7.0ft (2.1m)	Teal	61.49	59.03	56.57	CALL
TRD855HFX-10	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 10.0ft (3.0m)	Teal	71.99	69.11	66.23	CALL
TRD855HFX-15	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 15.0ft (4.6m)	Teal	89.49	85.91	82.33	CALL
TRD855HFX-25	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 25.0ft (7.6m)	Teal	124.49	119.51	114.53	CALL
TRD855HFX-50	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 50.0ft (15.2m)	Teal	211.99	203.51	195.03	CALL
TRD855HFX-75	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 75.0ft (22.9m)	Teal	299.49	287.51	275.53	CALL
TRD855HFX-100	Shielded Cat5e Hi-Flex Patch Cord, RJ45/RJ45, 100.0ft (30.4m)	Teal	386.99	371.51	356.03	CALL

TC5750

TFCHF2004

TFDL5026

TRD877HF

EXTREME HIGH-FLEX SHIELDED CATEGORY 5e

- 4 pair 26 AWG stranded
- Zero Halogen jacket
- Tested to 10 million flex cycles
- Double shielded foil

TRD855HFX

HIGH-FLEX SHIELDED CATEGORY 5e

- 4 pair 26 AWG stranded
- Oil resistant jacket
- Tested to 2.5 million flex cycles
- Braid shielding

ECRA4211UB0



ECRP5103UB0



ECRD0201U00



ECRD3103U00



ECRH0103U00



ECRH3201U00



ECRK0201U00



ECRJ0203U00



What does transversely sealed mean?

Did you know that all of L-com's new ruggedized RJ45 jam-nuts, flanges and in-line receptacles are transversely sealed? As the name implies, this means that they are waterproof. The parts meet or exceed IP-68 rating with or without dust covers or mated connectors engaged with the receptacle. The plugs and jacks are waterproof even without a mated cap or connector when submerged under 1 meter of water for up to two days. Your equipment will not be at risk from moisture or dust even if you lose or forget the dust cap.



Item #	Description	List Price
--------	-------------	------------

Ruggedized RJ45 Plugs and Jacks:

In today's world of high-speed communications, Ethernet has become the standard platform for all voice, video and data services. L-com's ruggedized family of RJ45 plugs and receptacles provide an efficient, comprehensive and affordable solution to Ethernet connectivity for harsh and environmentally challenged applications. These parts feature 100% transversely sealed (IP-68) configurations as a standard product design, preventing dust, water and moisture penetration, with or without dust cap or plug engagement. The ruggedized parts offer comprehensive shielding and grounding effectiveness capable of sustaining higher data transmission rates as well as Electro-Magnetic Conductance (EMC) for Military applications (only Zinc-Nickel finished parts offer EMC grounding). Suggested areas of usage include Data, VOIP, IPTV in harsh environments, 10/100/1000 Base-T networks, battlefield communication systems, industrial process control, data acquisition and control, factory environments, radar systems, railways and shelters among other things.

Ruggedized RJ45 Plugs

L-com's ruggedized RJ45 plugs are designed to integrate with other ruggedized jam-nuts, flange mounts and in-line receptacles. Special compressive fittings allow these plugs to work with shielded or unshielded cable. A compression nut establishes 10lb of cable strain relief establishing robust cable strength. Internal conductive compression is used to interoperate with the cable braid to form a 360° ground plane. Plugs are available with or without dust caps. Ruggedize your plugs for harsh environmental applications today.

ECRA0211UA0	Ruggedized RJ45 Plug, Anodized Finish, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	67.19
ECRA0213UA0	Ruggedized RJ45 Plug, Zinc-Nickel Finish, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	77.69
ECRA4211UA0	Ruggedized RJ45 Plug, Anodized Finish with Dust Cap, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	94.49
ECRA4213UA0	Ruggedized RJ45 Plug, Zinc-Nickel Finish with Dust Cap, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	104.99
ECRA0211UB0	Ruggedized RJ45 Plug, Anodized Finish, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	67.19
ECRA0213UB0	Ruggedized RJ45 Plug, Zinc-Nickel Finish, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	94.49
ECRA4211UB0	Ruggedized RJ45 Plug, Anodized Finish with Dust Cap, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	94.49
ECRA4213UB0	Ruggedized RJ45 Plug, Zinc-Nickel Finish with Dust Cap, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	104.99

Ruggedized RJ45 In-line Receptacle

These ruggedized RJ45 receptacles are transversely sealed with no mate but also designed to work with L-com's line of ruggedized RJ45 plugs. Choose your RJ45 plug and bulk cable from L-com's wide selection.

ECRP5103UA0	Ruggedized RJ45 Recept., Zinc-Nickel Finish w/Grounding Shield & Dust Cap, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	104.99
ECRP5201UA0	Ruggedized RJ45 Receptacle, Anodized Finish with Dust Cap, Fits Cable OD .190-.270 inches (0.5cm - 0.7cm)	89.19
ECRP5103UB0	Ruggedized RJ45 Recept., Zinc-Nickel Finish w/Grounding Shield & Dust Cap, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	110.19
ECRP5201UB0	Ruggedized RJ45 Receptacle, Anodized Finish with Dust Cap, Fits Cable OD .271-.330 inches (0.7cm - 0.8cm)	89.19

Ruggedized RJ45 Receptacles

These ruggedized RJ45 receptacles are transversely sealed for complete moisture and dust protection. L-com's ECRD line provides both the Flange mount and sealing gasket. The ECRH line comes with full mounting hardware including bracket, self-sealing mounting screws, and O-rings for an easy installation. The ECRK line is a simple D-hole jam nut and requires no additional hardware for mounting and the ECRJ line fits a D38999/24 and M83723/60 cutout. See L-com.com for our full line of harsh environment products.

ECRD0103U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Grounding Shield	52.49
ECRD0201U00	Ruggedized Flange Mount, Anodized Finish	38.79
ECRD0203U00	Ruggedized Flange Mount, Zinc-Nickel Finish	45.09
ECRD3103U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Grounding Shield and Dust Cap	73.49
ECRD3201U00	Ruggedized Flange Mount, Anodized Finish with Dust Cap	59.79
ECRD3203U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Dust Cap	67.19
ECRH0103U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Grounding Shield and Mounting Hardware	60.89
ECRH0201U00	Ruggedized Flange Mount, Anodized Finish with Mounting Hardware	48.29
ECRH0203U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Mounting Hardware	54.59
ECRH3103U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Grounding Shield, Mounting Hardware and Dust Cap	83.99
ECRH3201U00	Ruggedized Flange Mount, Anodized Finish with Mounting Hardware and Dust Cap	71.39
ECRH3203U00	Ruggedized Flange Mount, Zinc-Nickel Finish with Mounting Hardware and Dust Cap	78.69
ECRK0103U00	Ruggedized Jam-nut, Zinc-Nickel Finish with Grounding Shield	60.89
ECRK0201U00	Ruggedized Jam-nut, Anodized Finish	45.09
ECRK0203U00	Ruggedized Jam-nut, Zinc-Nickel Finish	51.39
ECRK2103U00	Ruggedized Jam-nut, Zinc-Nickel Finish with Grounding Shield and Dust Cap	93.39
ECRK2201U00	Ruggedized Jam-nut, Anodized Finish with Dust Cap	73.49
ECRK2203U00	Ruggedized Jam-nut, Zinc-Nickel Finish with Dust Cap	82.89
ECRJ0203U00	Ruggedized Jam-nut, Zinc-Nickel for D38999/24 or M83723/60 cutout	60.89



Grounding RJ45 ruggedized jacks

Many applications that require the use of higher data rates require proper grounding and shielding. To address this, L-com offers our Zinc-Nickel finished line of RJ45 Ruggedized jacks which are designed to establish sufficient grounding between shielded cord sets and chassis ground. They also provide EMC/EMI shielding for applications where immunity

to electromagnetic interference is crucial. The parts provide $<0.033\Omega$ for shielded cable to cable or cable to ground use. This is accomplished using a grounding plate, conductive O-ring and gasket. The parts adhere to and are tested to IAW MIL-STD-461F, RS103 for EMI emission and susceptibility.





EMC Shroud (front view)
– conductive surface with shielded cable and receptacle or chassis ground



EMC Shroud (rear view)
– conductive surface with shielded cable

Category 5e Ruggedized RJ45 Assemblies with FR-TPE Outdoor Rated Cable

L-com is proud to offer assemblies using our IP68 rated ruggedized RJ45 plugs and jacks in various combinations. Each cable is built using CMX Outdoor Rated, double-shielded industrial cable for the most durable Category 5e cable L-com has ever offered. Please see our custom cable configurator on L-com.com to create your own custom length variations. All ruggedized jacks and plugs come with dust caps. New armored versions have 1,500 PSI crush resistance. Call today for assistance.



Ordering is easy, add the desired number of the style code into the part number. Ex: TRD8RG6-01, Plug to Jack, Anodized finish, 1m in length

Item #	Description	Length	List Price
TRD8RG5-01	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	1.0m	387.59
TRD8RG5-02	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	2.0m	392.29
TRD8RG5-03	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	3.0m	396.79
TRD8RG5-05	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	5.0m	406.19
TRD8RG5-10	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	10.0m	429.29

Category 5e Ruggedized RJ45 Assemblies with Armored Cable

The TRD8RGMT line is the most rugged and durable Cat5e assemblies L-com has ever offered. Designed for use in outdoor, industrial and military applications where the harshest environments exist, these cables are built using our IP68, transversely sealed, ruggedized RJ45 plugs and jacks. The Category 5e cable used in the assemblies is double shielded, high-flex, UV and Oil resistant and made with a FR-TPE (Flame Retardant Thermoplastic Elastomer) jacket that is CMX outdoor rated. Superior shielding of both the cable and connectors ensures higher data transmission rates up to Gigabit Ethernet speeds. These cables offer complete moisture, dust, oil and UV protection for your military, outdoor or industrial application. Custom lengths are available for special projects with no min buy. Contact us today.



Ordering is easy, add the desired number of the style code into the part number. Ex: TRD8RGMT6-01, Plug to Jack, Anodized finish, 1m in length

TRD8RGMT5-01	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	1.0m	845.29
TRD8RGMT5-02	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	2.0m	869.39
TRD8RGMT5-03	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	3.0m	893.59
TRD8RGMT5-05	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	5.0m	941.89
TRD8RGMT5-10	Ruggedized Category 5e Assembly with FR-TPE Outdoor Rated Cable and Dust Caps	10.0m	1062.59



Item #	Description	1-9	10-24	25-99	100+
M12 D-Coded 4 Position Cables for Ethernet and Fieldbus Applications					
L-com offers popular 22 AWG 2-pair, 4 Position, D-coded M12 cable assemblies for use in Ethernet and fieldbus applications. These robust assemblies are 100% factory tested and feature UV and chemical resistant PUR jackets. Applications for these assemblies include manufacturing process control, factory automation and more. Contact us today with your custom M12 requirements.					
M12 4 Position D-Coded Male to Male Cable Assemblies					
M12M124D-0.5	M12 4 Position D-Coded Male / Male Cable Assembly, 0.5m	13.34	13.07	12.81	CALL
M12M124D-1	M12 4 Position D-Coded Male / Male Cable Assembly, 1.0m	14.37	14.08	13.80	CALL
M12M124D-2	M12 4 Position D-Coded Male / Male Cable Assembly, 2.0m	16.43	16.10	15.77	CALL
M12M124D-3	M12 4 Position D-Coded Male / Male Cable Assembly, 3.0m	18.49	18.12	17.75	CALL
M12M124D-5	M12 4 Position D-Coded Male / Male Cable Assembly, 5.0m	20.55	20.14	19.73	CALL
M12 4 Position D-Coded Male (Straight) to Male (Right Angle) Cable Assemblies					
M12M12R4D-0.5	M12 4 Position D-Coded Male / Male Right Angle Cable Assembly, 0.5m	13.34	13.07	12.81	CALL
M12M12R4D-1	M12 4 Position D-Coded Male / Male Right Angle Cable Assembly, 1.0m	14.37	14.08	13.80	CALL
M12M12R4D-2	M12 4 Position D-Coded Male / Male Right Angle Cable Assembly, 2.0m	16.43	16.10	15.77	CALL
M12M12R4D-3	M12 4 Position D-Coded Male / Male Right Angle Cable Assembly, 3.0m	18.49	18.12	17.75	CALL
M12M12R4D-5	M12 4 Position D-Coded Male / Male Right Angle Cable Assembly, 5.0m	20.55	20.14	19.73	CALL
M12 4 Position D-Coded Male to Female Cable Assemblies					
M12M12F4D-0.5	M12 4 Position D-Coded Male / Female Cable Assembly, 0.5m	15.40	15.09	14.78	CALL
M12M12F4D-1	M12 4 Position D-Coded Male / Female Cable Assembly, 1.0m	16.43	16.10	15.77	CALL
M12M12F4D-2	M12 4 Position D-Coded Male / Female Cable Assembly, 2.0m	18.49	18.12	17.75	CALL
M12M12F4D-3	M12 4 Position D-Coded Male / Female Cable Assembly, 3.0m	20.55	20.14	19.73	CALL
M12M12F4D-5	M12 4 Position D-Coded Male / Female Cable Assembly, 5.0m	23.64	23.17	22.69	CALL
M12 4 Position D-Coded Male to RJ45 Male Cable Assemblies					
M12RJ454D-0.5	M12 4 Position D-Coded Male / RJ45 Male Cable Assembly, 0.5m	13.34	13.07	12.81	CALL
M12RJ454D-1	M12 4 Position D-Coded Male / RJ45 Male Cable Assembly, 1.0m	14.37	14.08	13.80	CALL
M12RJ454D-2	M12 4 Position D-Coded Male / RJ45 Male Cable Assembly, 2.0m	18.49	18.12	17.75	CALL
M12RJ454D-3	M12 4 Position D-Coded Male / RJ45 Male Cable Assembly, 3.0m	22.61	22.16	21.71	CALL
M12RJ454D-5	M12 4 Position D-Coded Male / RJ45 Male Cable Assembly, 5.0m	31.88	31.24	30.60	CALL
M12 A-Coded 5 Position Cables for Sensor and Fieldbus Applications					
L-com stocks A-coded 5 Position M12 cable assemblies for use in sensor and fieldbus applications. These rugged cables feature PUR jackets, 22 AWG stranded conductors and are 100% factory tested to ensure system uptime.					
M12 5 Position A-Coded Female to Cut End Cable Assemblies					
M12FOE5A-1	M12 5 Position A-Coded Female / Cut End, 1.0m	10.56	9.93	9.29	CALL
M12FOE5A-2	M12 5 Position A-Coded Female / Cut End, 2.0m	13.34	12.54	11.74	CALL
M12 5 Position A-Coded Male to Male Cable Assemblies					
M12M125A-0.5	M12 5 Position A-Coded Male / Male Cable Assembly, 0.5m	14.37	14.08	13.80	CALL
M12M125A-1	M12 5 Position A-Coded Male / Male Cable Assembly, 1.0m	16.43	16.10	15.77	CALL
M12M125A-2	M12 5 Position A-Coded Male / Male Cable Assembly, 2.0m	19.52	19.13	18.74	CALL
M12M125A-3	M12 5 Position A-Coded Male / Male Cable Assembly, 3.0m	22.61	22.16	21.71	CALL
M12M125A-5	M12 5 Position A-Coded Male / Male Cable Assembly, 5.0m	27.76	27.20	26.65	CALL
M12 5 Position A-Coded Male to Female Cable Assemblies					
M12M12F5A-0.5	M12 5 Position A-Coded Male / Female Cable Assembly, 0.5m	16.43	16.10	15.77	CALL
M12M12F5A-1	M12 5 Position A-Coded Male / Female Cable Assembly, 1.0m	18.49	18.12	17.75	CALL
M12M12F5A-2	M12 5 Position A-Coded Male / Female Cable Assembly, 2.0m	21.58	21.15	20.72	CALL
M12M12F5A-3	M12 5 Position A-Coded Male / Female Cable Assembly, 3.0m	24.67	24.18	23.68	CALL
M12M12F5A-5	M12 5 Position A-Coded Male / Female Cable Assembly, 5.0m	30.85	30.23	29.62	CALL
M12 4 Position and 5 Position Adapters					
L-com stocks a multitude of M12 adapters including T style, I style and Y style M12 4 Position and 5 Position adapters. These rugged adapters are designed for use in harsh environments requiring temperature ranges from -25°C to 90°C.					
M12 A-Coded 3 Way T Style Adapters					
ADPT-M124MT	M12 4 Position 3 Way Male T Adapter	17.95	17.59	17.23	CALL
ADPT-M125MT	M12 5 Position 3 Way Male T Adapter	18.95	18.57	18.19	CALL
ADPT-M124FT	M12 4 Position 3 Way Female T Adapter	20.95	20.53	20.11	CALL
ADPT-M125FT	M12 5 Position 3 Way Female T Adapter	22.95	22.49	22.03	CALL
M12 A-Coded 2 Way I Style Adapters					
ADPT-M124MI	M12 4 Position Inline Male I Adapter	10.95	10.73	10.51	CALL
ADPT-M125MI	M12 5 Position Inline Male I Adapter	11.95	11.71	11.47	CALL
ADPT-M124FI	M12 4 Position Inline Female I Adapter	13.95	13.67	13.39	CALL
ADPT-M125FI	M12 5 Position Inline Female I Adapter	14.95	14.65	14.35	CALL
M12 A-Coded 3 Way Y Style Adapters					
ADPT-M124MY	M12 4 Position 3 Way Male Y Adapter	14.95	14.65	14.35	CALL
ADPT-M125MY	M12 5 Position 3 Way Male Y Adapter	17.95	17.59	17.23	CALL
ADPT-M124FY	M12 4 Position 3 Way Female Y Adapter	18.95	18.57	18.19	CALL
ADPT-M125FY	M12 5 Position 3 Way Female Y Adapter	20.95	20.53	20.11	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

M12 D-Coded 4 Position and 5 Position Panel, PCB and Solder Style Connectors

L-com offers a complete line of D-Coded 4 and 5 Position M12 connectors for enclosure, panel and PCB applications. These quality constructed connectors provide years of trouble free use in the most trying applications. These M12 connectors are offered in both male and female versions and are rated to IP68.

M12 D-Coded Panel Mount Connectors

CON-M124PM	M12 4 Position Male Panel Mount Connector	7.95	7.79	7.63	CALL
CON-M125PM	M12 5 Position Male Panel Mount Connector	8.45	8.28	8.11	CALL
CON-M124PF	M12 4 Position Female Panel Mount Connector	8.95	8.77	8.59	CALL
CON-M125PF	M12 5 Position Female Panel Mount Connector	9.45	9.26	9.07	CALL

M12 D-Coded PCB Mount Connectors

CON-M124PCBM	M12 4 Position Male PCB Mount Connector	7.45	7.30	7.15	CALL
CON-M125PCBM	M12 5 Position Male PCB Mount Connector	7.95	7.79	7.63	CALL
CON-M124PCBF	M12 4 Position Female PCB Mount Connector	10.45	10.24	10.03	CALL
CON-M125PCBF	M12 5 Position Female PCB Mount Connector	11.45	11.22	10.99	CALL

M12 D-Coded Solder Style Connectors

CON-M124SLDM	M12 4 Position Male Solder Style Connector	8.45	8.28	8.11	CALL
CON-M125SLDM	M12 5 Position Male Solder Style Connector	8.95	8.77	8.59	CALL
CON-M124SLDF	M12 4 Position Female Solder Style Connector	10.45	10.24	10.03	CALL
CON-M125SLDF	M12 5 Position Female Solder Style Connector	10.95	10.73	10.51	CALL

Item #	Description	List Price
--------	-------------	------------

Field Attachable IP67 M12 Connector

This robust field attachable Industrial Ethernet M12 connector is perfect for repair or installation of new and existing industrial cable plants. This connector is "D"- coded according to IEC 61076-2-101 4 and supports both 10Base-T and 100Base-T Ethernet applications. The EM12S Octopus is IP67 rated and features 4 contacts and IDC style termination.

EM12S OCTOPUS	Field Attachable IP67 M12 Connector	35.00
---------------	-------------------------------------	-------

Bulkhead M12 to RJ45 IP67/65 Connector

This versatile IP67/65 connector/adaptor provides a bulkhead style M12 connector on one and a shielded RJ45 jack on the other to address specific Industrial Ethernet applications. This connector is "D"- coded according to IEC 61076-2-101 and supports both 10Base-T and 100Base-T Ethernet applications.

90001136	Bulkhead M12 to RJ45 IP67/65 Connector	59.95
----------	--	-------

EtherWAN's Hardened M12 Ethernet Extender over Coax


L-com now carries EtherWAN's Hardened M12 Ethernet Extender. This unit has a rugged aluminum case and is ideal for industrial environments. It supports full 10/100 duplex operation at up to 85 Mbps for up to 200 meters and 1 Mbps for up to 2,600 meters over standard 50 Ohm Coaxial Cable. The extender features 10 speeds with easy to read indicator LEDs on the front panel of the unit and a robust operating temperature range of -40° to +75°C. Contact L-com today for assistance extending your M12 Ethernet network through an industrial environment. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-ED3344-00B	EtherWAN Hardened 10/100TX M12 Ethernet Extender over Coax	599.98
---------------	--	--------

EtherWAN's Managed Hardened M12 Industrial Ethernet Switches

EtherWAN M12 switches are ready to help you expand your M12 Ethernet network with additional ports. These managed switches provide eight and 16 of 10/100 M12 ports and two M12 ports supporting Gigabit Ethernet. The ruggedized case and -40° to +75°C operating temperature range make these units ideal for industrial installations. These switches comply with EN50155/50121-3-2 for Railway applications and are IP67 rated. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-ER58802-201G0	EtherWAN Managed, Hardened 8-Port 10/100TX M12 Ethernet Switch with 2 Port Gigabit M12	2454.98
------------------	--	---------

CON-M125PF
Front ViewCON-M125PF
Back ViewCON-M124PCBF
Front ViewCON-M124PCBF
Back ViewCON-M124SLDF
Front ViewCON-M124SLDF
Back View

Front View

Back View



90001136



EW-ED3344-00B




EW-ER58802-201G0

Rolling Stock Network

EtherWAN's EN50121-4 certified products are designed for railway applications and guarantee electromagnetic compatibility in the rail environment. The EN50155 certified products comply with the robust requirements of rolling stock applications, such as shock, vibration, humidity and temperature. M12 connectors are available on those products that are installed in the most extreme environments.

—	PoE Ethernet
—	Fiber Optic
—	Cat5 Ethernet
—	Coaxial Cable
—	Serial Cable

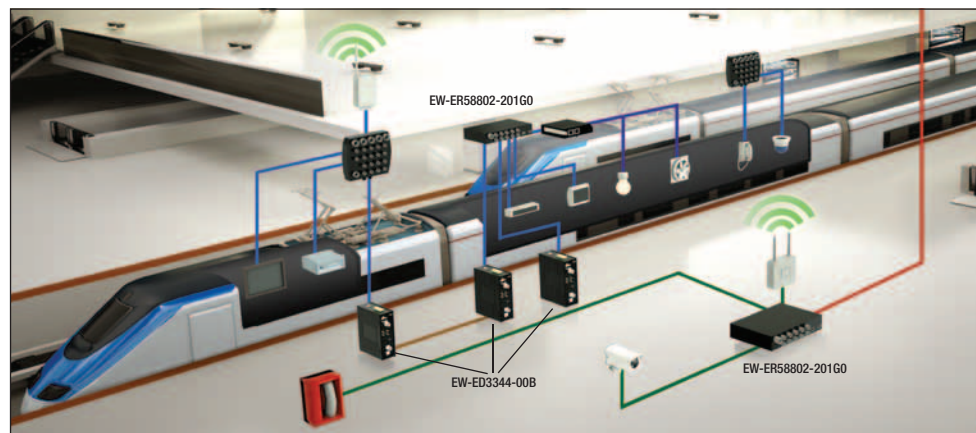

WT6788D
Front and Rear ViewWT6788FS
Front and Rear ViewWT6700FM
Front and
Rear View

WT67KC5FM



WT671105RM



WT67PCT



TRD855WTG



WPRJ-110CAT5E



WPRJ-FTCAT5E



WPRJ-FTRACAT5E



WPRJ-LSR



WPRJ-SSR




CG-CRJ



CG-DRJ



CG-RJ

**Easily attach a field installable plug****STEP 1:**
Slide compression nut, coupling and plug housing onto cable.**STEP 2:**
Strip and prepare conductors for crimping. Trim to .56" (1.4cm).**STEP 3:**
Install plug and crimp.**STEP 4:**
Slide crimped connector into place and tighten compression nut.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Ruggedized IP67 Rated RJ45 Ethernet Plug Kit

Installing Ethernet in harsh environments has never been easier. This IP67 rated plug housing is available for use with either shielded or non-shielded connections. A gasket seal keeps out unwanted contaminants and moisture. The optional flexible strain relief controls the bend radius of the cable. Call today to discuss your application with us.

WT6788D	Non-Shielded Dome Style	21.99	21.11	20.23	CALL
WT6788F	Non-Shielded Flex Style	21.99	21.11	20.23	CALL
WT6788DS	Shielded Dome Style	25.19	24.18	23.17	CALL
WT6788FS	Shielded Flex Style	25.19	24.18	23.17	CALL
TSP4088C5	Replacement RJ45 Non-Shielded Plugs, Pkg/50	29.95	27.55	25.16	CALL
TSP4088C5S	Replacement RJ45 Shielded Plugs, Pkg/50	49.95	45.95	41.96	CALL

Ruggedized IP67 Rated Keystone Flange Adapter Kits

Pass your Ethernet connections through a panel while still maintaining an IP67 rated seal. These receptacle kits consist of an IP67 rated flange adapter and industry standard keystone jacks and couplers. Don't see the combination you need? Call today and we'll help you find the right connection system for your application.

WT6700FM	Front Mount Empty	19.89	19.09	18.30	CALL
WT6700RM	Rear Mount Empty	19.89	19.09	18.30	CALL
WT67KC5FM	Front Mount Category 5e Coupler	27.29	26.20	25.11	CALL
WT67KC5RM	Rear Mount Category 5e Coupler	27.29	26.20	25.11	CALL
WT671105FM	Front Mount Category 5e IDC 110 Jack	21.99	21.11	20.23	CALL
WT671105RM	Rear Mount Category 5e IDC 110 Jack	21.99	21.11	20.23	CALL

Protective Covers for WT67 Series Plugs and Jacks

Maintain the IP67 rating for all open plugs and jacks with these covers. These caps are specifically designed to fit the WT67 series jacks and plugs. When a cable is connected, just attach a cap over the exposed connection and the seal is maintained.

WT67RC	IP67 Jack Cover for Female Receptacles	7.29	7.00	6.71	CALL
WT67RCT	IP67 Jack Cover for Female Receptacles with Tether	14.69	14.40	14.10	CALL
WT67PC	IP67 Jack Cover for Male Plug Kits	8.39	8.05	7.72	CALL
WT67PCT	IP67 Jack Cover for Male Plug Kits with Tether	14.69	14.40	14.10	CALL

Category 5e Outdoor Cables with Weathertight Grommet

Protect Ethernet cable runs outside with L-com's outdoor Category 5e rated cable. The Gel-filled jacket provides moisture protection when used in an outdoor environment. The built in feed-thru grommet allows the cable to pass through an enclosure while maintaining a watertight seal. With the UV protected jacket, outdoor cable runs are protected from damage caused by sunlight exposure. The cable is EIA568 color-coded for compatibility with standard installations and features solid conductors for termination into standard IDC connectors.

TRD855WTG-5	Category 5e Outdoor Patch Cable with Weathertight Grommets, 5.0ft (1.5m)	49.99	46.99	43.99	CALL
TRD855WTG-10	Category 5e Outdoor Patch Cable with Weathertight Grommets, 10.0ft (3.0m)	54.99	51.69	48.39	CALL
TRD855WTG-25	Category 5e Outdoor Patch Cable with Weathertight Grommets, 25.0ft (7.6m)	69.99	65.79	61.59	CALL
TRD855WTG-50	Category 5e Outdoor Patch Cable with Weathertight Grommets, 50.0ft (15.2m)	94.99	89.29	83.59	CALL
TRD855WTG-100	Category 5e Outdoor Patch Cable with Weathertight Grommets, 100.0ft (30.5m)	144.99	136.29	127.59	CALL

IP67 Panel Mount RJ45 Couplers and Connectors

L-com offers a complete IP67 rated RJ45 connection solution for all your demanding Industrial Ethernet applications. With feed-through couplers, 110 punch-down jacks and plug kits, these robust IP67 RJ45 products are constructed of ABS 94V-0 plastic and feature gaskets to keep dust and moisture out. The IP67 RJ45 panel mount couplers are designed for panels up to a thickness of 2.8mm.

WPRJ-110CAT5E	IP67 Panel Mount RJ45 Coupler, 110 Punch Down, Shielded	21.99	19.79	17.59	CALL
WPRJ-FTCAT5E	IP67 Panel Mount RJ45 Coupler, Feed-Thru, Shielded	20.99	18.89	16.79	CALL
WPRJ-FTRACAT5E	IP67 Panel Mount RJ45 Coupler, Feed-Thru Right Angle, Shielded	21.99	19.79	17.59	CALL
WPRJ-LSR	IP67 RJ45 Plug Kits with Long Body Strain Relief	9.39	8.45	7.51	CALL
WPRJ-SSR	IP67 RJ45 Plug Kits with Short Body Strain Relief	8.39	7.55	6.71	CALL

IP67 Rated RJ45 Cable Glands

L-com offers a versatile solution for running RJ45 connections into enclosures and panels. The CG-XX series feature EPDM rubber gaskets to keep moisture and dust out of your critical LAN connections. These cable glands can be used for wired LAN applications as well as WiFi wireless installations.

CG-CRJ	IP67 RJ45 Feed-Through Cable Gland with 14.5" (36.8cm) Pigtail	9.60	9.41	9.22	CALL
CG-RJ	IP67 RJ45 Feed-Through Cable Gland, One Way Style	7.45	7.30	7.15	CALL
CG-DRJ	IP67 RJ45 Feed-Through Cable Gland, Two Way Style	9.60	9.41	9.22	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Flat Silver Satin Modular Cable - Plug to Tinned Wires

Silver satin flat modular cords with one modular plug and pre-tinned wires. Choose four conductor (RJ11), six conductor (RJ12) or eight conductor (RJ45).

TDC019-1	Flat Modular Cable, RJ11 (6x4)/Tinned End, 1.0ft (0.3m)	1.99	1.95	1.87	CALL
TDC019-2	Flat Modular Cable, RJ11 (6x4)/Tinned End, 2.0ft (0.7m)	2.19	2.15	2.06	CALL
TDC019-7	Flat Modular Cable, RJ11 (6x4)/Tinned End, 7.0ft (2.1m)	2.59	2.54	2.43	CALL
TDC029-1	Flat Modular Cable, RJ12 (6x6)/Tinned End, 1.0ft (0.3m)	2.79	2.73	2.62	CALL
TDC029-2	Flat Modular Cable, RJ12 (6x6)/Tinned End, 2.0ft (0.7m)	3.09	3.03	2.90	CALL
TDC029-7	Flat Modular Cable, RJ12 (6x6)/Tinned End, 7.0ft (2.1m)	3.89	3.81	3.66	CALL
TDC029-14	Flat Modular Cable, RJ12 (6x6)/Tinned End, 14.0ft (4.3m)	5.59	5.48	5.25	CALL
TDC005-1	Flat Modular Cable, RJ45 (8x8)/Tinned End, 1.0ft (0.3m)	3.39	3.32	3.19	CALL
TDC005-2	Flat Modular Cable, RJ45 (8x8)/Tinned End, 2.0ft (0.7m)	3.69	3.62	3.47	CALL
TDC005-7	Flat Modular Cable, RJ45 (8x8)/Tinned End, 7.0ft (2.1m)	4.99	4.89	4.69	CALL
TDC005-14	Flat Modular Cable, RJ45 (8x8)/Tinned End, 14.0ft (4.3m)	6.99	6.85	6.57	CALL

Flat Silver Satin Modular Cable - Plug to Spade Lugs

Silver satin flat modular cords with one modular plug and uninsulated spade lugs. Great for terminating to screw terminals. Choose four conductor (RJ11), six conductor (RJ12) or eight conductor (RJ45).

TDC018-1	Flat Modular Cable, RJ11 (6x4)/Spade Lug, 1.0ft (0.3m)	1.99	1.95	1.87	CALL
TDC018-2	Flat Modular Cable, RJ11 (6x4)/Spade Lug, 2.0ft (0.7m)	2.19	2.15	2.06	CALL
TDC018-7	Flat Modular Cable, RJ11 (6x4)/Spade Lug, 7.0ft (2.1m)	2.59	2.54	2.43	CALL
TDC018-14	Flat Modular Cable, RJ11 (6x4)/Spade Lug, 14.0ft (4.3m)	3.69	3.62	3.47	CALL
TDC028-1	Flat Modular Cable, RJ12 (6x6)/Spade Lug, 1.0ft (0.3m)	2.79	2.73	2.62	CALL
TDC028-2	Flat Modular Cable, RJ12 (6x6)/Spade Lug, 2.0ft (0.7m)	3.09	3.03	2.90	CALL
TDC028-7	Flat Modular Cable, RJ12 (6x6)/Spade Lug, 7.0ft (2.1m)	4.19	4.11	3.94	CALL
TDC028-14	Flat Modular Cable, RJ12 (6x6)/Spade Lug, 14.0ft (4.3m)	5.59	5.48	5.25	CALL
TDC004-1	Flat Modular Cable, RJ45 (8x8)/Spade Lug, 1.0ft (0.3m)	3.39	3.32	3.19	CALL
TDC004-2	Flat Modular Cable, RJ45 (8x8)/Spade Lug, 2.0ft (0.7m)	3.69	3.62	3.47	CALL
TDC004-7	Flat Modular Cable, RJ45 (8x8)/Spade Lug, 7.0ft (2.1m)	4.99	4.89	4.69	CALL

Flat Silver Satin Modular Cable - Plug to Plug, Straight-thru Wiring


Silver satin flat modular cords with two modular plugs. Wired straight-thru (1-1, 2-2, 3-3...) for most low speed data applications. Choose four conductor (RJ11), six conductor (RJ12) or eight conductor (RJ45).

TDC301	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 1.0ft (0.3m)	1.99	1.95	1.87	CALL
TDC302	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 2.0ft (0.7m)	2.19	2.15	2.06	CALL
TDC303	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 3.0ft (0.9m)	2.29	2.24	2.15	CALL
TDC305	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 5.0ft (1.5m)	2.49	2.44	2.34	CALL
TDC307	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 7.0ft (2.1m)	2.59	2.54	2.43	CALL
TDC314	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 14.0ft (4.3m)	3.69	3.62	3.47	CALL
TDC325	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 25.0ft (7.6m)	5.29	5.18	4.97	CALL
TDC057-2	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 2.0ft (0.7m)	3.09	3.03	2.90	CALL
TDC057-7	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 7.0ft (2.1m)	4.19	4.11	3.94	CALL
TDC057-14	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 14.0ft (4.3m)	5.59	5.48	5.25	CALL
TDC057-25	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 25.0ft (7.6m)	7.79	7.63	7.32	CALL
TDC057-50	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 50.0ft (15.2m)	12.69	12.44	11.93	CALL
TDC053-2	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 2.0ft (0.7m)	3.39	3.32	3.19	CALL
TDC053-7	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 7.0ft (2.1m)	4.99	4.89	4.69	CALL
TDC053-14	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 14.0ft (4.3m)	6.99	6.85	6.57	CALL
TDC053-25	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 25.0ft (7.6m)	9.99	9.79	9.39	CALL
TDC053-50	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 50.0ft (15.2m)	16.89	16.55	15.88	CALL
TDC053-100	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 100.0ft (30.5m)	30.89	30.27	29.04	CALL

Flat Silver Satin Modular Cable - Plug to Plug, Crossed Wiring

Silver satin flat modular cords with two modular plugs. Crossed wires for many voice applications. Choose four conductor (RJ11), six conductor (RJ12) or eight conductor (RJ45).

TDC207	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 7.0ft (2.1m)	2.59	2.54	2.43	CALL
TDC214	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 14.0ft (4.3m)	3.69	3.62	3.47	CALL
TDC225	Flat Modular Cable, RJ11 (6x4)/RJ11 (6x4), 25.0ft (7.6m)	4.99	4.89	4.69	CALL
TDC027-2	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 2.0ft (0.7m)	3.09	3.03	2.90	CALL
TDC027-7	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 7.0ft (2.1m)	4.19	4.11	3.94	CALL
TDC027-14	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 14.0ft (4.3m)	5.59	5.48	5.25	CALL
TDC027-25	Flat Modular Cable, RJ12 (6x6)/RJ12 (6x6), 25.0ft (7.6m)	7.79	7.63	7.32	CALL
TDC003-2	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 2.0ft (0.7m)	3.69	3.62	3.47	CALL
TDC003-7	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 7.0ft (2.1m)	4.99	4.89	4.69	CALL
TDC003-25	Flat Modular Cable, RJ45 (8x8)/RJ45 (8x8), 25.0ft (7.6m)	9.99	9.79	9.39	CALL



TDC019



TDC029




TDC005



TDC018



TDC028



TDC004



TDC301 STRAIGHT-THRU



TDC057 STRAIGHT-THRU




TDC053 STRAIGHT-THRU



TDC207 CROSSED



TDC027 CROSSED



TDC003 CROSSED




What is the difference between straight-thru and cross pinning?




Straight-thru means each contact is straight pinned to its respective contact (1-1, 2-2, 3-3, etc.). Crossed pinning means contacts are pinned through to the opposite contact. Ex: on an 8 position RJ45: 1-8, 2-7, 3-6, etc.

When using a coupler between two patch cords it is important to choose the correct type. As the diagrams illustrate, if the desired pinning from end to end is crossed then the coupler and cables must be crossed. For straight pinning, all cables and couplers must be straight-thru type.

Crossed Couplers with Crossed Output



Straight Couplers with Straight Output



Bulk Flat Cable can be found on [page 73](#).



L-com's Tool-less Jack Series

For the best performance with a unique IDC connection that is easy to use and reliable, L-com's tool-less jacks are the answer. This simple wire guide makes it effortless for users to terminate their conductors securely. Each jack is intelligently designed into a compact and efficient body. Jacks are also available with a flanged connector for installation in panels too thick for a standard keystone.

How to terminate a keystone tool-less jack



Online Video

L-com.com/Videos/A26

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Category 5e - Tool-less Keystone Jacks

RJTLCS5E-WT	Category 5e Tool-less Keystone Jack, RJ45 (8x8) 568A/B	White	5.95	5.36	4.76	CALL
RJTLCS5E-IV	Category 5e Tool-less Keystone Jack, RJ45 (8x8) 568A/B	Ivory	5.15	4.64	4.12	CALL
RJTLCS5E-BLK	Category 5e Tool-less Keystone Jack, RJ45 (8x8) 568A/B	Black	5.95	5.36	4.76	CALL

Category 6 - Tool-less Keystone Jacks

RJTLCL6-WT	Category 6 Tool-less Keystone Jack, RJ45 (8x8) 568A/B	White	6.15	5.54	4.92	CALL
RJTLCL6-IV	Category 6 Tool-less Keystone Jack, RJ45 (8x8) 568A/B	Ivory	6.95	6.25	5.56	CALL
RJTLCL6-BLK	Category 6 Tool-less Keystone Jack, RJ45 (8x8) 568A/B	Black	6.95	6.25	5.56	CALL

Shielded Category 6a - Tool-less Jack

RJTL6A-S	Shielded Category 6a Tool-less Keystone Jack, RJ45 (8x8) 568A/B	Silver	15.95	14.67	13.40	CALL
----------	---	--------	-------	-------	-------	------

Category 5e, 6 and 6a - 110 Keystone Jacks - 90 Degree Style

L-com's keystone 110 punch down style connectors offer users simple installation via the popular 110 punch down style connecting system. Each jack is color coded for the EIA/TIA568 A and B standards.

MJS110C5E-WT	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	White	3.45	3.11	2.76	CALL
MJS110C5E-IV	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	3.45	3.11	2.76	CALL
MJS110C5E-BLK	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	3.45	3.11	2.76	CALL
MJS110C5E-YL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	3.45	3.11	2.76	CALL
MJS110C5E-BL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	3.45	3.11	2.76	CALL
MJS110C5E-RED	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Red	3.45	3.11	2.76	CALL
MJS110C6-WT	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	White	4.25	3.83	3.40	CALL
MJS110C6-IV	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	4.25	3.83	3.40	CALL
MJS110C6-BLK	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	4.25	3.83	3.40	CALL
MJS110C6-YL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	4.25	3.83	3.40	CALL
MJS110C6-BL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	4.25	3.83	3.40	CALL
MJS110C6-RED	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Red	3.95	3.56	3.16	CALL
RJ110C6A-GRY	Category 6A Keystone Jack, 110/RJ45 (8x8) 568A/B	Gray	13.75	12.65	11.55	CALL

Shielded Category 5e, 6 and 6a Jacks

L-com's shielded modular jacks offer users a complete solution to EMI/RFI problems. By utilizing fully shielded jacks and connecting hardware, users can reduce the effects of interference on the network data transmissions. All jacks feature 110-style punch down connections for fast and easy termination.

MJS110C5E-S	Shielded Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Silver	5.95	5.36	4.76	CALL
MJS110C6-S	Shielded Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Silver	6.95	6.25	5.56	CALL
RJ110C6A-S	Shielded Category 6a Keystone Jack, 110/RJ45 (8x8) 568A/B	Silver	14.95	13.75	12.56	CALL

Category 5e and Category 6 Keystone Jack Kits - 110/RJ45 EIA568A/B

These unique panel mount RJ45 connector kits allow keystone style 110 IDC connectors to be mounted into panels thicker than 0.062" (0.2cm). Packaged as a kit, including the flange, two 4-40 screws, and one RJ45 Cat5e or Cat6 jack.

ECF110C5E-BLK	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	6.50	6.37	6.11	CALL
ECF110C5E-BL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	6.50	6.37	6.11	CALL
ECF110C5E-IV	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	6.50	6.37	6.11	CALL
ECF110C5E-WT	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	White	6.50	6.37	6.11	CALL
ECF110C5E-YL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	6.50	6.37	6.11	CALL
ECF110C5E-S	Shielded Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Silver	7.60	7.45	7.14	CALL
ECF110C6-BLK	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	8.70	8.53	8.18	CALL
ECF110C6-BL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	8.70	8.53	8.18	CALL
ECF110C6-IV	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	8.70	8.53	8.18	CALL
ECF110C6-WT	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	White	8.70	8.53	8.18	CALL
ECF110C6-YL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	8.70	8.53	8.18	CALL
ECF110C6-S	Shielded Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Silver	9.80	9.60	9.21	CALL

Category 5e and Category 6 Tool-less Keystone Jack Kits - RJ45 EIA568A/B

The ECFRJTL series of panel mount RJ45 connector kits allow L-com's tool-less RJ45 keystone connectors to mount into panels thicker than 0.062" (0.2cm). Packaged as a kit, including the flange, two 4-40 screws, and one RJ45 Cat5e or Cat6 jack.

ECFRJTLCS5-BLK	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	9.85	8.87	7.88	CALL
ECFRJTLCS5-IV	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	9.85	8.87	7.88	CALL
ECFRJTLCS5-WT	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	White	9.85	8.87	7.88	CALL
ECFRJTLCS6-BLK	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	10.95	9.86	8.76	CALL
ECFRJTLCS6-IV	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	10.95	9.86	8.76	CALL
ECFRJTLCS6-WT	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	White	10.95	9.86	8.76	CALL


ECF Keystone Panel Adapters - Pkg / 25

L-com now offers convenient bags of 25 of our ECF style flanges for use in patch panel and enclosure designs which require L-com's unique ECF flanges. These rugged flanges are perfect for use with Category 3/5/5e/6/6a keystone couplers.

ECE-SK-25	ECE Keystone Panel Adapter Kit, Pkg/25	Silver	29.95	27.55	25.16	CALL
-----------	--	--------	-------	-------	-------	------

Tool-less termination speeds installations

Easy to use wire guide with dual EIA568A/B color

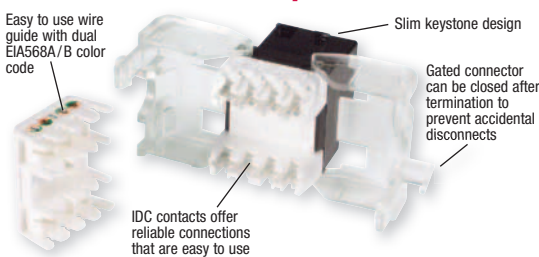

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Category 3 RJ12 110 Keystone Jacks - Telephone and Data Applications

L-com's keystone Category 3 110 punch style connectors offer an economical choice with the popular 110-punch style connection system. Each jack is color coded for both the EIA and USOC standards for compatibility with any installation. Jacks are available in two colors to fit individual installations. Large volume quotations are available for installers and contractors looking to save money. Contact us today.

MJS110RJ12-IV	Category 3 RJ12 IDC Keystone Jack	Ivory	2.95	2.66	2.36	CALL
MJS110RJ12-WT	Category 3 RJ12 IDC Keystone Jack	White	2.95	2.66	2.36	CALL

Category 5e Economy 110 IDC Keystone Jacks - Package of 25 White

This economy series offers true Category 5e performance with an installer friendly price. Packaged 25 pieces per bag. Available in White.

RJE110C5E90-PK	Category 5e Economy 110 IDC Keystone Jacks - Package of 25	White	39.95	38.75	37.55	CALL
----------------	--	-------	-------	-------	-------	------

Item #	Description	Color	List Price
--------	-------------	-------	------------

Premium Category 6 RJ45 - 110 Keystone Jack - 90 Degree Style

OCC's Category 6 Keystone jacks offer printed circuit board technology that provides best-in-class Category 6 component performance. With standard 110-style terminations, OCC's Category 6 jacks are ETL verified to TIA 568-C.2 Category 6 specifications. Contact us today with your project needs!

MK110C6-BLK	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Black	6.70
MK110C6-BLU	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Blue	6.70
MK110C6-BW	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Bright White	6.70
MK110C6-GRN	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Green	6.70
MK110C6-GRY	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Gray	6.70
MK110C6-IV	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Ivory	6.70
MK110C6-ORN	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Orange	6.70
MK110C6-RED	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Red	6.70
MK110C6-W	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	White	6.70
MK110C6-Y	Category 6 Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Yellow	6.70

Premium Category 5e RJ45 - 110 Keystone Jack - 90 Degree Style

The OCC Category 5e Keystone Modular Jack is a great alternative for high-density applications. Featuring a lower profile and a snap-in design, these Category 5e jacks offer exceptional performance that exceeds industry standards. Offering Universal T568A/B wiring and component compliance to Cat 5e specifications, these Keystone jacks feature OCC's patented PC board technology. Contact us today with your project needs!

MK110C5E-BLK	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Black	5.15
MK110C5E-BLU	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Blue	5.15
MK110C5E-BW	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Bright White	5.15
MK110C5E-GRN	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Green	5.15
MK110C5E-GRY	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Gray	5.15
MK110C5E-IV	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Ivory	5.15
MK110C5E-ORN	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Orange	5.15
MK110C5E-RED	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Red	5.15
MK110C5E-W	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	White	5.15
MK110C5E-Y	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Yellow	5.15

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Category 6a RJ45 - 110 Keystone Jack - Traditional 180 Degree Style

L-com now offers the latest in Ethernet technology in the Category 6a standard. With network speeds up to 10 Gigabit, video and large file transfers are a breeze. These IDC 110 jacks are easy to assemble and the popular Keystone mount design is compatible with many different wall plates. Build your network with the fastest network technology available today.

RJ110C6A-90-GRY	Category 6a Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Gray	13.75	12.65	11.55	CALL
-----------------	---	------	-------	-------	-------	------

Category 5e RJ45 - 110 Keystone Jack - Traditional 180 Degree Style

The traditional 180° design has the 110 connectors parallel to the modular plug entry. This jack comes in Ivory and is EIA568A/B dual color coded.

RJ110C5B-I	Category 5e Keystone Jack, 110/RJ45 (8x8) EIA568A/B	Ivory	6.95	6.81	6.67	CALL
------------	---	-------	------	------	------	------

10 Position Category 5 and USOC - 110 IDC Keystone Jacks - Traditional 180 Degree Style




These 10 position 10 contact keystone style jacks are an ideal solution in applications where additional contacts are required. The traditional 180° design has the 110 connectors parallel to the modular plug entry. Category 5 version is dual color coded, compatible with EIA568A and B wiring with position 1 and 10 populated.

EC1107B-USOC	Keystone IDC - 10P10C Jack, USOC	Black	7.55	6.95	6.34	CALL
EC1107B-10C5	Keystone IDC - 10P10C Jack, Cat5-568A/B	Black	7.55	6.95	6.34	CALL

Miscellaneous Keystone Jacks - Coaxial, and Fiber Couplers

Add more than just data and telephone connections to workstation outlets. L-com features coaxial, and fiber adapters designed to fit our wall plate systems.

MJSCPF-WT	Keystone Coaxial Type F Coupler Insert	White	1.75	1.61	1.47	CALL
MJSCPSC-WT	Keystone Fiber SC Coupler Insert	White	6.45	5.93	5.42	CALL
MJSCPST-WT	Keystone Fiber ST Coupler Insert	White	6.45	5.93	5.42	CALL
MJSCVR-WT	Keystone Blank Insert	White	0.45	0.44	0.42	CALL
MJSCPBNC-IV	Keystone BNC Coupler Insert	Ivory	3.95	3.83	3.71	CALL
MJSCPST-IV	Keystone Fiber ST Coupler Insert	Ivory	6.45	5.93	5.42	CALL
MJSCVR-IV	Keystone Blank Insert	Ivory	0.45	0.44	0.42	CALL

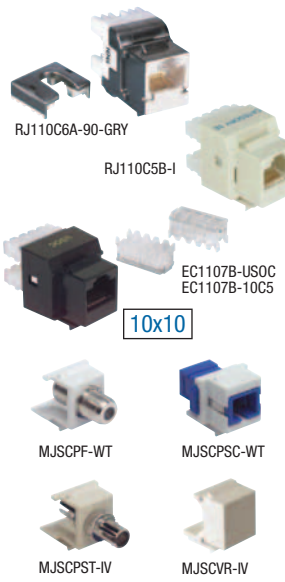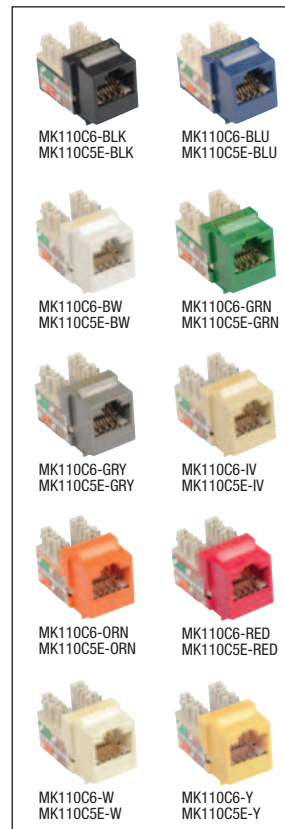



MWP101K-WT

MWP102K-WT



MWP103K-WT

MWP104K-WT



MWP101K-IV



MWP102K-IV

MWP103K-IV



ECP001


ECP002



MWP401K-WT

MWP402K-WT

MWP403K-WT



MWP404K-WT

Close-up of Shutter Door

Medical Grade

Meets IEC 6060-1
Medical Device
Safety Standards



6000691-L

6000693-L

Item #	Description	Color	1-9	10-24	25-99	100+
Flush Mount Wall Plates that Accept Keystone Jacks						
The flush mount wall plate series offers a choice of keystone port options for users to configure each workstation outlet for individual needs. These wall plates come in a choice of White or Ivory and can accept up to four keystone inserts.						
MWP101K-WT	Flush Wall Plate for 1 Keystone Jack	White	1.75	1.61	1.47	CALL
MWP102K-WT	Flush Wall Plate for 2 Keystone Jacks	White	1.75	1.61	1.47	CALL
MWP103K-WT	Flush Wall Plate for 3 Keystone Jacks	White	1.75	1.61	1.47	CALL
MWP104K-WT	Flush Wall Plate for 4 Keystone Jacks	White	1.75	1.61	1.47	CALL
MWP101K-IV	Flush Wall Plate for 1 Keystone Jack	Ivory	1.75	1.61	1.47	CALL
MWP102K-IV	Flush Wall Plate for 2 Keystone Jacks	Ivory	1.75	1.61	1.47	CALL
MWP103K-IV	Flush Wall Plate for 3 Keystone Jacks	Ivory	1.75	1.61	1.47	CALL

Stainless Wall Plates for Usage in High EMI/RFI Environments or Medical Applications

These stainless wall plates offer users a clean finish for information outlets in environments where traditional plastic wall plates are not suitable.

ECP001	Stainless Wall Plate for 1 Keystone Jack	Silver	2.95	2.89	2.77	CALL
ECP002	Stainless Wall Plate for 2 Keystone Jacks	Silver	2.95	2.89	2.77	CALL

Flush Mount Wall Plates with Shutter Doors

For a professional look to any installation select L-com's Keystone wall plates. The flush mount design maintains a low profile with the wall and the integrated shutter door prevents dust/debris from getting into the ports. They are available in a choice of keystone port options for you to configure each workstation outlet for individual needs. We stock large quantities of plates that can accept up to four keystone inserts. Contact us for your next project.

- Flush mount Keystone wall plates with a smooth gloss finish
- Integrated shutter prevents dust and debris from entering the port
- No visible mounting hardware for a clean finished look
- Available with up to 4 Keystone ports
- Contractor quotations welcome for large quantities or custom colors

MWP401K-WT	Flush Mount Wall Plate for 1 Keystone Jack	White	3.25	2.99	2.73	CALL
MWP402K-WT	Flush Mount Wall Plate for 2 Keystone Jacks	White	3.45	3.17	2.90	CALL
MWP403K-WT	Flush Mount Wall Plate for 3 Keystone Jacks	White	3.75	3.45	3.15	CALL
MWP404K-WT	Flush Mount Wall Plate for 4 Keystone Jacks	White	3.95	3.63	3.32	CALL



How to easily panel mount a Keystone style connector


Keystone style refers to the snap-in mounting mechanism that many manufacturers have adopted. It is simple, requires no tools and is easily removable.

STEP 1



L-com's two piece wall plate design hides the screw holes from view to provide a sleek, clean display.

STEP 2



STEP 3




Item #	Description	Color	List Price
L-com Isolator Wall Plates for 10/100 Ethernet Networks			
L-com's Ethernet Isolator wall plates are fully self-contained devices that protect valuable network equipment from damaging surges and power anomalies that commonly occur across network cabling. Operation and installation is quick and easy. Simply plug these devices in-line between the cabling behind the wall and the patch cable that normally attaches the equipment to the network. These isolators are available in Stainless Steel or Ivory High Impact ABS Plastic. Each unit is fully RoHS compliant and has been certified to meet the IEC 6060-1 Medical Device Safety Standard making them ideal for hospital and medical laboratory environments.			
6000691-L	10/100 Base-T Ethernet Data Isolator, Stainless	Silver	104.99
6000693-L	10/100 Base-T Ethernet Data Isolator, Plastic	Ivory	109.95



How isolation works

Isolators place a physical barrier between your computer or other device and the network cables that are attached to it. Only data can travel across this barrier through the coupling of magnetic fields. Hazardous voltages and ground potential differences are blocked. Surge suppressors don't electrically separate the connected equipment - they use special components to limit the energy that can travel through a data connection. Isolators eliminate the wire connections that surge suppressors don't.

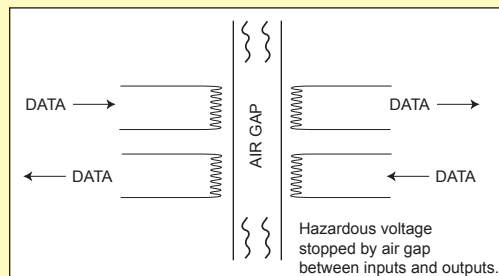

TRD815SRA15BLK
Category 5e
Shielded Right
Angle Patch Cable,
Right Angle Up.
Shown on
page 46.



TRD815RA5RD
Category 5e Right Angle
Patch Cable, Right Angle Up.

Decora Style Wall Plate System with Keystone Ports

Combine all your cable connections into L-com's Decora style wall plates. This popular design provides a clean, modern look to cable connections in a finished room. With support for up to three keystone jacks, you can easily combine all your telephone, network, and video connections needs in one Decora plate for a professional, finished appearance. Volume discounts are available; contact us today with your project needs.



Easy access to IDC Jacks

Wall Plate Mounting Bracket
(see below) for installation
into wall.

Item #	Description	Color	1-9	10-24	25-99	100+
MWP500S-WT	Decora Style Single Gang Wall Plate	White	1.45	1.33	1.22	CALL
MWP500D-WT	Decora Style Double Gang Wall Plate	White	1.95	1.79	1.64	CALL
MWP501-WT	Decora Style Wall Plate Insert with 1 Keystone Port	White	1.75	1.61	1.47	CALL
MWP502-WT	Decora Style Wall Plate Insert with 2 Keystone Ports	White	1.85	1.70	1.55	CALL
MWP503-WT	Decora Style Wall Plate Insert with 3 Keystone Ports	White	1.95	1.79	1.64	CALL

Category 5e, 6 and 6a - 110 Keystone Jacks - 90 Degree Style

L-com's keystone 110 punch down style connectors offer users simple installation via the popular 110 punch down style connecting system. Each jack is color coded for the EIA/TIA568 A and B standards.

MJS110C5E-WT	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	White	3.45	3.11	2.76	CALL
MJS110C5E-IV	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	3.45	3.11	2.76	CALL
MJS110C5E-BLK	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	3.45	3.11	2.76	CALL
MJS110C5E-YL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	3.45	3.11	2.76	CALL
MJS110C5E-BL	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	3.45	3.11	2.76	CALL
MJS110C5E-RD	Category 5e Keystone Jack, 110/RJ45 (8x8) 568A/B	Red	3.45	3.11	2.76	CALL
MJS110C6-WT	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	White	4.25	3.83	3.40	CALL
MJS110C6-IV	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Ivory	4.25	3.83	3.40	CALL
MJS110C6-BLK	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Black	4.25	3.83	3.40	CALL
MJS110C6-YL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Yellow	4.25	3.83	3.40	CALL
MJS110C6-BL	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Blue	4.25	3.83	3.40	CALL
MJS110C6-RD	Category 6 Keystone Jack, 110/RJ45 (8x8) 568A/B	Red	3.95	3.56	3.16	CALL
RJ110C6A-GRY	Category 6a Keystone Jack, 110/RJ45 (8x8) 568A/B	Gray	13.75	12.65	11.55	CALL

Wall Plate Mounting Bracket for Class 2 Wiring

The wall plate mounting bracket is an excellent aid for electricians and cable installers to mount single gang wall plates at any convenient wallboard location. There is no need for traditional metal boxes which inhibit the installation of coaxial and data cables. Furthermore, users can make use of the complete wall cavity to hold excess cable and avoid sharp bends. These brackets have universally spaced threaded holes to accept any standard single or double gang wall plate. It's simple to install, just start by making a 2.125"W x 3.625"H (5.4cm x 9.2cm, single gang) or 3.875"W x 3.625"H (9.8cm x 9.2cm, double gang) rectangular hole and then tighten the built-in mounting screws. Large quantity pricing for installation contractors is available upon request.

WPMB1	Wall Plate Mounting Bracket for Class 2 Wiring, Single Gang	2.95	2.71	2.48	CALL
WPMB2	Wall Plate Mounting Bracket for Class 2 Wiring, Double Gang	3.95	3.63	3.32	CALL

Shielded Category 5e and 6 Surface Mount Boxes


L-com's Shielded Modular Surface Mount Boxes offer users a complete solution to EMI/RFI problems. By utilizing fully shielded jacks and connecting hardware, users can reduce the effects of interference on the network data transmissions. All jacks feature 110-style punch down connections for fast and easy termination. Surface mount boxes come pre-installed with shielded jacks.

SMB110C5ES-S	Shielded Category 5e Surface Mount Jack with 1 RJ45 (8x8) 568A/B	7.95	7.31	6.68	CALL
SMB110C6S-S	Shielded Category 6 Surface Mount Jack with 1 RJ45 (8x8) 568A/B	9.95	9.15	8.36	CALL
SMD110C5ED-S	Shielded Category 5e Surface Mount Jack with 2 RJ45s (8x8) 568A/B	11.95	10.99	10.04	CALL

Surface Mount Boxes for Keystone Jacks

These one and two port surface mount boxes can accept standard keystone insert options. These boxes feature a location for icon inserts to identify each port for the connection type.

SMB01K-WT	Surface Mount Box for 1 Keystone Insert	White	1.95	1.79	1.64	CALL
SMB01K-IV	Surface Mount Box for 1 Keystone Insert	Ivory	1.95	1.79	1.64	CALL

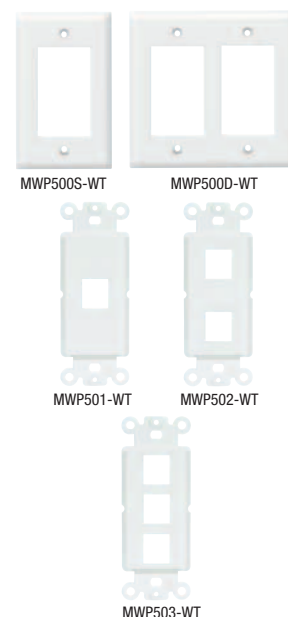

**Easily wire a
Surface Mount Box**



Online Video

L-com.com/Videos/A18



SMB01K-WT

Note: Keystone inserts are not included, order separately. See MJS Series on page 57





SMB45-W

SMB4545-W



SMM45-6W

SMM45-12W
(Shown with
cover removed)

TDA310-8C

TDA306-6C

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Category 5e Surface Mount Boxes Include RJ45 or RJ12 Jacks and 110 Connectors

One and two port surface mount boxes include RJ45 (Category 5e) and/or RJ12 (Voice) jacks for easy surface mounting. These units feature colored icons, write on labels and tri-directional cable entry points. Both EIA568A and B wiring codes listed on RJ45 jacks. 50 microinches (1.27µm) gold on modular contacts. Ivory or White and UL Listed.

SMB45-I	Category 5e Surface Box, Single Port, RJ45 (8x8)	Ivory	7.95	7.31	6.68	CALL
SMB45-W	Category 5e Surface Box, Single Port, RJ45 (8x8)	White	7.95	7.31	6.68	CALL
SMB4512-I	Category 5e Surface Box, RJ45 (8x8)/RJ12 (6x6)	Ivory	10.95	10.07	9.20	CALL
SMB4545-I	Category 5e Surface Box, RJ45 (8x8)/RJ45 (8x8)	Ivory	12.95	11.91	10.88	CALL
SMB4545-W	Category 5e Surface Box, RJ45 (8x8)/RJ45 (8x8)	White	12.95	11.91	10.88	CALL

Category 5e-6 and 12 Port Surface Mount Box

These boxes are extremely useful when wiring up densely populated areas such as office cubicles. Each box utilizes 6 or 12 enhanced Category 5 (RJ45) jacks with 110 insulation displacement contacts. Modular contacts have 50 microinches (1.27µm) gold meeting FCC requirements and 110 contacts are color coded for EIA568A and B wiring. Multiple cable entry knock outs accommodate different cable dimensions. Supplied with Blue and Red snap in icons, write in strips, double sided adhesive and wood screws. Color: White.

SMM45-6W	Category 5e Surface Box, 6 Port, RJ45 (8x8)	White	34.95	32.15	29.36	CALL
SMM45-12W	Category 5e Surface Box, 12 Port, RJ45 (8x8)	White	59.95	55.15	50.36	CALL

Surface Mounted Jacks - Feature Standard Screw Connections and Snap Covers

Eliminating the cover retaining screw and pre-wiring the jack assembly to the terminals reduces installation time. Packaging includes double-sided adhesive tape for mounting on desks, cabinets or where attaching with wood screws is objectionable.

TDA310-4C	Modular Surface Mount Jack, Side Access, RJ11 (6x4)	Beige	2.25	2.07	1.89	CALL
TDA310-6C	Modular Surface Mount Jack, Side Access, RJ12 (6x6)	Beige	2.75	2.53	2.31	CALL
TDA310-8C	Modular Surface Mount Jack, Side Access, RJ45 (8x8)	Beige	4.95	4.55	4.16	CALL
RJ31X	Modular Surface Mount Jack, with Shorting Bars, RJ45 (8x8)	Beige	4.95	4.55	4.16	CALL

Surface Mounted Jack - Narrow Type for High-Density Applications

Measuring less than 1.7" (4.3cm) in width with cable entrance in the rear and supplied with wood mounting screws and two-sided adhesive tape. Screw terminal wiring.

TDA306-6C	Modular Surface Mount Jack, End Access, RJ12 (6x6)	Beige	2.75	2.53	2.31	CALL
-----------	--	-------	------	------	------	------

How to wire a surface mount box

Parts List:

- SMB series surface mount box
- Wire cutters
- Jacket stripping tool
- 110 tool




Online Video


L-com.com/Videos/A18




Remove cover and attach the jack base assembly using the supplied screws or double stick tape.




Insert the pairs to the color coded slots taking care to maintain the conductor twist at the IDC terminal. Punch down using a 110 style tool.




Remove approximately 3" (7.6cm) of the outer jacket from the cable. Take care not to nick the wires.



Trim excess wire (if your 110 tool doesn't cut) and snap on the retainer caps.



Secure cable with a cable tie to the desired entry point.



Notch cover to match the cable entry and snap in place.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

110 Style Accessories - The Most Popular Way to Achieve Category 5e and 6 Performance

The 110 connect system is a high performance means of terminating UTP wiring and it is currently the most popular choice in installations. This system utilizes wiring blocks, connecting blocks, patch panels, 24 AWG UTP cabling and patch cords.

Most 110 style wiring blocks come pre-configured to a number of RJ45 ports, allowing easy patching with RJ45-RJ45 data grade patch cords. L-com offers a variety of common 110 style components. Other styles and configurations can be supplied on a custom basis; call our Technical Support Department for assistance.

Category 5e Wall Mount 12 Port Patch Panel

The Category 5e wall mount 12 port patch panel offers users an economical way to terminate smaller groups of connections without the need to install a rack system. Each block features industry standard 110 style connections and write-on surfaces for port identification. These panels are universally marked for EIA568A and EIA568B color codes.

DCWM110C5E-12	Category 5e Patch Panel, 12 Port EIA568A/B	48.00	44.16	40.32	CALL
---------------	--	-------	-------	-------	------

Category 6 Wall Mount 12 Port Patch Panel

The Category 6 wall mount 12 port patch panel offers users high performance in a small package. Users can terminate Category 6 cabling without the need to install a rack system. Each block features industry standard 110 style connections and write-on surfaces for port identification. These panels are universally marked for EIA568A and EIA568B color codes.

DCWM110C6-12	Category 6 Patch Panel, 12 Port EIA568A/B	54.00	49.68	45.36	CALL
--------------	---	-------	-------	-------	------

Category 5e 19" (48.3cm) Rack Mount Patch Panel - 24 and 48 Port

L-com's Category 5e 19" (48.3cm) rack mount patch panels come pre-configured in 24 and 48 port versions. These panels feature industry standard 110 punch-down style termination for quick installation. Users can identify ports by either writing directly on the screened in label surfaces or using a regular label printer to create labels. Each port is EIA568A/B color encoded for compatibility with all types of network jacks and cabling.

DCP110C5E-24	Category 5e Patch Panel, 24 Port EIA568A/B	107.00	98.44	89.88	CALL
DCP110C5E-48	Category 5e Patch Panel, 48 Port EIA568A/B	237.00	218.04	199.08	CALL

Category 6 19" (48.3cm) Rack Mount Patch Panel - 24 and 48 Port

For enhanced performance users can choose L-com's Category 6 rack mount patch panels. These panels feature Category 6 performance for today's high-speed network installations. Installers will find easy to use 110 style punch down terminals for quick installation. Each port is EIA568A/B color encoded for compatibility with all types of network jacks and cabling.

DCP110C6-24	Category 6 Patch Panel, 24 Port EIA568A/B	165.00	151.80	138.60	CALL
DCP110C6-48	Category 6 Patch Panel, 48 Port EIA568A/B	272.00	250.24	228.48	CALL
MRP110C6-48	Category 6 Patch Panel, 48 Port EIA568A/B (Write-on Surface for Port ID)	220.00	202.40	184.80	CALL

Voice Grade 19" (48.3cm) Patch Panel with 50 RJ12 Ports

Consolidate voice terminations to your rack panel with L-com's 50 port RJ12 voice grade patch panel. This panel features a compact 1U 1.75" (4.4cm) design with a total of 50 RJ12 style ports. On the back, installers will find 110 style connections for simple termination of cabling.

MRP110RJ12-50	Voice Grade Patch Panel, 50 Port RJ12	154.00	141.68	129.36	CALL
---------------	---------------------------------------	--------	--------	--------	------

100Base-T, Category 5 Telco Patch Panels - 24 Port

These low profile, high density Telco patch panels provide the ability to connect up to 24 Cat5 Ethernet patch cords to four 25 pair Telco style interface connectors, while maintaining Category 5 100 Base-T performance throughout the cabling system. Color: Black

DCPT100BT24	Category 5 Patch Panel 1U High, 24 Port Telco	110.00	101.20	92.40	CALL
-------------	---	--------	--------	-------	------

24/48 Port Category 5e/6 Shielded 19" (48.3cm) Patch Panel - Industrial Grade

These Category 5e/6 rack panels are fully shielded for use in areas with high levels of noise and EMI. Commonly used in industrial environments the panels are made using heavy gauge sheet metal that fully encloses over the circuit board and cable terminations for ultimate shielding. Permanent connections are made to 110 style IDC contacts and patching is made through shielded RJ45 (8x8) modular connectors. These panels mount into standard 19" (48.3cm) racks and take 1U of rack height 1.75" (4.4cm). Compatible with EIA568A or B wiring schemes. 18 AWG grounding wire included. Color: Black

DCP110C5E-24S	Category 5e Patch Panel, 24 Port Shielded EIA568A/B	164.00	150.88	137.76	CALL
DCP110C5E-48S	Category 5e Patch Panel, 48 Port Shielded EIA568A/B	280.00	257.60	235.20	CALL
DCP110C6-24S	Category 6 Patch Panel, 24 Port Shielded EIA568A/B	217.00	199.64	182.28	CALL
DCP110C6-48S	Category 6 Patch Panel, 48 Port Shielded EIA568A/B	316.00	290.72	265.44	CALL



DCWM110C5E-12



DCWM110C6-12



DCP110C5E-24



DCP110C5E-48



DCP110C6-24



DCP110C6-48



MRP110C6-48



MRP110RJ12-50



DCPT100BT24



DCP110C5E-24S



DCP110C5E-48S



DCP110C6-24S



DCP110C6-48S



110 blocks are protected by metal cover





How are rack spaces and sizes measured?

Racks are a great way to neaten up wiring closets and labs. Network equipment and rack panels usually come in 1.75", 3.5" and 5.25" heights. (1, 2 and 3 rack spaces).



Racks utilize 10-32 threaded holes for mounting hardware.

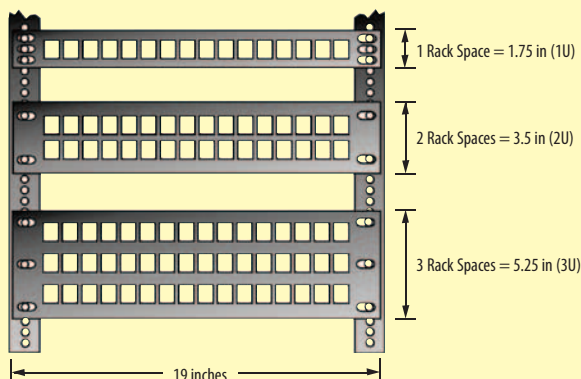

HTS7100
Frame OnlyHTS7100-04
4 Position Die SetHTS7100-06A
6 Position Die Set

HTS501

HT1500
for RJ11/12
& RJ45HT210A
for RJ45HT2096
for RJ11/12HT2094C
for Handset

HTS2500



HTS2600

HTS9000
for RJ50

TCPT110



TCPT2



TCK68MOD

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Tela-Crimp Tool Provides High Level of Versatility and Termination Reliability

The ultimate design based on many years experience, this new model produces a perfect crimp every time and is offered at an affordable price. Dies need to be purchased separately. The following features should be noted:


- Full cycle ratchet action assures consistent terminations.
- A release lever is provided to prevent faulty crimps.
- The compound action produces high crimping forces with minimal user effort.
- A replaceable cutter and stripper are conveniently placed offering two strip lengths per industry standards.
- All dies are interchangeable and guarantee perfect alignment.
- The modular plug nests accept most configurations available within the industry today.
- Spring activated handles have cushion grips to minimize user fatigue.
- Tools are conservatively rated for 50,000 crimps.

HTS7100	Crimp Tool Only, accepts any HTS7100 Die Set	69.95	68.55	67.15	CALL
HTS7100-04	4 Position Die Set with Primary & Secondary Strain Relief for RJ22 Handset Plugs	29.95	29.35	28.75	CALL
Note: This die is equipped with a secondary strain relief. For use with Stewart and generic plugs only. May damage other vendor's plugs.					
HTS7100-06A	6 Position Die Set without Secondary Strain Relief, for all RJ11 & RJ12 Plugs	29.95	29.35	28.75	CALL
HTS7100-08A	8 Position Die Set without Secondary Strain Relief, for all RJ45 Plugs	29.95	29.35	28.75	CALL
HTS7100-10	10 Position Die Set without Secondary Strain Relief	33.95	33.27	32.59	CALL



What is a primary and secondary strain relief?

The three main points of contact within any plug are the crimp contact, primary strain relief and secondary strain relief. Compatibility issues exist between various plug and tool designs with respect to the secondary strain relief. If the plug and tool are slightly misaligned due to incompatibility, bad crimps end up crushing the plug. The plugs and tools listed have been carefully chosen to minimize compatibility problems.

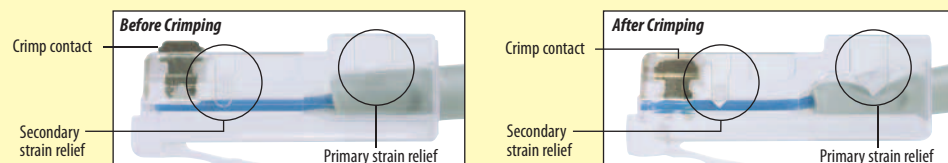

UTP/STP Cable Stripper for Round or Flat Cable

This handy cable stripping tool is a great addition to any cable installer's tool belt. Featuring an adjustable blade for all sizes of UTP, STP, and flat silver satin cabling, this tool allows users to consistently remove the cable jacket without damaging the internal conductors. The cable stripper also features a built in cable cutter.

HTS501	Modular Cable Stripper for UTP/STP Round or Flat Cable	12.95	12.69	12.43	CALL
--------	--	-------	-------	-------	------

Heavy Duty Two-in-One Tool - Strip and Crimp RJ11/12 and RJ45 Modular Cables

Finally a quality tool at a reasonable price. This two-in-one tool features a straight-line-parallel operation of the die set for precision crimping each and every time. Tool has two sets of dies to accept a 2, 4 or 6 position RJ11/12 and more important the RJ45 (8x8), either keyed or non-keyed. Equipped with a built-in wire stripper. All steel construction with plastic handle grips for overall comfort.

HT1500	Two-In-One Modular Crimp Tool	49.95	48.95	47.95	CALL
--------	-------------------------------	-------	-------	-------	------

Medium Service Hand Tools - Cut, Strip and Crimp Modular Plugs to Flat Cable

Durable modular crimp tools with carbon steel dies and all steel construction to withstand frequent use. Three tool types satisfy the requirements of crimping 4x4 handset, RJ11, RJ12, and RJ45 modular plugs. The HT210A accepts RJ45 plugs either with or without key.

HT210A	Modular Crimp Tool Kit for RJ45 Plugs	28.95	28.37	27.79	CALL
HT2096	Modular Crimp Tool for RJ11 and RJ12 Plugs	24.95	24.45	23.95	CALL
HT2094C	Modular Crimp Tool for 4x4 Handset Plugs	22.95	22.49	22.03	CALL

Heavy Duty Ratcheting Crimp Tools for TDS8PC5 Shielded Plugs

These crimp tools are specifically designed for L-com's TDS8PC5 heavy duty shielded plugs. Features include, fully ratcheting crimp action, hardened dies and adjustability. The HTS2500 crimps the contact and strain relief in one step. The HTS2600 features separate crimp and strain relief capability in two steps.

HTS2500	Crimp Tool for Shielded Plugs with Strain Relief, One Step	69.95	68.55	67.15	CALL
HTS2600	Crimp Tool for Shielded Plugs with Strain Relief, Two Step	79.95	78.35	76.75	CALL

10P10C (RJ50) Crimp Tool with Cut and Strip Function

The HTS9000 not only crimps 10P10C style connectors but it also cuts and strips your cable for complete cable preparation. This rugged tool is constructed of carbon steel and features a cushioned grip handle. This crimp tool can be used with L-com's TDR10P10C and TDR10P10CS, 10 position RJ50 plugs.

HTS9000	Crimp Tool for 10P10C RJ50 Plugs	49.95	48.95	47.95	CALL
---------	----------------------------------	-------	-------	-------	------

Cable Prep Tools - Fast, Easy Stripping of UTP or Data Cable Jacket Covers

These are the simplest tools we've ever seen for removing the jacket from round, unshielded or shielded twisted pair cable. The TCPT2 tool is intended for removing the jacket on UTP cable only. The second tool, the TCPT110, also incorporates a 110 blade for punching 110 blocks. Just insert the cable into the tool, twist/turn a couple of times and pull off the jacket slug. Simple and yet inexpensive enough to have a few on hand.

TCPT2	UTP Round Cable Jacket Stripper	6.95	6.81	6.67	CALL
TCPT110	UTP Round Cable Jacket Stripper with 110 Punch	7.95	7.79	7.63	CALL

Heavy Duty Modular Crimp Tool Kit Includes RJ45 and RJ11/12 Plugs

This tool kit includes 1 HT1500 crimping tool for RJ45 and RJ11/12 plugs, 20 RJ11/12 plugs for flat cable, 20 RJ11/12 plugs for round cable, 20 RJ45 plugs for flat cable, 20 RJ45 plugs for round cable and a four compartment case.

TCK68MOD	RJ45 and RJ12 Crimp Tool Kit with Plugs	59.95	58.75	57.55	CALL
----------	---	-------	-------	-------	------

Item #	Description	1-9	10-24	25-99	100+
Protective Covers for Plugs and Jacks - Protect Unused Ports and Cables from Contact Damage					
These covers are perfect for protecting unused ports in wall plates and expensive equipment from physical damage, dirt and grime. Made from flexible PVC, these covers attach easily and stay in place with a snug friction fit.					
MP45P	RJ45 Protective Covers for Plugs, Pkg/100	16.95	16.61	16.27	CALL
MP45J	RJ45 Protective Covers for Jacks, Pkg/100	16.95	16.61	16.27	CALL

DSL Line Conditioner - Filters Noise for Better Performance


This DSL Line Conditioner filters out unwanted noise by using 2 pole low pass filters. Inline plug/jack configuration. Color: Ivory. Specifications: REN 0.2B; DC Resistance Through T&R to Phone: 10 Ohms; Loading Capacity: 47nF; Attenuation Distortion \pm 1 dB max.; 3 dB Cutoff Point.

S900LC50-I	Inline DSL Conditioner, RJ12 (6x6) Male/Female	7.95	7.71	7.47	CALL
------------	--	------	------	------	------

Wire Tap and Butt Splice - Gel Filled IDC Connectors

These handy IDC connectors make wire splicing a snap. Gel filled IDC contact area provides a moisture resistant barrier for reliable connections. Usable with 19-26 AWG copper wire with a .066" (0.2cm) maximum insulation diameter (.060 max. for WT-UY). Sold in 100 piece packs.

WT-UY	UY Butt Splice 2 Wire Connector, Gel Filled, Pkg/100	13.59	13.05	12.50	CALL
WT-UR	UR Butt Splice, 3 Wire Connector, Gel Filled, Pkg/100	13.59	13.05	12.50	CALL
WT-UB	UB Butt Tap Connector, Gel Filled, Pkg/100	13.59	13.05	12.50	CALL

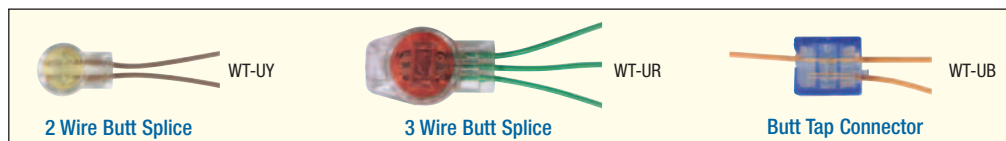

110 Wiring Block Field Termination Kits - Everything Necessary to Wire a 110 Block

Wiring blocks are the main instrument in setting up horizontal wiring in a 110 style connector system. Each kit contains one 100 pair wiring block with detachable legs, label holders with designation labels and sufficient connecting blocks. Each kit includes five four pair and one five pair connecting block per 25 pair termination strip. Designation strips are mounted to the wiring block addressing each cable termination.

S110K-4PR	100 Pair Wiring Block Kit with 4 Pair Connecting Blocks	44.95	44.05	43.15	CALL
-----------	---	-------	-------	-------	------

50 Pair 66 Style Category 5 Block

This 66 style 50 pair block has been designed to meet Category 5 requirements as specified by the EIA/TIA. Ease of use and low cost has made this style of block one of the most popular termination methods. Improved design now permits use in data applications up to 100 Mbps. Included are 100 quick connect bridging clips and a clear protective cover. 66 type tool required for termination.

S66M1-50-C5	50 Pair 66 Style Block, Category 5 Rated	19.95	19.55	19.15	CALL
C1127-A1-100	Bridging Clips for 66 Style Blocks, Pkg/100	12.95	12.69	12.43	CALL

Professional Grade Cable Splicer Knife, Scissor and Kit

These tools are a great addition to any cable technicians tool kit. The CS925 is an industrial grade serrated scissor capable of cutting thin wires and cable jacketing. This tool also has wire stripping notches on one blade as well as a scraper and file on the back of the other. The CK6 is a forged steel splicer knife with red cushioned handle. It comes in handy whenever a sharp blade is necessary. The CS925KIT offers both tools plus a heavy duty leather holder that will keep the knife and scissor secured to a tool belt.

CS925	Cable Splicer Serrated Scissor	16.95	16.61	16.27	CALL
CK6	Cable Splicer Knife	10.95	10.73	10.51	CALL
CS925KIT	Knife and Scissor with Holder	33.95	33.27	32.59	CALL

Parallel Action Pliers - Use for Compressing IDC Body to Jack

These parallel action pliers are great for crimping wire taps and butt splices. The jaws of the tool work close in parallel providing a better crimp than regular pliers.

HT1008	Parallel Action Pliers	39.95	39.15	38.35	CALL
--------	------------------------	-------	-------	-------	------

Premium Auto Impact Tool - Our Best Model, Features an Adjustable Spring Load

Now installers can make effortless, uniform connections with L-com's premium auto impact tool. Set tool for high or low impact with a variable impact pressure control that will provide the right amount of force. Blades are easily reversible, one end terminates only while the other terminates and cuts. This model features a hidden storage compartment which opens to fit an extra blade. Accepts blades for 66, 110 and Krone use. This tool comes without blades, order separately.

H351	Premium Impact Tool Body Only, Without Blade	38.95	38.17	37.39	CALL
------	--	-------	-------	-------	------

Reversible Blades - Fit H351 Series Tool

H351B66	Impact Blade, Reversible for 66 Terminals	9.95	9.75	9.55	CALL
H351B110	Impact Blade, Reversible for 110 Terminals	9.95	9.75	9.55	CALL
H351B-K	Impact Blade, Reversible for Krone Terminals	9.95	9.75	9.55	CALL


Note: Mixing of blades is allowed for quantity pricing





- FCC compliant, Part 68; Doc. 47, Sub F.
- UL component recognized, File E132408(N)-DUXR2.
- Certified Canadian Standards Assn., File 67725.

Standard Alignment



A 4x4
Handset



B 6x4
RJ11



C 6x6
RJ12



E 8x8
RJ45




TD6P6CSR-L



TDR10P10CS-L



Staggered Alignment



TSP4288C6





TSP4088C5

TSP4088C5S



What is the difference between a Stewart contact plug and a commercial grade contact plug?

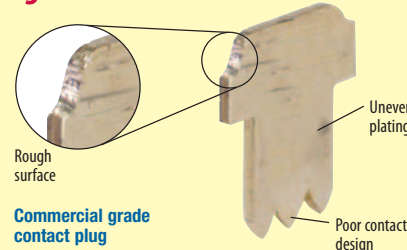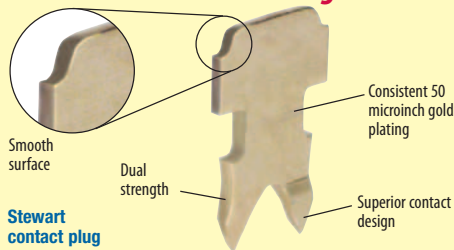

Item #	Description	Code	1-9	10-24	25-99	100+
--------	-------------	------	-----	-------	-------	------

The Ultimate in Modular Telco Plugs, Made in the USA, Comply with Industry Standards

L-com offers Stewart modular plugs featuring mirror smooth contact surfaces for extended mating life. Lowest contact resistance and high reliability. Pre-inserted selectively gold plated contacts are ready for mass termination on most industry compatible crimping machines and hand tools. Fully complies with FCC & telephone industry standards for size and performance. Choice of plugs for flat modular or round UTP cable. Plugs accept 24-28 AWG stranded or solid conductors. Sold only in packages of 100 plugs.

Modular Plugs for Flat Cable - With Standard Rectangular Cable Entrance

TSP3044	Modular Plugs, Handset (4x4), Pkg/100	A	29.95	27.55	25.16	CALL
TSP3046	Modular Plugs, RJ11 (6x4), Pkg/100	B	29.95	27.55	25.16	CALL
TSP3066	Modular Plugs, RJ12 (6x6), Pkg/100	C	34.95	32.15	29.36	CALL
TSP3088	Modular Plugs, RJ45 (8x8), Pkg/100	E	49.95	45.95	41.96	CALL

Modular Plugs for Round Twisted Pair Cable - With Radiused Cable Entrance

TSP3046R	Modular Plugs, RJ11 (6x4), Pkg/100	B	29.95	27.55	25.16	CALL
TSP3066R	Modular Plugs, RJ12 (6x6), Pkg/100	C	34.95	32.15	29.36	CALL
TSP3088R	Modular Plugs, RJ45 (8x8), Pkg/100	E	49.95	45.95	41.96	CALL

SPECIFICATIONS:


Material: Insulator - Polycarbonate rated UL 94V-0
Contacts - Phosphor Bronze

Plating: 50 microinch (1.27µm) gold to MIL-G-45204, Type II, Grade C min. on contact area over 100 microinch (2.54µm) min
Nickel underplate to QQ-N-290, Class 2, Grade C, gold flash on balance.

Environmental: Operating temperature - -40°C to +85°C.

Mechanical: Terminates to 24, 26 and 28 AWG
Accepts Stranded or Solid conductors.
Mating durability - 1,000 cycles min.

Electrical: Voltage rating - 150 VAC max.
Current rating - 1.5 Amps max.
Contact resistance - 15 milliohms min.
Insulation resistance - 500 Mohm min @ 1000 VAC between adjacent contacts (75°F and 50% R.H.)
Dielectric withstanding voltage - 1000 VAC min rms (sea level).

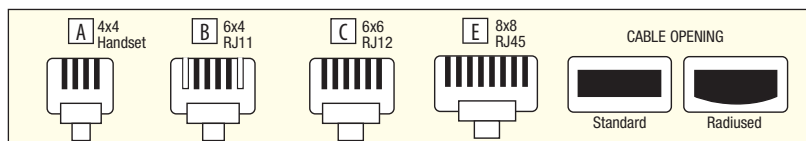

Shielded Modular Plugs for Round Twisted Pair Cable - With Radiused Cable Entrance

TD6P6CSR-L	Modular Plugs, RJ12 (6x6), Pkg/50	39.95	39.15	37.55	CALL
TDR10P10CS-L	Modular Plugs, RJ45 (10x10), Pkg/100	69.95	67.15	64.35	CALL


High Performance Category 5/5e and Category 6 Staggered Alignment Plugs

Stewart's staggered-pin Category 5/5e and Category 6 rated RJ45 crimp plugs are designed for today's high performance networks. A superior two-prong contact design works for both solid and stranded conductors. The multi-level contact design helps improve performance. The shielded version protects against EMI/RFI interference and maintains proper ground connection. Sold in packages of 50 plugs.


TSP4288C6	Modular Plugs, RJ45(8x8) Category 6, Pkg/50	49.95	45.95	41.96	CALL
TSP4088C5	Modular Plugs, RJ45(8x8) Category 5/5e, Pkg/50	29.95	27.55	25.16	CALL
TSP4088C5S	Modular Plugs, RJ45(8x8) Category 5/5e Shielded, Pkg/50	49.95	45.95	41.96	CALL




What is the difference between stranded and solid contact design?



Two point staggered for solid or stranded. The contact prongs straddle the conductor.



Piercing type for stranded. Jagged end pierces jacket and embeds into the strands of the conductor.



Tripoint type for solid or stranded. Long contact prongs spread apart to accept conductor.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Stranded Conductor Modular Plugs - Rectangular Entry for Flat Cable

A full complement of modular plugs is offered for all applications. Piercing-type connections are simultaneously made through each stranded conductor of 24-28 AWG flat modular cable. 15 microinches (0.381µm) gold plating on contacts. Sold in packages of 100 plugs.

TD4P4HS	Modular Plugs, Handset (4x4), Pkg/100	19.95	18.35	16.76	CALL
TD6P4C	Modular Plugs, RJ11 (6x4), Pkg/100	19.95	18.35	16.76	CALL
TD6P6C	Modular Plugs, RJ12 (6x6), Pkg/100	24.95	22.95	20.96	CALL
TD6P6MMJ	Modular Plugs, MMJ (6x6), Pkg/100	34.95	32.15	29.36	CALL
TD8P8C	Modular Plugs, RJ45 (8x8), Pkg/100	39.95	36.75	33.56	CALL
TD8P8CK	Modular Plugs, RJ45 (8x8) (Keyed), Pkg/100	39.95	36.75	33.56	CALL

Stranded Conductor Modular Plugs - Radiused Entry for Round or Flat Cable

These modular plugs have a radiused rear entry compatible with most round and flat cables. 50 microinches gold plating on contacts. Compatible with 24-28 AWG stranded conductors.

TDR6P4C	Modular Plugs, RJ11 (6x4), Pkg/100	19.95	18.35	16.76	CALL
TDR6P6C	Modular Plugs, RJ12 (6x6), Pkg/100	24.95	22.95	20.96	CALL
TDR8P8C	Modular Plugs, RJ45 (8x8), Pkg/100	39.95	36.75	33.56	CALL
TDR10P10C	Modular Plugs, RJ50 (10x10), Pkg/100	49.95	45.95	41.96	CALL

Shielded Long Body RJ45 Generic Plug

This plug will accept round or flat cable with solid or stranded wires. Prices shown are per piece. Compatible with generic 8x8 crimp tools such as L-com part numbers: HT210A, HT1500, HTS7100 + HTS7100-08A die set and HTS2100 + HTS2100-08 die set.

T8P8CSR	Shielded Modular Plug, RJ45 (8x8), Single	0.95	0.87	0.80	CALL
---------	---	------	------	------	------

Shielded Category 5e and Category 6 RJ45 Plugs for Solid or Stranded Cables

These superior high performance shielded plugs allow users to perform factory grade terminations in the field. A unique metallic strain relief provides superior cable retention and a reliable 360° shielding contact. The short body design combined with a loading bar allows easy insertion while maintaining Category 5e or Category 6 twist requirements. Superior two-point contact design is compatible with solid and stranded cable.




TDS8PC5	Category 5e Shielded Modular Plug, RJ45 (8x8), Pkg/50	64.95	62.35	59.75	CALL
TDS8PC6	Category 6 Shielded Modular Plug, RJ45 (8x8), Pkg/50	69.95	67.15	64.35	CALL
TDS8CVR-GR	8x8 Shielded Covers, Gray - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-BK	8x8 Shielded Covers, Black - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-BL	8x8 Shielded Covers, Blue - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-GN	8x8 Shielded Covers, Green - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-IV	8x8 Shielded Covers, Ivory - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-RD	8x8 Shielded Covers, Red - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-WH	8x8 Shielded Covers, White - Pkg/50	15.95	14.67	13.40	CALL
TDS8CVR-YL	8x8 Shielded Covers, Yellow - Pkg/50	15.95	14.67	13.40	CALL
HTS2500	Crimp Tool for Shielded Plugs with Strain Relief, One Step	69.95	68.55	67.15	CALL
HTS2600	Crimp Tool for Shielded Plugs with Strain Relief, Two Step	79.95	78.35	76.75	CALL
TSP8048C5S	Category 6 Shielded Modular Plug, RJ45 (8x8), for Large OD Conductors	5.95	5.83	5.71	CALL
TSP8048C5S-10PK	Category 6 Shielded Modular Plug, RJ45 (8x8), for Large OD Conductors, Pkg/10	51.95	50.91	49.87	CALL
HT1500	Two-In-One Modular Crimp Tool	49.95	48.95	47.95	CALL

High Performance Shielded Category 6a Plugs for Solid or Stranded Cables


These high performance C6a plugs are designed to meet the strict 10Gigabit 6a standards. A superior two-prong contact design works for both Solid and Stranded conductors. 360° strain relief provides superior shield termination and all plugs come with a wire aligner and load bar for an easy installation. Plugs come in three versions to suit all conductor OD options; please refer to **L-com.com** for complete specifications.

TSP6088S	Category 6a Shielded Modular Plug, RJ45 (8x8), Pkg/100	159.95	150.35	140.76	CALL
TSP8048C6AS-25PK	Category 6a Shielded Modular Plug, RJ45 (8x8), for Large OD Conductors, Pkg/25	129.95	127.35	124.75	CALL
TSP6188S-25	Category 6a Shielded Modular Plug, RJ45 (8x8), for Small OD Conductors, Pkg/25	89.95	87.25	85.45	CALL
HTS8200	Crimp Tool for Shielded Category 6a Plugs	399.95	391.95	383.95	CALL

Standard Alignment



Best Seller

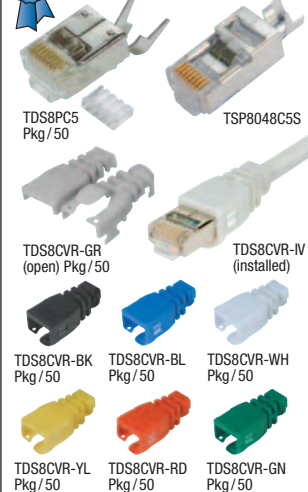


How to assemble a TDS8PC5 and TDS8PC6 series shielded Category 5e and Category 6 modular plug




Online Video


L-com.com/Videos/A22




Strip jacketing and shield to dimensions shown.




Fold shield back onto jacketing. Wrap drain wire one and a half times around shield. Trim excess.



Untwist pairs and arrange to desired order. Trim conductors at an angle and insert into loading bar. Trim excess wires.

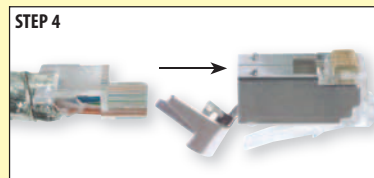

Insert prepared cable into plug.



Bend strain relief to lay along cable.



Crimp plug with the specially designed HTS2500 or HTS2600 crimp tool.

Exclusive

ECF504-C3

ECF504-SC3

Best Seller

ECF504-C5

ECF504-SC5E







ECF504-C6

ECF504-SC6



ECF504-C6A

ECF504-SC6A

PR175F504B-C3
PR175F504B-SC3
PR175F504B-C6PR175F504B-SC3
PR175F504B-SC5
PR175F504B-SC6PR35F504B-C3
PR35F504B-C5
PR35F504B-C6PR35F504B-SC3
PR35F504B-SC5
PR35F504B-SC6

PR175F504B




PR35F504B

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------


Premium Panel Mounted Modular Coupler Kits - Category 3, 5e and 6 - Shielded and Unshielded

These unique coupler kits allow panel mounting in virtually any panel thickness. A solid die-cast metal mounting frame provides secure mounting and reliable grounding. Kits include a snap-in coupler, mounting frame and two 4-40 machine screws.

ECF504-C3	Category 3 Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	4.95	4.55	4.16	CALL
ECF504-SC3	Category 3 Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	7.45	6.85	6.26	CALL
ECF504-C5	Category 5e Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	7.45	6.85	6.26	CALL
ECF504-SC5E	Category 5e Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	9.95	9.15	8.36	CALL
ECF504-C6	Category 6 Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	8.45	7.77	7.10	CALL
ECF504-SC6	Category 6 Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	10.45	9.61	8.78	CALL
ECF504-C6A	Category 6a Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	12.95	11.91	10.88	CALL
ECF504-SC6A	Category 6a Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	15.95	14.67	13.40	CALL

Easily install a premium ECF coupler kit**Online Video**L-com.com/Videos/A09**STEP 1**

Secure frame in specified opening with supplied hardware and align coupler in proper orientation to the opening.

STEP 2

Seat bottom retainer and pivot coupler upward while depressing upper retainer.

STEP 3

Coupler fully seated.


Telecom and Network Grade Patch Panels

These 19" (48.3cm) panels feature L-com's exclusive ECF series flange mounted feed-thru couplers. These couplers are available in Category 3, Category 5e or Category 6 in either shielded or non-shielded styles. The ECF series couplers are unique in that they use 2 4-40 screws to firmly attach the connector flange to the rack panel. The panels have a powder coat black finish for durability and each port is numbered to simplify cable organization and tracking. Both 16 and 32 port versions are available.

PR175F504B-C3	1.75" (4.4cm) Panel with 16 Category 3 Couplers	142.95	137.23	131.51	CALL
PR175F504B-SC3	1.75" (4.4cm) Panel with 16 Category 3 Shielded Couplers	175.95	168.91	161.87	CALL
PR35F504B-C3	3.50" (8.9cm) Panel with 32 Category 3 Couplers	252.95	242.83	232.71	CALL
PR35F504B-SC3	3.50" (8.9cm) Panel with 32 Category 3 Shielded Couplers	329.95	316.75	303.55	CALL
PR175F504B-C5	1.75" (4.4cm) Panel with 16 Category 5e Couplers	186.95	179.47	171.99	CALL
PR175F504B-SC5	1.75" (4.4cm) Panel with 16 Category 5e Shielded Couplers	252.95	242.83	232.71	CALL
PR35F504B-C5	3.50" (8.9cm) Panel with 32 Category 5e Couplers	351.95	337.87	323.79	CALL
PR35F504B-SC5	3.50" (8.9cm) Panel with 32 Category 5e Shielded Couplers	439.95	422.35	404.75	CALL
PR175F504B-C6	1.75" (4.4cm) Panel with 16 Category 6 Couplers	219.95	211.15	202.35	CALL
PR175F504B-SC6	1.75" (4.4cm) Panel with 16 Category 6 Shielded Couplers	274.95	263.95	252.95	CALL
PR35F504B-C6	3.50" (8.9cm) Panel with 32 Category 6 Couplers	384.95	369.55	354.15	CALL
PR35F504B-SC6	3.50" (8.9cm) Panel with 32 Category 6 Shielded Couplers	472.95	454.03	435.11	CALL
PR175F504B	1.75" (4.4cm) Panel, 16 ECF Style Cutouts, Black	43.95	42.19	40.43	CALL
PR35F504B	3.50" (8.9cm) Panel, 32 ECF Style Cutouts, Black	43.95	42.19	40.43	CALL

**What is the difference between Category 5e & Category 6 100 Ohm UTP?**

The Category 6 standard adopted in mid 2002 extended key parameters over Category 5e specifications. The additional headroom is intended to provide quality transmission at higher data rates required by emerging applications. As the chart indicates, the most prominent difference is the frequency at which the key parameters are measured. The jump from 100 to 250 MHz places a great deal of emphasis on component quality as well as installation techniques. This improvement is commonly noticed by the increased pair twisting and staggering of twisted pairs.

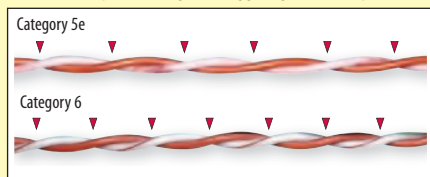


	Category 5e	Category 6
Frequency	100 MHz	250 MHz
Attenuation	22db	19.8db/100M @ 100 MHz 32.8db/100M @ 250 MHz
Return Loss	19db	19db @ 100 MHz 15.6db @ 250 MHz
Delay Skew	45ns	45ns
Near End Crosstalk (NEXT)	35.3db	44.3db @ 100 MHz 38.3db @ 250 MHz
Power Sum Near End Crosstalk (PS-NEXT)	32.3db	42.3db @ 100 MHz 36.3db @ 250 MHz
Equal Level Far End Crosstalk (ELFEXT)	23.8db	27.8db @ 100 MHz 19.8db @ 250 MHz
Power Sum Equal Level Far End Crosstalk (PS-ELFEXT)	20.8db	24.8db @ 100 MHz 16.8db @ 250 MHz




Build Custom Configurations with L-com's Universal Rack Panel System

STEP 1



Start with the Master Rack Panel, UPR35-6B.

STEP 2



Now select a ready made sub-panel that works with your rack panel. See pages 238-242 for more variations.

STEP 3



Using a Phillips or Flat screwdriver, install your sub-panels in the master rack panel.

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Universal Master Rack Panel with 6 Openings

L-com's Universal Series offers installers the ability to customize their installation with different connections within a single rack panel. The Universal Series panels can save time, money and rack space in an installation project. The master panels feature six punched rectangular openings that will accept any of the numerous sub-panels shown in this catalog. Sub-panel openings are 2.20" (5.6cm) x 2.75" (7.0cm).

UPR35-6B	Master Rack Panel	Black	27.95	26.83	25.71	CALL
UPR-S-KIT	Master Rack Panel with 6 Black Steel Blanks	Black	51.95	49.87	47.79	CALL
UPR-A-KIT	Master Rack Panel with 6 Black Aluminum Blanks	Black	51.95	49.87	47.79	CALL

Universal Series Blank Sub-Panels

Universal Series blank sub-panels can be used to cover unused openings or may be used to customize a panel assembly. These panels come in 3 rated styles for users to choose from: black anodized aluminum, white high impact plastic, or black steel. The aluminum and plastic panels offer the easiest option for custom drilling or punching holes. The black steel panels are constructed of sturdy cold rolled steel for durability. Each sub-panel is equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USPB	Universal Steel Blank Sub-Panel	Black	4.95	4.75	4.55	CALL
USP-A	Universal Aluminum Blank Sub-Panel	Black	4.95	4.75	4.55	CALL
USP-P	Universal Plastic Blank Sub-Panel	White	4.95	4.75	4.55	CALL

Universal Series Sub-Panels Featuring Telecom/Network Grade Connections

The Universal sub-panel series offers connections for telecom and network equipment. Choose between Category 3, Category 5e or Category 6 rated connections either shielded or non-shielded. Panel choices offer both feed-thru style couplers and jacks with 110 style punch terminations. Either 2 or 4 connections per panel can be chosen and blank panels are available for further customization. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP2ECF4SB	Sub-Panel with 2 ECF Style RJ11 (6x4) Couplers, Straight Wired	15.95	15.31	14.67	CALL
USP2ECF6SB	Sub-Panel with 2 ECF Style RJ12 (6x6) Couplers, Straight Wired	15.95	15.31	14.67	CALL
USP2ECF8SKB	Sub-Panel with 2 ECF Style RJ45K (8x8) Keyed Couplers, Straight Wired	17.95	17.23	16.51	CALL
USP2ECFB4SB	Sub-Panel with 2 ECF Style RJ11 (6x4) Couplers, Straight Wired	19.95	19.15	18.35	CALL
USP2ECFB6SB	Sub-Panel with 2 ECF Style RJ12 (6x6) Couplers, Straight Wired	19.95	19.15	18.35	CALL
USP2ECFB8SKB	Sub-Panel with 2 ECF Style RJ45K (8x8) Keyed Couplers, Straight Wired	21.95	21.07	20.19	CALL
USP2ECF-C3B	Sub-Panel with 2 Category 3 RJ45 (8x8) Couplers	23.95	22.99	22.03	CALL
USP2ECF-SC3B	Sub-Panel with 2 Category 3 RJ45 (8x8) Couplers, Shielded	28.95	27.79	26.63	CALL
USP2MC5B	Sub-Panel with 2 Category 5e RJ45 (8x8) Couplers	17.95	17.23	16.51	CALL
USP4MC5B	Sub-Panel with 4 Category 5e RJ45 (8x8) Couplers	28.95	27.79	26.63	CALL
USP2SMC5B	Sub-Panel with 2 Category 5e RJ45 (8x8) Couplers, Shielded	21.95	21.07	20.19	CALL
USP4SMC5B	Sub-Panel with 4 Category 5e RJ45 (8x8) Couplers, Shielded	37.95	36.43	34.91	CALL
USP2MC6B	Sub-Panel with 2 Category 6 RJ45 (8x8) Couplers	19.95	19.15	18.35	CALL
USP4MC6B	Sub-Panel with 4 Category 6 RJ45 (8x8) Couplers	32.95	31.63	30.31	CALL
USP2SMC6B	Sub-Panel with 2 Category 6 RJ45 (8x8) Couplers, Shielded	24.95	23.95	22.95	CALL
USP4SMC6B	Sub-Panel with 4 Category 6 RJ45 (8x8) Couplers, Shielded	41.95	40.27	38.59	CALL
USP2ECF-C5EB	Sub-Panel with 2 ECF Kit Category 5e RJ45 (8x8) Couplers	29.95	28.75	27.55	CALL
USP2ECF-SC5EB	Sub-Panel with 2 ECF Kit Category 5e RJ45 (8x8) Couplers, Shielded	33.95	32.59	31.23	CALL
USP2ECF-C6B	Sub-Panel with 2 ECF Kit Category 6 RJ45 (8x8) Couplers	32.95	31.63	30.31	CALL
USP2ECF-SC6B	Sub-Panel with 2 ECF Kit Category 6 RJ45 (8x8) Couplers, Shielded	37.95	36.43	34.91	CALL
USP2KC-R5EB	Sub-Panel with 2 Category 5e Right Angle Keystone Couplers	31.95	30.67	29.39	CALL
USP2KCS-R5EB	Sub-Panel with 2 Category 5e Right Angle Keystone Couplers, Shielded	36.95	35.47	33.99	CALL
USP4KC-R5EB	Sub-Panel with 4 Category 5e Right Angle Keystone Couplers	55.95	53.71	51.47	CALL
USP4KCS-R5EB	Sub-Panel with 4 Category 5e Right Angle Keystone Couplers, Shielded	64.95	62.35	59.75	CALL
USP238B	Blank Sub-Panel with 2 Keystone Openings, Pre-Punched	6.95	6.67	6.39	CALL
USP231B	Blank Sub-Panel with 4 Keystone Openings, Pre-Punched	6.95	6.67	6.39	CALL
USP229B	Blank Sub-Panel with 2 ECF Style Openings, Pre-Punched	6.95	6.67	6.39	CALL

Universal Series Sub-Panel Mounted Cable D-Ring


A D-Ring style cable manager mounted to a sub-panel allows a convenient way to secure cables on the rack panel.

USP-CM134B	Sub-Panel Mounted Cable D-Ring	18.95	18.19	17.43	CALL
------------	--------------------------------	-------	-------	-------	------



Best Seller

UPR35-6B

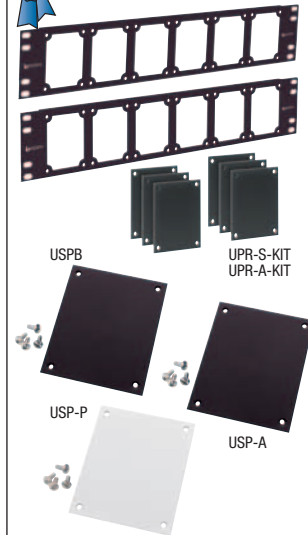

USP2ECF4SB



USP2ECF6SB



USP2ECF8SKB



USP2ECFB4SB



USP2ECFB6SB



USP2ECFB8SKB



USP2ECF-C3B



USP2ECF-SC3B



USP2ECF-C5EB



USP2ECF-SC5EB



USP2ECF-C6B



USP2ECF-SC6B




USP2MC5B



USP4MC5B

ECF504 Series

Network Rating: Category 3
Color: Ivory
Gold Plating: 30 microinches
Flammability Rating: 94V-0



ECJ504 Series

Color: Ivory
Gold Plating: 30 microinches
Flammability Rating: 94V-0

ECF504B Series


Network Rating: Category 3
Color: Black
Gold Plating: 50 microinches
Flammability Rating: 94V-0



PR175F504B-6S



PR35F504B-6S



PR175F504B-4S



PR35F504B-4S



PR175UT568



PR35UT568



PR175C6-16




PR35C6-32



PR175R5E-16



PR35R5E-32



Right Angle
Keystone
Coupler

Item #	Description	Color	1-9	10-24	25-99	100+
Deluxe Panel Mounted Modular Couplers, 30 Microinches (0.762μm) Gold, Ivory Color						
These straight and cross wired modular couplers are available exclusively from L-com. Six different configurations all fit into the same 0.675" (1.7cm) x 0.900" (2.3cm) rectangular opening. Wire contacts have 30 microinch (0.762μm) gold plating for multiple insertions. Plastic is 94V-0 rated. Color: Ivory. Flange accepts #4 or #5 mounting screws to be purchased separately. Category 3 rated.						
ECF504-4C	Modular Coupler, RJ11 (6x4), Crossed, 30μ (0.762μm)	Ivory	3.95	3.87	3.71	CALL
ECF504-6C	Modular Coupler, RJ12 (6x6), Crossed, 30μ (0.762μm)	Ivory	4.25	4.17	3.99	CALL
ECF504-4S	Modular Coupler, RJ11 (6x4), Straight, 30μ (0.762μm)	Ivory	3.95	3.87	3.71	CALL
ECF504-6S	Modular Coupler, RJ12 (6x6), Straight, 30μ (0.762μm)	Ivory	4.25	4.17	3.99	CALL
ECF504-8SK	Modular Coupler, RJ45 (8x8K), Straight, 30μ (0.762μm)	Ivory	5.45	5.34	5.12	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

Deluxe Panel Mounted Modular Jacks - 10" Wire Leads, 30 Microinches (0.762μm) Gold, Ivory Color

One difficulty in using modular jacks is the mounting problem on a panel. L-com's solution to this problem is providing a flange that mounts with two screws in a 0.675" (1.7cm) x 0.900" (2.3cm) rectangular opening. Choice of RJ11/12 (6x6) or RJ45 (8x8K) usable with keyed or non-keyed plugs. Custom versions of other jack types considered in quantities of 500/up. Mounting screws must be purchased separately.

ECJ504-6	Modular Panel Jack, RJ12 (6x6)/Wires, 30μ	Ivory	4.35	4.26	4.09	CALL
ECJ504-8	Modular Panel Jack, RJ45K (8x8K)/Wires, 30μ	Ivory	4.75	4.66	4.46	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

Deluxe Panel Mounted Couplers, 50 Microinches (1.27μm) Gold, Black Color

These couplers are similar to the ECF504 Series with two changes. The molding has been changed to a Black color for applications when Ivory is not wanted. Also, the contacts have 50 microinches (1.27μm) of gold for superior mating with modular plugs. Mounting screws must be purchased separately. Category 3 rated.


ECF504B-4S	Modular Coupler, RJ11 (6x4), Straight, 50μ (1.27μm)	Black	4.25	4.17	3.99	CALL
ECF504B-6S	Modular Coupler, RJ12 (6x6), Straight, 50μ (1.27μm)	Black	4.45	4.36	4.18	CALL
ECF504B-8SK	Modular Coupler, RJ45K (8x8K), Straight, 50μ (1.27μm)	Black	5.45	5.34	5.12	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

19" (48.3cm) Modular Patch Panels - Equipped with 16 or 32 ECF504B Modular Couplers

These panels utilize the ECF504B couplers with 50 microinch (1.27μm) plating. 16 and 32 port available. Straight thru pinned only. Color: Black.

PR175F504B-4S	1.75" (4.4cm) 16 Port Panel RJ11 (6x4), Straight-Thru	Black	82.95	79.63	76.31	CALL
PR175F504B-6S	1.75" (4.4cm) 16 Port Panel RJ12 (6x6), Straight-Thru	Black	91.95	88.27	84.59	CALL
PR175F504B-8SK	1.75" (4.4cm) 16 Port Panel RJ45 (8x8), Straight, Keyed	Black	98.95	94.99	91.03	CALL
PR35F504B-4S	3.50" (8.9cm) 32 Port Panel RJ11 (6x4), Straight-Thru	Black	142.95	137.23	131.51	CALL
PR35F504B-6S	3.50" (8.9cm) 32 Port Panel RJ12 (6x6), Straight-Thru	Black	159.95	153.55	147.15	CALL
PR35F504B-8SK	3.50" (8.9cm) 32 Port Panel RJ45 (8x8), Straight, Keyed	Black	186.95	179.47	171.99	CALL

How Rack Spaces and Sizes are Measured

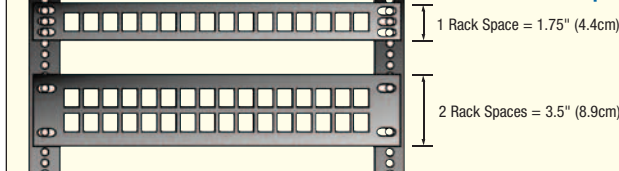

Racks are a great way to neaten up wiring closets and labs. Network equipment and rack panels usually come in 1.75" (4.4cm), 3.5" (8.9cm) and 5.25" (13.3cm) heights. (1, 2 and 3 rack spaces).

Premium Keystone Style - 16 and 32 Port Feed-Thru Modular Panels, Category 5e Rated

These 19" (48.3cm) rack panels utilize the UJ5T568 and UJ5T568S couplers. 16 and 32 port versions available in shielded and unshielded configurations. Category 5e rated. Color: Black.

PR175UT568	1.75" (4.4cm) 16 Port Cat5e Feed-Thru Panel, Unshielded	Black	204.95	196.75	188.55	CALL
PR175UT568S	1.75" (4.4cm) 16 Port Cat5e Feed-Thru Panel, Shielded	Black	244.95	235.15	225.35	CALL
PR35UT568	3.50" (8.9cm) 32 Port Cat5e Feed-Thru Panel, Unshielded	Black	344.95	331.15	317.35	CALL
PR35UT568S	3.50" (8.9cm) 32 Port Cat5e Feed-Thru Panel, Shielded	Black	399.95	383.95	367.95	CALL

Keystone Style - 16 and 32 Port Feed-Thru Modular Panels - Category 6 Rated

These rack panels utilize the TDG1026KC6 or TDG1026KS-C6 Category 6 couplers. 16 and 32 port versions are available in shielded and unshielded configurations. Color: Black.

PR175C6-16	1.75" (4.4cm) 16 Port Cat6 Feed-Thru Panel, Unshielded	Black	208.95	200.59	192.23	CALL
PR175C6-16S	1.75" (4.4cm) 16 Port Cat6 Feed-Thru Panel, Shielded	Black	263.95	253.39	242.83	CALL
PR35C6-32	3.50" (8.9cm) 32 Port Cat6 Feed-Thru Panel, Unshielded	Black	351.95	337.87	323.79	CALL
PR35C6-32S	3.50" (8.9cm) 32 Port Cat6 Feed-Thru Panel, Shielded	Black	406.95	390.67	374.39	CALL

Right Angle Keystone Style - 16 and 32 Port Feed-Thru Modular Panels - Category 5e Rated

Unique, high speed network patching is made easy with L-com's right angle Keystone coupler patch panels. L-com's low-profile, 90 degree Keystone couplers are pre-installed into standard 19" rack panels, providing an easy method for addressing tight fit applications. These couplers offer a true 90 Degree exit from the cable entry point.

PR175R5E-16	1.75" (4.4cm) 16 Port, RA, Cat5e Feed-Thru Panel, Unshielded	Black	179.95	172.75	165.55	CALL
PR175R5E-16	1.75" (4.4cm) 16 Port, RA, Cat5e Feed-Thru Panel, Shielded	Black	209.95	201.55	193.15	CALL
PR35R5E-32	3.50" (8.9cm) 32 Port, RA, Cat5e Feed-Thru Panel, Unshielded	Black	252.95	242.83	232.71	CALL
PR35R5E-32	3.50" (8.9cm) 32 Port, RA, Cat5e Feed-Thru Panel, Shielded	Black	279.95	268.75	257.55	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

L-com's Exclusive Right Angle Category 5e Keystone Couplers

An exclusive product design from L-com, these right angle Category 5e couplers offer true 90° connectivity and meet Category 5e standards. These unique right angle keystone couplers were designed to address tight fit applications commonly seen with wall plates and some patch panel designs. These robust right angle Category 5e couplers fit standard .765" (0.3cm) x .585" (0.2cm) keystone openings and can be used for myriad voice, video and data applications.

Features of this right angle coupler:

- High Performance Cat5e right angle coupler for panel, wall plate and enclosure mounting
- Gold plated contacts provide reliable connections with repeated mating cycles
- EIA568A/B dual wiring provides compatibility in every installation
- RJ45 jacks conform to TIA-1096
- Meets or exceeds Category 5e standards

Right Angle Category 5e Keystone Couplers


TDG1026KC-R5E	Category 5e Unshielded RJ45 (8x8) Right Angle Keystone Coupler	8.45	7.77	7.10	CALL
TDG1026KCS-R5E	Category 5e Shielded RJ45 (8x8) Right Angle Keystone Coupler	10.45	9.61	8.78	CALL




Using L-com's right angle Cat5e coupler

The unique design of the L-com TDG1026KC-R5E right angle Cat5e coupler allows for cable connectivity in tight fit / confined space applications found with premise wiring installations involving wall plates and with MDF and IDF applications where patch panel depth is limited.

Wall Plate Mounting



Patch Panel Mounting



Premium Panel Mounted Modular Coupler Kits - Category 3, 5e and 6 - Shielded and Unshielded

These unique coupler kits allow panel mounting in virtually any panel thickness. A solid die-cast metal mounting frame provides secure mounting and reliable grounding. Kits include a snap-in coupler, mounting frame and two 4-40 machine screws.

ECF504-C3	Category 3 Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	4.95	4.55	4.16	CALL
ECF504-SC3	Category 3 Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	7.45	6.85	6.26	CALL
ECF504-C5	Category 5e Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	7.45	6.85	6.26	CALL
ECF504-SC5E	Category 5e Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	9.95	9.15	8.36	CALL
ECF504-C6	Category 6 Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	8.45	7.77	7.10	CALL
ECF504-SC6	Category 6 Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	10.45	9.61	8.78	CALL
ECF504-C6A	Category 6a Unshielded RJ45 (8x8) Deluxe Panel Coupler Kit	12.95	11.91	10.88	CALL
ECF504-SC6A	Category 6a Shielded RJ45 (8x8) Deluxe Panel Coupler Kit	15.95	14.67	13.40	CALL

RJ45 (8x8) Keystone Feed-Thru Couplers - Shielded and Unshielded Category 3, 5e and 6


These couplers utilize two RJ45 (8x8) modular jacks and fit into a standard keystone style opening. A slim housing design permits high density mounting. Couplers listed include Category 3, Category 5e and Category 6 performance ratings in both shielded and unshielded versions. Connector housings enclosed within a fully stamped shielding. Designed to work with EIA/TIA 568A and B wiring.

TDG1026KC3	Category 3 Unshielded RJ45 (8x8) Keystone Feed-thru Coupler	2.35	2.16	1.97	CALL
TDG1026KS-8P	Category 3 Shielded RJ45 (8x8) Keystone Feed-thru Coupler	4.99	4.59	4.19	CALL
TDG1026KC5	Category 5e Unshielded RJ45 (8x8) Keystone Feed-thru Coupler	5.15	4.74	4.33	CALL
TDG1026KS-C5E	Category 5e Shielded RJ45 (8x8) Keystone Feed-thru Coupler	6.99	6.43	5.87	CALL
TDG1026KC6	Category 6 Unshielded RJ45 (8x8) Keystone Feed-thru Coupler	6.15	5.66	5.17	CALL
TDG1026KS-C6	Category 6 Shielded RJ45 (8x8) Keystone Feed-thru Coupler	7.99	7.35	6.71	CALL
TDG1026KC6A	Category 6a Unshielded RJ45 (8x8) Keystone Feed-thru Coupler	7.95	7.31	6.68	CALL
TDG1026KS-C6A	Category 6a Shielded RJ45 (8x8) Keystone Feed-thru Coupler	9.99	9.19	8.39	CALL


Easily panel mount a keystone style connector

Keystone style refers to the snap-in mounting mechanism that many manufacturers have adopted.


STEP 1



STEP 2



STEP 3



Online Video

L-com.com/Videos/A10

Premium Keystone Style RJ45 (8x8) Feed-Thru Modular Couplers - Category 5e Rated

Two Category 5e feed-thru modular couplers for mating EIA568 A or B Category 5 connections. In both shielded and unshielded versions, this unique offset design maintains Category 5e performance and limits depth to only 1.25" (0.5cm). Designed to mate with keystone style holes.

UJ5T568	Modular Coupler, Cat5e RJ45 (8x8), Unshielded	9.95	9.15	8.36	CALL
UJ5T568S	Modular Coupler, Cat5e RJ45 (8x8), Shielded	12.45	11.45	10.46	CALL

RJ45 Coupler Overview



Online Video

L-com.com/Videos/A29



TDG1026KC-R5E



TDG1026KC-R5E
Bottom/Back View



TDG1026KC-R5E
Bottom/Front View



Exclusive



ECF504-C3



ECF504-SC3



Best Seller



ECF504-C5
ECF504-C6



ECF504-SC5E
ECF504-SC6



ECF504-C6A



ECF504-SC6A



TDG1026KC3



TDG1026KS-8P



Best Seller



TDG1026KC5
TDG1026KC6



TDG1026KS-C5E
TDG1026KS-C6



TDG1026KC6A



TDG1026KS-C6A



Best Seller



UJ5T568
(Unshielded)



UJ5T568S
(Shielded)

Network Rating: Category 5e
Color: Black or Silver
Gold Plating: 50 microinches
Flammability Rating: 94V-0



Category 5e
Inline Coupler

What is the difference in flammability ratings?





Online Video

L-com.com/Videos/A20


Category 6



Category 6 Hi-Speed



Category 6 to 250 MHz UTP Bulk Cable - Maximum Performance for LAN Environments

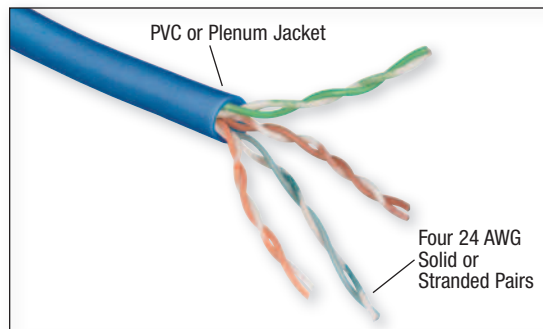

Maximize performance in your next cabling project with L-com's Category 6 twisted pair cabling. Designed for today's hi-speed gigabit networks. This series is EIA568 color-coded for compatibility with standard installations. Solid conductors terminate easily into standard IDC connectors and panels. Designed to exceed EIA568B standards, this cable will easily handle Gigabit Ethernet applications.

Category 6 Bulk Cable

Category 6 Stranded 4 Pair Cable




Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

FREQUENCY	NEAR END CROSSTALK (NEXT)	POWER SUM NEXT LOSS	EQUAL LEVEL FAR END CROSSTALK (EFLX)	POWER SUM EFLX	INSERTION LOSS	ATTENUATION	IMPEDANCE
4 MHz	65.3 db	63.3 db	55.8 db	52.8 db	3.8 db	3.8 db	100 Ohms ± 15 Ohms
10 MHz	59.3 db	57.3 db	47.8 db	44.8 db	6.0 db	6.0 db	100 Ohms ± 15 Ohms
20 MHz	54.8 db	52.8 db	41.8 db	38.8 db	8.5 db	8.6 db	100 Ohms ± 15 Ohms
100 MHz	44.3 db	42.3 db	27.8 db	24.8 db	19.8 db	20.2 db	100 Ohms ± 15 Ohms
250 MHz	38.3 db	36.3 db	19.8 db	16.8 db	32.8 db	33.8 db	100 Ohms ± 15 Ohms

This table refers to the electrical specifications of TPC2756, other Category 6 cabling is similar.

Item #	Description	Color	List Price
TC5050	Category 6, PVC, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Blue	219.00
TPC2756	Category 6, Plenum, 1,000ft (304.8m) Pull Box, 4 Pr. Solid	Blue	299.00

Category 6 Hi-Speed Shielded Network Bulk Cable

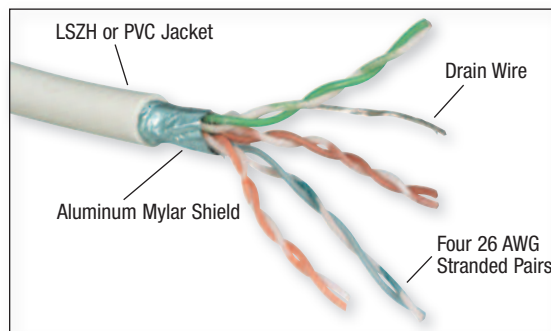

For Protection against EMI/RFI interference L-com's High-Performance Category 6 Shielded bulk cable is the perfect choice. Designed for today's hi-speed gigabit networks, this Category 6 cable from L-com is made to out-perform all others. With a 100% foil shield covering 4-Pair 26 AWG stranded conductors, your data is protected from interference. Designed to exceed EIA568B standards, this cable will easily handle Gigabit Ethernet applications.

Category 6 Bulk Cable

Category 6 Stranded 4 Pair Cable



Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

TFC2930	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Black	349.00
TFC2932	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Red	349.00
TFC2934	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Yellow	349.00
TFC2936	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Blue	349.00
TFC2939	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	White	349.00
TFC2940	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Beige	349.00
TFC6101	Category 6 Shielded, 4 Pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Gray	349.00
TFCLS6001	Category 6 Shielded, 4 Pr. Stranded LSZH 26 AWG, 1,000ft (304.8m) Reel	Gray	519.95

Solid vs Stranded Center Conductors



Online Video

L-com.com/Videos/A19

In network cabling there are two distinct types of cable that are offered. Each type of cable has advantages and disadvantages:

Stranded cable, used on workstation patch cords, is very flexible and easily bends but has a slightly higher attenuation factor.

Solid cable, used in horizontal runs, is stiff but offers better transmission performance.

Comparison Between Solid and Stranded Conductor Cable

	Solid Conductor Cable	Stranded Conductor Cable
Advantages	Lowest Cost Best Transmission Performance Terminates to IDC110 Blocks / Jacks	Very Flexible Easy Plug Termination
Disadvantages	Not Flexible Difficult to terminate to plug	Higher Cost Recommended Distance (<10m) Higher Attenuation Cannot connect to IDC 110 blocks

Solid Conductor Cable





Stranded Conductor Cable



Shielded F (UTP) 5e to 100 MHz Bulk Cable - Help Suppress Noise in Networks - 2 and 4 Pair

Screened (shielded) twisted pair is ideal for use in environments where EMI/RFI is a concern. A foil wrap with a drain wire protects signals from external noise. Available in stranded 26 AWG conductor with PVC and Low Smoke Zero Halogen jackets. Double shielded (foil + braid) 24 AWG solid is now available for use where extra noise protection is required. Plenum version is 24 AWG solid conductor. Sold in 1000' (304.8m) spools.

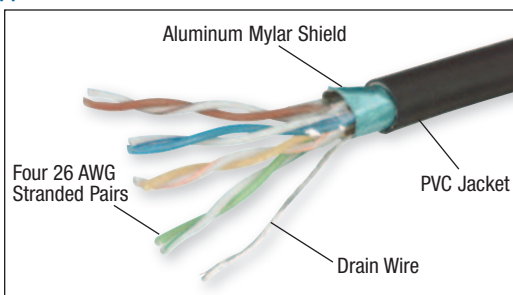

FREQUENCY	NEAR END CROSS TALK (NEXT)	ATTENUATION	CAPACITANCE	IMPEDANCE
4 MHz	53 db min.	13 db/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
10 MHz	47 db min.	20 db/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
20 MHz	42 db min.	28 db/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
100 MHz	32 db min.	67 db/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms

This table refers to the electrical specifications of TFC2648, other Screened Category 5e cabling is similar. TFC2002, TFC2004, TFC2006, TFDL2004, TFC2004 and TFC2004 cables are 26 AWG.

Item #	Description	Color	List Price
Category 5e PVC Bulk Cable with Foil Shield			
TFC2002	Category 5e Shielded, 2-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Beige	289.00
TFC2004	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Lt. Gray	249.00
TFC2006	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Red	249.00
TFC2900	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Black	249.00
TFC2901	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Brown	249.00
TFC2903	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Orange	249.00
TFC2904	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Yellow	249.00
TFC2905	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Green	249.00
TFC2906	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Blue	249.00
TFC2907	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Violet	249.00
TFC2908	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	Gray	249.00
TFC2909	Category 5e Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (304.8m) Reel	White	249.00

Category 5e Plenum Bulk Cable with Foil Shield

TFPC2648	Category 5e, 4-pr. Solid Plenum, 1,000ft (304.8m) Reel	Blue	399.00
----------	--	------	--------

Category 5e PVC Bulk Cable with Foil + Braid Shielding

TFSC2004	Category 5e Shielded, 4-pr. Solid PVC 24 AWG, 1,000ft (304.8m) Reel	Ivory	349.00
----------	---	-------	--------

Category 5e Low Smoke Zero Halogen Bulk Cable with Foil Shield

TFCLS2004	Category 5e Shielded, 4-pr. Stranded LSZH, 1,000ft (304.8m) Reel	Black	479.00
-----------	--	-------	--------

Category 5e Low Smoke Zero Halogen Bulk Cable with Foil + Braid Shielding

TFDL2004	Category 5e Shielded, 4-pr. Stranded LSZH 26 AWG, 1,000ft (304.8m) Reel	Lt. Gray	499.00
TFDL2104	Category 5e Shielded, 4-pr. Solid LSZH 24 AWG, 1,000ft (304.8m) Reel	Lt. Gray	399.00

Category 5e PUR Double Shielded Industrial Ethernet Bulk Cable

TFCPUR5730	Category 5e, Double Shielded, PUR 4-pr. Stranded, 26 AWG, 1,000ft (305m) Reel	Black	949.00
------------	---	-------	--------



Category 5e Shielded Continuous Hi-Flex Oil Resistant Industrial Ethernet Bulk Cable

Designed for environments where ordinary cables fail, this exclusive ultra flexible Category 5e shielded bulk cable from L-com is built to take a beating. With a Halogen-Free PUR jacket, these Hi-Flex cables will not breakdown when exposed to oil based lubricants making it ideal for robotic control systems on the factory floor. TFCHF2004 is tested to 2.5 million flex cycles (12.5 X cable O.D. min. radius). TFCLS2005 is tested to 10 Million flex cycles (20 X cable O.D. min radius).




TFCHF2004	Category 5e Shielded, 4-pr. Stranded Hi-Flex, 26 AWG, 1,000ft (304.8m) Reel	Teal	2999.00
TFCLS2005	Category 5e Shielded, 4-pr. Stranded Extreme Hi-Flex, 26 AWG, 1,000ft (304.8m) Reel	Teal	1449.00
TFCLS5075	Category 5e Shielded, 4-pr. Stranded Extreme Hi-Flex, 26 AWG, 1,000ft (304.8m) Reel	Black	1449.00

Category 6a High Performance Shielded Bulk Cable

For Protection against EMI/RFI interference L-com's High-Performance Category 6a foil shielded bulk cable is the perfect choice. Surpassing the Category 6 standard, this Category 6a cable is designed for 10 gigabit networks. With a 100% foil shield covering 4-Pair 26 AWG stranded conductors, your data is protected from interference. Designed to exceed EIA568B standards, this cable will easily handle 10 Gigabit Ethernet applications. Contact us today for all of your network cabling needs.

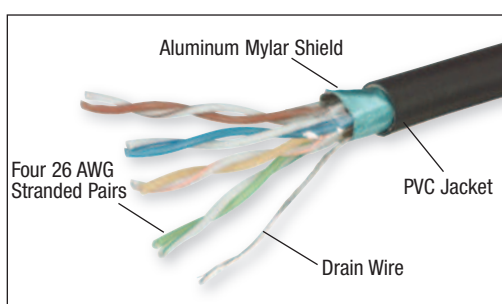

TFC2942	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Black	419.95
TFC2944	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Red	419.95
TFC2946	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Yellow	419.95
TFC2947	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Green	419.95
TFC2948	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Blue	419.95
TFC2950	Category 6a Shielded, 4-pr. Stranded PVC 26 AWG, 1,000ft (305m) Reel	Gray	419.95

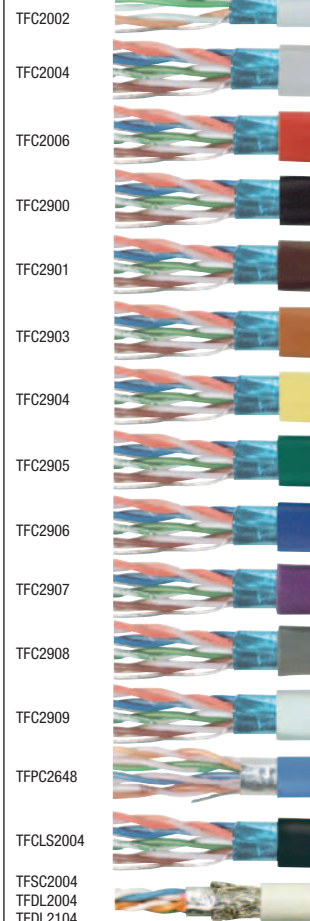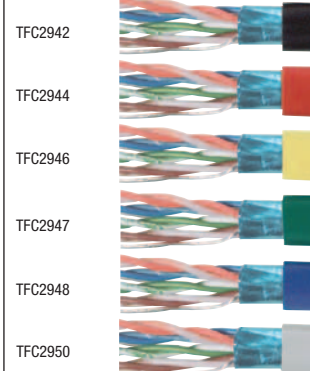Screened Category 5e**Industrial Category 5e****Screened Category 6a**

What is the difference in flammability ratings?



Online Video

L-com.com/Videos/A20

Category 5e




Outdoor Category 5e



Outdoor Category 6



Category 5e to 100 MHz - Hi-Speed UTP for LAN and Emerging Applications

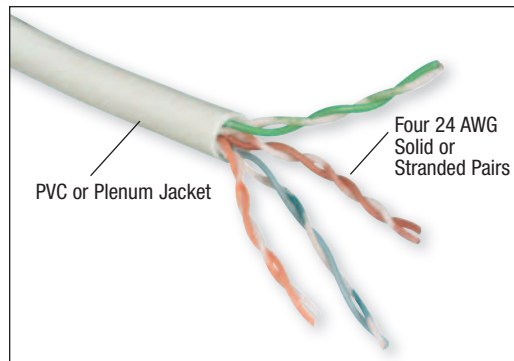

Unshielded twisted pair has become the cabling of choice in voice and data applications. Low cost and easy installation are driving popularity. As new higher speed applications emerge, higher performance from cabling systems is required. Category 5e performance requirements add margin over existing Category 5 specifications to support more robust, bi-directional signaling schemes over all four pairs. Applications supported include: 10Base-T, 100Base-T, 100Base-TX, 100Base-VG-Any-LAN, 155Mbps ATM and a number of emerging multimedia applications.

Category 5e Bulk Cable

Category 5e Stranded 4 Pair Cable



Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

FREQUENCY	NEAR END CROSSTALK (NEXT)	POWER SUM NEXT LOSS	EQUAL LEVEL FAR END CROSSTALK (EFLX)	POWER SUM EFLX	RETURN LOSS	ATTENUATION	IMPEDANCE
4 MHz	56.3 db	53.3 db	51.7 db	48.7 db	23 db	4.1 db	100 Ohms ± 15 Ohms
10 MHz	50.3 db	47.3 db	43.8 db	40.8 db	25 db	6.5 db	100 Ohms ± 15 Ohms
20 MHz	45.8 db	42.8 db	37.7 db	34.7 db	25 db	9.3 db	100 Ohms ± 15 Ohms
100 MHz	35.3 db	32.3 db	23.8 db	20.8 db	20.1 db	22 db	100 Ohms ± 15 Ohms

This table refers to the electrical specifications of TC2379, other Category 5e cabling is similar.

Item #	Description	Color	List Price
TC2379	Category 5e, PVC Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	Beige	89.00
TC2737	Category 5e, PVC Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	Gray	89.00
TC2380	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 2 Pr. Stranded	Beige	159.00
TC2382	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Beige	199.00
TC2581	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Yellow	199.00
TC2589	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Red	199.00
TC2590	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Green	199.00
TC2595	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Lt. Blue	199.00
TC2596	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Aqua	199.00
TC2599	Category 5e, PVC Bulk, 1,000ft (304.8m) Reel, 4 Pr. Stranded	Blue	199.00
TPC2347	Category 5e, Plenum Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	White	189.00
TPC2567	Category 5e, Plenum Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	Blue	189.00
TPC58142	Category 5e, Plenum Bulk, 1,000ft (304.8m) Reel, 25 Pr. Solid	Gray	3999.00

Category 5e and 6 Outdoor UV Resistant Gel-Filled Bulk Cable - Ethernet Grade Cable for Outdoor Usage

Protect Ethernet cable runs outside with L-com's outdoor Category 5e rated twisted pair cabling. The gel-filled jacket provides moisture protection when used in an outdoor environment. With the UV protected jacket, outdoor cable runs are protected from damage caused by sunlight exposure. The cable is EIA568 color-coded for compatibility with standard installations and features solid conductors for termination into standard IDC connectors.

FREQUENCY	NEAR END CROSS TALK (NEXT)	ATTENUATION	CAPACITANCE	IMPEDANCE
4 MHz	53 dB min.	4.1 dB/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
10 MHz	47 dB min.	6.5 dB/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
20 MHz	42 dB min.	9.3 dB/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms
100 MHz	32 dB min.	22 dB/330 ft max.	14 pF/ft Max	100 Ohms ± 15 Ohms

TOAC2004	Category 5e, Outdoor Aerial/Duct, 1,000ft (304.8m) Reel, 4 Pr. Solid	Black	259.00
TOBC2004	Category 5e, Outdoor Direct Burial, 1,000ft (304.8m) Reel, 4 Pr. Solid	Black	549.00
TOAC2005	Category 6, Outdoor Aerial/Duct, 1,000ft (304.8m) Reel, 4 Pr. Solid	Black	439.00
TOC35911	Category 6, Outdoor, 1,000ft (304.8m) Reel, 4 Pr. Solid	Black	289.00



What is the difference in flammability ratings?

Shown below is a comparison between NEC® National Electrical Code articles and the corresponding UL® Underwriters Laboratories test methods. Be sure to consult your local electrical inspector for guidance on current code requirements.

PLENUM	RISER	GENERAL PURPOSE	RESIDENTIAL
<ul style="list-style-type: none"> Highest flame resistance Suitable for use in areas designated as plenums UL-910 Steiner tunnel flame test 	<ul style="list-style-type: none"> Suitable for vertical installation between building floors NEC Communications Cable Code: CMR 	<ul style="list-style-type: none"> Used in broad applications NEC Communications Cable Code: CMG UL-1581 Vertical tray flame test 	<ul style="list-style-type: none"> Lowest flame resistance NEC Communications Cable Code: CMX UL-1581 VW-1 Vertical flame test

Category 3 to 16 MHz - Medium Speed UTP - 2, 3, 4, 12 and 25 Pair Solid Conductor


Category 3 twisted pair cabling is the perfect choice to control cost when low speed telephone or data is required. This PVC-jacketed cable is EIA568 color-coded for compatibility with standard installations. Category 3 cabling is perfect for telephone and low speed data applications. Solid conductors terminate easily into standard IDC connectors and panels. Available in PVC or Plenum rated jacket styles.

Category 3 Bulk Cable

EIA568



Twisted Pair Pinning: 1 & 2, 3 & 6, 4 & 5, 7 & 8

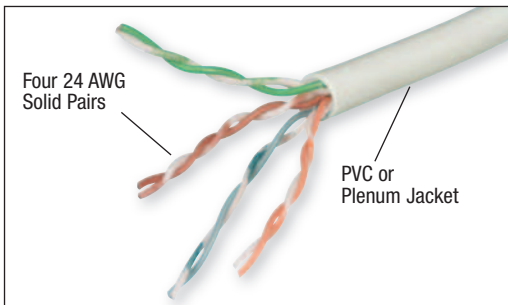Category 3 Solid
4 Pair CableFour 24 AWG
Solid PairsPVC or
Plenum Jacket

FREQUENCY	NEAR END CROSS TALK (NEXT)	ATTENUATION	CAPACITANCE	IMPEDANCE
1 MHz	41 db min.	2.6 db/330 ft max.	20 pF/ft Max	100 Ohms ± 15 Ohms
4 MHz	32 db min.	5.6 db/330 ft max.	20 pF/ft Max	100 Ohms ± 15 Ohms
10 MHz	26 db min.	9.7 db/330 ft max.	20 pF/ft Max	100 Ohms ± 15 Ohms
16 MHz	23 db min.	13.1 db/330 ft max.	20 pF/ft Max	100 Ohms ± 15 Ohms

This table refers to the electrical specifications of TC3559, other Category 3 cabling is similar.

Item #	Description	Color	List Price
TC3559	Category 3, PVC Bulk, 1,000ft (304.8m) Box, 2 Pr. Solid	Gray	59.95
TC3561	Category 3, PVC Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	Gray	99.95
TC3570	Category 3, PVC Bulk, 1,000ft (304.8m) Reel, 25 Pr. Solid	Gray	579.00
TPC4757	Category 3, Plenum Bulk, 1,000ft (304.8m) Box, 3 Pr. Solid	Green	119.95
TPC4758	Category 3, Plenum Bulk, 1,000ft (304.8m) Box, 4 Pr. Solid	Green	129.95

Flat Modular Cord - 26 AWG Stranded - 4, 6, 8 and 10 Conductors

Flat modular (POTS) cable is suitable for voice and low speed data applications. Flat oval design permits fast stripping and crimping of modular plugs. Cable construction features flexible PVC jacketing. Available in popular 4, 6, 8 and 10 conductor counts. UL listed. Sold in 100' (30.5m), 500' (152.4m) and 1000' (304.8m) spools.

TDB4-100	4 Conductor Flat Modular Cord, PVC Bulk, 100ft (30.5m) Coil	Gray	11.95
TDB6-100	6 Conductor Flat Modular Cord, PVC Bulk, 100ft (30.5m) Coil	Gray	17.95
TDB8-100	8 Conductor Flat Modular Cord, PVC Bulk, 100ft (30.5m) Coil	Gray	26.95
TDB4-500	4 Conductor Flat Modular Cord, PVC Bulk, 500ft (152.4m) Reel	Gray	41.95
TDB6-500	6 Conductor Flat Modular Cord, PVC Bulk, 500ft (152.4m) Reel	Gray	69.95
TDB8-500	8 Conductor Flat Modular Cord, PVC Bulk, 500ft (152.4m) Reel	Gray	89.95
TDB4-1000	4 Conductor Flat Modular Cord, PVC Bulk, 1,000ft (304.8m) Reel	Gray	79.95
TDB6-1000	6 Conductor Flat Modular Cord, PVC Bulk, 1,000ft (304.8m) Reel	Gray	121.95
TDB8-1000	8 Conductor Flat Modular Cord, PVC Bulk, 1,000ft (304.8m) Reel	Gray	169.95
TDB10-1000	10 Conductor Flat Modular Cord, PVC Bulk, 1,000ft (304.8m) Reel	Gray	199.95

What is the difference between stranded and solid cable?




Online Video

L-com.com/Videos/A19

Category 3

TC3559



TC3561



TC3570



TPC4757



TPC4758



Flat Modular Cord

TDB4-500



TDB6-500



TDB8-500



TDB10-1000



UTP and STP installation guidelines




The minimum recommended bend radius for UTP is typically 10 times the cable's OD (Outside Diameter).



DO NOT twist the cable




DO NOT overtighten wire ties



DO NOT bend cable greater than 90 degrees



DO NOT use a stapler for installations



DO NOT stretch or apply pull force greater than 25 lbs (11.4kg).



TDC350FF




TDC550MM




TDC50M88




TRDC500M



DGC50F



DGC50M



DGC50MF

Item #	Description	Wiring	1-9	10-24	25-99	100+
25-Pair Telco Cables - Dual Terminated and Breakout (Octopus) Versions						
L-com offers a variety of straight-thru and breakout 25 pair telco trunk cables for voice and data networks. Cables come in Category 3 and 5 grades and utilize PVC jackets. Plenum grade and other configurations available by custom request. Category 5 cables utilize 180° or 90° connector ends.						
TDC350FF-5	Cat3, Telco Cable, 90° Female/90° Female, 5.0ft (1.5m)	A	34.99	32.19	29.39	CALL
TDC350FF-10	Cat3, Telco Cable, 90° Female/90° Female, 10.0ft (3.0m)	A	39.99	36.79	33.59	CALL
TDC350FF-15	Cat3, Telco Cable, 90° Female/90° Female, 15.0ft (4.6m)	A	46.99	43.23	39.47	CALL
TDC350FF-25	Cat3, Telco Cable, 90° Female/90° Female, 25.0ft (7.6m)	A	59.89	55.10	50.31	CALL
TDC350FF-50	Cat3, Telco Cable, 90° Female/90° Female, 50.0ft (15.2m)	A	93.69	86.19	78.70	CALL
TDC350FF-100	Cat3, Telco Cable, 90° Female/90° Female, 100.0ft (30.5m)	A	156.89	144.34	131.79	CALL
TDC350MM-5	Cat3, Telco Cable, 90° Male/90° Male, 5.0ft (1.5m)	A	34.99	32.19	29.39	CALL
TDC350MM-10	Cat3, Telco Cable, 90° Male/90° Male, 10.0ft (3.0m)	A	39.99	36.79	33.59	CALL
TDC350MM-15	Cat3, Telco Cable, 90° Male/90° Male, 15.0ft (4.6m)	A	46.99	43.23	39.47	CALL
TDC350MM-25	Cat3, Telco Cable, 90° Male/90° Male, 25.0ft (7.6m)	A	59.89	55.10	50.31	CALL
TDC350MM-50	Cat3, Telco Cable, 90° Male/90° Male, 50.0ft (15.2m)	A	93.69	86.19	78.70	CALL
TDC350MM-100	Cat3, Telco Cable, 90° Male/90° Male, 100.0ft (30.5m)	A	156.89	144.34	131.79	CALL
TDC550MM-5	Cat5, Telco Cable, 180° Male/180° Male, 5.0ft (1.5m)	A	96.69	90.89	85.09	CALL
TDC550MM-10	Cat5, Telco Cable, 180° Male/180° Male, 10.0ft (3.0m)	A	107.49	101.04	94.59	CALL
TDC550MM-15	Cat5, Telco Cable, 180° Male/180° Male, 15.0ft (4.6m)	A	118.29	111.19	104.10	CALL
TDC550MM-25	Cat5, Telco Cable, 180° Male/180° Male, 25.0ft (7.6m)	A	153.49	144.28	135.07	CALL
TDC550MM-50	Cat5, Telco Cable, 180° Male/180° Male, 50.0ft (15.2m)	A	229.39	215.63	201.86	CALL
TDC550MM-100	Cat5, Telco Cable, 180° Male/180° Male, 100.0ft (30.5m)	A	378.89	356.16	333.42	CALL

Category 3, Octopus Cables - Convert 25-Pair Telco to a Variety of Modular Cable Breakouts

This is a useful cable arrangement that allows conversion from a 90° 50 pin Telco connector to a variety of modular cables terminated with male RJ plugs having 2, 4, 6 or 8 active pins. All cables are three feet (0.9m) long. Wired per USOC Standard. Category 3 rated.

TDC50M62	Cat3 Telco Breakout Cable, Male Telco/25 (6x2), 3.0ft (0.9m)	B	97.69	91.83	85.97	CALL
TDC50M64	Cat3 Telco Breakout Cable, Male Telco/12 (6x4), 3.0ft (0.9m)	C	70.69	66.45	62.21	CALL
TDC50M66	Cat3 Telco Breakout Cable, Male Telco/8 (6x6), 3.0ft (0.9m)	D	65.29	61.37	57.46	CALL
TDC50M88	Cat3 Telco Breakout Cable, Male Telco/6 (8x8), 3.0ft (0.9m)	E	65.29	61.37	57.46	CALL
TDC50F62	Cat3 Telco Breakout Cable, Female Telco/25 (6x2), 3.0ft (0.9m)	B	97.69	91.83	85.97	CALL
TDC50F64	Cat3 Telco Breakout Cable, Female Telco/12 (6x4), 3.0ft (0.9m)	C	70.69	66.45	62.21	CALL
TDC50F66	Cat3 Telco Breakout Cable, Female Telco/8 (6x6), 3.0ft (0.9m)	D	65.29	61.37	57.46	CALL
TDC50F88	Cat3 Telco Breakout Cable, Female Telco/6 (8x8), 3.0ft (0.9m)	E	65.29	61.37	57.46	CALL

Category 5, Octopus Cables - Patch to Network Ethernet Equipment, etc.


Category 5 octopus cables break out one 180° telco connector to 12 RJ45 plugs wired for Ethernet 10Base-T.

TRDC500M-3S	Cat5 Breakout Cable, Male Telco/12 10Base-T (8x4), 3.0ft (0.9m)	F	62.75	58.98	55.22	CALL
TRDC500M-6S	Cat5 Breakout Cable, Male Telco/12 10Base-T (8x4), 6.0ft (1.8m)	F	66.60	62.60	58.61	CALL
TRDC500M-10S	Cat5 Breakout Cable, Male Telco/12 10Base-T (8x4), 10.0ft (3.0m)	F	71.70	67.40	63.10	CALL

50 Position Slim-Line Gender Changers - Mate with SCSI-1 and 50 Position Telco Connectors

DGC50F	50 Pin SCSI Gender Changer, Female/Female	13.29	12.23	11.16	CALL
DGC50M	50 Pin SCSI Gender Changer, Male/Male	13.29	12.23	11.16	CALL
DGC50MF	50 Pin SCSI Telco Socket Saver, Male/Female	13.29	12.23	11.16	CALL

Pinning Legend

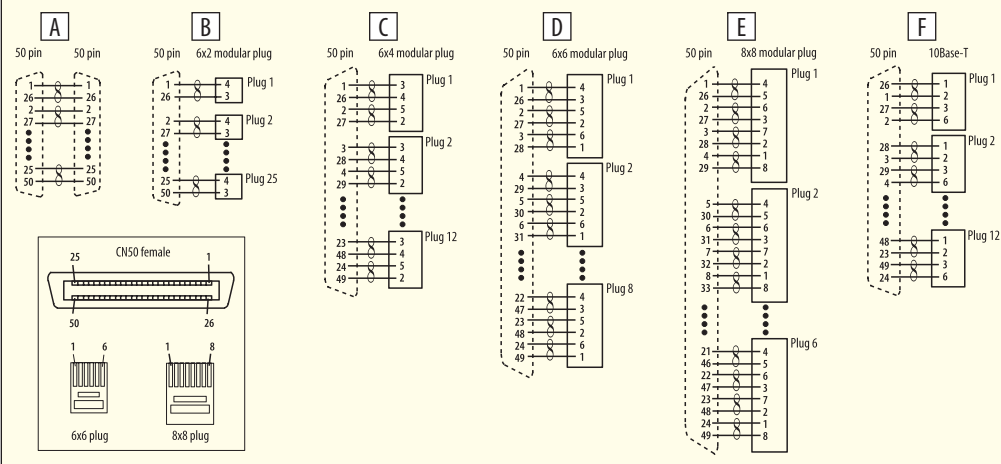

Item #	Description	Wiring	1-9	10-24	25-99	100+
Harmonica Style Cluster Bars - An Efficient Way to Distribute Your 25 Pair Lines						
Break out your 50 pin Telco terminated cabling by connecting to a harmonica style cluster bar. These units use one male or female 25 pair Telco connector as input and 6, 8 or 12 modular jacks as output. Two holes for screw mounting or 2-sided tape may be used. Connector has Hook and Loop hold-down straps to eliminate screw tightening. USOC and 10Base-T wiring only.						
EC412M	Telco Harmonica 12 RJ11 (6x4)/50 Pin Male	USOC	32.95	29.66	26.36	CALL
EC608M	Telco Harmonica 8 RJ12 (6x6)/50 Pin Male	USOC	31.95	28.75	25.56	CALL
EC806M	Telco Harmonica 6 RJ45 (8x8)/50 Pin Male	USOC	34.95	31.46	27.96	CALL
EC412F	Telco Harmonica 12 RJ11 (6x4)/50 Pin Female	USOC	31.95	28.75	25.56	CALL
EC608F	Telco Harmonica 8 RJ12 (6x6)/50 Pin Female	USOC	31.95	28.75	25.56	CALL
EC806F	Telco Harmonica 6 RJ45 (8x8)/50 Pin Female	USOC	34.95	31.46	27.96	CALL
E412F10BASE-T	Telco Harmonica 12 RJ45 (8x4)/50 Pin Female	10Base-T	44.95	41.35	37.76	CALL

19" (48.3cm) x 1.75" (4.4cm) Modular Patch Panel - 2, 3, or 4 Harmonicas Mounted in Low Profile Panel

These exclusive 19" (48.3cm) x 1.75" (4.4cm) panels come loaded with 2, 3, or 4 harmonica cluster bars. Panels are steel construction for durability and have a shelf in back for cable mounting. Black, with White imprinting.

ECHL24-4M	1.75" (4.4cm) Panel with 2 EC412M	USOC	109.95	105.55	101.15	CALL
ECHL24-6M	1.75" (4.4cm) Panel with 3 EC608M	USOC	142.95	137.23	131.51	CALL
ECHL24-4F	1.75" (4.4cm) Panel with 2 EC412F	USOC	109.95	105.55	101.15	CALL
ECHL24-8F	1.75" (4.4cm) Panel with 4 EC806F	USOC	153.95	147.79	141.63	CALL
ECHL24-10BTF	1.75" (4.4cm) Panel with 2 EC412F 10Base-T	10Base-T	131.95	126.67	121.39	CALL

Harmonica Style Bridging Adapters - For RJ45 Modular Equipped Cables


Your choice of 6 or 12 port bridging adapters. The RJ45 (8x8) lines are all wired in parallel.

TDS1881S	6 Way Bridging Adapter, RJ45 (8x8)	29.50	27.14	24.78	CALL
TDS2167	12 Way Bridging Adapter, RJ45 (8x8)	41.95	40.69	39.43	CALL

19" (48.3cm) x 1.75" (4.4cm) Modular Bridging Panels - Equipped with 6 or 12 Way Bridging Adapters

ECHL1881	1.75" (4.4cm) Panel with 4-6 Way (8x8) Bridging Adapters	142.95	137.23	131.51	CALL
ECHL2167	1.75" (4.4cm) Panel with 2-12 Way (8x8) Bridging Adapters	120.95	116.11	111.27	CALL

Wiring Diagram for RJ45 Bridging Adapter

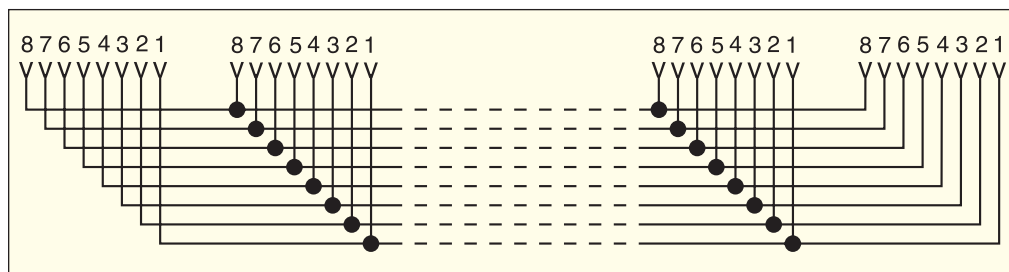


EC412M



EC806M



E412F10BASE-T




ECHL24-4



ECHL24-6



ECHL24-8



Panel bottom holds cables securely

Top View of ECHL24-4



TDS1881S




TDS2167

Item #	Description	List Price
--------	-------------	------------

Voice Grade Keystone Jack and Panel Kit Assortment - At Significant Savings

These kits include a pre-punched 19" (48.3cm) rack panel and appropriate number of keystone jacks to complete the assembly. Keystone jacks use insulation displacement contacts and each connector has 30 microinches (0.762µm) of gold on jack mating surfaces. Panel color is Black. Keystone jacks are also available separately on [pages 56-57](#).

PR175-1606	1.75" (4.4cm) x 19" (48.3cm) Panel Kit with 16 RJ12 (6x6) Keystone Jacks	64.95
PR35-3206	3.50" (48.3cm) x 19" (48.3cm) Panel Kit with 32 RJ12 (6x6) Keystone Jacks	86.95
PR175-1608	1.75" (4.4cm) x 19" (48.3cm) Panel Kit with 16 RJ45 (8x8) Keystone Jacks	126.95
PR35-3208	3.50" (48.3cm) x 19" (48.3cm) Panel Kit with 32 RJ45 (8x8) Keystone Jacks	164.95




PR35-3208




Kit includes keystone jacks



TRDC5EXT



TRDC6EXTS



TRDC5EXTF



TRDC6EXTSF



TRDC500M-6S

Item #	Description	Length	1-9	10-24	25-99	100+
--------	-------------	--------	-----	-------	-------	------

Category 5e and 6 Network Extension Cables

L-com's unique network extension cables offer the perfect solution for extending an Ethernet network cable to the outside of an enclosure or by making a hard to reach port more accessible. Available in either Category 5e or Category 6, shielded or un-shielded, these cables are up to the task for your high demand data tasks. These extensions feature either a panel mountable flange or an inline flange-free design.

- Category 5e or Category 6 Network Extension Cables
- Available either with or without a panel mountable flange
- Choose either un-shielded (UTP) or Shielded (FTP)
- Feature L-com's unique snag-less molded plugs
- Standard lengths up to 25ft (7.6m) or call for custom options

Category 5e Non-Shielded Non-Flanged Extension Cables

TRDC5EXT-3	Category 5e RJ45 Extension Cable	3.0ft (0.9m)	13.95	12.83	11.72	CALL
TRDC5EXT-5	Category 5e RJ45 Extension Cable	5.0ft (1.5m)	14.85	13.66	12.47	CALL
TRDC5EXT-7	Category 5e RJ45 Extension Cable	7.0ft (2.1m)	16.90	15.55	14.20	CALL
TRDC5EXT-10	Category 5e RJ45 Extension Cable	10.0ft (3.0m)	17.20	15.82	14.45	CALL
TRDC5EXT-15	Category 5e RJ45 Extension Cable	15.0ft (4.6m)	19.45	17.89	16.34	CALL
TRDC5EXT-25	Category 5e RJ45 Extension Cable	25.0ft (7.6m)	23.60	21.71	19.82	CALL

Category 5e Shielded Non-Flanged Extension Cables

TRDC5EXTS-3	Category 5e RJ45 Shielded Extension Cable	3.0ft (0.9m)	16.65	15.32	13.99	CALL
TRDC5EXTS-5	Category 5e RJ45 Shielded Extension Cable	5.0ft (1.5m)	17.75	16.33	14.91	CALL
TRDC5EXTS-7	Category 5e RJ45 Shielded Extension Cable	7.0ft (2.1m)	20.00	18.40	16.80	CALL
TRDC5EXTS-10	Category 5e RJ45 Shielded Extension Cable	10.0ft (3.0m)	20.60	18.95	17.30	CALL
TRDC5EXTS-15	Category 5e RJ45 Shielded Extension Cable	15.0ft (4.6m)	23.30	21.44	19.57	CALL
TRDC5EXTS-25	Category 5e RJ45 Shielded Extension Cable	25.0ft (7.6m)	28.35	26.08	23.81	CALL

Category 6 Non-Shielded Non-Flanged Extension Cables

TRDC6EXT-3	Category 6 RJ45 Extension Cable	3.0ft (0.9m)	14.25	13.11	11.97	CALL
TRDC6EXT-5	Category 6 RJ45 Extension Cable	5.0ft (1.5m)	15.35	14.12	12.89	CALL
TRDC6EXT-7	Category 6 RJ45 Extension Cable	7.0ft (2.1m)	17.60	16.19	14.78	CALL
TRDC6EXT-10	Category 6 RJ45 Extension Cable	10.0ft (3.0m)	18.15	16.70	15.25	CALL
TRDC6EXT-15	Category 6 RJ45 Extension Cable	15.0ft (4.6m)	20.85	19.18	17.51	CALL
TRDC6EXT-25	Category 6 RJ45 Extension Cable	25.0ft (7.6m)	25.95	23.87	21.80	CALL

Category 6 Shielded Non-Flanged Extension Cables

TRDC6EXTS-3	Category 6 RJ45 Shielded Extension Cable	3.0ft (0.9m)	16.10	14.81	13.52	CALL
TRDC6EXTS-5	Category 6 RJ45 Shielded Extension Cable	5.0ft (1.5m)	17.40	16.01	14.62	CALL
TRDC6EXTS-7	Category 6 RJ45 Shielded Extension Cable	7.0ft (2.1m)	19.95	18.35	16.76	CALL
TRDC6EXTS-10	Category 6 RJ45 Shielded Extension Cable	10.0ft (3.0m)	20.85	19.18	17.51	CALL
TRDC6EXTS-15	Category 6 RJ45 Shielded Extension Cable	15.0ft (4.6m)	24.25	22.31	20.37	CALL
TRDC6EXTS-25	Category 6 RJ45 Shielded Extension Cable	25.0ft (7.6m)	30.50	28.06	25.62	CALL

Category 5e Non-Shielded Flanged Extension Cables

TRDC5EXTF-3	Category 5e RJ45 Extension Cable	3.0ft (0.9m)	15.30	14.08	12.85	CALL
TRDC5EXTF-5	Category 5e RJ45 Extension Cable	5.0ft (1.5m)	16.20	14.90	13.61	CALL
TRDC5EXTF-7	Category 5e RJ45 Extension Cable	7.0ft (2.1m)	18.30	16.84	15.37	CALL
TRDC5EXTF-10	Category 5e RJ45 Extension Cable	10.0ft (3.0m)	18.55	17.07	15.58	CALL
TRDC5EXTF-15	Category 5e RJ45 Extension Cable	15.0ft (4.6m)	20.80	19.14	17.47	CALL
TRDC5EXTF-25	Category 5e RJ45 Extension Cable	25.0ft (7.6m)	24.95	22.95	20.96	CALL

Category 5e Shielded Flanged Extension Cables

TRDC5EXTSF-3	Category 5e RJ45 Shielded Extension Cable	3.0ft (0.9m)	16.75	15.41	14.07	CALL
TRDC5EXTSF-5	Category 5e RJ45 Shielded Extension Cable	5.0ft (1.5m)	17.85	16.42	14.99	CALL
TRDC5EXTSF-7	Category 5e RJ45 Shielded Extension Cable	7.0ft (2.1m)	20.15	18.54	16.93	CALL
TRDC5EXTSF-10	Category 5e RJ45 Shielded Extension Cable	10.0ft (3.0m)	20.70	19.04	17.39	CALL
TRDC5EXTSF-15	Category 5e RJ45 Shielded Extension Cable	15.0ft (4.6m)	23.45	21.57	19.70	CALL
TRDC5EXTSF-25	Category 5e RJ45 Shielded Extension Cable	25.0ft (7.6m)	28.50	26.22	23.94	CALL

Category 6 Non-Shielded Flanged Extension Cables

TRDC6EXTF-3	Category 6 RJ45 Extension Cable	3.0ft (0.9m)	15.60	14.35	13.10	CALL
TRDC6EXTF-5	Category 6 RJ45 Extension Cable	5.0ft (1.5m)	16.70	15.36	14.03	CALL
TRDC6EXTF-7	Category 6 RJ45 Extension Cable	7.0ft (2.1m)	19.00	17.48	15.96	CALL
TRDC6EXTF-10	Category 6 RJ45 Extension Cable	10.0ft (3.0m)	19.50	17.94	16.38	CALL
TRDC6EXTF-15	Category 6 RJ45 Extension Cable	15.0ft (4.6m)	22.25	20.47	18.69	CALL
TRDC6EXTF-25	Category 6 RJ45 Extension Cable	25.0ft (7.6m)	27.30	25.12	22.93	CALL

Category 6 Shielded Flanged Extension Cables

TRDC6EXTSF-3	Category 6 RJ45 Shielded Extension Cable	3.0ft (0.9m)	17.15	15.78	14.41	CALL
TRDC6EXTSF-5	Category 6 RJ45 Shielded Extension Cable	5.0ft (1.5m)	18.50	17.02	15.54	CALL
TRDC6EXTSF-7	Category 6 RJ45 Shielded Extension Cable	7.0ft (2.1m)	21.05	19.37	17.68	CALL
TRDC6EXTSF-10	Category 6 RJ45 Shielded Extension Cable	10.0ft (3.0m)	21.95	20.19	18.44	CALL
TRDC6EXTSF-15	Category 6 RJ45 Shielded Extension Cable	15.0ft (4.6m)	25.30	23.28	21.25	CALL
TRDC6EXTSF-25	Category 6 RJ45 Shielded Extension Cable	25.0ft (7.6m)	31.65	29.12	26.59	CALL

Category 5 Octopus Cables - Patch to Network Ethernet Equipment, etc.

Breakout your 25-Pair Trunk lines to RJ45 style plugs for Ethernet. Available in a Category 5 rating, these cables simplify the process of connecting individual lines from or to a 25-pair Telco connection. One end features a standard RJ21 Telco connection and the other has twelve RJ45 style connectors. Custom lengths are available with modest minimums.





TRDC500M-3S	Cat5 Breakout Cable, Male Telco / 12 10Base-T (8x4)	3.0ft (0.9m)	62.75	58.98	55.22	CALL
TRDC500M-6S	Cat5 Breakout Cable, Male Telco / 12 10Base-T (8x4)	6.0ft (1.8m)	66.60	62.60	58.61	CALL
TRDC500M-10S	Cat5 Breakout Cable, Male Telco / 12 10Base-T (8x4)	10.0ft (3.0m)	71.70	67.40	63.10	CALL

Item #	Description	Wiring	1-9	10-24	25-99	100+
--------	-------------	--------	-----	-------	-------	------

Modular Y Adapters-Allow Line Splitting Flexibility in Today's DataCom Networks

Market demand for varied types of modular Y splitter cables has prompted this choice of six standard listings. The most popular types are stocked in one foot overall lengths. However, custom lengths are available. A dark, Gray molded box design style with all rounded edges is used as well as round U.T.P. Category 3 cable. All contact surfaces have 50 microinches (1.27µm) gold plating. **Note:** Custom variations solicited to include: choice of modular jacks, any length of cable, different modular or DIN or other style plugs on cable. Minimum quantity of 250 may apply for most custom quotes.


ECS203-1	Modular Y-Bridge, USOC-6/USOC-6	A	8.95	8.77	8.41	CALL
ECS204-1	Modular Y-Bridge, USOC-8/USOC-8	B	8.95	8.77	8.41	CALL
ECS205-1	Modular Y-Splitter, 10Base-T/10Base-T	C	8.95	8.77	8.41	CALL
ECS206-1	Modular Y-Splitter, 10Base-T/Token Ring	D	8.95	8.77	8.41	CALL
ECS207-1	Modular Y-Splitter, Token Ring/Token Ring	E	8.95	8.77	8.41	CALL
ECS208-1	Modular Y-Splitter, Token Ring/Token Ring	F	8.95	8.77	8.41	CALL

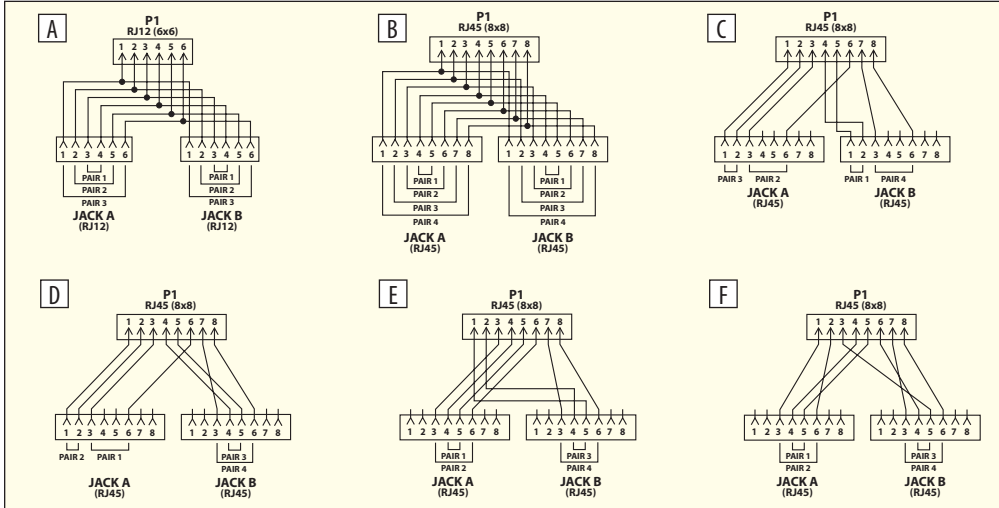

Shielded Modular 2-Way Splitters-Allow Multiple Uses of 4-Pair Cabling

This series is designed for use in environments where shielding protection is required. Features include: fully shielded PCB mounted jacks, RJ45 plugs with a 360 degree strain relief and a sturdy ABS housing. Three configurations in 12 inch (30.5cm) lengths are offered. The bridging adapter combines all like numbered pins allowing devices to share a single interface. Two splitter versions are available configured for 10Base-T and Token Ring applications. Custom configurations will be considered with modest minimums. Please contact our Sales group for assistance.


ECS801-1	USOC Splitter, 8x8 Plug/2 (8x4) Jacks	A	10.95	10.73	10.29	CALL
ECS802-1	TIA568 Splitter, 8x8 Plug/2 10Base-T Jacks	B	10.95	10.73	10.29	CALL
ECS803-1	USOC Bridge, 8x8 Plug/2 (8x8) Jacks	C	10.95	10.73	10.29	CALL

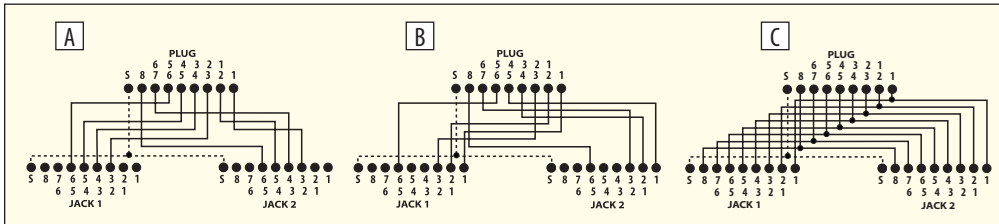

Modular 4-Way Splitters-Allow Multiple Uses of 4-Pair Cabling

This series allows users to take advantage of installed 4-pair to gain access to individual pairs or bridge multiple jacks. Four configurations in a 12 inch (30.5cm) overall length are offered. The bridging adapter combines all like numbered pins allowing devices to share a single interface. The breakout models allow access to each individual pair at the 8x8 plug through four 6x2 or 8x2 jacks. Custom configurations will be considered with modest minimums. Please contact our Sales group for assistance.


ECS401-12	TIA568B Splitter, 8x8 Plug/4 (6x2) Jacks	A	10.95	10.73	10.29	CALL
ECS403-12	TIA568 Splitter, 8x8 Plug/4 (8x2) Jacks	B	10.95	10.73	10.29	CALL
ECS404-12	USOC Bridge, 8x8 Plug/4 (8x8) Jacks	C	10.95	10.73	10.29	CALL

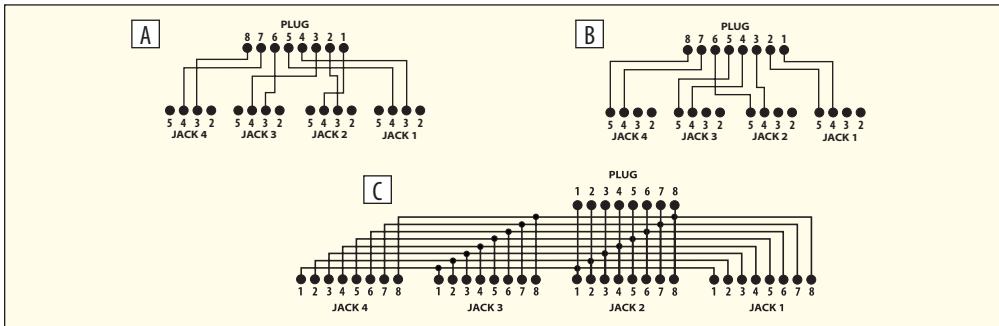

Premium Grade


50 microinches GOLD with thumbscrews

REC098M

**Deluxe Grade**

30 microinches GOLD with thumbscrews


RA098M



RA256M



RA258F

**Deluxe Grade**

30 microinches GOLD w/ slotted screws

RBA098M




RBA256F


**Deluxe Grade Shielded**

30 microinches GOLD with thumbscrews

RS9EMI8M



RS25EMI8F



SHIELDED

RA2588FS



RA2588MS



TDT



TDTPRO

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Premium Modular Adapter Kits - Design Features Molded Knurled Hold Down Screws

The increased popularity of modular adapters prompted L-com to offer an off-the-shelf product that is a superior design featuring dark Gray 94V-0 plastic and 50 microinches (1.27µm) of gold plating on the pins. L-com offers quotations for custom programming to fit your needs and with legends and/or logo, either molded-in or on labels for your application. TDT series insertion/extraction tools are necessary for programming.

REC096F	Modular Adapter, DB9 Female/RJ12 (6x6) Jack	7.45	7.30	7.00	CALL
REC096M	Modular Adapter, DB9 Male/RJ12 (6x6) Jack	7.45	7.30	7.00	CALL
REC096FD	Modular Adapter, DB9 Female/MMJ (6x6) Jack	8.95	8.77	8.41	CALL
REC098F	Modular Adapter, DB9 Female/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL
REC098M	Modular Adapter, DB9 Male/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL
REC256M	Modular Adapter, DB25 Male/RJ12 (6x6) Jack	7.95	7.79	7.47	CALL
REC258F	Modular Adapter, DB25 Female/RJ45 (8x8) Jack	7.95	7.79	7.47	CALL
REC258M	Modular Adapter, DB25 Male/RJ45 (8x8) Jack	7.95	7.79	7.47	CALL

Modular Adapter Kits With Long Thumbscrews, Mate with DB9, DB15 and DB25

With one-piece housing, the modular adapter kits offer users a simple way to prepare custom wired adapters in the field. Featuring 30 microinches (0.762µm) gold plating on the contact pins and long metal thumbscrews. Each unit is programmable to your needs by simply inserting the prepared flying leads into the appropriate positions. TDT series insertion/extraction tools are necessary for programming.

RA096F	Modular Adapter, DB9 Female/RJ12 (6x6) Jack	6.95	6.81	6.53	CALL
RA096M	Modular Adapter, DB9 Male/RJ12 (6x6) Jack	6.95	6.81	6.53	CALL
RA098F	Modular Adapter, DB9 Female/RJ45 (8x8) Jack	6.95	6.81	6.53	CALL
RA098M	Modular Adapter, DB9 Male/RJ45 (8x8) Jack	6.95	6.81	6.53	CALL
RA158M	Modular Adapter, DB15 Male/RJ45 (8x8) Jack	6.95	6.81	6.53	CALL
RA256M	Modular Adapter, DB25 Male/RJ12 (6x6) Jack	7.45	7.30	7.00	CALL
RA258F	Modular Adapter, DB25 Female/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL
RA258M	Modular Adapter, DB25 Male/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL
RA2510F	Modular Adapter, DB25 Female/10 Pin Modular Jack	7.45	7.30	7.00	CALL
RA2510M	Modular Adapter, DB25 Male/10 Pin Modular Jack	7.45	7.30	7.00	CALL
RA2588F	Modular Adapter, DB25 Female/Dual RJ45 Modular Jack	11.95	11.71	11.23	CALL
RA2588M	Modular Adapter, DB25 Male/Dual RJ45 Modular Jack	11.95	11.71	11.23	CALL

Modular Adapter Kits -With Slotted Screws, Mate with DB9 and DB25

This series is identical to the RA Series except for the fact that the thumbscrew is replaced with a shorter screw head requiring a screwdriver for fastening to the system. A full range is provided which includes the DB9 and DB25 interface, available with RJ11/12 or RJ45 jacks. Modular contacts have 30 microinches (0.762µm) of gold plating. TDT series insertion/extraction tools are necessary for programming.

RBA096F	Modular Adapter, DB9 Female/RJ12 (6x6) Jack	6.45	6.32	6.06	CALL
RBA096M	Modular Adapter, DB9 Male/RJ12 (6x6) Jack	6.45	6.32	6.06	CALL
RBA098F	Modular Adapter, DB9 Female/RJ45 (8x8) Jack	6.45	6.32	6.06	CALL
RBA098M	Modular Adapter, DB9 Male/RJ45 (8x8) Jack	6.45	6.32	6.06	CALL
RBA256F	Modular Adapter, DB25 Female/RJ12 (6x6) Jack	7.45	7.30	7.00	CALL
RBA256M	Modular Adapter, DB25 Male/RJ12 (6x6) Jack	7.45	7.30	7.00	CALL
RBA258F	Modular Adapter, DB25 Female/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL
RBA258M	Modular Adapter, DB25 Male/RJ45 (8x8) Jack	7.45	7.30	7.00	CALL

Shielded Modular Adapter Kits - Feature Special Internal Design - EMI/RFI Shield

Similar in appearance and use to our standard RA Series but the similarity ends there. Built into the Gray plastic case assembly is an inner formed metal shield. This provides 100% EMI/RFI protection when used with the fully shielded modular plugs as listed on page 65. Modular contacts have 30 microinches (0.762µm) of gold plating. This is our best adapter; guaranteed to provide the best shielding effectiveness. Mandatory for systems utilizing fully shielded cabling and shielded modular plugs. Use TDT series tools to insert/remove contacts. 4-40 hardware.

RS9EMI8F	Shielded Modular Adapter, DB9 Female/RJ45 (8x8) Jack	10.45	10.14	9.82	CALL
RS9EMI8M	Shielded Modular Adapter, DB9 Male/RJ45 (8x8) Jack	10.45	10.14	9.82	CALL
RS25EMI8F	Shielded Modular Adapter, DB25 Female/RJ45 (8x8) Jack	10.45	10.14	9.82	CALL
RS25EMI8M	Shielded Modular Adapter, DB25 Male/RJ45 (8x8) Jack	10.45	10.14	9.82	CALL

Shielded Dual RJ45 Die-cast Adapters

L-com's exclusive die cast dual RJ45 to D-Sub 25 male or female adapters provide 100% shield coverage. These unique fully die cast adapter housings ship as a kit so that you can terminate as needed for your project. L-com can custom wire these for you with modest minimums. Contact us today with your project.

RA2588FS	Shielded Adapter, DB25 Female/Dual RJ45 (8x8) Jack	27.95	27.11	26.27	CALL
RA2588MS	Shielded Adapter, DB25 Male/Dual RJ45 (8x8) Jack	27.95	27.11	26.27	CALL

Insertion and Removal Tools For Crimp & Poke Type Contacts - Professional and Economy Versions


Two insertion/extraction tools are available for inserting contacts into D-Subs. Professional model is made for multiple insertions and is built on a larger, more ergonomic tool body. The economy version is also available when limited insertions are necessary.

TDT	Economy Contact Insertion/Extraction Tool	2.95	2.89	2.83	CALL
TDTPRO	Pro Contact Insertion/Extraction Tool	24.95	24.45	23.95	CALL

HANDSET 4x4	RJ11 6x4	RJ12 6x6	MMJ OFFSET 6x6	RJ45 8x8	RJ45 KEYED 8x8	10 POSITION 10x10

Modular Jack Configuration**Jack**
(Female Gender)

Item #	Description	Wiring	1-9	10-24	25-99	100+
Modular TEE Adapters - The Most Practical Way to Tap Into Your Wiring Networks						
All units have either 2, 3 or 4 RJ jacks mating to a male or female. Useful in daisy chain wiring, parallel phones or answering machines. It also is very useful in test environments where access to specific pins is required.						
EC503-4	Modular TEE Adapter (6x4)M / (6x4)F / (6x4)F	A	4.45	4.09	3.74	CALL
EC503-6E	Modular TEE Adapter (6x6)M / (6x6)F / (6x6)F	B	4.45	4.09	3.74	CALL
EC503-8	Modular TEE Adapter (8x8)M / (8x8)KF / (8x8)KF	C	5.45	5.01	4.58	CALL
EC503-448	Modular TEE Splitter (8x8)M / (8x4)KF / (8x4)KF	D	5.45	5.01	4.58	CALL

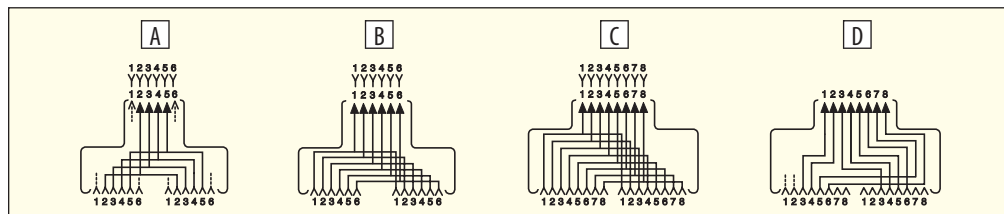

Modular TEE Splitter - Allows Dual Telco Line to Separate into Two RJ11 Jacks

EC503-1703	Modular TEE Splitter (6x4)M / (6x2)F / (6x2)F	E	5.45	5.01	4.58	CALL
------------	---	---	------	------	------	------

Modular Splitter Adapter - Allows Three RJ11 / 12 Circuits to be Parallel Connected

EC503-2134	Modular 1 to 3 Adapter (6x4)M / 3 (6x4)F	F	5.45	5.01	4.58	CALL
------------	--	---	------	------	------	------

Modular TEE Junction - Three RJ11 / 12 or RJ45 Receptacles Accept Three Plugs

TDS1039-4C	Modular TEE Junction (6x4)F / (6x4)F / (6x4)F	A	4.45	4.32	4.18	CALL
TDS1039-6C	Modular TEE Junction (6x6)F / (6x6)F / (6x6)F	B	5.25	5.09	4.93	CALL
TDS1039-8C	Modular TEE Junction (8x8)F / (8x8)F / (8x8)F	C	5.45	5.29	5.12	CALL

Socket Saver Adapters - Extend the Life of Frequently Used Modular Jacks

Avoid costly repairs trying to replace modular jacks. Particularly useful with cable testers where jacks are in constant use. A small price to pay to assure maximum performance for the life of your equipment. Also available is the EC535D-10X 10Base-T crossover adapter. Attach this in series with any 10Base-T compatible patch cord and the 1-2 pair crosses to the 3-6 pair. This wiring is often necessary for stacking Ethernet hubs.

EC535AD	Modular Conversion Adapter (6x6)M / (8x6)KF	G	4.15	3.82	3.49	CALL
EC535D	Modular Socket Saver (8x8)M / (8x8)KF	J	4.15	3.82	3.49	CALL
EC535D-10X	Modular 10Base-T Crossover Adapter (8x4)M / (8x4)KF	K	4.15	3.82	3.49	CALL

Modular Couplers - Allow Mating of Cables Having Same Modular Termination

We offer a choice of wiring types, straight-thru for use in low speed data communication and crossed wiring for voice applications. This series has gold plated contact surfaces.

TDG1026-4R	Modular Coupler, RJ11 (6x4), Cross Wired	2.45	2.25	2.06	CALL
TDG1026-6R	Modular Coupler, RJ12 (6x6), Cross Wired	2.55	2.35	2.14	CALL
TDG1026-8R	Modular Coupler, RJ45 (8x8), Cross Wired	3.25	2.99	2.73	CALL
TDG1026-6C	Modular Coupler, RJ12 (6x6), Straight Wired	2.55	2.35	2.14	CALL
TDG1026-8C	Modular Coupler, RJ45 (8x8), Straight Wired	3.25	2.99	2.73	CALL

Reverse Cable Adapter - A Handy Device To Have To Reverse Polarity (Cross Wiring)

TDC48R	Reverse Cable Adapter, RJ11 (6x4), Male / Female, 10" (25.4cm)	2.99	2.69	2.39	CALL
--------	--	------	------	------	------

Note: Longer lengths and modular connector types available on special orders

Telephone and Data 7 Ft Extension Cords - With Male and Female Modular Connectors



TAC535-4-7	7 ft Modular Extension Cord, Straight Wired, RJ11 (6x4)	5.49	5.05	4.61	CALL
TAC535-6-7	7 ft Modular Extension Cord, Straight Wired, RJ12 (6x6)	6.49	5.97	5.45	CALL
TAC535-8-7	7 ft Modular Extension Cord, Straight Wired, RJ45K (8x8), Keyed	7.49	6.89	6.29	CALL

Note: 8x8 jacks are keyed. This series also available as Cross Wired. Custom wiring schemes considered.

Modular Insert Adapters

These adapters provide a simple way to allow smaller modular plugs to fit securely into a larger jack. Two types are available: an RJ11 / 12 plug into an RJ45 jack or an RJ22 style handset plug into an RJ11 / 12 size jack.

EC4X4A	Modular Insert Adapter, RJ22 Handset Plug into an RJ11 / 12 Jack, Pkg / 10	3.95	3.63	3.32	CALL
EC8X8A	Modular Insert Adapter, RJ11 / 12 Plug into an RJ45 Jack, Pkg / 10	3.95	3.63	3.32	CALL

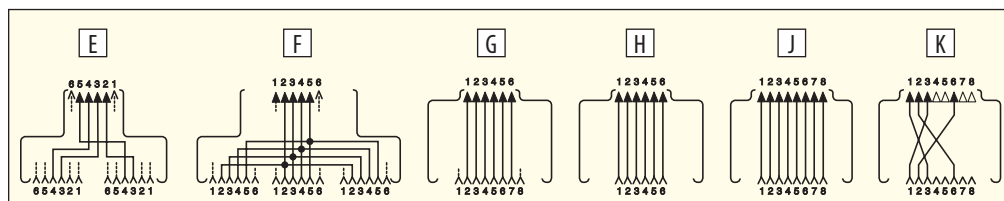


EC503 Typical

EC503-8




EC503-2134

TDS1039-6C




EC535AD Front View

EC535AD Rear View




TDG1026-8C


TDG1026-8CK




TDC48R



TAC535-4-7 (Non-keyed)



TAC535-8-7 (Keyed)



EC4X4A Pkg / 10

EC8X8A Pkg / 10



Data Cabling Tutorial

What is D-Subminiature?

D-Subminiature products are connection products utilizing various D-Subminiature style interface types to transmit data signals.

How is D-Subminiature used?

D-Subminiature products are used to connect a data generating device such as a CPU (Central Processing Unit) to a data producing device such as a printer.

Where is D-Subminiature used?

D-Subminiature products are used in numerous data transmission applications found in office, industrial, home or testing environments.




Poorly shielded cables can cause systems to fail EMI Certification

L-com's manufacturing process includes 360 degree shielding under the mold to insure full shielding from the bulk cable shield to the connector shell. Some competitors shortcut this process by just tack soldering the cable drain wire to the connector shell. In many applications this shortcut results in EMI leakage causing systems to fail testing.


Economy Series

360° Foil Shield




Deluxe Series

360° Copper Shield

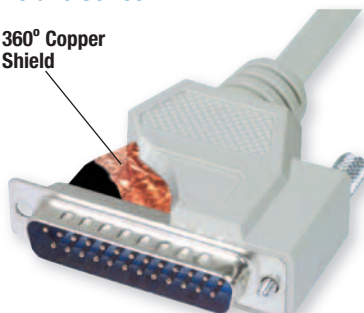


Premium Series

Terminal Shield
Custom steel box
provides 100%
shielding

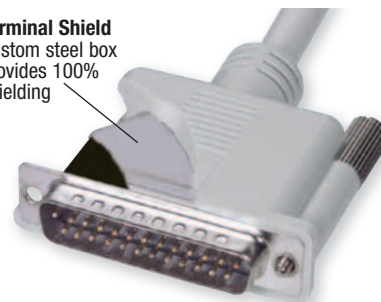

What is the difference between assembled and molded cable assemblies?

The difference between an assembled and molded cable assembly is in the construction of the backshell. An assembled backshell can be plastic (not shielded) or metal (shielded) and can be disassembled by removing hardware. On a molded cable assembly, the backshell is typically molded PVC that cannot be disassembled.

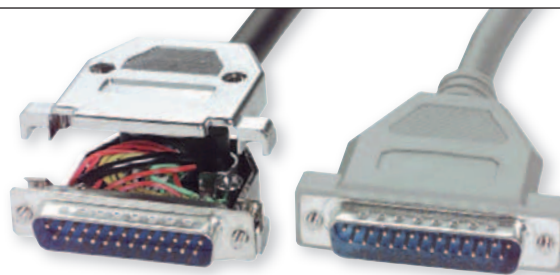

ASSEMBLED

MOLDED


What is the difference between standard and High-Density D-Sub configurations?

The industry uses 5 different shell sizes; each shell size can have 2 different configurations of pins. Standard configurations are listed on top and High-Density are listed below.



Online Video

L-com.com/Videos/A13

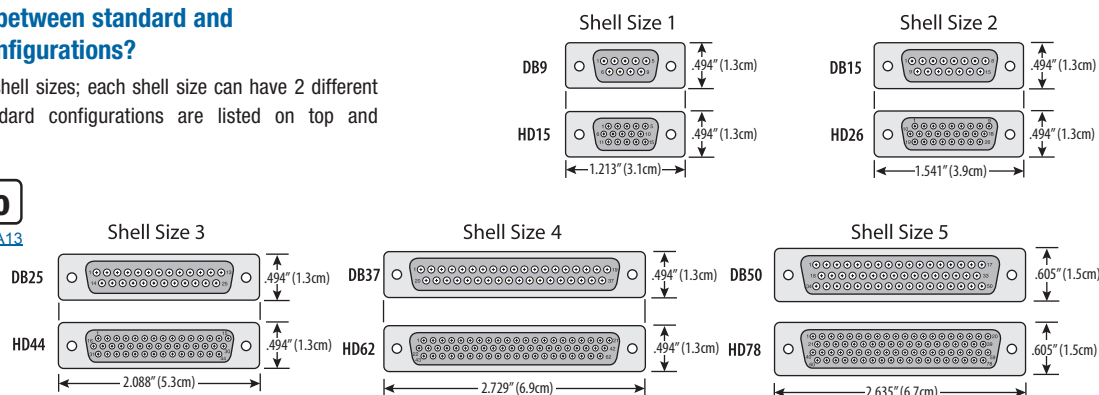

Data Cabling Tutorial



Selecting the right D-Sub Cable Assembly for your application.

L-com takes pride in having the largest variety of D-Sub cables in the industry. The following selection guide is intended to assist you in selecting the right cable for your particular need.

No more D-Sub connector gender confusion!



Online Video

L-com.com/Videos/A14

Cable Series	Available Sizes	Available Connector Combinations	Color	Cable Shielding	Wire AWG	Distinguishing Characteristics	Photo
CSM page 82	DB9, DB15, DB25, DB37	Male-Male, Male-Female	Gray	Foil / Mylar	26	Least expensive option Uses smaller, slotted screws instead of thumbscrews	
CSMN pages 83, 84	DB9, DB15, DB25, DB37, DB50	Male-Male, Male-Female, Female-Female	Light Gray	Foil / Mylar *	26 *	Most similar to industry standard cables Note: Right Angle and 45 Degree Angle types available, see pages 88, 89	
CSMNB page 87	DB9, DB15, DB25	Male-Male, Male-Female	Black	Foil / Mylar	26	Black color for color matching black computer peripherals	
CS2N page 85	DB9, HDB15, DB25, DB37, DB15	Male-Male, Male-Female	Light Gray	Foil / Mylar + Braid	26	Extra cable shielding and steel internal enclosure provides maximum protection from EMI / RFI corruption	
CS2NB page 86	DB9, HDB15, DB25, DB15	Male-Male, Male-Female	Black	Foil / Mylar + Braid	26	Extra cable shielding and steel internal enclosure provides maximum protection from EMI / RFI corruption	
CRMN page 91	DB9, DB15, DB25, DB37	Male-Male, Male-Female, Female-Female	Light Gray	Foil / Mylar	26	Reversible hardware feature allows cables to be directly panel mounted without the use of an adapter or any other component	
CSMUZ page 87	DB9, DB15, DB25	Male-Male, Male-Female	Black	Foil / Mylar + Braid	24	Low Smoke Zero Halogen (LSZH) jacket and backshell material significantly reduce the amount of toxic and corrosive gases emitted during combustion. Extra cable shielding and steel internal enclosure provides maximum protection from EMI / RFI corruption	
CSNULL page 86	DB9, DB25, DB25-DB9	Male-Female, Female-Female	Light Gray	Foil / Mylar	26	Data lines wired specifically to allow devices to communicate without the use of modems or other peripherals	
CMZ page 95	DB25 Male-DB9 Female	Male-Female	Light Gray	Foil / Mylar	26	Wired specifically to connect an external modem (DB25) to a PC serial port (DB9)	
CHD page 92	HDB15, HDB26, HDB44, HDB62, HDB78	Male-Male, Male-Female	Light Gray	See below**	See below**	High density D-Sub connectors utilize more contacts than standard D-Sub connectors even though they use the same size connector shells	
CSMT page 90	DB9, DB15, DB25	Male-Male, Male-Female	Silver / Metal	Foil / Mylar + Braid	26	Stainless steel crush resistant jacket over our premium D-Sub braid & foil shielded cable provides protection in applications where standard cables would be damaged due to excessive force.	
CSPL page 90	DB9, DB15, DB25	Male-Male, Male-Female	Black	Foil / Mylar + Braid	26	PVC plastic crush resistant jacket over our premium D-Sub braid & foil shielded cables provides protection in applications where standard cables would be damaged due to excessive force.	
CPMS page 84	DB9, DB15, DB25	Male-Male, Male-Female	Dark Gray	Foil / Mylar + Braid	20	20 AWG conductors allow for maximum current throughput. Extra cable shielding provides maximum protection from EMI / RFI. Reversible hardware feature allows cables to be panel mounted without the use of an adapter or any other component.	

* Exception - CSMN50 is double shielded (foil / mylar + braid) with 28 AWG conductors

** CHD15 & CHD26 are foil / mylar shielded with 26 AWG conductors

CHD44 is double shielded (foil / mylar + braid) with 24 AWG conductors

CHD62 & CHD78 are double shielded (foil / mylar + braid) with 28 AWG conductors

**Standard or Hi-Density
D-Sub configurations**



Online Video

L-com.com/Videos/A13




TS-CSM

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Economy D-Sub Cable Assemblies - Fully Populated with 4-40 Hardware

The CSM Series of D-Sub cable assemblies offer solid performance at economical prices. All assemblies utilize 26 AWG stranded conductors with foil shielding for flexibility and performance. Backshells are fully molded for reliability in environments where flexing is an issue. Mating hardware is 4-40 machine screws. Hex nuts on female connectors are removable to expose 4-40 machine screws. Color: Gray.

- More lengths available. Go to L-com.com

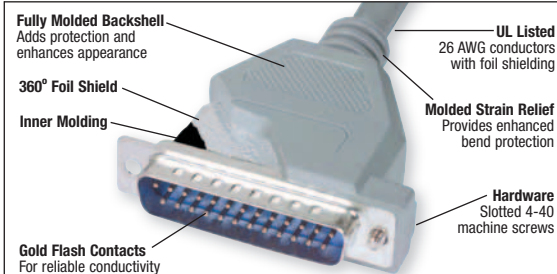

Economy 9 Pin D-Sub Molded Cables - Common for Serial Connections, Shielded and Fully Populated

CSM9MM-1	Economy Molded Cable, DB9 Male/Male, 1.0ft (0.3m)	6.15	5.66	5.17	CALL
CSM9MM-2.5	Economy Molded Cable, DB9 Male/Male, 2.5ft (0.8m)	6.75	6.21	5.67	CALL
CSM9MM-5	Economy Molded Cable, DB9 Male/Male, 5.0ft (1.5m)	7.75	7.13	6.51	CALL
CSM9MM-10	Economy Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	9.75	8.97	8.19	CALL
CSM9MM-25	Economy Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	15.75	14.49	13.23	CALL
CSM9MF-1	Economy Molded Cable, DB9 Male/Female, 1.0ft (0.3m)	6.15	5.66	5.17	CALL
CSM9MF-2.5	Economy Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	6.75	6.21	5.67	CALL
CSM9MF-5	Economy Molded Cable, DB9 Male/Female, 5.0ft (1.5m)	7.75	7.13	6.51	CALL
CSM9MF-10	Economy Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	9.75	8.97	8.19	CALL
CSM9MF-15	Economy Molded Cable, DB9 Male/Female, 15.0ft (4.6m)	11.75	10.81	9.87	CALL
CSM9MF-25	Economy Molded Cable, DB9 Male/Female, 25.0ft (7.6m)	15.75	14.49	13.23	CALL
CSM9MF-50	Economy Molded Cable, DB9 Male/Female, 50.0ft (15.2m)	25.75	23.69	21.63	CALL

Economy 15 Pin D-Sub Molded Cables - For Various Applications, Shielded and Fully Populated

CSM15MM-1	Economy Molded Cable, DB15 Male/Male, 1.0ft (0.3m)	7.25	6.81	6.38	CALL
CSM15MM-2.5	Economy Molded Cable, DB15 Male/Male, 2.5ft (0.8m)	8.00	7.52	7.04	CALL
CSM15MM-5	Economy Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	9.25	8.70	8.14	CALL
CSM15MM-10	Economy Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	11.75	11.04	10.34	CALL
CSM15MM-25	Economy Molded Cable, DB15 Male/Male, 25.0ft (7.6m)	19.25	18.09	16.94	CALL
CSM15MF-1	Economy Molded Cable, DB15 Male/Female, 1.0ft (0.3m)	7.25	6.81	6.38	CALL
CSM15MF-2.5	Economy Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	8.00	7.52	7.04	CALL
CSM15MF-5	Economy Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	9.25	8.70	8.14	CALL
CSM15MF-10	Economy Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	11.75	11.04	10.34	CALL
CSM15MF-15	Economy Molded Cable, DB15 Male/Female, 15.0ft (4.6m)	14.25	13.39	12.54	CALL
CSM15MF-50	Economy Molded Cable, DB15 Male/Female, 50.0ft (15.2m)	31.75	29.84	27.94	CALL

Economy 25 Pin D-Sub Molded Cables - Shielded and Fully Populated

CSM25MM-1	Economy Molded Cable, DB25 Male/Male, 1.0ft (0.3m)	7.60	7.14	6.69	CALL
CSM25MM-2.5	Economy Molded Cable, DB25 Male/Male, 2.5ft (0.8m)	8.50	7.99	7.48	CALL
CSM25MM-5	Economy Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	10.00	9.40	8.80	CALL
CSM25MM-10	Economy Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	14.00	13.16	12.32	CALL
CSM25MM-25	Economy Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	25.00	23.50	22.00	CALL
CSM25MF-1	Economy Molded Cable, DB25 Male/Female, 1.0ft (0.3m)	7.60	7.14	6.69	CALL
CSM25MF-2.5	Economy Molded Cable, DB25 Male/Female, 2.5ft (0.8m)	8.50	7.99	7.48	CALL
CSM25MF-5	Economy Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	10.00	9.40	8.80	CALL
CSM25MF-10	Economy Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	14.00	13.16	12.32	CALL
CSM25MF-25	Economy Molded Cable, DB25 Male/Female, 25.0ft (7.6m)	25.00	23.50	22.00	CALL
CSM25MF-50	Economy Molded Cable, DB25 Male/Female, 50.0ft (15.2m)	40.00	37.60	35.20	CALL

Economy 37 Pin D-Sub Molded Cables - Shielded and Fully Populated

CSM37MM-1	Economy Molded Cable, DB37 Male/Male, 1.0ft (0.3m)	25.85	24.30	22.75	CALL
CSM37MM-2.5	Economy Molded Cable, DB37 Male/Male, 2.5ft (0.8m)	27.50	25.85	24.20	CALL
CSM37MM-5	Economy Molded Cable, DB37 Male/Male, 5.0ft (1.5m)	30.25	28.43	26.62	CALL
CSM37MM-10	Economy Molded Cable, DB37 Male/Male, 10.0ft (3.0m)	35.75	33.60	31.46	CALL
CSM37MF-1	Economy Molded Cable, DB37 Male/Female, 1.0ft (0.3m)	25.85	24.30	22.75	CALL
CSM37MF-2.5	Economy Molded Cable, DB37 Male/Female, 2.5ft (0.8m)	27.50	25.85	24.20	CALL
CSM37MF-5	Economy Molded Cable, DB37 Male/Female, 5.0ft (1.5m)	30.25	28.43	26.62	CALL
CSM37MF-10	Economy Molded Cable, DB37 Male/Female, 10.0ft (3.0m)	35.75	33.60	31.46	CALL
CSM37MF-25	Economy Molded Cable, DB37 Male/Female, 25.0ft (7.6m)	52.25	49.11	45.98	CALL

Replacement 4-40 Screws for CSM Series Assemblies - Sold in 10/Packs

TS-CSM	Replacement Screws for CSM Series Assemblies, Pkg/10	3.80	3.57	3.34	CALL
--------	--	------	------	------	------



Copper wire current carrying capacity

Current carrying capacity is the maximum number of amperes (amps) that can flow through a conductor before it breaks down. Many factors determine actual current carrying capacity including conductor size, temperature, number of bundled conductors, air flow and insulation material and thickness. Therefore, this chart should only be used as a general guideline to determine actual performance.

Note: Figures based on 30°C ambient temperature
Units are measured in Amps
x = Current reduction factor

Reduction factors apply when conductors are bundled

INSULATION MATERIAL	WIRE SIZE					
	30 AWG	28 AWG	26 AWG	24 AWG	20 AWG	18 AWG
PVC - Standard Data Cables	2x	3x	4x	6x	8x	10x
Polyethylene - Low Smoke, Zero Halogen Cable	3x	4x	5x	7x	9x	12x
Halar - Plenum, High Temperature Data Cable	3x	5x	6x	8x	11x	14x

# Bundled Conductors	Reduction Factor (x)
2-5	0.8
6-15	0.7
16-30	0.5

Example:

Q: What is the estimated current capacity for L-com data cable CSMN9MM-10?

A: The important factors are:

1) 26 AWG conductors, 2) PVC Insulation, 3) 9 Conductors.
The current rating is: $[4x(x=0.7)] = 2.8$ Amps per conductor.


Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Deluxe D-Sub Cable Assemblies - Fully Populated with 4-40 Thumbscrews

The CSMN Series of D-Sub cable assemblies is our middle of the line offering excellent performance and lower pricing. All assemblies utilize 26AWG stranded conductors with foil shielding for flexibility and performance. Backshells are fully molded with copper shielding for better immunity to outside noise. Mating hardware is 4-40 thumbscrews which makes securing without tools quick and easy. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

Note: 50 pin assemblies use 28AWG twisted pairs due to space constraints in backshell molding. Color: Light Gray.

- More lengths available. Go to L-com.com
- Female / Female in DB9, DB15 and DB25

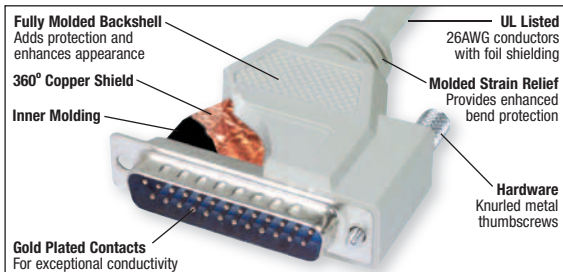

See pgs 88, 89 for Right Angle and 45 Degree Angle Types

Best Seller



CSMN9MF



CSMN15MF



CSMN15FF



CSMN25MF



CSMN25FF



TS-CSMN

Deluxe 9 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN9MM-1	Deluxe Molded Cable, DB9 Male/Male, 1.0ft (0.3m)	6.75	6.21	5.67	CALL
CSMN9MM-2.5	Deluxe Molded Cable, DB9 Male/Male, 2.5ft (0.8m)	7.50	6.90	6.30	CALL
CSMN9MM-5	Deluxe Molded Cable, DB9 Male/Male, 5.0ft (1.5m)	8.75	8.05	7.35	CALL
CSMN9MM-10	Deluxe Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	11.25	10.35	9.45	CALL
CSMN9MM-15	Deluxe Molded Cable, DB9 Male/Male, 15.0ft (4.6m)	13.75	12.65	11.55	CALL
CSMN9MM-25	Deluxe Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	18.75	17.25	15.75	CALL
CSMN9MM-125	Deluxe Molded Cable, DB9 Male/Male, 125.0ft (38.1m)	68.75	63.25	57.75	CALL
CSMN9MF-1	Deluxe Molded Cable, DB9 Male/Female, 1.0ft (0.3m)	6.75	6.21	5.67	CALL
CSMN9MF-2.5	Deluxe Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	7.50	6.90	6.30	CALL
CSMN9MF-5	Deluxe Molded Cable, DB9 Male/Female, 5.0ft (1.5m)	8.75	8.05	7.35	CALL
CSMN9MF-10	Deluxe Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	11.25	10.35	9.45	CALL
CSMN9MF-15	Deluxe Molded Cable, DB9 Male/Female, 15.0ft (4.6m)	13.75	12.65	11.55	CALL
CSMN9MF-25	Deluxe Molded Cable, DB9 Male/Female, 25.0ft (7.6m)	18.75	17.25	15.75	CALL
CSMN9FF-1	Deluxe Molded Cable, DB9 Female/Female, 1.0ft (0.3m)	6.75	6.21	5.67	CALL
CSMN9FF-2.5	Deluxe Molded Cable, DB9 Female/Female, 2.5ft (0.8m)	7.50	6.90	6.30	CALL
CSMN9FF-5	Deluxe Molded Cable, DB9 Female/Female, 5.0ft (1.5m)	8.75	8.05	7.35	CALL
CSMN9FF-10	Deluxe Molded Cable, DB9 Female/Female, 10.0ft (3.0m)	11.25	10.35	9.45	CALL
CSMN9FF-15	Deluxe Molded Cable, DB9 Female/Female, 15.0ft (4.6m)	13.75	12.65	11.55	CALL
CSMN9FF-25	Deluxe Molded Cable, DB9 Female/Female, 25.0ft (7.6m)	18.75	17.25	15.75	CALL
CSMN9FF-50	Deluxe Molded Cable, DB9 Female/Female, 50.0ft (15.2m)	31.25	28.75	26.25	CALL

Deluxe 15 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN15MM-1	Deluxe Molded Cable, DB15 Male/Male, 1.0ft (0.3m)	10.35	9.73	9.11	CALL
CSMN15MM-2.5	Deluxe Molded Cable, DB15 Male/Male, 2.5ft (0.8m)	11.25	10.57	9.90	CALL
CSMN15MM-5	Deluxe Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	12.75	11.98	11.22	CALL
CSMN15MM-10	Deluxe Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN15MM-15	Deluxe Molded Cable, DB15 Male/Male, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN15MM-25	Deluxe Molded Cable, DB15 Male/Male, 25.0ft (7.6m)	24.75	23.26	21.78	CALL
CSMN15MM-50	Deluxe Molded Cable, DB15 Male/Male, 50.0ft (15.2m)	39.75	37.36	34.98	CALL
CSMN15MF-1	Deluxe Molded Cable, DB15 Male/Female, 1.0ft (0.3m)	10.35	9.73	9.11	CALL
CSMN15MF-2.5	Deluxe Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	11.25	10.57	9.90	CALL
CSMN15MF-5	Deluxe Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	12.75	11.98	11.22	CALL
CSMN15MF-10	Deluxe Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN15MF-15	Deluxe Molded Cable, DB15 Male/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN15MF-25	Deluxe Molded Cable, DB15 Male/Female, 25.0ft (7.6m)	24.75	23.26	21.78	CALL
CSMN15MF-50	Deluxe Molded Cable, DB15 Male/Female, 50.0ft (15.2m)	39.75	37.36	34.98	CALL
CSMN15FF-1	Deluxe Molded Cable, DB15 Female/Female, 1.0ft (0.3m)	10.35	9.73	9.11	CALL
CSMN15FF-2.5	Deluxe Molded Cable, DB15 Female/Female, 2.5ft (0.8m)	11.25	10.57	9.90	CALL
CSMN15FF-5	Deluxe Molded Cable, DB15 Female/Female, 5.0ft (1.5m)	12.75	11.98	11.22	CALL
CSMN15FF-10	Deluxe Molded Cable, DB15 Female/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN15FF-15	Deluxe Molded Cable, DB15 Female/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN15FF-25	Deluxe Molded Cable, DB15 Female/Female, 25.0ft (7.6m)	24.75	23.26	21.78	CALL
CSMN15FF-50	Deluxe Molded Cable, DB15 Female/Female, 50.0ft (15.2m)	39.75	37.36	34.98	CALL

Deluxe 25 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN25MM-1	Deluxe Molded Cable, DB25 Male/Male, 1.0ft (0.3m)	9.35	8.79	8.23	CALL
CSMN25MM-2.5	Deluxe Molded Cable, DB25 Male/Male, 2.5ft (0.8m)	10.25	9.63	9.02	CALL
CSMN25MM-5	Deluxe Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CSMN25MM-10	Deluxe Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN25MM-15	Deluxe Molded Cable, DB25 Male/Male, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN25MM-25	Deluxe Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	27.75	26.08	24.42	CALL
CSMN25MM-125	Deluxe Molded Cable, DB25 Male/Male, 125.0ft (38.1m)	95.75	90.00	84.26	CALL
CSMN25MF-1	Deluxe Molded Cable, DB25 Male/Female, 1.0ft (0.3m)	9.35	8.79	8.23	CALL
CSMN25MF-2.5	Deluxe Molded Cable, DB25 Male/Female, 2.5ft (0.8m)	10.25	9.63	9.02	CALL
CSMN25MF-5	Deluxe Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CSMN25MF-10	Deluxe Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN25MF-15	Deluxe Molded Cable, DB25 Male/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN25MF-25	Deluxe Molded Cable, DB25 Male/Female, 25.0ft (7.6m)	27.75	26.08	24.42	CALL
CSMN25MF-50	Deluxe Molded Cable, DB25 Male/Female, 50.0ft (15.2m)	42.75	40.18	37.62	CALL
CSMN25FF-1	Deluxe Molded Cable, DB25 Female/Female, 1.0ft (0.3m)	9.35	8.79	8.23	CALL
CSMN25FF-2.5	Deluxe Molded Cable, DB25 Female/Female, 2.5ft (0.8m)	10.25	9.63	9.02	CALL
CSMN25FF-5	Deluxe Molded Cable, DB25 Female/Female, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CSMN25FF-10	Deluxe Molded Cable, DB25 Female/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMN25FF-15	Deluxe Molded Cable, DB25 Female/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMN25FF-25	Deluxe Molded Cable, DB25 Female/Female, 25.0ft (7.6m)	27.75	26.08	24.42	CALL
CSMN25FF-50	Deluxe Molded Cable, DB25 Female/Female, 50.0ft (15.2m)	42.75	40.18	37.62	CALL

Replacement 4-40 Screws for CSMN Series Assemblies - Sold in 10/Packs

TS-CSMN	Replacement Screws for CSMN Series Assemblies, Pkg/10	4.75	4.46	4.18	CALL
---------	---	------	------	------	------

Flammability/toxicity ratings of cable jackets



Online Video

L-com.com/Videos/A20



CSMN37MF

CSMN50MF

More lengths available.
Go to L-com.com



CPMS9MF

CPMS15MF

CPMS25MF



TS-CSMN

Item #	Description	1-9	10-24	25-99	100+
Deluxe 37 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated					
CSMN37MM-1	Deluxe Molded Cable, DB37 Male/Male, 1.0ft (0.3m)	29.15	27.40	25.65	CALL
CSMN37MM-2.5	Deluxe Molded Cable, DB37 Male/Male, 2.5ft (0.8m)	30.80	28.95	27.10	CALL
CSMN37MM-5	Deluxe Molded Cable, DB37 Male/Male, 5.0ft (1.5m)	33.60	31.58	29.57	CALL
CSMN37MM-10	Deluxe Molded Cable, DB37 Male/Male, 10.0ft (3.0m)	39.20	36.85	34.50	CALL
CSMN37MM-25	Deluxe Molded Cable, DB37 Male/Male, 25.0ft (7.6m)	56.00	52.64	49.28	CALL
CSMN37MM-50	Deluxe Molded Cable, DB37 Male/Male, 50.0ft (15.2m)	84.00	78.96	73.92	CALL
CSMN37MF-1	Deluxe Molded Cable, DB37 Male/Female, 1.0ft (0.3m)	29.15	27.40	25.65	CALL
CSMN37MF-2.5	Deluxe Molded Cable, DB37 Male/Female, 2.5ft (0.8m)	30.80	28.95	27.10	CALL
CSMN37MF-5	Deluxe Molded Cable, DB37 Male/Female, 5.0ft (1.5m)	33.60	31.58	29.57	CALL
CSMN37MF-10	Deluxe Molded Cable, DB37 Male/Female, 10.0ft (3.0m)	39.20	36.85	34.50	CALL
CSMN37MF-25	Deluxe Molded Cable, DB37 Male/Female, 25.0ft (7.6m)	56.00	52.64	49.28	CALL
CSMN37MF-50	Deluxe Molded Cable, DB37 Male/Female, 50.0ft (15.2m)	84.00	78.96	73.92	CALL

Deluxe 50 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated


CSMN50MM-1	Deluxe Molded Cable, DB50 Male/Male, 1.0ft (0.3m)	52.65	49.49	46.33	CALL
CSMN50MM-2.5	Deluxe Molded Cable, DB50 Male/Male, 2.5ft (0.8m)	57.70	54.24	50.78	CALL
CSMN50MM-10	Deluxe Molded Cable, DB50 Male/Male, 10.0ft (3.0m)	82.90	77.93	72.95	CALL
CSMN50MM-25	Deluxe Molded Cable, DB50 Male/Male, 25.0ft (7.6m)	133.30	125.30	117.30	CALL
CSMN50MM-50	Deluxe Molded Cable, DB50 Male/Male, 50.0ft (15.2m)	217.30	204.26	191.22	CALL
CSMN50MF-1	Deluxe Molded Cable, DB50 Male/Female, 1.0ft (0.3m)	52.65	49.49	46.33	CALL
CSMN50MF-2.5	Deluxe Molded Cable, DB50 Male/Female, 2.5ft (0.8m)	57.70	54.24	50.78	CALL
CSMN50MF-10	Deluxe Molded Cable, DB50 Male/Female, 10.0ft (3.0m)	82.90	77.93	72.95	CALL
CSMN50MF-25	Deluxe Molded Cable, DB50 Male/Female, 25.0ft (7.6m)	133.30	125.30	117.30	CALL
CSMN50MF-50	Deluxe Molded Cable, DB50 Male/Female, 50.0ft (15.2m)	217.30	204.26	191.22	CALL

Replacement 4-40 Screws for CSMN Series Assemblies - Sold in 10/Packs

TS-CSMN	Replacement Screws for CSMN Series Assemblies, Pkg/10	4.75	4.46	4.18	CALL
---------	---	------	------	------	------

Heavy Duty D-Sub Cables - 20 AWG Conductors, Double Shielded

L-com's ground breaking D-Sub cables use 20 AWG conductors, the largest conductor most D-Sub connectors can accommodate. This allows for maximum current throughput as well as an extremely durable assembly. Other key features include double shielding to prevent against data corrupting EMI/RFI, threaded inserts allowing the cable to be panel mounted directly without use of an adapter, and straight through wiring to accommodate most applications. Standard lengths range from 1 to 50ft (0.3 to 15.2m) and custom lengths/pinouts are available with modest minimum requirements.

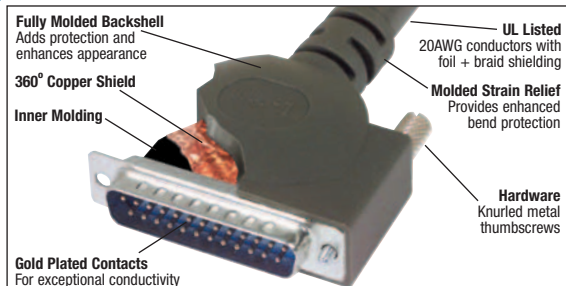

Heavy Duty 9 Pin D-Sub Molded Cables with Thumbscrews - 20 AWG Conductors, Double Shielded

CPMS9MM-1	Heavy Duty Molded Cable, DB9 Male/Male, 1.0ft (0.3m)	17.43	16.38	15.34	CALL
CPMS9MM-2.5	Heavy Duty Molded Cable, DB9 Male/Male, 2.5ft (0.8m)	20.42	19.19	17.97	CALL
CPMS9MM-5	Heavy Duty Molded Cable, DB9 Male/Male, 5.0ft (1.5m)	25.31	23.79	22.27	CALL
CPMS9MM-10	Heavy Duty Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	35.12	33.01	30.91	CALL
CPMS9MM-25	Heavy Duty Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	64.63	60.75	56.87	CALL
CPMS9MM-50	Heavy Duty Molded Cable, DB9 Male/Male, 50.0ft (15.2m)	113.77	106.94	100.12	CALL
CPMS9MF-1	Heavy Duty Molded Cable, DB9 Male/Female, 1.0ft (0.3m)	17.43	16.38	15.34	CALL
CPMS9MF-2.5	Heavy Duty Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	20.42	19.19	17.97	CALL
CPMS9MF-5	Heavy Duty Molded Cable, DB9 Male/Female, 5.0ft (1.5m)	25.31	23.79	22.27	CALL
CPMS9MF-10	Heavy Duty Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	35.12	33.01	30.91	CALL
CPMS9MF-25	Heavy Duty Molded Cable, DB9 Male/Female, 25.0ft (7.6m)	64.63	60.75	56.87	CALL
CPMS9MF-50	Heavy Duty Molded Cable, DB9 Male/Female, 50.0ft (15.2m)	113.77	106.94	100.12	CALL

Heavy Duty 15 Pin D-Sub Molded Cables with Thumbscrews - 20 AWG Conductors, Double Shielded

CPMS15MM-1	Heavy Duty Molded Cable, DB15 Male/Male, 1.0ft (0.3m)	24.20	22.75	21.30	CALL
CPMS15MM-2.5	Heavy Duty Molded Cable, DB15 Male/Male, 2.5ft (0.8m)	28.82	27.09	25.36	CALL
CPMS15MM-5	Heavy Duty Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	36.54	34.35	32.16	CALL
CPMS15MM-10	Heavy Duty Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	51.98	48.86	45.74	CALL
CPMS15MM-25	Heavy Duty Molded Cable, DB15 Male/Male, 25.0ft (7.6m)	98.33	92.43	86.53	CALL
CPMS15MM-50	Heavy Duty Molded Cable, DB15 Male/Male, 50.0ft (15.2m)	175.56	165.03	154.49	CALL
CPMS15MF-1	Heavy Duty Molded Cable, DB15 Male/Female, 1.0ft (0.3m)	24.20	22.75	21.30	CALL
CPMS15MF-2.5	Heavy Duty Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	28.82	27.09	25.36	CALL
CPMS15MF-5	Heavy Duty Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	36.54	34.35	32.16	CALL
CPMS15MF-10	Heavy Duty Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	51.98	48.86	45.74	CALL
CPMS15MF-25	Heavy Duty Molded Cable, DB15 Male/Female, 25.0ft (7.6m)	98.33	92.43	86.53	CALL
CPMS15MF-50	Heavy Duty Molded Cable, DB15 Male/Female, 50.0ft (15.2m)	175.56	165.03	154.49	CALL

Heavy Duty 25 Pin D-Sub Molded Cables with Thumbscrews - 20 AWG Conductors, Double Shielded

CPMS25MM-1	Heavy Duty Molded Cable, DB25 Male/Male, 1.0ft (0.3m)	32.03	30.11	28.19	CALL
CPMS25MM-2.5	Heavy Duty Molded Cable, DB25 Male/Male, 2.5ft (0.8m)	40.06	37.66	35.25	CALL
CPMS25MM-5	Heavy Duty Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	53.39	50.19	46.98	CALL
CPMS25MM-10	Heavy Duty Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	80.06	75.26	70.45	CALL
CPMS25MM-25	Heavy Duty Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	160.13	150.52	140.91	CALL
CPMS25MM-50	Heavy Duty Molded Cable, DB25 Male/Male, 50.0ft (15.2m)	293.53	275.92	258.31	CALL
CPMS25MF-1	Heavy Duty Molded Cable, DB25 Male/Female, 1.0ft (0.3m)	32.03	30.11	28.19	CALL
CPMS25MF-2.5	Heavy Duty Molded Cable, DB25 Male/Female, 2.5ft (0.8m)	40.06	37.66	35.25	CALL
CPMS25MF-5	Heavy Duty Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	53.39	50.19	46.98	CALL
CPMS25MF-10	Heavy Duty Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	80.06	75.26	70.45	CALL
CPMS25MF-25	Heavy Duty Molded Cable, DB25 Male/Female, 25.0ft (7.6m)	160.13	150.52	140.91	CALL
CPMS25MF-50	Heavy Duty Molded Cable, DB25 Male/Female, 50.0ft (15.2m)	293.53	275.92	258.31	CALL

Replacement 4-40 Screws for CPMS Series Assemblies - Sold in 10/Packs


TS-CSMN	Replacement Screws for CPMS Series Assemblies, Pkg/10	4.75	4.46	4.18	CALL
---------	---	------	------	------	------

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Premium D-Sub Cable Assemblies - Fully Populated and Double Shielded

The CS2N Series of D-Sub cable assemblies is our top of the line D-Sub cabling offering. These cables offer the best features for those applications where only the best will do. The bulk cable utilizes 26AWG stranded conductors with double shielding (copper braid plus aluminum mylar foil) and flexible PVC jacket. Fully molded backshells also have a unique stamped steel internal enclosure that provides the ultimate in shielding performance. Mounting is done via rugged 4-40 thumbscrews that are easy to grip without the need for a screwdriver. Hex nuts on female connectors are removable to expose 4-40 thumbscrews. Color: Light Gray.

- More lengths available. Go to L-com.com

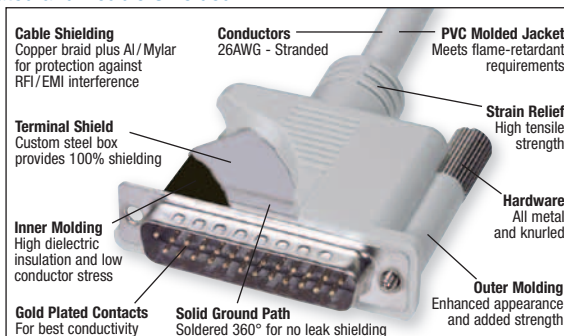

No more D-Sub connector gender confusion!



Online Video

L-com.com/Videos/A14



Best Seller

Premium 9 Pin D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2N9MM-1	Premium Molded Cable, DB9 Male/Male, 1.0ft (0.3m)	14.90	14.01	13.11	CALL
CS2N9MM-2.5	Premium Molded Cable, DB9 Male/Male, 2.5ft (0.8m)	16.25	15.27	14.30	CALL
CS2N9MM-6	Premium Molded Cable, DB9 Male/Male, 6.0ft (1.8m)	19.40	18.24	17.07	CALL
CS2N9MM-10	Premium Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	23.00	21.62	20.24	CALL
CS2N9MM-15	Premium Molded Cable, DB9 Male/Male, 15.0ft (4.6m)	27.50	25.85	24.20	CALL
CS2N9MM-25	Premium Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	36.50	34.31	32.12	CALL
CS2N9MM-50	Premium Molded Cable, DB9 Male/Male, 50.0ft (15.2m)	59.00	55.46	51.92	CALL
CS2N9MF-1	Premium Molded Cable, DB9 Male/Female, 1.0ft (0.3m)	14.90	14.01	13.11	CALL
CS2N9MF-2.5	Premium Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	16.25	15.27	14.30	CALL
CS2N9MF-6	Premium Molded Cable, DB9 Male/Female, 6.0ft (1.8m)	19.40	18.24	17.07	CALL
CS2N9MF-10	Premium Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	23.00	21.62	20.24	CALL
CS2N9MF-15	Premium Molded Cable, DB9 Male/Female, 15.0ft (4.6m)	27.50	25.85	24.20	CALL
CS2N9MF-25	Premium Molded Cable, DB9 Male/Female, 25.0ft (7.6m)	36.50	34.31	32.12	CALL
CS2N9MF-50	Premium Molded Cable, DB9 Male/Female, 50.0ft (15.2m)	59.00	55.46	51.92	CALL

Premium HD15 D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2H15MM-1	Premium Molded Cable, HD15 Male/Male, 1.0ft (0.3m)	19.95	18.75	17.56	CALL
CS2H15MM-2.5	Premium Molded Cable, HD15 Male/Male, 2.5ft (0.8m)	21.55	20.26	18.96	CALL
CS2H15MM-5	Premium Molded Cable, HD15 Male/Male, 5.0ft (1.5m)	24.15	22.70	21.25	CALL
CS2H15MM-10	Premium Molded Cable, HD15 Male/Male, 10.0ft (3.0m)	29.40	27.64	25.87	CALL
CS2H15MM-25	Premium Molded Cable, HD15 Male/Male, 25.0ft (7.6m)	45.15	42.44	39.73	CALL
CS2H15MM-50	Premium Molded Cable, HD15 Male/Male, 50.0ft (15.2m)	71.40	67.12	62.83	CALL
CS2H15MF-1	Premium Molded Cable, HD15 Male/Female, 1.0ft (0.3m)	19.95	18.75	17.56	CALL
CS2H15MF-2.5	Premium Molded Cable, HD15 Male/Female, 2.5ft (0.8m)	21.55	20.26	18.96	CALL
CS2H15MF-5	Premium Molded Cable, HD15 Male/Female, 5.0ft (1.5m)	24.15	22.70	21.25	CALL
CS2H15MF-10	Premium Molded Cable, HD15 Male/Female, 10.0ft (3.0m)	29.40	27.64	25.87	CALL
CS2H15MF-25	Premium Molded Cable, HD15 Male/Female, 25.0ft (7.6m)	45.15	42.44	39.73	CALL
CS2H15MF-50	Premium Molded Cable, HD15 Male/Female, 50.0ft (15.2m)	71.40	67.12	62.83	CALL

Premium DB15 D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2N15MM-1	Premium Molded Cable, DB15 Male/Male, 1.0ft (0.3m)	19.20	18.05	16.90	CALL
CS2N15MM-2.5	Premium Molded Cable, DB15 Male/Male, 2.5ft (0.8m)	20.40	19.18	17.95	CALL
CS2N15MM-5	Premium Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
CS2N15MM-10	Premium Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	25.50	23.97	22.44	CALL
CS2N15MM-25	Premium Molded Cable, DB15 Male/Male, 25.0ft (7.6m)	36.00	33.84	31.68	CALL
CS2N15MF-1	Premium Molded Cable, DB15 Male/Female, 1.0ft (0.3m)	19.20	18.05	16.90	CALL
CS2N15MF-2.5	Premium Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	20.40	19.18	17.95	CALL
CS2N15MF-5	Premium Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
CS2N15MF-10	Premium Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	25.50	23.97	22.44	CALL
CS2N15MF-25	Premium Molded Cable, DB15 Male/Female, 25.0ft (7.6m)	36.00	33.84	31.68	CALL

Premium 25 Pin D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2N25MM-1	Premium Molded Cable, DB25 Male/Male, 1.0ft (0.3m)	21.00	19.74	18.48	CALL
CS2N25MM-2.5	Premium Molded Cable, DB25 Male/Male, 2.5ft (0.8m)	22.50	21.15	19.80	CALL
CS2N25MM-5	Premium Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	25.00	23.50	22.00	CALL
CS2N25MM-10	Premium Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	30.00	28.20	26.40	CALL
CS2N25MM-25	Premium Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	45.00	42.30	39.60	CALL
CS2N25MM-50	Premium Molded Cable, DB25 Male/Male, 50.0ft (15.2m)	70.00	65.80	61.60	CALL
CS2N25MF-1	Premium Molded Cable, DB25 Male/Female, 1.0ft (0.3m)	21.00	19.74	18.48	CALL
CS2N25MF-5	Premium Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	25.00	23.50	22.00	CALL
CS2N25MF-10	Premium Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	30.00	28.20	26.40	CALL
CS2N25MF-25	Premium Molded Cable, DB25 Male/Female, 25.0ft (7.6m)	45.00	42.30	39.60	CALL
CS2N25MF-50	Premium Molded Cable, DB25 Male/Female, 50.0ft (15.2m)	70.00	65.80	61.60	CALL

Premium 37 Pin D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2N37MM-1	Premium Molded Cable, DB37 Male/Male, 1.0ft (0.3m)	38.35	36.05	33.75	CALL
CS2N37MM-2.5	Premium Molded Cable, DB37 Male/Male, 2.5ft (0.8m)	40.70	38.26	35.82	CALL
CS2N37MM-5	Premium Molded Cable, DB37 Male/Male, 5.0ft (1.5m)	44.65	41.97	39.29	CALL
CS2N37MM-10	Premium Molded Cable, DB37 Male/Male, 10.0ft (3.0m)	52.50	49.35	46.20	CALL
CS2N37MM-25	Premium Molded Cable, DB37 Male/Male, 25.0ft (7.6m)	76.15	71.58	67.01	CALL
CS2N37MF-1	Premium Molded Cable, DB37 Male/Female, 1.0ft (0.3m)	38.35	36.05	33.75	CALL
CS2N37MF-2.5	Premium Molded Cable, DB37 Male/Female, 2.5ft (0.8m)	40.70	38.26	35.82	CALL
CS2N37MF-5	Premium Molded Cable, DB37 Male/Female, 5.0ft (1.5m)	44.65	41.97	39.29	CALL
CS2N37MF-10	Premium Molded Cable, DB37 Male/Female, 10.0ft (3.0m)	52.50	49.35	46.20	CALL
CS2N37MF-25	Premium Molded Cable, DB37 Male/Female, 25.0ft (7.6m)	76.15	71.58	67.01	CALL

Replacement 4-40 Screws for CS2N and CS2H Series Assemblies - Sold in 10/Packs

TS-CS21	Replacement Screws for CS2N9, CS2N15, CS2H15 Series Assemblies, Pkg/10	4.10	3.85	3.61	CALL
TS-CS2N25	Replacement Screws for CS2N25 Series Assemblies, Pkg/10	4.10	3.85	3.61	CALL
TS-CS2N37	Replacement Screws for CS2N37 Series Assemblies, Pkg/10	4.50	4.23	3.96	CALL

CS2N9MF

CS2H15MF

CS2N15MF

CS2N25MF

TS-CS21

TS-CS2N25

TS-CS2N37

More lengths available.
Go to L-com.com

CS2NB9MMF

CS2HB15MF

CS2NB25MF

TS-CS21

TS-CS2N25

CSNULL9MF

CSNULL9MF-A

CSNULL259MF

See detailed drawings for wiring
information at L-com.com

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Premium 9 Pin Black D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2NB9MM-1	Premium Molded Black Cable, DB9 Male/Male, 1.0ft (0.3m)	14.90	14.01	13.11	CALL
CS2NB9MM-2.5	Premium Molded Black Cable, DB9 Male/Male, 2.5ft (0.8m)	16.25	15.27	14.30	CALL
CS2NB9MM-5	Premium Molded Black Cable, DB9 Male/Male, 5.0ft (1.5m)	18.50	17.39	16.28	CALL
CS2NB9MM-10	Premium Molded Black Cable, DB9 Male/Male, 10.0ft (3.0m)	23.00	21.62	20.24	CALL
CS2NB9MM-15	Premium Molded Black Cable, DB9 Male/Male, 15.0ft (4.6m)	27.50	25.85	24.20	CALL
CS2NB9MM-25	Premium Molded Black Cable, DB9 Male/Male, 25.0ft (7.6m)	36.50	34.31	32.12	CALL
CS2NB9MM-50	Premium Molded Black Cable, DB9 Male/Male, 50.0ft (15.2m)	59.00	55.46	51.92	CALL
CS2NB9MF-1	Premium Molded Black Cable, DB9 Male/Female, 1.0ft (0.3m)	14.90	14.01	13.11	CALL
CS2NB9MF-2.5	Premium Molded Black Cable, DB9 Male/Female, 2.5ft (0.8m)	16.25	15.27	14.30	CALL
CS2NB9MF-5	Premium Molded Black Cable, DB9 Male/Female, 5.0ft (1.5m)	18.50	17.39	16.28	CALL
CS2NB9MF-10	Premium Molded Black Cable, DB9 Male/Female, 10.0ft (3.0m)	23.00	21.62	20.24	CALL
CS2NB9MF-25	Premium Molded Black Cable, DB9 Male/Female, 25.0ft (7.6m)	36.50	34.31	32.12	CALL
CS2NB9MF-50	Premium Molded Black Cable, DB9 Male/Female, 50.0ft (15.2m)	59.00	55.46	51.92	CALL

Premium HD15 Pin Black D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2HB15MM-1	Premium Molded Black Cable, HD15 Male/Male, 1.0ft (0.3m)	19.95	18.75	17.56	CALL
CS2HB15MM-2.5	Premium Molded Black Cable, HD15 Male/Male, 2.5ft (0.8m)	21.55	20.26	18.96	CALL
CS2HB15MM-5	Premium Molded Black Cable, HD15 Male/Male, 5.0ft (1.5m)	24.15	22.70	21.25	CALL
CS2HB15MM-10	Premium Molded Black Cable, HD15 Male/Male, 10.0ft (3.0m)	29.40	27.64	25.87	CALL
CS2HB15MM-15	Premium Molded Black Cable, HD15 Male/Male, 15.0ft (4.6m)	34.65	32.57	30.49	CALL
CS2HB15MM-25	Premium Molded Black Cable, HD15 Male/Male, 25.0ft (7.6m)	45.15	42.44	39.73	CALL
CS2HB15MM-50	Premium Molded Black Cable, HD15 Male/Male, 50.0ft (15.2m)	71.40	67.12	62.83	CALL
CS2HB15MF-1	Premium Molded Black Cable, HD15 Male/Female, 1.0ft (0.3m)	19.95	18.75	17.56	CALL
CS2HB15MF-2.5	Premium Molded Black Cable, HD15 Male/Female, 2.5ft (0.8m)	21.55	20.26	18.96	CALL
CS2HB15MF-5	Premium Molded Black Cable, HD15 Male/Female, 5.0ft (1.5m)	24.15	22.70	21.25	CALL
CS2HB15MF-10	Premium Molded Black Cable, HD15 Male/Female, 10.0ft (3.0m)	29.40	27.64	25.87	CALL
CS2HB15MF-15	Premium Molded Black Cable, HD15 Male/Female, 15.0ft (4.6m)	34.65	32.57	30.49	CALL
CS2HB15MF-25	Premium Molded Black Cable, HD15 Male/Female, 25.0ft (7.6m)	45.15	42.44	39.73	CALL
CS2HB15MF-50	Premium Molded Black Cable, HD15 Male/Female, 50.0ft (15.2m)	71.40	67.12	62.83	CALL

Premium 15 Pin Black D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2NB15MM-1	Premium Molded Black Cable, DB15 Male/Male, 1.0ft (0.3m)	19.00	17.86	16.72	CALL
CS2NB15MM-2.5	Premium Molded Black Cable, DB15 Male/Male, 2.5ft (0.8m)	20.50	19.27	18.04	CALL
CS2NB15MM-5	Premium Molded Black Cable, DB15 Male/Male, 5.0ft (1.5m)	23.00	21.62	20.24	CALL
CS2NB15MM-15	Premium Molded Black Cable, DB15 Male/Male, 15.0ft (4.6m)	33.00	31.02	29.04	CALL
CS2NB15MM-25	Premium Molded Black Cable, DB15 Male/Male, 25.0ft (7.6m)	43.00	40.42	37.84	CALL
CS2NB15MM-50	Premium Molded Black Cable, DB15 Male/Male, 50.0ft (15.2m)	68.00	63.92	59.84	CALL
CS2NB15MF-1	Premium Molded Black Cable, DB15 Male/Female, 1.0ft (0.3m)	19.00	17.86	16.72	CALL
CS2NB15MF-2.5	Premium Molded Black Cable, DB15 Male/Female, 2.5ft (0.8m)	20.50	19.27	18.04	CALL
CS2NB15MF-5	Premium Molded Black Cable, DB15 Male/Female, 5.0ft (1.5m)	23.00	21.62	20.24	CALL
CS2NB15MF-10	Premium Molded Black Cable, DB15 Male/Female, 10.0ft (3.0m)	28.00	26.32	24.64	CALL
CS2NB15MF-15	Premium Molded Black Cable, DB15 Male/Female, 15.0ft (4.6m)	33.00	31.02	29.04	CALL
CS2NB15MF-25	Premium Molded Black Cable, DB15 Male/Female, 25.0ft (7.6m)	43.00	40.42	37.84	CALL
CS2NB15MF-50	Premium Molded Black Cable, DB15 Male/Female, 50.0ft (15.2m)	68.00	63.92	59.84	CALL

Premium 25 Pin Black D-Sub Cables - Molded, Fully Populated and Double Shielded

CS2NB25MM-1	Premium Molded Black Cable, DB25 Male/Male, 1.0ft (0.3m)	21.00	19.74	18.48	CALL
CS2NB25MM-2.5	Premium Molded Black Cable, DB25 Male/Male, 2.5ft (0.8m)	22.50	21.15	19.80	CALL
CS2NB25MM-5	Premium Molded Black Cable, DB25 Male/Male, 5.0ft (1.5m)	25.00	23.50	22.00	CALL
CS2NB25MM-10	Premium Molded Black Cable, DB25 Male/Male, 10.0ft (3.0m)	30.00	28.20	26.40	CALL
CS2NB25MM-15	Premium Molded Black Cable, DB25 Male/Male, 15.0ft (4.6m)	35.00	32.90	30.80	CALL
CS2NB25MM-25	Premium Molded Black Cable, DB25 Male/Male, 25.0ft (7.6m)	45.00	42.30	39.60	CALL
CS2NB25MM-50	Premium Molded Black Cable, DB25 Male/Male, 50.0ft (15.2m)	70.00	65.80	61.60	CALL
CS2NB25MF-1	Premium Molded Black Cable, DB25 Male/Female, 1.0ft (0.3m)	21.00	19.74	18.48	CALL
CS2NB25MF-2.5	Premium Molded Black Cable, DB25 Male/Female, 2.5ft (0.8m)	22.50	21.15	19.80	CALL
CS2NB25MF-5	Premium Molded Black Cable, DB25 Male/Female, 5.0ft (1.5m)	25.00	23.50	22.00	CALL
CS2NB25MF-10	Premium Molded Black Cable, DB25 Male/Female, 10.0ft (3.0m)	30.00	28.20	26.40	CALL
CS2NB25MF-25	Premium Molded Black Cable, DB25 Male/Female, 25.0ft (7.6m)	45.00	42.30	39.60	CALL
CS2NB25MF-50	Premium Molded Black Cable, DB25 Male/Female, 50.0ft (15.2m)	70.00	65.80	61.60	CALL

Replacement 4-40 Screws for CS2NB and CS2HB Series Assemblies - Sold in 10/Packs

TS-CS21	Replacement Screws for CS2NB9, CS2NB15, CS2HB15 Series Assemblies, Pkg/10	4.10	3.85	3.61	CALL
TS-CS2N25	Replacement Screws for CS2NB25 Series Assemblies, Pkg/10	4.10	3.85	3.61	CALL

Deluxe Null Modem Cable Assemblies with Thumbscrews, Fully Shielded

The CSNULL series of cable assemblies features the same construction as the CSMN series but is wired to the most common null modem wiring schemes. The transmit data and receive data signals are crossed to allow two DTE or DCE devices to communicate.

CSNULL9FF-5	Deluxe Null Modem Cable, DB9 Female/Female, 5.0ft (1.5m)	11.85	10.90	9.95	CALL
CSNULL9FF-10	Deluxe Null Modem Cable, DB9 Female/Female, 10.0ft (3.0m)	13.75	12.65	11.55	CALL
CSNULL9FF-25	Deluxe Null Modem Cable, DB9 Female/Female, 25.0ft (7.6m)	19.55	17.99	16.42	CALL
CSNULL9MF-5	Deluxe Null Modem Cable, DB9 Male/Female, 5.0ft (1.5m)	11.85	10.90	9.95	CALL
CSNULL9MF-10	Deluxe Null Modem Cable, DB9 Male/Female, 10.0ft (3.0m)	13.75	12.65	11.55	CALL
CSNULL9MF-25	Deluxe Null Modem Cable, DB9 Male/Female, 25.0ft (7.6m)	19.55	17.99	16.42	CALL
CSNULL9FF-5A	Deluxe Null Modem Cable, DB9 Female/Female, 5.0ft (1.5m)	11.85	10.90	9.95	CALL
CSNULL9FF-10A	Deluxe Null Modem Cable, DB9 Female/Female, 10.0ft (3.0m)	13.75	12.65	11.55	CALL
CSNULL9FF-25A	Deluxe Null Modem Cable, DB9 Female/Female, 25.0ft (7.6m)	19.55	17.99	16.42	CALL
CSNULL9MF-5A	Deluxe Null Modem Cable, DB9 Male/Female, 5.0ft (1.5m)	11.85	10.90	9.95	CALL
CSNULL9MF-10A	Deluxe Null Modem Cable, DB9 Male/Female, 10.0ft (3.0m)	13.75	12.65	11.55	CALL
CSNULL9MF-25A	Deluxe Null Modem Cable, DB9 Male/Female, 25.0ft (7.6m)	19.55	17.99	16.42	CALL
CSNULL259MF-5	Deluxe Null Modem Cable, DB25 Male/DB9 Female, 5.0ft (1.5m)	12.40	11.41	10.42	CALL
CSNULL259MF-10	Deluxe Null Modem Cable, DB25 Male/DB9 Female, 10.0ft (3.0m)	14.30	13.16	12.01	CALL
CSNULL259MF-25	Deluxe Null Modem Cable, DB25 Male/DB9 Female, 25.0ft (7.6m)	20.10	18.49	16.88	CALL

More lengths available. Go to L-com.com

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Deluxe Molded Black D-Sub Cables

These cables give the user the option to color match to black equipment and are constructed identically to our popular CSMN light gray cable series.

Deluxe 9 Pin D-Sub Molded Cables - Shielded and Fully Populated

CSMNB9MM-1	Deluxe Molded Cable, DB9 Male/Male, 1.0ft (0.3m)	6.75	6.21	5.67	CALL
CSMNB9MM-5	Deluxe Molded Cable, DB9 Male/Male, 5.0ft (1.5m)	8.75	8.05	7.35	CALL
CSMNB9MM-10	Deluxe Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	11.25	10.35	9.45	CALL
CSMNB9MM-25	Deluxe Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	18.75	17.25	15.75	CALL
CSMNB9MM-50	Deluxe Molded Cable, DB9 Male/Male, 50.0ft (15.2m)	31.25	28.75	26.25	CALL
CSMNB9MF-2.5	Deluxe Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	7.50	6.90	6.30	CALL
CSMNB9MF-5	Deluxe Molded Cable, DB9 Male/Female, 5.0ft (1.5m)	8.75	8.05	7.35	CALL
CSMNB9MF-10	Deluxe Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	11.25	10.35	9.45	CALL
CSMNB9MF-15	Deluxe Molded Cable, DB9 Male/Female, 15.0ft (4.6m)	13.75	12.65	11.55	CALL
CSMNB9MF-50	Deluxe Molded Cable, DB9 Male/Female, 50.0ft (15.2m)	31.25	28.75	26.25	CALL

Deluxe 15 Pin D-Sub Molded Cables - Shielded and Fully Populated

CSMNB15MM-1	Deluxe Molded Cable, DB15 Male/Male, 1.0ft (0.3m)	10.35	9.73	9.11	CALL
CSMNB15MM-5	Deluxe Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	12.75	11.98	11.22	CALL
CSMNB15MM-10	Deluxe Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMNB15MM-25	Deluxe Molded Cable, DB15 Male/Male, 25.0ft (7.6m)	24.75	23.26	21.78	CALL
CSMNB15MM-50	Deluxe Molded Cable, DB15 Male/Male, 50.0ft (15.2m)	39.75	37.36	34.98	CALL
CSMNB15MF-1	Deluxe Molded Cable, DB15 Male/Female, 1.0ft (0.3m)	10.35	9.73	9.11	CALL
CSMNB15MF-2.5	Deluxe Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	11.25	10.57	9.90	CALL
CSMNB15MF-5	Deluxe Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	12.75	11.98	11.22	CALL
CSMNB15MF-10	Deluxe Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMNB15MF-15	Deluxe Molded Cable, DB15 Male/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMNB15MF-25	Deluxe Molded Cable, DB15 Male/Female, 25.0ft (7.6m)	24.75	23.26	21.78	CALL
CSMNB15MF-50	Deluxe Molded Cable, DB15 Male/Female, 50.0ft (15.2m)	39.75	37.36	34.98	CALL

Deluxe 25 Pin D-Sub Molded Cables - Shielded and Fully Populated

CSMNB25MM-1	Deluxe Molded Cable, DB25 Male/Male, 1.0ft (0.3m)	9.35	8.79	8.23	CALL
CSMNB25MM-5	Deluxe Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CSMNB25MM-10	Deluxe Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMNB25MM-25	Deluxe Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	27.75	26.08	24.42	CALL
CSMNB25MM-50	Deluxe Molded Cable, DB25 Male/Male, 50.0ft (15.2m)	42.75	40.18	37.62	CALL
CSMNB25MF-2.5	Deluxe Molded Cable, DB25 Male/Female, 2.5ft (0.8m)	10.25	9.63	9.02	CALL
CSMNB25MF-5	Deluxe Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CSMNB25MF-10	Deluxe Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	15.75	14.80	13.86	CALL
CSMNB25MF-15	Deluxe Molded Cable, DB25 Male/Female, 15.0ft (4.6m)	18.75	17.63	16.50	CALL
CSMNB25MF-50	Deluxe Molded Cable, DB25 Male/Female, 50.0ft (15.2m)	42.75	40.18	37.62	CALL

Low Smoke Zero Halogen (LSZH) D-Sub Cable Assemblies, DB9, DB15 and DB25

LSZH D-Sub cable assemblies are available in DB9, DB15 and DB25 connector sizes with male to male and male to female configurations. Cable is 24AWG with a foil/braid shield. Color is black.

Low Smoke Zero Halogen 9 Pin D-Sub Cables - Fully Populated and Double Shielded

CSMUZ9MM-1	LSZH Cable, DB9 Male/Male, 1.0ft (0.3m)	27.75	26.64	25.53	CALL
CSMUZ9MM-5	LSZH Cable, DB9 Male/Male, 5.0ft (1.5m)	33.75	32.40	31.05	CALL
CSMUZ9MM-10	LSZH Cable, DB9 Male/Male, 10.0ft (3.0m)	41.25	39.60	37.95	CALL
CSMUZ9MM-25	LSZH Cable, DB9 Male/Male, 25.0ft (7.6m)	56.25	54.00	51.75	CALL
CSMUZ9MM-125	LSZH Cable, DB9 Male/Male, 125.0ft (38.1m)	206.25	198.00	189.75	CALL
CSMUZ9MF-1	LSZH Cable, DB9 Male/Female, 1.0ft (0.3m)	27.75	26.64	25.53	CALL
CSMUZ9MF-5	LSZH Cable, DB9 Male/Female, 5.0ft (1.5m)	33.75	32.40	31.05	CALL
CSMUZ9MF-10	LSZH Cable, DB9 Male/Female, 10.0ft (3.0m)	41.25	39.60	37.95	CALL
CSMUZ9MF-25	LSZH Cable, DB9 Male/Female, 25.0ft (7.6m)	56.25	54.00	51.75	CALL
CSMUZ9MF-125	LSZH Cable, DB9 Male/Female, 125.0ft (38.1m)	206.25	198.00	189.75	CALL

Low Smoke Zero Halogen 15 Pin D-Sub Cables - Fully Populated and Double Shielded

CSMUZ15MM-1	LSZH Cable, DB15 Male/Male, 1.0ft (0.3m)	29.50	28.32	27.14	CALL
CSMUZ15MM-2.5	LSZH Cable, DB15 Male/Male, 2.5ft (0.8m)	32.50	31.20	29.90	CALL
CSMUZ15MM-5	LSZH Cable, DB15 Male/Male, 5.0ft (1.5m)	37.50	36.00	34.50	CALL
CSMUZ15MM-10	LSZH Cable, DB15 Male/Male, 10.0ft (3.0m)	47.50	45.60	43.70	CALL
CSMUZ15MM-15	LSZH Cable, DB15 Male/Male, 15.0ft (4.6m)	57.50	55.20	52.90	CALL
CSMUZ15MM-25	LSZH Cable, DB15 Male/Male, 25.0ft (7.6m)	66.00	63.36	60.72	CALL
CSMUZ15MM-50	LSZH Cable, DB15 Male/Male, 50.0ft (15.2m)	116.00	111.36	106.72	CALL
CSMUZ15MM-125	LSZH Cable, DB15 Male/Male, 125.0ft (38.1m)	266.00	255.36	244.72	CALL
CSMUZ15MF-1	LSZH Cable, DB15 Male/Female, 1.0ft (0.3m)	29.50	28.32	27.14	CALL
CSMUZ15MF-2.5	LSZH Cable, DB15 Male/Female, 2.5ft (0.8m)	32.50	31.20	29.90	CALL
CSMUZ15MF-5	LSZH Cable, DB15 Male/Female, 5.0ft (1.5m)	37.50	36.00	34.50	CALL
CSMUZ15MF-10	LSZH Cable, DB15 Male/Female, 10.0ft (3.0m)	47.50	45.60	43.70	CALL
CSMUZ15MF-15	LSZH Cable, DB15 Male/Female, 15.0ft (4.6m)	57.50	55.20	52.90	CALL
CSMUZ15MF-25	LSZH Cable, DB15 Male/Female, 25.0ft (7.6m)	66.00	63.36	60.72	CALL
CSMUZ15MF-50	LSZH Cable, DB15 Male/Female, 50.0ft (15.2m)	116.00	111.36	106.72	CALL
CSMUZ15MF-125	LSZH Cable, DB15 Male/Female, 125.0ft (38.1m)	266.00	255.36	244.72	CALL

Low Smoke Zero Halogen 25 Pin D-Sub Cables - Fully Populated and Double Shielded

CSMUZ25MM-2.5	LSZH Cable, DB25 Male/Male, 2.5ft (0.8m)	37.50	36.00	34.50	CALL
CSMUZ25MM-5	LSZH Cable, DB25 Male/Male, 5.0ft (1.5m)	45.00	43.20	41.40	CALL
CSMUZ25MM-15	LSZH Cable, DB25 Male/Male, 15.0ft (4.6m)	75.00	72.00	69.00	CALL
CSMUZ25MM-50	LSZH Cable, DB25 Male/Male, 50.0ft (15.2m)	165.00	158.40	151.80	CALL
CSMUZ25MM-125	LSZH Cable, DB25 Male/Male, 125.0ft (38.1m)	390.00	374.40	358.80	CALL
CSMUZ25MF-2.5	LSZH Cable, DB25 Male/Female, 2.5ft (0.8m)	37.50	36.00	34.50	CALL
CSMUZ25MF-5	LSZH Cable, DB25 Male/Female, 5.0ft (1.5m)	45.00	43.20	41.40	CALL
CSMUZ25MF-15	LSZH Cable, DB25 Male/Female, 15.0ft (4.6m)	75.00	72.00	69.00	CALL
CSMUZ25MF-50	LSZH Cable, DB25 Male/Female, 50.0ft (15.2m)	165.00	158.40	151.80	CALL
CSMUZ25MF-125	LSZH Cable, DB25 Male/Female, 125.0ft (38.1m)	390.00	374.40	358.80	CALL


More lengths available. Go to L-com.com

**Standard or Hi-Density
D-Sub configurations**



Online Video

L-com.com/Videos/A13



More lengths available.
Go to L-com.com






CSMNRA9-1MM



CSMNRA9-2MM



CSMNRA9-3MM




CSMNRA9-4MM



CSMNRA15-1MM



CSMNRA15-2MM



CSMNRA15-3MM



CSMNRA15-4MM



Defining 90 degree angled D-Sub cable assemblies

Angled connector hoods help connect D-Sub cables in tight places. L-com now offers four 90 degree angled options for each DB9, DB15 and DB25. The photos below detail the connector position relative to the cable entry direction.

Exit 1 - Left Exit



Exit 2 - Right Exit



Exit 3 - Down Exit



Exit 4 - Up Exit



Longer side of
"D" connector

Longer side of
"D" connector

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Deluxe D-Sub Right Angle Cables - 4 Options each for DB9, 15 and 25

L-com's CSMNRA series cables are perfect for tight fit and confined space D-Sub applications. These rugged cable assemblies feature a standard D-Sub connector on one end and right angle (4 options) D-Sub connector on the other. These right angle D-Sub cables are designed for use in enclosures, cabinets or other confined spaces where standard D-Sub connectors will not fit.

90° Angled Deluxe 9 Pin D-Sub Molded Male/Male Cables - 4 Exit Options

CSMNRA9-1MM-1	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNRA9-1MM-2.5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNRA9-1MM-5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNRA9-1MM-10	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNRA9-1MM-15	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNRA9-1MM-25	Deluxe Molded Cable, DB9 Male/Right Angle Exit 1 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL
CSMNRA9-2MM-1	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNRA9-2MM-2.5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNRA9-2MM-5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNRA9-2MM-10	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNRA9-2MM-15	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNRA9-2MM-25	Deluxe Molded Cable, DB9 Male/Right Angle Exit 2 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL
CSMNRA9-3MM-1	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNRA9-3MM-2.5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNRA9-3MM-5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNRA9-3MM-10	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNRA9-3MM-15	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNRA9-3MM-25	Deluxe Molded Cable, DB9 Male/Right Angle Exit 3 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL
CSMNRA9-4MM-1	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNRA9-4MM-2.5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNRA9-4MM-5	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNRA9-4MM-10	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNRA9-4MM-15	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNRA9-4MM-25	Deluxe Molded Cable, DB9 Male/Right Angle Exit 4 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL

90° Angled Deluxe 15 Pin D-Sub Molded Male/Male Cables - 4 Exit Options


CSMNRA15-1MM-1	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNRA15-1MM-2.5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 2.5ft (0.8m)	13.25	12.46	11.66	CALL
CSMNRA15-1MM-5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNRA15-1MM-10	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNRA15-1MM-15	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNRA15-1MM-25	Deluxe Molded Cable, DB15 Male/Right Angle Exit 1 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL
CSMNRA15-2MM-1	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNRA15-2MM-2.5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 2.5ft (0.8m)	13.25	12.46	11.66	CALL
CSMNRA15-2MM-5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNRA15-2MM-10	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNRA15-2MM-15	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNRA15-2MM-25	Deluxe Molded Cable, DB15 Male/Right Angle Exit 2 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL
CSMNRA15-3MM-1	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNRA15-3MM-2.5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 2.5ft (0.8m)	13.25	12.46	11.66	CALL
CSMNRA15-3MM-5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNRA15-3MM-10	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNRA15-3MM-15	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNRA15-3MM-25	Deluxe Molded Cable, DB15 Male/Right Angle Exit 3 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL
CSMNRA15-4MM-1	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNRA15-4MM-2.5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 2.5ft (0.8m)	13.25	12.46	11.66	CALL
CSMNRA15-4MM-5	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNRA15-4MM-10	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNRA15-4MM-15	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNRA15-4MM-25	Deluxe Molded Cable, DB15 Male/Right Angle Exit 4 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL

Item #	Description	1-9	10-24	25-99	100+
90° Angled Deluxe 25 Pin D-Sub Molded Male / Male Cables - 4 Exit Options					
CSMNR25-1MM-1	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNR25-1MM-2.5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNR25-1MM-5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNR25-1MM-10	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNR25-1MM-15	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNR25-1MM-25	Deluxe Molded Cable, DB25 Male/Right Angle Exit 1 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL
CSMNR25-2MM-1	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNR25-2MM-2.5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNR25-2MM-5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNR25-2MM-10	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNR25-2MM-15	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNR25-2MM-25	Deluxe Molded Cable, DB25 Male/Right Angle Exit 2 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL
CSMNR25-3MM-1	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNR25-3MM-2.5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNR25-3MM-5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNR25-3MM-10	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNR25-3MM-15	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNR25-3MM-25	Deluxe Molded Cable, DB25 Male/Right Angle Exit 3 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL
CSMNR25-4MM-1	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNR25-4MM-2.5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNR25-4MM-5	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNR25-4MM-10	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNR25-4MM-15	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNR25-4MM-25	Deluxe Molded Cable, DB25 Male/Right Angle Exit 4 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL



Defining 45 degree angled D-Sub cable assemblies

L-com has added 45 degree angle options for DB9, DB15 and DB25 cable assemblies. The photos below detail the connector position relative to the cable entry direction.

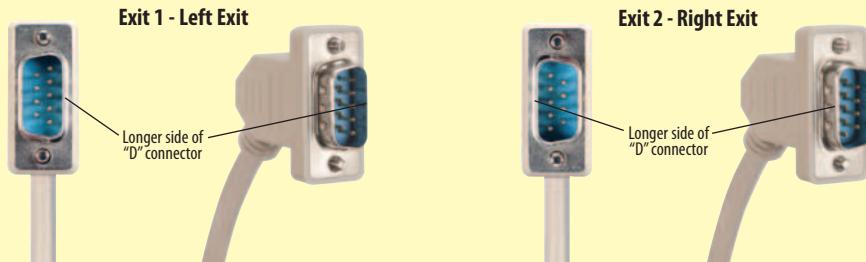

45° Angled Deluxe 9 Pin D-Sub Molded Male / Male Cables - 2 Exit Options

CSMNA459-1MM-1	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNA459-1MM-2.5	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNA459-1MM-5	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNA459-1MM-10	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNA459-1MM-15	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNA459-1MM-25	Deluxe Molded Cable, DB9 Male / 45° Exit 1 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL
CSMNA459-2MM-1	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 1.0ft (0.3m)	8.75	8.22	7.70	CALL
CSMNA459-2MM-2.5	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 2.5ft (0.8m)	9.50	8.93	8.36	CALL
CSMNA459-2MM-5	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 5.0ft (1.5m)	10.75	10.10	9.46	CALL
CSMNA459-2MM-10	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 10.0ft (3.0m)	13.25	12.46	11.66	CALL
CSMNA459-2MM-15	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 15.0ft (4.6m)	15.75	14.80	13.86	CALL
CSMNA459-2MM-25	Deluxe Molded Cable, DB9 Male / 45° Exit 2 Male, 25.0ft (7.6m)	20.75	19.50	18.26	CALL

45° Angled Deluxe 15 Pin D-Sub Molded Male / Male Cables - 2 Exit Options

CSMNA4515-1MM-1	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNA4515-1MM-2.5	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 2.5ft (0.8m)	12.35	11.61	10.87	CALL
CSMNA4515-1MM-5	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNA4515-1MM-10	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNA4515-1MM-15	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNA4515-1MM-25	Deluxe Molded Cable, DB15 Male / 45° Exit 1 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL
CSMNA4515-2MM-1	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 1.0ft (0.3m)	12.35	11.61	10.87	CALL
CSMNA4515-2MM-2.5	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 2.5ft (0.8m)	13.25	12.46	11.66	CALL
CSMNA4515-2MM-5	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 5.0ft (1.5m)	14.75	13.86	12.98	CALL
CSMNA4515-2MM-10	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 10.0ft (3.0m)	17.75	16.68	15.62	CALL
CSMNA4515-2MM-15	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 15.0ft (4.6m)	20.75	19.50	18.26	CALL
CSMNA4515-2MM-25	Deluxe Molded Cable, DB15 Male / 45° Exit 2 Male, 25.0ft (7.6m)	26.75	25.14	23.54	CALL

45° Angled Deluxe 25 Pin D-Sub Molded Male / Male Cables - 2 Exit Options

CSMNA4525-1MM-1	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNA4525-1MM-2.5	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNA4525-1MM-5	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNA4525-1MM-10	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNA4525-1MM-15	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNA4525-1MM-25	Deluxe Molded Cable, DB25 Male / 45° Exit 1 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL
CSMNA4525-2MM-1	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 1.0ft (0.3m)	12.55	11.80	11.04	CALL
CSMNA4525-2MM-2.5	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 2.5ft (0.8m)	13.75	12.92	12.10	CALL
CSMNA4525-2MM-5	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 5.0ft (1.5m)	15.75	14.80	13.86	CALL
CSMNA4525-2MM-10	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 10.0ft (3.0m)	19.75	18.56	17.38	CALL
CSMNA4525-2MM-15	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 15.0ft (4.6m)	23.75	22.32	20.90	CALL
CSMNA4525-2MM-25	Deluxe Molded Cable, DB25 Male / 45° Exit 2 Male, 25.0ft (7.6m)	31.75	29.84	27.94	CALL





Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Metal Armored Cables - Double Shielded with Additional Outer Metal Shield

These unique cables feature a stainless steel crush resistant jacket over our premium D-Sub braid & foil shielded cable to provide protection in applications where standard cables would be damaged due to excessive force. A custom steel internal enclosure under the backshell mold provides further strength. Crush resistance is 1500 PSI (Pounds per Square Inch).

D-Sub Metal Armor Product Grid. All families are available in lengths of 2.5, 5, 10, 15, 25 and 50 feet. See L-com.com.

	DB9	DB15	DB25
MALE/MALE	CSMT9MM	CSMT15MM	CSMT25MM
MALE/FEMALE	CSMT9MF	CSMT15MF	CSMT25MF

Metal Armored DB9 Male/Male or Male/Female Cables - Double Shielded with Added Outer Metal Shield

CSMT9MM-2.5	Metal Armored Cable, DB9 Male/Male, 2.5ft (0.8m)	22.75	21.38	20.02	CALL
CSMT9MM-10	Metal Armored Cable, DB9 Male/Male, 10.0ft (3.0m)	34.00	31.96	29.92	CALL
CSMT9MM-25	Metal Armored Cable, DB9 Male/Male, 25ft (7.6m)	56.50	53.11	49.72	CALL
CSMT9MF-5	Metal Armored Cable, DB9 Male/Female, 5.0ft (1.5m)	26.50	24.91	23.32	CALL
CSMT9MF-15	Metal Armored Cable, DB9 Male/Female, 15ft (4.6m)	41.50	39.01	36.52	CALL
CSMT9MF-50	Metal Armored Cable, DB9 Male/Female, 50ft (15.2m)	94.00	88.36	82.72	CALL

Metal Armored DB15 Male/Male or Male/Female Cables - Double Shielded with Added Outer Metal Shield

CSMT15MM-2.5	Metal Armored Cable, DB15 Male/Male, 2.5ft (0.8m)	26.50	24.91	23.32	CALL
CSMT15MM-10	Metal Armored Cable, DB15 Male/Male, 10.0ft (3.0m)	40.00	37.60	35.20	CALL
CSMT15MM-25	Metal Armored Cable, DB15 Male/Male, 25ft (7.6m)	67.00	62.98	58.96	CALL
CSMT15MF-5	Metal Armored Cable, DB15 Male/Female, 5.0ft (1.5m)	31.00	29.14	27.28	CALL
CSMT15MF-15	Metal Armored Cable, DB15 Male/Female, 15ft (4.6m)	49.00	46.06	43.12	CALL
CSMT15MF-50	Metal Armored Cable, DB15 Male/Female, 50ft (15.2m)	112.00	105.28	98.56	CALL

Metal Armored DB25 Male/Male or Male/Female Cables - Double Shielded with Added Outer Metal Shield

CSMT25MM-2.5	Metal Armored Cable, DB25 Male/Male, 2.5ft (0.8m)	30.50	28.67	26.84	CALL
CSMT25MM-10	Metal Armored Cable, DB25 Male/Male, 10.0ft (3.0m)	47.00	44.18	41.36	CALL
CSMT25MM-25	Metal Armored Cable, DB25 Male/Male, 25ft (7.6m)	80.00	75.20	70.40	CALL
CSMT25MF-5	Metal Armored Cable, DB25 Male/Female, 5.0ft (1.5m)	36.00	33.84	31.68	CALL
CSMT25MF-15	Metal Armored Cable, DB25 Male/Female, 15ft (4.6m)	58.00	54.52	51.04	CALL
CSMT25MF-50	Metal Armored Cable, DB25 Male/Female, 50ft (15.2m)	135.00	126.90	118.80	CALL

Plastic Armored Cables - Double Shielded with Additional Outer Plastic Shield

These unique cables feature a plastic crush resistant jacket over our premium D-sub braid & foil shielded cable to provide protection in applications where standard cables would be damaged due to excessive force. A custom steel internal enclosure under the backshell mold provides further strength. Crush resistance is 800 PSI (Pounds per Square Inch).

D-Sub Plastic Armor Product Grid. All families are available in lengths of 2.5, 5, 10, 15, 25 and 50 feet. See L-com.com.

	DB9	DB15	DB25
MALE/MALE	CSPL9MM	CSPL15MM	CSPL25MM
MALE/FEMALE	CSPL9MF	CSPL15MF	CSPL25MF

Plastic Armored DB9 Male/Male or Male/Female Cables - Double Shielded with Added Outer Plastic Shield

CSPL9MM-2.5	Plastic Armored Cable, DB9 Male/Male, 2.5ft (0.8m)	20.75	19.50	18.26	CALL
CSPL9MM-10	Plastic Armored Cable, DB9 Male/Male, 10.0ft (3.0m)	29.00	27.26	25.52	CALL
CSPL9MM-25	Plastic Armored Cable, DB9 Male/Male, 25ft (7.6m)	45.50	42.77	40.04	CALL
CSPL9MF-5	Plastic Armored Cable, DB9 Male/Female, 5.0ft (1.5m)	23.50	22.09	20.68	CALL
CSPL9MF-15	Plastic Armored Cable, DB9 Male/Female, 15ft (4.6m)	34.50	32.43	30.36	CALL
CSPL9MF-50	Plastic Armored Cable, DB9 Male/Female, 50ft (15.2m)	73.00	68.62	64.24	CALL

Plastic Armored DB15 Male/Male or Male/Female Cables - Double Shielded with Added Outer Plastic Shield

CSPL15MM-2.5	Plastic Armored Cable, DB15 Male/Male, 2.5ft (0.8m)	22.00	20.68	19.36	CALL
CSPL15MM-10	Plastic Armored Cable, DB15 Male/Male, 10.0ft (3.0m)	31.00	29.14	27.28	CALL
CSPL15MM-25	Plastic Armored Cable, DB15 Male/Male, 25ft (7.6m)	49.00	46.06	43.12	CALL
CSPL15MF-5	Plastic Armored Cable, DB15 Male/Female, 5.0ft (1.5m)	25.00	23.50	22.00	CALL
CSPL15MF-15	Plastic Armored Cable, DB15 Male/Female, 15ft (4.6m)	37.00	34.78	32.56	CALL
CSPL15MF-50	Plastic Armored Cable, DB15 Male/Female, 50ft (15.2m)	79.00	74.26	69.52	CALL

Plastic Armored DB25 Male/Male or Male/Female Cables - Double Shielded with Added Outer Plastic Shield

CSPL25MM-2.5	Plastic Armored Cable, DB25 Male/Male, 2.5ft (0.8m)	24.75	23.26	21.78	CALL
CSPL25MM-10	Plastic Armored Cable, DB25 Male/Male, 10.0ft (3.0m)	36.00	33.84	31.68	CALL
CSPL25MM-25	Plastic Armored Cable, DB25 Male/Male, 25ft (7.6m)	58.50	54.99	51.48	CALL
CSPL25MF-5	Plastic Armored Cable, DB25 Male/Female, 5.0ft (1.5m)	28.50	26.79	25.08	CALL
CSPL25MF-15	Plastic Armored Cable, DB25 Male/Female, 15ft (4.6m)	43.50	40.89	38.28	CALL
CSPL25MF-50	Plastic Armored Cable, DB25 Male/Female, 50ft (15.2m)	96.00	90.24	84.48	CALL



D-Subminiature armored cables explained

Metal Coupling Nut

Heavy duty construction ensures that the crush resistant jacket remains in place

Crush Resistant Metal Jacket
Up to 1500 PSI (pounds per square inch)

Plastic Coupling Nut

Heavy duty plastic construction ensures that the crush resistant jacket remains in place

Crush Resistant Plastic Jacket
Up to 800 PSI (pounds per square inch)

Uses our Premium bulk cable including PVC cable jacket and braid/foil shield under the armor.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Data Cables -With Reversible Hardware to Mate Any Serial Cables or Mount on Panels

L-com is proud to offer an **exclusive family** of D-Sub data cables featuring user defined mounting hardware. Each cable end is capable of being connected with either male jack screws or female hex standoffs regardless of D-Sub gender. This capability allows a user much more flexibility to interface ports with opposite gender hardware. A by-product feature is to use the same cable with the male or female connector end mounted on a panel. No other standard off-the-shelf cable has this capability. The secret is in the kit of four custom hex standoffs that are included with each cable assembly. The specially made cable readily accepts these hex standoffs mounting on panels no thicker than 0.062" (0.2cm).

Reversing Hardware 9 Pin D-Sub Cables - Shielded and Fully Populated

CRMN9MM-2.5	Reversible Hardware Molded Cable, DB9 Male/Male, 2.5ft (0.8m)	14.75	14.16	13.57	CALL
CRMN9MM-5	Reversible Hardware Molded Cable, DB9 Male/Male, 5.0ft (1.5m)	15.75	15.12	14.49	CALL
CRMN9MM-10	Reversible Hardware Molded Cable, DB9 Male/Male, 10.0ft (3.0m)	17.50	16.80	16.10	CALL
CRMN9MM-15	Reversible Hardware Molded Cable, DB9 Male/Male, 15.0ft (4.6m)	19.25	18.48	17.71	CALL
CRMN9MM-25	Reversible Hardware Molded Cable, DB9 Male/Male, 25.0ft (7.6m)	22.75	21.84	20.93	CALL
CRMN9MF-2.5	Reversible Hardware Molded Cable, DB9 Male/Female, 2.5ft (0.8m)	14.75	14.16	13.57	CALL
CRMN9MF-5	Reversible Hardware Molded Cable, DB9 Male/Female, 5.0ft (1.5m)	15.75	15.12	14.49	CALL
CRMN9MF-10	Reversible Hardware Molded Cable, DB9 Male/Female, 10.0ft (3.0m)	17.50	16.80	16.10	CALL
CRMN9MF-15	Reversible Hardware Molded Cable, DB9 Male/Female, 15.0ft (4.6m)	19.25	18.48	17.71	CALL
CRMN9MF-25	Reversible Hardware Molded Cable, DB9 Male/Female, 25.0ft (7.6m)	22.75	21.84	20.93	CALL
CRMN9FF-2.5	Reversible Hardware Molded Cable, DB9 Female/Female, 2.5ft (0.8m)	14.75	14.16	13.57	CALL
CRMN9FF-5	Reversible Hardware Molded Cable, DB9 Female/Female, 5.0ft (1.5m)	15.75	15.12	14.49	CALL
CRMN9FF-10	Reversible Hardware Molded Cable, DB9 Female/Female, 10.0ft (3.0m)	17.50	16.80	16.10	CALL
CRMN9FF-15	Reversible Hardware Molded Cable, DB9 Female/Female, 15.0ft (4.6m)	19.25	18.48	17.71	CALL
CRMN9FF-25	Reversible Hardware Molded Cable, DB9 Female/Female, 25.0ft (7.6m)	22.75	21.84	20.93	CALL

Reversing Hardware 15 Pin D-Sub Cables - Shielded and Fully Populated

CRMN15MM-2.5	Reversible Hardware Molded Cable, DB15 Male/Male, 2.5ft (0.8m)	18.90	17.39	15.88	CALL
CRMN15MM-5	Reversible Hardware Molded Cable, DB15 Male/Male, 5.0ft (1.5m)	20.25	18.63	17.01	CALL
CRMN15MM-10	Reversible Hardware Molded Cable, DB15 Male/Male, 10.0ft (3.0m)	22.60	20.79	18.98	CALL
CRMN15MM-15	Reversible Hardware Molded Cable, DB15 Male/Male, 15.0ft (4.6m)	24.95	22.95	20.96	CALL
CRMN15MF-2.5	Reversible Hardware Molded Cable, DB15 Male/Female, 2.5ft (0.8m)	18.90	17.39	15.88	CALL
CRMN15MF-5	Reversible Hardware Molded Cable, DB15 Male/Female, 5.0ft (1.5m)	20.25	18.63	17.01	CALL
CRMN15MF-10	Reversible Hardware Molded Cable, DB15 Male/Female, 10.0ft (3.0m)	22.60	20.79	18.98	CALL
CRMN15MF-15	Reversible Hardware Molded Cable, DB15 Male/Female, 15.0ft (4.6m)	24.95	22.95	20.96	CALL
CRMN15FF-2.5	Reversible Hardware Molded Cable, DB15 Female/Female, 2.5ft (0.8m)	18.90	17.39	15.88	CALL
CRMN15FF-5	Reversible Hardware Molded Cable, DB15 Female/Female, 5.0ft (1.5m)	20.25	18.63	17.01	CALL
CRMN15FF-10	Reversible Hardware Molded Cable, DB15 Female/Female, 10.0ft (3.0m)	22.60	20.79	18.98	CALL
CRMN15FF-15	Reversible Hardware Molded Cable, DB15 Female/Female, 15.0ft (4.6m)	24.95	22.95	20.96	CALL

Reversing Hardware 25 Pin D-Sub Cables - Shielded and Fully Populated

CRMN25MM-2.5	Reversible Hardware Molded Cable, DB25 Male/Male, 2.5ft (0.8m)	21.50	20.64	19.78	CALL
CRMN25MM-5	Reversible Hardware Molded Cable, DB25 Male/Male, 5.0ft (1.5m)	23.25	22.32	21.39	CALL
CRMN25MM-10	Reversible Hardware Molded Cable, DB25 Male/Male, 10.0ft (3.0m)	26.50	25.44	24.38	CALL
CRMN25MM-15	Reversible Hardware Molded Cable, DB25 Male/Male, 15.0ft (4.6m)	29.75	28.56	27.37	CALL
CRMN25MM-25	Reversible Hardware Molded Cable, DB25 Male/Male, 25.0ft (7.6m)	36.25	34.80	33.35	CALL
CRMN25MF-2.5	Reversible Hardware Molded Cable, DB25 Male/Female, 2.5ft (0.8m)	21.50	20.64	19.78	CALL
CRMN25MF-5	Reversible Hardware Molded Cable, DB25 Male/Female, 5.0ft (1.5m)	23.25	22.32	21.39	CALL
CRMN25MF-10	Reversible Hardware Molded Cable, DB25 Male/Female, 10.0ft (3.0m)	26.50	25.44	24.38	CALL
CRMN25MF-15	Reversible Hardware Molded Cable, DB25 Male/Female, 15.0ft (4.6m)	29.75	28.56	27.37	CALL
CRMN25MF-25	Reversible Hardware Molded Cable, DB25 Male/Female, 25.0ft (7.6m)	36.25	34.80	33.35	CALL
CRMN25FF-2.5	Reversible Hardware Molded Cable, DB25 Female/Female, 2.5ft (0.8m)	21.50	20.64	19.78	CALL
CRMN25FF-5	Reversible Hardware Molded Cable, DB25 Female/Female, 5.0ft (1.5m)	23.25	22.32	21.39	CALL
CRMN25FF-10	Reversible Hardware Molded Cable, DB25 Female/Female, 10.0ft (3.0m)	26.50	25.44	24.38	CALL
CRMN25FF-15	Reversible Hardware Molded Cable, DB25 Female/Female, 15.0ft (4.6m)	29.75	28.56	27.37	CALL
CRMN25FF-25	Reversible Hardware Molded Cable, DB25 Female/Female, 25.0ft (7.6m)	36.25	34.80	33.35	CALL

Reversing Hardware 37 Pin D-Sub Cables - Shielded and Fully Populated

CRMN37MM-2.5	Reversible Hardware Molded Cable, DB37 Male/Male, 2.5ft (0.8m)	36.00	33.12	30.24	CALL
CRMN37MM-5	Reversible Hardware Molded Cable, DB37 Male/Male, 5.0ft (1.5m)	38.60	35.51	32.42	CALL
CRMN37MM-10	Reversible Hardware Molded Cable, DB37 Male/Male, 10.0ft (3.0m)	43.60	40.11	36.62	CALL
CRMN37MM-15	Reversible Hardware Molded Cable, DB37 Male/Male, 15.0ft (4.6m)	48.60	44.71	40.82	CALL
CRMN37MM-25	Reversible Hardware Molded Cable, DB37 Male/Male, 25.0ft (7.6m)	58.55	53.87	49.18	CALL
CRMN37MF-2.5	Reversible Hardware Molded Cable, DB37 Male/Female, 2.5ft (0.8m)	36.00	33.12	30.24	CALL
CRMN37MF-5	Reversible Hardware Molded Cable, DB37 Male/Female, 5.0ft (1.5m)	38.60	35.51	32.42	CALL
CRMN37MF-10	Reversible Hardware Molded Cable, DB37 Male/Female, 10.0ft (3.0m)	43.60	40.11	36.62	CALL
CRMN37MF-15	Reversible Hardware Molded Cable, DB37 Male/Female, 15.0ft (4.6m)	48.60	44.71	40.82	CALL
CRMN37MF-25	Reversible Hardware Molded Cable, DB37 Male/Female, 25.0ft (7.6m)	58.55	53.87	49.18	CALL
CRMN37FF-2.5	Reversible Hardware Molded Cable, DB37 Female/Female, 2.5ft (0.8m)	36.00	33.12	30.24	CALL
CRMN37FF-5	Reversible Hardware Molded Cable, DB37 Female/Female, 5.0ft (1.5m)	38.60	35.51	32.42	CALL
CRMN37FF-10	Reversible Hardware Molded Cable, DB37 Female/Female, 10.0ft (3.0m)	43.60	40.11	36.62	CALL
CRMN37FF-15	Reversible Hardware Molded Cable, DB37 Female/Female, 15.0ft (4.6m)	48.60	44.71	40.82	CALL
CRMN37FF-25	Reversible Hardware Molded Cable, DB37 Female/Female, 25.0ft (7.6m)	58.55	53.87	49.18	CALL

Exclusive

CRMN9


CRMN15

CRMN25

CRMN37


Comes complete with male and female 4-40 hardware plus instruction sheet.

STEP 1




This cable is shipped with male knurled thumbscrews regardless of D-Sub gender.

STEP 2



If you need a female fastening system, simply unscrew the knurled thumbscrew.

STEP 3



Then: install (thread) hex jack screws which are provided.


STEP 4



To install your cable on a panel it should be no thicker than 0.062" (0.2cm). Simply follow step 2. Provide proper panel opening, install hex jack screw, and tighten.




Recommended panel openings for rear mounted D-Sub adapters

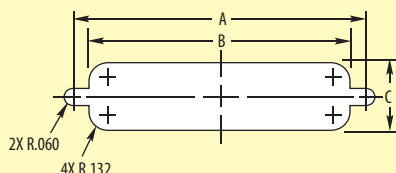

PANEL MOUNTING DIMENSIONS (shown in inches / cm)			
CONTACTS	DIM. A	DIM. B	DIM. C
DB9 or HD15	0.984 (2.5cm)	0.806 (2.0cm)	.449 (1.1cm)
DB15 or HD26	1.312 (3.3cm)	1.134 (2.9cm)	.449 (1.1cm)
DB25 or HD44	1.852 (4.7cm)	1.684 (4.3cm)	.449 (1.1cm)
DB37 or HD62	2.500 (6.4cm)	2.326 (5.9cm)	.449 (1.1cm)
DB50 or HD78	2.406 (6.1cm)	2.218 (5.6cm)	.555 (1.4cm)

Standard or Hi-Density
D-Sub configurations

Online Video

L-com.com/Videos/A13


More lengths available.
Go to L-com.com

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Deluxe High-Density 15 Pin D-Sub Cables - Fully Populated and Completely Shielded

High-density D-Sub connectors are used in a number of PC and network applications. This type of connector can usually be recognized because they have three rows of smaller pins versus the larger pins used in conventional D-Subs. Fully populated with stranded conductors and aluminum mylar shielding. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

CHD15MM-2.5	Deluxe Molded Cable, HD15 Male/Male, 2.5ft (0.8m)	10.90	10.25	9.59	CALL
CHD15MM-5	Deluxe Molded Cable, HD15 Male/Male, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CHD15MM-7.5	Deluxe Molded Cable, HD15 Male/Male, 7.5ft (2.3m)	12.65	11.89	11.13	CALL
CHD15MM-10	Deluxe Molded Cable, HD15 Male/Male, 10.0ft (3.0m)	13.50	12.69	11.88	CALL
CHD15MM-15	Deluxe Molded Cable, HD15 Male/Male, 15.0ft (4.6m)	15.25	14.33	13.42	CALL
CHD15MM-25	Deluxe Molded Cable, HD15 Male/Male, 25.0ft (7.6m)	17.00	15.98	14.96	CALL
CHD15MF-2.5	Deluxe Molded Cable, HD15 Male/Female, 2.5ft (0.8m)	10.90	10.25	9.59	CALL
CHD15MF-5	Deluxe Molded Cable, HD15 Male/Female, 5.0ft (1.5m)	11.75	11.04	10.34	CALL
CHD15MF-7.5	Deluxe Molded Cable, HD15 Male/Female, 7.5ft (2.3m)	12.65	11.89	11.13	CALL
CHD15MF-10	Deluxe Molded Cable, HD15 Male/Female, 10.0ft (3.0m)	13.50	12.69	11.88	CALL
CHD15MF-15	Deluxe Molded Cable, HD15 Male/Female, 15.0ft (4.6m)	15.25	14.33	13.42	CALL
CHD15MF-25	Deluxe Molded Cable, HD15 Male/Female, 25.0ft (7.6m)	17.00	15.98	14.96	CALL

Note: Most monitor manufacturers recommend using premium grade VGA cables that utilize 75 Ohm coaxial lines.

Deluxe High-Density 26 Pin Molded Cables - Ready Made, Fully Populated for Many Applications

Fully molded data cables equipped with high-density D-Sub connectors. Fully populated with 26 AWG stranded conductors and aluminum mylar shielding. They are equipped with readily accessible thumbscrew type hold downs. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

CHD26MM-2.5	Deluxe Molded Cable, HD26 Male/Male, 2.5ft (0.8m)	26.90	25.29	23.67	CALL
CHD26MM-5	Deluxe Molded Cable, HD26 Male/Male, 5.0ft (1.5m)	28.90	27.17	25.43	CALL
CHD26MM-10	Deluxe Molded Cable, HD26 Male/Male, 10.0ft (3.0m)	32.95	30.97	29.00	CALL
CHD26MM-15	Deluxe Molded Cable, HD26 Male/Male, 15.0ft (4.6m)	37.00	34.78	32.56	CALL
CHD26MF-2.5	Deluxe Molded Cable, HD26 Male/Female, 2.5ft (0.8m)	26.90	25.29	23.67	CALL
CHD26MF-5	Deluxe Molded Cable, HD26 Male/Female, 5.0ft (1.5m)	28.90	27.17	25.43	CALL
CHD26MF-10	Deluxe Molded Cable, HD26 Male/Female, 10.0ft (3.0m)	32.95	30.97	29.00	CALL
CHD26MF-15	Deluxe Molded Cable, HD26 Male/Female, 15.0ft (4.6m)	37.00	34.78	32.56	CALL
CHD26MF-25	Deluxe Molded Cable, HD26 Male/Female, 25.0ft (7.6m)	45.10	42.39	39.69	CALL
CHD26MF-50	Deluxe Molded Cable, HD26 Male/Female, 50.0ft (15.2m)	65.35	61.43	57.51	CALL

Deluxe High-Density 44 Pin Molded Cables - Fully Populated and Shielded

Injection molded cable assemblies with HD44 terminations. Fully populated with 24 AWG stranded conductors and aluminum mylar and braided shielding. 4-40 metal thumbscrews molded into the strain relief. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

CHD44MM-2.5	Deluxe Molded Cable, HD44 Male/Male, 2.5ft (0.8m)	43.75	41.13	38.50	CALL
CHD44MM-5	Deluxe Molded Cable, HD44 Male/Male, 5.0ft (1.5m)	51.85	48.74	45.63	CALL
CHD44MM-10	Deluxe Molded Cable, HD44 Male/Male, 10.0ft (3.0m)	68.05	63.97	59.88	CALL
CHD44MM-15	Deluxe Molded Cable, HD44 Male/Male, 15.0ft (4.6m)	84.25	79.19	74.14	CALL
CHD44MM-25	Deluxe Molded Cable, HD44 Male/Male, 25.0ft (7.6m)	116.65	109.65	102.65	CALL
CHD44MM-50	Deluxe Molded Cable, HD44 Male/Male, 50.0ft (15.2m)	197.65	185.79	173.93	CALL
CHD44MF-2.5	Deluxe Molded Cable, HD44 Male/Female, 2.5ft (0.8m)	43.75	41.13	38.50	CALL
CHD44MF-5	Deluxe Molded Cable, HD44 Male/Female, 5.0ft (1.5m)	51.85	48.74	45.63	CALL
CHD44MF-10	Deluxe Molded Cable, HD44 Male/Female, 10.0ft (3.0m)	68.05	63.97	59.88	CALL
CHD44MF-15	Deluxe Molded Cable, HD44 Male/Female, 15.0ft (4.6m)	84.25	79.19	74.14	CALL
CHD44MF-25	Deluxe Molded Cable, HD44 Male/Female, 25.0ft (7.6m)	116.65	109.65	102.65	CALL
CHD44MF-50	Deluxe Molded Cable, HD44 Male/Female, 50.0ft (15.2m)	197.65	185.79	173.93	CALL

Deluxe High-Density 62 Pin Molded Cables - 31 Twisted Pairs and Full Shielding

Fully molded data cables with HD62 D-Sub connectors. Fully shielded with aluminum mylar and fully populated with 28 AWG twisted pairs. Straight-thru pinning. Equipped with 4-40 thumbscrews. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

CHD62MM-2.5	Deluxe Molded Cable, HD62 Male/Male, 2.5ft (0.8m)	56.70	53.30	49.90	CALL
CHD62MM-5	Deluxe Molded Cable, HD62 Male/Male, 5.0ft (1.5m)	67.50	63.45	59.40	CALL
CHD62MM-10	Deluxe Molded Cable, HD62 Male/Male, 10.0ft (3.0m)	89.10	83.75	78.41	CALL
CHD62MM-15	Deluxe Molded Cable, HD62 Male/Male, 15.0ft (4.6m)	110.70	104.06	97.42	CALL
CHD62MM-25	Deluxe Molded Cable, HD62 Male/Male, 25.0ft (7.6m)	132.30	124.36	116.42	CALL
CHD62MF-2.5	Deluxe Molded Cable, HD62 Male/Female, 2.5ft (0.8m)	56.70	53.30	49.90	CALL
CHD62MF-5	Deluxe Molded Cable, HD62 Male/Female, 5.0ft (1.5m)	67.50	63.45	59.40	CALL
CHD62MF-10	Deluxe Molded Cable, HD62 Male/Female, 10.0ft (3.0m)	89.10	83.75	78.41	CALL
CHD62MF-15	Deluxe Molded Cable, HD62 Male/Female, 15.0ft (4.6m)	110.70	104.06	97.42	CALL
CHD62MF-25	Deluxe Molded Cable, HD62 Male/Female, 25.0ft (7.6m)	132.30	124.36	116.42	CALL
CHD62MF-50	Deluxe Molded Cable, HD62 Male/Female, 50.0ft (15.2m)	240.30	225.88	211.46	CALL

Deluxe High-Density 78 Pin Molded Cables - 39 Twisted Pairs and Double Shielded

Fully molded data cables equipped with HD78 D-Sub connectors. Fully shielded with aluminum mylar and braided shielding and fully populated with 28 AWG twisted pairs. Straight-thru pinning. Equipped with 4-40 thumbscrews. Hex nuts on female connectors are removable to expose 4-40 thumbscrews.

CHD78MM-2.5	Deluxe Molded Cable, HD78 Male/Male, 2.5ft (0.8m)	62.10	58.37	54.65	CALL
CHD78MM-5	Deluxe Molded Cable, HD78 Male/Male, 5.0ft (1.5m)	75.60	71.06	66.53	CALL
CHD78MM-10	Deluxe Molded Cable, HD78 Male/Male, 10.0ft (3.0m)	102.60	96.44	90.29	CALL
CHD78MM-25	Deluxe Molded Cable, HD78 Male/Male, 25.0ft (7.6m)	183.60	172.58	161.57	CALL
CHD78MM-50	Deluxe Molded Cable, HD78 Male/Male, 50.0ft (15.2m)	318.60	299.48	280.37	CALL
CHD78MF-2.5	Deluxe Molded Cable, HD78 Male/Female, 2.5ft (0.8m)	62.10	58.37	54.65	CALL
CHD78MF-5	Deluxe Molded Cable, HD78 Male/Female, 5.0ft (1.5m)	75.60	71.06	66.53	CALL
CHD78MF-10	Deluxe Molded Cable, HD78 Male/Female, 10.0ft (3.0m)	102.60	96.44	90.29	CALL
CHD78MF-25	Deluxe Molded Cable, HD78 Male/Female, 25.0ft (7.6m)	183.60	172.58	161.57	CALL
CHD78MF-50	Deluxe Molded Cable, HD78 Male/Female, 50.0ft (15.2m)	318.60	299.48	280.37	CALL

Replacement 4-40 Screws for CHD Series Assemblies - Sold in 10/Packs

TS-CSMN	Replacement Screws for CHD Series Assemblies, Pkg/10	4.75	4.46	4.18	CALL
---------	--	------	------	------	------

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Waterproof D-Sub Connectors and Backshells - IEC IP67 Rated

Harsh outdoor or indoor environments can destroy electronic equipment. Standard D-Sub connectors are not intended to withstand contaminants such as water and dust. By utilizing tough ABS housings, rubber gaskets and silicone insulating rings, these products achieve IEC IP67 ratings. Panel mounted D-Sub solder connectors are rear mounted and fit into standard D-Sub holes. Backshells conform to a variety of cable diameters by adjusting the sealing nut. L-com will manufacture cable assemblies using waterproof backshells with modest minimum requirements.

Waterproof D-Sub Panel Mount Solder Connectors

These solder cup connectors are available in male or female genders and DB9, DB15, DB25 and HD15 sizes. They will accommodate wire ranges from 30 - 20 AWG. Construction features gold plated brass contacts, nickel plated steel shells and a silicone insulating ring. Maximum recommended panel thickness is 0.078" (0.2cm).

WPSD9P	Waterproof Panel Mount Solder Cup D-Sub Connector, DB9M	14.45	13.58	12.72	CALL
WPSD9S	Waterproof Panel Mount Solder Cup D-Sub Connector, DB9F	14.45	13.58	12.72	CALL
WPSD15P	Waterproof Panel Mount Solder Cup D-Sub Connector, DB15M	16.55	15.56	14.56	CALL
WPSD15S	Waterproof Panel Mount Solder Cup D-Sub Connector, DB15F	16.55	15.56	14.56	CALL
WPSD25P	Waterproof Panel Mount Solder Cup D-Sub Connector, DB25M	18.65	17.53	16.41	CALL
WPSD25S	Waterproof Panel Mount Solder Cup D-Sub Connector, DB25F	18.65	17.53	16.41	CALL
WPSDH15P	Waterproof Panel Mount Solder Cup D-Sub Connector, HD15M	16.55	15.56	14.56	CALL
WPSDH15S	Waterproof Panel Mount Solder Cup D-Sub Connector, HD15F	16.55	15.56	14.56	CALL

Waterproof D-Sub Connector Covers

L-com's WPSD series of waterproof covers are perfect for protecting D-Subminiature connectors from contamination and moisture. Designed for harsh environments, these protective covers can be used with L-com's WPSD series waterproof D-Sub connectors to ensure IP67 rated protection. Several versions are available for the most common D-Sub connector styles including DB9 (HD15), DB15 and DB25.

WPSD1-CVR	Waterproof D-Sub Connector Cover, DB9 and HD15	7.15	6.72	6.29	CALL
WPSD2-CVR	Waterproof D-Sub Connector Cover, DB15	7.45	7.00	6.56	CALL
WPSD3-CVR	Waterproof D-Sub Connector Cover, DB25	7.70	7.24	6.78	CALL

Waterproof D-Sub Backshell Kits


These backshell kits include solder cup connectors and are also available in male or female genders and DB9, DB15, DB25 and HD15 sizes. The connectors will accommodate wire ranges from 30 - 20 AWG. Backshell construction features ABS housings, nylon seals, nickel plated brass thumbscrews and rubber sealing gaskets to insure IEC IP67 rating. Color: Black.

WPDB9P-KIT	Waterproof D-Sub Backshell Kit, DB9M	16.55	15.56	14.56	CALL
WPDB9S-KIT	Waterproof D-Sub Backshell Kit, DB9F	16.55	15.56	14.56	CALL
WPDB15P-KIT	Waterproof D-Sub Backshell Kit, DB15M	18.65	17.53	16.41	CALL
WPDB15S-KIT	Waterproof D-Sub Backshell Kit, DB15F	18.65	17.53	16.41	CALL
WPDB25P-KIT	Waterproof D-Sub Backshell Kit, DB25M	21.80	20.49	19.18	CALL
WPDB25S-KIT	Waterproof D-Sub Backshell Kit, DB25F	21.80	20.49	19.18	CALL
WPHDB15P-KIT	Waterproof D-Sub Backshell Kit, HD15M	14.45	13.29	12.14	CALL
WPHDB15S-KIT	Waterproof D-Sub Backshell Kit, HD15F	14.45	13.29	12.14	CALL




How to apply panel mount waterproof D-Sub products

STEP 1




Mount D-Sub connector from inside of panel or enclosure using hex jack screws provided.




Maximum panel thickness is 0.078"

STEP 2

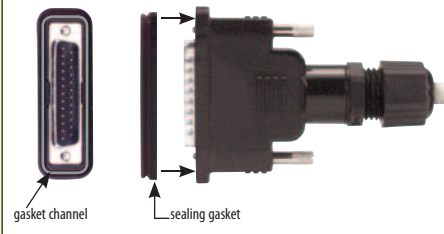

Apply sealing gasket (supplied with backshell kit) in backshell channel around perimeter of D-Sub connector.

STEP 3

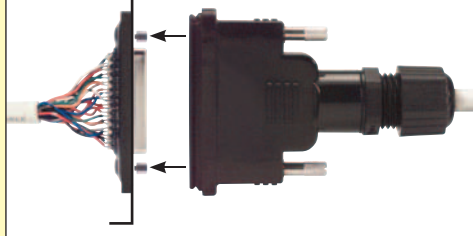

Mate connectors and secure backshell thumbscrews to threaded jack screws.



Waterproof IP67 rating is achieved by gaskets / seals in backshell and silicone seal ring in connector.

How are slimline adapters used?



Online Video

L-com.com/Videos/A24

Gender Changers:

Allow two same gender connectors to mate. Very handy to have on hand to solve problems in the field or lab. **See detail 1.**

Can also be used as pass through connectors for panel mounting.
Note: See the tip on [page 96](#) for panel mounting hardware required.
See detail 3.

Socket Savers:

Extend the life of more expensive D-Sub connectors on PCBs and cable assemblies that are subject to frequent mating and unmating. **See detail 2.**


Can also be used as pass through connectors for panel mounting.

Null Modem, Reverser and Custom Wired Adapters:

Convert existing straight wired cables to the desired wiring scheme.

Can also be used for panel mounting.

Slim-Line adapters are used in a variety of applications, as illustrated here. Due to their low profile, they help reduce leverage strain on overstressed interface ports. (F = Female Connector, M = Male Connector)

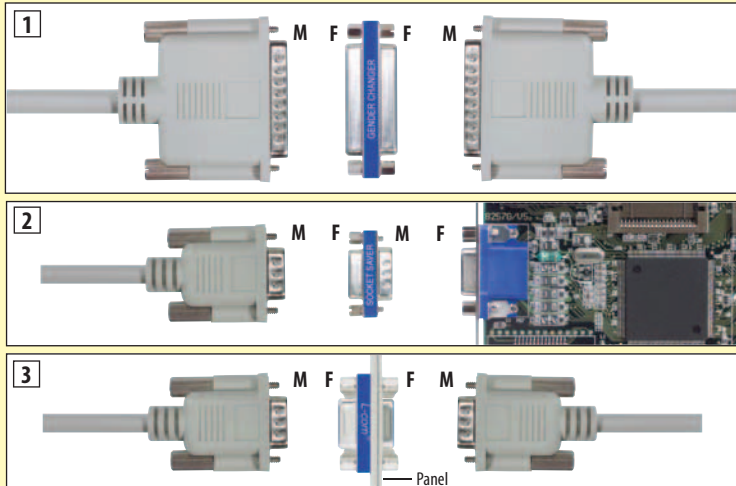


How slimline adapters are constructed

All slimline adapters are fully shielded providing EMI protection in electrically noisy environments. Gender Changers and Socket Savers use a one piece contact design ensuring reliability in applications requiring frequent connector mating/unmating. Standard mating hardware is easily removed and replaced for situations such as mismatched hardware, panel mounting, etc.

Adapters and Reversers

Gender Changer / Socket Saver

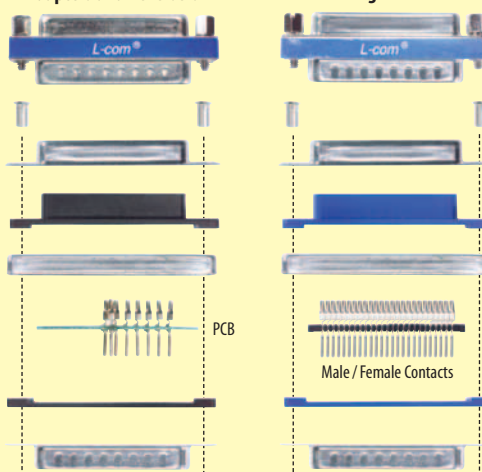

Mating Hardware	Brass, Nickel Plated
Durability Mating / Unmating	Approx. 100 cycles
Temperature Rating	-55°C to 105°C
Current Rating	5 amps max.
Voltage Rating	50 volts max.

Components	Materials
Hollow Rivet	Steel / Tin Plated
Female Connector Shell	Steel / Tin Plated
Female Connector Housing	Glass filled PBT, UL94 V-0 rated
Metal Shield	Steel / Tin Plated
Contacts	Brass / Gold Flash Plated
Male Connector Housing	Glass filled PBT, UL94 V-0 rated
Male Connector Shell	Steel / Tin Plated



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DB9, DB15 and DB25 Shielded Covers - Protect Ports from Contamination and EMI

These unique all metal covers provide port protection and shielding from EMI/RFI interference. Unlike other covers, the DML series is equipped with 4-40 screws for positive attachment and proper grounding.

DML009P	Shielded Cover for DB9M	1.75	1.61	1.47	CALL
DML009S	Shielded Cover for DB9F/HD15F	1.75	1.61	1.47	CALL
DML015P	Shielded Cover for DB15M	1.75	1.61	1.47	CALL
DML015S	Shielded Cover for DB15F/HD26F	1.75	1.61	1.47	CALL
DML019P	Shielded Cover for DB25M	1.75	1.61	1.47	CALL
DML019S	Shielded Cover for DB25F/HD44F	1.75	1.61	1.47	CALL

D-Sub Connector Covers - Protect Unused Ports, Pkg/10

These covers are perfect for protecting unused ports, cables or any expensive equipment from physical damage, dirt, and dust. Made from RoHS compliant PVC, these covers attach easily and stay in place with a snug friction fit. Color is Black.

CVR9F	DB9 / HD15 Protective Cover for Female Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR9M	DB9 / HD15 Protective Cover for Male Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR15F	DB15 / HD26 Protective Cover for Female Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR15M	DB15 / HD26 Protective Cover for Male Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR25F	DB25 / HD44 Protective Cover for Female Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR25M	DB25 / HD44 Protective Cover for Male Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR37F	DB37 / HD62 Protective Cover for Female Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR37M	DB37 / HD62 Protective Cover for Male Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR50F	DB50 / HD78 Protective Cover for Female Connectors, Pkg/10	6.95	6.39	5.84	CALL
CVR50M	DB50 / HD78 Protective Cover for Male Connectors, Pkg/10	6.95	6.39	5.84	CALL

Assorted D-Sub Adapter Selection Matrix

Use this handy chart to locate the desired D-Sub adapter. Simply locate the connector sizes and genders along the top and intersect with the row showing the desired adapter style. If a specific adapter is not listed, please visit our website at **L-com.com** for the latest information or select Product Wizards

under the heading of Technical Resources at the top of our website or call our Technical Support Group at **800-343-1455** for assistance. Wiring schemes are on the engineering drawings available on L-com's website.

ADAPTER TYPE	ASSORTED D-SUB ADAPTER SELECTOR GUIDE						
	INTERFACE	DB9 MALE-DB25 FEMALE	DB9 FEMALE-DB25 MALE	DB9 FEMALE-DB25 FEMALE	DB9 MALE-DB9 FEMALE	DB25 MALE-DB25 FEMALE	DB9 MALE-HD15 MALE
	AT MODEM	DG259FM-IBM DMA010MF	DG259MF-IBM DGL259MF-IBM DMA010FM	DGL259FF-IBM			
	NULL MODEM				DMA060MF	DMA070MF DMA071MF DMA072MF DMA074MF	
	REVERSER (Position 2 & 3)				DMA030MF	DMA040MF	
	RGB MONITOR						DMA100MM

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Slim-Line DB9 or DB25 Null Modems, Adapters and Reversers - Communicate Without Modems

L-com's series of Null Modems and Reversers are completely shielded. More important, their extremely low profile reduces leverage strain and breakage on overstressed computer ports. The Null Modems shown are typical of our Slim-Line manufacturing technique. They are also available in virtually any wiring configuration.

DMA030MF	Slim-Line Reversing Adapter, Pins 2 and 3, DB9 Male/Female	7.19	6.47	5.75	CALL
DMA040MF	Slim-Line Reversing Adapter, Pins 2 and 3, DB25 Male/Female	8.39	7.55	6.71	CALL
DMA060MF	Slim-Line Null Modem Adapter, DB9 Male/Female	7.19	6.47	5.75	CALL
DMA070MF	Slim-Line Null Modem Adapter, DB25 Std. Handshake, Male/Female	8.39	7.55	6.71	CALL
DMA071MF	Slim-Line Null Modem Adapter, DB25 Full Handshake, Male/Female	8.39	7.55	6.71	CALL
DMA072MF	Slim-Line Null Modem Adapter, DB25 Auto Handshake, Male/Female	8.39	7.55	6.71	CALL
DMA074MF	Slim-Line Null Modem Adapter, DB25 Specialty, Male/Female	8.39	7.55	6.71	CALL

DB25-DB9 Serial Port Adapters and Cables - Change From 9 to 25 and Vice Versa

Does your PC have a DB9 serial port while your modem has a DB25? These handy adapters and cables can solve your interface problem. All are 100% shielded for applications where noise is abundant.

CMZ6-IBM	Molded AT Modem Cable, DB25 Male/DB9 Female, 6.0ft (1.8m)	8.29	7.63	6.96	CALL
CMZ10-IBM	Molded AT Modem Cable, DB25 Male/DB9 Female, 10.0ft (3.0m)	9.99	9.19	8.39	CALL
DG259FM-IBM	Molded AT Adapter, High Profile, DB25 Female/DB9 Male	6.89	6.34	5.79	CALL
DG259MF-IBM	Molded AT Adapter, High Profile, DB25 Male/DB9 Female	6.89	6.34	5.79	CALL

Note: DG types supplied with user removable hex nuts.

DMA010MF	Slimline AT Adapter, DB9 Male/DB25 Female	7.49	6.74	5.99	CALL
DMA010FM	Slimline AT Adapter, DB9 Female/DB25 Male	7.49	6.74	5.99	CALL

DB25-DB9 Low Profile Serial Port Adapters - Change From DB9 to DB25 and Vice Versa

Convert your existing serial cables to insure a reliable connection between your DCE serial device/modem and your PC's 9 pin serial port by using these adapters. Features 100% shielding, rugged molded backshells, gold plated contacts for the best conductivity and low profile design for tight spaces. Hex nuts are removable to mate with PC ports having reverse hardware or peripherals with standard hardware.

DGL259MF-IBM	Molded AT Adapter, Low Profile, DB25 Male/DB9 Female	6.89	6.34	5.79	CALL
DGL259FF-IBM	Molded AT Adapter, Low Profile, DB25 Female/DB9 Female	6.89	6.34	5.79	CALL

See detailed drawings for wiring information at **L-com.com**



Gender Changer and Socket Saver Selection Matrix

Use this handy chart to locate the desired gender changer or socket saver. Simply locate the connector size along the top (standard or filtered) and intersect with the row showing the desired connector genders. If a specific adapter is not listed, please visit our website at **L-com.com** for the latest

information and select Product Wizards under the heading of Technical Resources at the top of our website or call our Technical Support Group at **800-343-1455** for assistance.

GENDER CHANGER & SOCKET SAVER D-SUB ADAPTER SELECTOR GUIDE (ALL WIRING STRAIGHT THROUGH)															
INTERFACE		STANDARD D-SUB								HIGH DENSITY D-SUB					
		9 PIN D-SUB	9 PIN D-SUB FILTERED	15 PIN D-SUB	15 PIN D-SUB FILTERED	25 PIN D-SUB	25 PIN D-SUB FILTERED	37 PIN D-SUB	37 PIN D-SUB FILTERED	50 PIN D-SUB	15 PIN HIGH DENSITY	26 PIN HIGH DENSITY	44 PIN HIGH DENSITY	62 PIN HIGH DENSITY	78 PIN HIGH DENSITY
GENDER	Female-Female	DGB9F		DGB15F		DGB25F		DGB37F		DGB50F	DGBH15F DGBV15F* DMB521F	DGBH26F	DGBH44F	DGBH62F	DGBH78F
	Male-Male	DGB9M		DGB15M		DGB25M		DGB37M		DGB50M	DGBH15M DGBV15M* DMB520M	DGBH26M	DGBH44M	DGBH62M	DGBH78M
	Male-Female	DGB9MF DG909MF1 DG909MF2 DG909MF3	DGF9MF DGF9MF	DGB15MF DG9015MF1 DG9015MF2 DG9015MF3	DGF15MF DGF15MF	DGB25MF DG9025MF1 DG9025MF2 DG9025MF3	DGF25MF DGF25MF	DGB37MF	DGF37MF DGF37MF	DGB50MF	DGBV15MF* DGBH15MF DG90H15MF1 DG90H15MF2 DG90H15MF3	DGBH26MF	DGBH44MF	DGBH62MF	DGBH78MF




*Pin 9 missing for older, legacy VGA applications.

Standard D-Sub



High-Density D-Sub

Best Seller

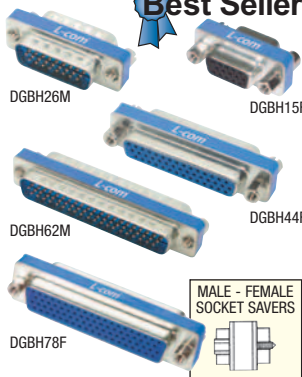

Item #	Description	1-9	10-24	25-99	100+
Slim-Line Gender Changer/Adapters - Reduce Port Receptacle Strain Up To 90%					
DGB9F	Slim-Line Gender Changer, DB9 Female/Female	4.95	4.46	3.96	CALL
DGB9M	Slim-Line Gender Changer, DB9 Male/Male	4.95	4.46	3.96	CALL
DGB15F	Slim-Line Gender Changer, DB15 Female/Female	5.95	5.36	4.76	CALL
DGB15M	Slim-Line Gender Changer, DB15 Male/Male	5.95	5.36	4.76	CALL
DGB25F	Slim-Line Gender Changer, DB25 Female/Female	6.95	6.25	5.56	CALL
DGB25M	Slim-Line Gender Changer, DB25 Male/Male	6.95	6.25	5.56	CALL
DGB37F	Slim-Line Gender Changer, DB37 Female/Female	8.95	8.05	7.16	CALL
DGB37M	Slim-Line Gender Changer, DB37 Male/Male	8.95	8.05	7.16	CALL
DGB50F	Slim-Line Gender Changer, DB50 Female/Female	10.95	9.86	8.76	CALL
DGB50M	Slim-Line Gender Changer, DB50 Male/Male	10.95	9.86	8.76	CALL

Socket Saver Adapters - Extend D-Sub Connector Usage and Avoid Major Repairs

DGB9MF	Slim-Line Socket Saver, DB9 Male/Female	4.95	4.46	3.96	CALL
DGB15MF	Slim-Line Socket Saver, DB15 Male/Female	5.95	5.36	4.76	CALL
DGB25MF	Slim-Line Socket Saver, DB25 Male/Female	6.95	6.25	5.56	CALL
DGB37MF	Slim-Line Socket Saver, DB37 Male/Female	8.95	8.05	7.16	CALL
DGB50MF	Slim-Line Socket Saver, DB50 Male/Female	10.95	9.86	8.76	CALL

High-Density Slim-Line Gender Changers - Same Small Size for High-Density D-Subs

DGBH15F	Slim-Line Gender Changer, HD15 Female/Female	7.95	7.16	6.36	CALL
DGBH15M	Slim-Line Gender Changer, HD15 Male/Male	7.95	7.16	6.36	CALL
DGBH26F	Slim-Line Gender Changer, HD26 Female/Female	10.55	9.50	8.44	CALL
DGBH26M	Slim-Line Gender Changer, HD26 Male/Male	10.55	9.50	8.44	CALL
DGBH44F	Slim-Line Gender Changer, HD44 Female/Female	11.71	10.54	9.37	CALL
DGBH44M	Slim-Line Gender Changer, HD44 Male/Male	11.71	10.54	9.37	CALL
DGBH62F	Slim-Line Gender Changer, HD62 Female/Female	15.23	13.71	12.18	CALL
DGBH62M	Slim-Line Gender Changer, HD62 Male/Male	15.23	13.71	12.18	CALL
DGBH78F	Slim-Line Gender Changer, HD78 Female/Female	16.43	14.79	13.14	CALL
DGBH78M	Slim-Line Gender Changer, HD78 Male/Male	16.43	14.79	13.14	CALL

High-Density Socket Saver Adapters - Great for Preventing Wear on High-Density Connectors

DGBH15MF	Slim-Line Socket Saver, HD15 Male/Female	7.95	7.16	6.36	CALL
DGBH26MF	Slim-Line Socket Saver, HD26 Male/Female	10.55	9.50	8.44	CALL
DGBH44MF	Slim-Line Socket Saver, HD44 Male/Female	11.71	10.54	9.37	CALL
DGBH62MF	Slim-Line Socket Saver, HD62 Male/Female	15.23	13.71	12.18	CALL
DGBH78MF	Slim-Line Socket Saver, HD78 Male/Female	16.43	14.79	13.14	CALL

Slim-Line Gender Changer/Adapters - with Pin 9 Missing for Legacy VGA Cable Applications

DGBV15F	Slim-Line Gender Changer, HD15 Female/Female	8.35	7.51	6.68	CALL
DGBV15M	Slim-Line Gender Changer, HD15 Male/Male	8.35	7.51	6.68	CALL
DGBV15MF	Slim-Line Socket Saver, HD15 Male/Female	8.35	7.51	6.68	CALL
DMA100MM	PS-2 Monitor Adapter, DB9 Male/HD15 Male	7.95	7.16	6.36	CALL

Slim-Line Gender Changers and Socket Saver - SCSI/Telco 50

DGC50F	Slim-Line SCSI Gender Changer, 50 Pin Female/Female	13.29	12.23	11.16	CALL
DGC50M	Slim-Line SCSI Gender Changer, 50 Pin Male/Male	13.29	12.23	11.16	CALL
DGC50MF	Slim-Line SCSI Socket Saver, 50 Pin Male/Female	13.29	12.23	11.16	CALL

D-Sub Gender Changer Assortment Kit - Never Have a Mismatched Data Cable Again

Each of these assortment kits have a total of 8 adapters for just about every D-Sub cable correction. DGB1010K includes: DB9, DB15, DB25 and DB37; the DGBH1010K high-density kit includes DGBH15, DGBH26, DGBH44 and DGBH62, each in male/male and female/female versions.

DGB1010K	Slim-Line Gender Changer Kit, 8 Pieces	54.95	49.46	43.96	CALL
DGBH1010K	Hi-Density Gender Changer Kit, 8 Pieces	78.35	70.52	62.68	CALL

Slim-Line Block Ferrite Filter Adapters - Eliminate Problem EMI in Computing Devices

L-com's plug-receptacle feed-thru adapter is a viable alternative solution for companies that need to rework (retrofit) existing designs in their effort to meet FCC regulations. Use these filtered D-Sub adapters where it's necessary to limit electromagnetic interference (EMI). Easy installation, economical cost, low profile and fully shielded. Four D-Sub sizes available, supplied with male/female hardware. Engineer's kit is also available and contains one of each adapter in a plastic carrying case.

DGF9MF	Ferrite Filter (EMI) Adapter, DB9 Male/Female	8.35	7.68	7.01	CALL
DGF15MF	Ferrite Filter (EMI) Adapter, DB15 Male/Female	9.40	8.65	7.90	CALL
DGF25MF	Ferrite Filter (EMI) Adapter, DB25 Male/Female	10.45	9.61	8.78	CALL
DGF37MF	Ferrite Filter (EMI) Adapter, DB37 Male/Female	12.55	11.55	10.54	CALL
DGF100K	Engineer's Kit with 4 EMI Adapters	42.85	39.42	35.99	CALL


Easily panel mount adapters



Online Video

L-com.com/Videos/A03



1. Remove standard hardware provided with adapter. Mount adapter from rear of panel.



2. Secure with jackscrew SDG450XS (purchased separately) from the front of the panel.



3. Thread hex nut SDHS (purchased separately) onto exposed threads of SDG450XS.





*Note: Maximum recommended panel thickness is 0.062" (0.2cm). Dimensions in excess of 0.062" (0.2cm) can limit proper cable mating due to hex nut protrusion. Panels exceeding 0.062" (0.2cm) can be milled down to the recommended thickness in the area around the adapter.





How filter adapters are constructed

Filtered adapters provide a cost effective method for reducing electromagnetic interference (EMI) and can help to avoid costly product redesigns. L-com offers two styles of filtered adapters, **Ferrite** and **Capacitive**.

Ferrite

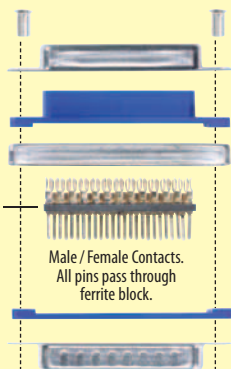

Capacitive



Mating Hardware

Durability Mating / Unmating Approx. 100 cycles
Temperature Rating -55°C to 105°C
Current Rating 5 amps max.
Capacitors (Ceramic) 820 pF ± 10%
Dielectric Withstanding Voltage 500 VDC, 1 minute
Insulation Resistance 500m Ohms @ 100 VDC

Components

Components	Materials
Hollow Rivet	Steel / Tin Plated
Female Connector Shell	Steel / Tin Plated
Female Connector Housing	Glass filled PBT, UL94 V-0 rated
Metal Shield	Steel / Tin Plated
Contacts	Brass / gold flash plated
Male Connector Housing	Glass filled PBT, UL94 V-0 rated
Male Connector Shell	Steel / Tin Plated

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Slim-Line Ceramic Capacitive Filter Adapters - For Excellent, Economical Noise Removal

Filtering is the simplest method of removing unwanted interference from within a circuit. A capacitive filter is built into a male/female D-sub adapter that provides an easy-to-use retrofit adapter. Although reasonably priced, there is a cost associated with capacitors and that is signal degradation, particularly in CMOS circuits with extremely low signal levels. Systems that transmit strong signals and can tolerate moderate loss are well suited for capacitive filtering. Our compact design allows an extremely low profile of only 0.2" (0.5cm). Individual capacitance on each pin is 820pF. Also available in an engineer's kit of 4 adapters.

DGFC9MF	Capacitive Filter (EMC) Adapter, DB9 Male/Female	9.85	9.06	8.27	CALL
DGFC15MF	Capacitive Filter (EMC) Adapter, DB15 Male/Female	12.05	11.09	10.12	CALL
DGFC25MF	Capacitive Filter (EMC) Adapter, DB25 Male/Female	15.35	14.12	12.89	CALL
DGFC37MF	Capacitive Filter (EMC) Adapter, DB37 Male/Female	23.05	21.21	19.36	CALL
DGFC100K	Engineer's Kit with 4 EMC Adapters	59.35	54.60	49.85	CALL

DB9, DB15, DB25 or HD15 Connectors for Field Termination - Panel Mountable, Male or Female

These field termination connectors provide an easy and convenient way to perform field termination of any DB9, DB15, DB25 or HD15 cable. Separate connection points are provided for all positions of the connector plus the ground. Terminal block design with set screws provides reliable electrical connections without special tools. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable for thickness up to 0.062" (0.2cm). Please note the orientation of the terminal blocks on the new male connectors.

DGB9FT	DB9 Female Connector for Field Termination	8.70	8.18	7.66	CALL
DGB15FT	DB15 Female Connector for Field Termination	10.25	9.63	9.02	CALL
DGB25FT	DB25 Female Connector for Field Termination	12.60	11.84	11.09	CALL
DGBH15FT	SVGA HD15 Female Connector for Field Termination	11.03	10.37	9.71	CALL
DGB9MT1	DB9 Male Connector for Field Termination	8.70	8.18	7.66	CALL
DGB15MT1	DB15 Male Connector for Field Termination	10.25	9.63	9.02	CALL
DGB25MT1	DB25 Male Connector for Field Termination	12.60	11.84	11.09	CALL
DGBH15MT1	SVGA HD15 Male Connector for Field Termination	10.50	9.87	9.24	CALL

DB9, DB15, DB25 or HD15 Female Connectors for Field Termination with Screwless Terminal Block

These field termination female connectors provide an easy and convenient way to perform field termination of any cable. Separate connection points are provided for all positions of the connector plus the ground. Screwless terminal block design with spring clamp provides reliable electrical connections utilizing no special tools. Simply depress the spring clamp, insert wire, release and the wire is secure. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable for thickness up to 0.062" (0.2cm).

DGS9FT	DB9 Female Connector for Field Termination	9.20	8.65	8.10	CALL
DGS15FT	DB15 Female Connector for Field Termination	10.80	10.15	9.50	CALL
DGS25FT	DB25 Female Connector for Field Termination	13.40	12.60	11.79	CALL
DGSH15FT	HD15 Female Connector for Field Termination	11.05	10.39	9.72	CALL

Covers for DGB9 Field Termination Connectors

These secure, snap together covers provide protection and strain relief for our popular DGB9FT and DGB9MT1 field termination connectors. Simply snap together the two cover halves over the terminated connector and secure exiting cable or wires with a tie wrap (included). Additional covers for other connectors will be available soon.

DGB9FT-CVR	Cover for DGB9FT Field Termination Connector	2.20	2.07	1.94	CALL
DGB9MT1-CVR	Cover for DGB9MT1 Field Termination Connector	2.20	2.07	1.94	CALL

Slim-Line Loopback Test Plugs - Emulate Working Conditions for Your Testing Needs

DMA019S	Slim-Line Parallel Loopback Plug, DB25 Male	8.79	7.91	7.03	CALL
DMA021T	Slim-Line Loopback Plug, DB9 Female	8.79	7.91	7.03	CALL



DGFC25MF




DGFC37MF



DGB9FT



DGBH15MT1




DGB25MT1




DGS9FT




DGS15FT



DGS25FT



DGS15FT





DGB9MT1-CVR shown on connector




DGB9MT1-CVR



DMA019S



DMA021T

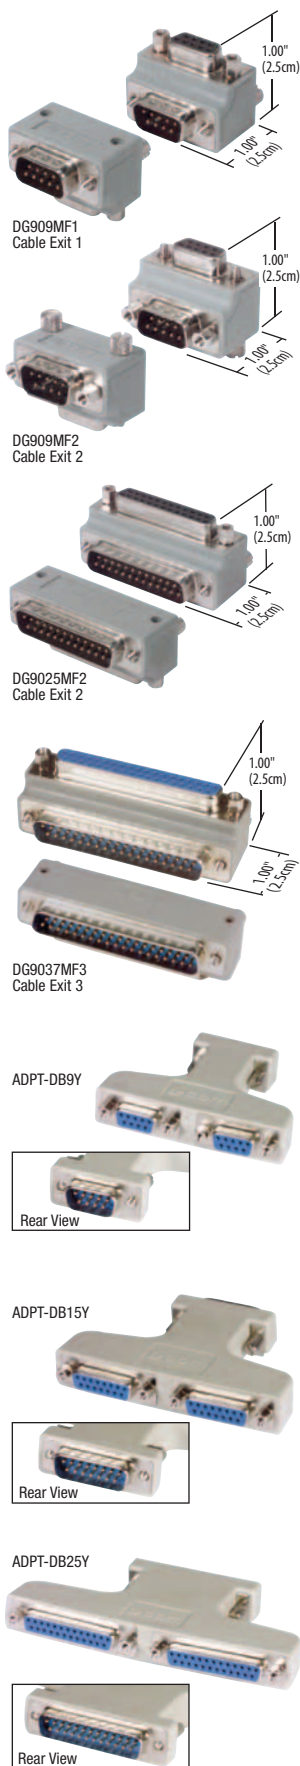


Item #	Description	1-9	10-24	25-99	100+
DB9, HD15, DB15, DB25 and DB37 Low Profile Right Angle Adapters - Molded and Fully Shielded					
DG909MF1	Low Profile Right Angle Adapter, DB9 Male/Female, Cable Exit 1	7.83	7.36	6.89	CALL
DG909MF2	Low Profile Right Angle Adapter, DB9 Male/Female, Cable Exit 2	7.83	7.36	6.89	CALL
DG909MF3	Low Profile Right Angle Adapter, DB9 Male/Female, Cable Exit 3	7.83	7.36	6.89	CALL
DG90H15MF1	Low Profile Right Angle Adapter, HD15 Male/Female, Cable Exit 1	8.91	8.38	7.84	CALL
DG90H15MF2	Low Profile Right Angle Adapter, HD15 Male/Female, Cable Exit 2	8.91	8.38	7.84	CALL
DG90H15MF3	Low Profile Right Angle Adapter, HD15 Male/Female, Cable Exit 3	8.91	8.38	7.84	CALL
DG9015MF1	Low Profile Right Angle Adapter, DB15 Male/Female, Cable Exit 1	8.91	8.38	7.84	CALL
DG9015MF2	Low Profile Right Angle Adapter, DB15 Male/Female, Cable Exit 2	8.91	8.38	7.84	CALL
DG9015MF3	Low Profile Right Angle Adapter, DB15 Male/Female, Cable Exit 3	8.91	8.38	7.84	CALL
DG9025MF1	Low Profile Right Angle Adapter, DB25 Male/Female, Cable Exit 1	11.12	10.45	9.79	CALL
DG9025MF2	Low Profile Right Angle Adapter, DB25 Male/Female, Cable Exit 2	11.12	10.45	9.79	CALL
DG9025MF3	Low Profile Right Angle Adapter, DB25 Male/Female, Cable Exit 3	11.12	10.45	9.79	CALL
DG9037MF1	Low Profile Right Angle Adapter, DB37 Male/Female, Cable Exit 1	13.39	12.59	11.78	CALL
DG9037MF2	Low Profile Right Angle Adapter, DB37 Male/Female, Cable Exit 2	13.39	12.59	11.78	CALL
DG9037MF3	Low Profile Right Angle Adapter, DB37 Male/Female, Cable Exit 3	13.39	12.59	11.78	CALL



How are right angle adapters used?

Right angle adapters assist in connecting cables in tight spaces by allowing the cable to mate at a 90 degree angle. This reduces the backshell and cable bend distance required when mating cables. L-com offers right angle adapters in DB9, DB15, DB25, DB37 and HD15 male to female configurations with three cable exit directions each. Hardware is reversible allowing for use in virtually any application.


Figure 1



Cables require approximately 2.5" to exit a mating connector depending on backshell length and cable diameter/flexibility.

Figure 2

Mating to a female connector

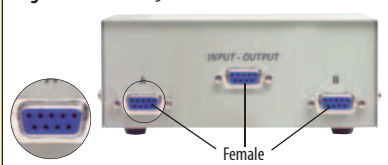

Choose the proper adapter for desired cable exit direction and simply plug the cable into the adapter.

Figure 3







Figure 4




Cable Exit 1 Side View

Figure 5




Cable Exit 2 Side View

Figure 6




Cable Exit 3 allows the user to rotate the female connector 180° compared to Cable Exits 1 and 2.

Figure 7




Mating to a male connector

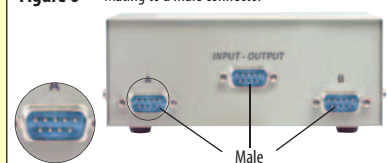

Choose the proper adapter for desired cable exit direction and simply plug the cable into the adapter.

Figure 8



Note: When mating to a male connector, Cable Exits 1 and 2 exit in the same direction.

Y Adapters/Splitters for DB9, DB15 and DB25 Connector Sizes

These handy Y adapters are wired straight through for applications requiring splitting signals. The single end is male while the dual/split end is female for easy attachment to standard cable assemblies. The housing is fully shielded to maintain EMI protection and the contacts are 30 microinch (0.762µm) gold plated allowing for many mating cycles. Color is light gray.

ADPT-DB9Y	Y Splitter Adapter, DB9M - DB9F & DB9F	10.45	10.03	9.61	CALL
ADPT-DB15Y	Y Splitter Adapter, DB15M - DB15F & DB15F	12.10	11.62	11.13	CALL
ADPT-DB25Y	Y Splitter Adapter, DB25M - DB25F & DB25F	15.40	14.78	14.17	CALL

Item #	Description	1-9	10-24	25-99	100+
Do-It-Yourself Kits - Everything You Need to Build Your Own Data Line Adapters					
Allows the creation of many types of data line adapters. Utilizes the most popular D-Subminiature connectors with solder cup terminations. Simply solder short wire jumpers to pins of your choice. The following components are included in each kit: two D-Sub Connectors of appropriate size and gender, two snap-on half covers and a complete set of hardware for the connectors. No jumper wires are supplied.					
DIY9MF	Do-It-Yourself Kit, DB9 Male / Female	8.39	8.05	7.72	CALL
DIY9MM	Do-It-Yourself Kit, DB9 Male / Male	8.18	7.85	7.53	CALL
DIY9FF	Do-It-Yourself Kit, DB9 Female / Female	8.60	8.26	7.91	CALL
DIY15MF	Do-It-Yourself Kit, DB15 Male / Female	9.23	8.86	8.49	CALL
DIY15MM	Do-It-Yourself Kit, DB15 Male / Male	9.02	8.66	8.30	CALL
DIY15FF	Do-It-Yourself Kit, DB15 Female / Female	9.44	9.06	8.68	CALL
DIY25MF	Do-It-Yourself Kit, DB25 Male / Female	10.28	9.87	9.46	CALL
DIY259MF	Do-It-Yourself Kit, DB25 Male / DB9 Female	8.60	8.26	7.91	CALL
DIY259FF	Do-It-Yourself Kit, DB25 Female / DB9 Female	8.81	8.46	8.11	CALL
DIY259MM	Do-It-Yourself Kit, DB25 Male / DB9 Male	8.39	8.05	7.72	CALL
DIY9CMF	Metalized DIY Kit, DB9 Male / Female	8.81	8.46	8.11	CALL
DIY-HD15CMF	Metalized DIY Kit, HD15 Male / Female	10.07	9.67	9.26	CALL
DIYW	Pre-tinned Jumpers, Pkg/25	2.61	2.56	2.51	CALL

Data Jumper Box Kits - Include a PC Board to Simplify Data Line Adapter Design

Every pin of the male or female D-Subminiature connector terminates to solder pads with drilled holes on each end of the adapters' PC board to make connection easy. Supplied with ten wires already stripped and tinned for permanent wiring to suit your needs.

DJB9MF	Plastic PCB Jumper Box, DB9 Male / Female	11.75	11.28	10.81	CALL
DJB15MF	Plastic PCB Jumper Box, DB15 Male / Female	13.32	12.79	12.25	CALL
DJB25MF	Plastic PCB Jumper Box, DB25 Male / Female	14.79	14.20	13.61	CALL

Plastic D-Sub Half Cover Pairs - Popular Accessory to Assemble Custom Adapters

Choosing these D-Sub half cover pairs will satisfy most of your custom adapter requirements. These covers feature UL94V-0 rated plastic and are available in Gray or Black. They are supplied with the appropriate hardware to allow male/female or male/male cable connections. For female/female applications, you'll need two (2) additional hex standoffs (page 102).

DHP9G	Half Cover Pair, DB9, Gray Plastic	2.51	2.41	2.31	CALL
DHP15G	Half Cover Pair, DB15, Gray Plastic	2.82	2.71	2.59	CALL
DHP25G	Half Cover Pair, DB25, Gray Plastic	2.93	2.81	2.70	CALL
DHP9B	Half Cover Pair, DB9, Black Plastic	2.51	2.41	2.31	CALL
DHP15B	Half Cover Pair, DB15, Black Plastic	2.40	2.21	2.02	CALL
DHP25B	Half Cover Pair, DB25, Black Plastic	2.93	2.81	2.70	CALL

All Metal DB9 and DB25 Half Cover Pairs - Satisfy the Need for Being Compact and Rugged

The special design of these covers provides a smart look in adapter creation. All steel to take much abuse, with a heavy chrome plate to add attractiveness. Snaps together and comes apart easily. They are supplied with appropriate cable connector fastening hardware for male/female connections. See page 102 for additional hardware.

DHS9	Half Cover Pair, DB9, Nickel Plated Steel	3.66	3.51	3.37	CALL
DHS25	Half Cover Pair, DB25, Nickel Plated Steel	3.77	3.62	3.47	CALL

Crimp & Poke Style Straight and Y Jumper Wires - Sold Only in Packs of 10

RA50M	Straight Jumper Wires, Male / Male, Pkg / 10	3.45	3.38	3.24	CALL
RA50F	Straight Jumper Wires, Female / Female, Pkg / 10	3.45	3.38	3.24	CALL
RA50MF	Straight Jumper Wires, Male / Female, Pkg / 10	3.45	3.38	3.24	CALL
RA50MFM	Y Jumper Wires, Male / Female / Male, Pkg / 10	4.45	4.36	4.18	CALL
RA50FMF	Y Jumper Wires, Female / Male / Female, Pkg / 10	4.45	4.36	4.18	CALL
RA50FFF	Y Jumper Wires, Female / Female / Female, Pkg / 10	4.45	4.36	4.18	CALL

Right Angle D-Sub PCB Connectors - 10 Connectors per Tray

Right angle PCB connectors are popular for many I/O applications. Board locks provide a secure PCB connection and easy soldering every time. Connectors are available in DB9, DB15, DB25, DB37 and HD15 sizes.

SD9P-RA-PC	Right Angle PCB D-Sub Connector, DB9 Male, Tray of 10	11.80	10.86	9.91	CALL
SD15P-RA-PC	Right Angle PCB D-Sub Connector, DB15 Male, Tray of 10	13.90	12.79	11.68	CALL
SD25P-RA-PC	Right Angle PCB D-Sub Connector, DB25 Male, Tray of 10	19.35	17.80	16.25	CALL
SD37P-RA-PC	Right Angle PCB D-Sub Connector, DB37 Male, Tray of 10	26.90	24.75	22.60	CALL
SDH15P-RA-PC	Right Angle PCB D-Sub Connector, HD15 Male, Tray of 10	16.80	15.46	14.11	CALL
SD9S-RA-PC	Right Angle PCB D-Sub Connector, DB9 Female, Tray of 10	11.80	10.86	9.91	CALL
SD15S-RA-PC	Right Angle PCB D-Sub Connector, DB15 Female, Tray of 10	13.90	12.79	11.68	CALL
SD25S-RA-PC	Right Angle PCB D-Sub Connector, DB25 Female, Tray of 10	19.35	17.80	16.25	CALL
SD37S-RA-PC	Right Angle PCB D-Sub Connector, DB37 Female, Tray of 10	26.90	24.75	22.60	CALL
SDH15S-RA-PC	Right Angle PCB D-Sub Connector, HD15 Female, Tray of 10	16.80	15.46	14.11	CALL


DB9, DB15, DB25 or HD15 Connectors for Field Termination - Panel Mountable


These field termination connectors provide an easy and convenient way to perform field termination of any DB9, DB15, DB25 or HD15 cable. Separate connection points are provided for all positions of the connector plus the ground. Terminal block design with set screws provides reliable electrical connections without special tools. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable for thickness up to 0.062" (0.2cm).

DGB9FT	DB9 Female Connector for Field Termination	8.70	8.18	7.66	CALL
DGB15FT	DB15 Female Connector for Field Termination	10.25	9.63	9.02	CALL
DGB25FT	DB25 Female Connector for Field Termination	12.60	11.84	11.09	CALL
DGBH15FT	SVGA HD15 Female Connector for Field Termination	11.03	10.37	9.71	CALL

NOTE:

The adapter kits shown on these pages are also available completely wired and optionally provided with internal jumpers and circuit components. Your Sales Representative will be happy to address your needs.

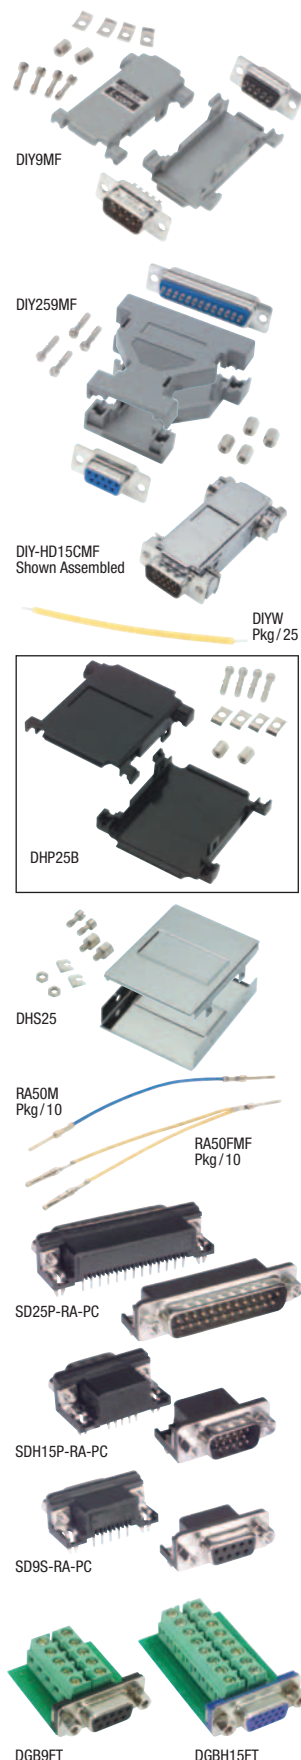

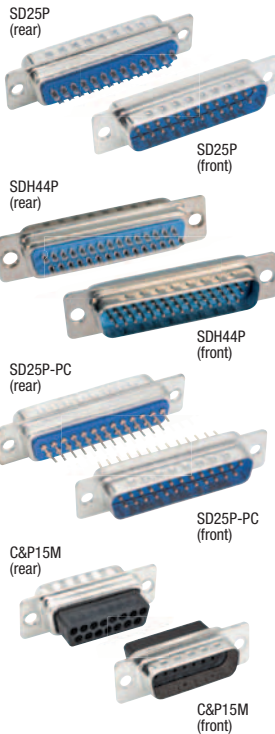


No more D-Sub connector gender confusion!




Online Video


L-com.com/Videos/A14



SD9P-TRAY



SD25P-TRAY (front)



SDH44P-TRAY (front)



C&P25M-TRAY (front)

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

D-Sub Connectors - Choose from Solder Cup, Insertion Style or PC Termination Style Individually Packaged

These D-Sub connectors conform to commercial industry standards and will mate with any opposite gender D-Sub connector. Contact plating is gold flash, connector insulator is UL94V-0 rated.

SD9P	Solder Cup D-Sub Connector, DB9 Male	1.20	1.10	1.01	CALL
SD15P	Solder Cup D-Sub Connector, DB15 Male	1.35	1.24	1.13	CALL
SD25P	Solder Cup D-Sub Connector, DB25 Male	1.55	1.43	1.30	CALL
SD37P	Solder Cup D-Sub Connector, DB37 Male	4.65	4.28	3.91	CALL
SD50P	Solder Cup D-Sub Connector, DB50 Male	5.90	5.43	4.96	CALL
SD9S	Solder Cup D-Sub Connector, DB9 Female	1.25	1.15	1.05	CALL
SD15S	Solder Cup D-Sub Connector, DB15 Female	1.40	1.29	1.18	CALL
SD25S	Solder Cup D-Sub Connector, DB25 Female	1.65	1.52	1.39	CALL
SD37S	Solder Cup D-Sub Connector, DB37 Female	4.90	4.51	4.12	CALL
SD50S	Solder Cup D-Sub Connector, DB50 Female	6.20	5.70	5.21	CALL

Solder Cup High-Density D-Subminiature Connectors - Accept up to 22 AWG Wires

SDH15P	Solder Cup D-Sub Connector, HD15 Male	1.90	1.75	1.60	CALL
SDH26P	Solder Cup D-Sub Connector, HD26 Male	3.15	2.90	2.65	CALL
SDH44P	Solder Cup D-Sub Connector, HD44 Male	5.45	5.01	4.58	CALL
SDH62P	Solder Cup D-Sub Connector, HD62 Male	6.60	6.07	5.54	CALL
SDH78P	Solder Cup D-Sub Connector, HD78 Male	7.90	7.27	6.64	CALL
SDH15S	Solder Cup D-Sub Connector, HD15 Female	2.00	1.84	1.68	CALL
SDH26S	Solder Cup D-Sub Connector, HD26 Female	3.35	3.08	2.81	CALL
SDH44S	Solder Cup D-Sub Connector, HD44 Female	5.65	5.20	4.75	CALL
SDH62S	Solder Cup D-Sub Connector, HD62 Female	6.80	6.26	5.71	CALL
SDH78S	Solder Cup D-Sub Connector, HD78 Female	8.20	7.54	6.89	CALL

PC Termination D-Subminiature Connectors - Male and Female Genders

SD9P-PC	PC Termination D-Sub Connector, DB9 Male	1.70	1.56	1.43	CALL
SD15P-PC	PC Termination D-Sub Connector, DB15 Male	2.50	2.30	2.10	CALL
SD25P-PC	PC Termination D-Sub Connector, DB25 Male	3.10	2.85	2.60	CALL
SD37P-PC	PC Termination D-Sub Connector, DB37 Male	5.95	5.47	5.00	CALL
SD9S-PC	PC Termination D-Sub Connector, DB9 Female	1.75	1.61	1.47	CALL
SD15S-PC	PC Termination D-Sub Connector, DB15 Female	2.55	2.35	2.14	CALL
SD25S-PC	PC Termination D-Sub Connector, DB25 Female	3.20	2.94	2.69	CALL
SD37S-PC	PC Termination D-Sub Connector, DB37 Female	6.15	5.66	5.17	CALL

Insertion Style D-Sub Connectors Accept Industry Standard Pins and Sockets

C&P9M	Insertion Type D-Sub Connector, DB9 Male	0.80	0.74	0.67	CALL
C&P15M	Insertion Type D-Sub Connector, DB15 Male	0.90	0.83	0.76	CALL
C&P25M	Insertion Type D-Sub Connector, DB25 Male	1.05	0.97	0.88	CALL
C&P37M	Insertion Type D-Sub Connector, DB37 Male	2.75	2.53	2.31	CALL
C&P50M	Insertion Type D-Sub Connector, DB50 Male	4.55	4.19	3.82	CALL
C&P9F	Insertion Type D-Sub Connector, DB9 Female	0.90	0.83	0.76	CALL
C&P15F	Insertion Type D-Sub Connector, DB15 Female	1.05	0.97	0.88	CALL
C&P25F	Insertion Type D-Sub Connector, DB25 Female	1.15	1.06	0.97	CALL
C&P37F	Insertion Type D-Sub Connector, DB37 Female	2.90	2.67	2.44	CALL
C&P50F	Insertion Type D-Sub Connector, DB50 Female	4.65	4.28	3.91	CALL

D-Sub and HD Style Bulk Packaged Connectors - Solder and Crimp Styles

Save time and money with these D-Sub and HD style connector multi packs. Packed in convenient trays, these connectors are ideal for high volume production. Offered in both solder and crimp versions these connectors are perfect for all of your cable termination needs.

SD9P-TRAY	Solder Cup D-Sub Connector, DB9 Male, Tray of 50	42.35	38.96	35.57	CALL
SD15P-TRAY	Solder Cup D-Sub Connector, DB15 Male, Tray of 70	67.40	62.01	56.62	CALL
SD25P-TRAY	Solder Cup D-Sub Connector, DB25 Male, Tray of 50	55.85	51.38	46.91	CALL
SD37P-TRAY	Solder Cup D-Sub Connector, DB37 Male, Tray of 40	135.55	124.71	113.86	CALL
SD50P-TRAY	Solder Cup D-Sub Connector, DB50 Male, Tray of 40	172.50	158.70	144.90	CALL
SD9S-TRAY	Solder Cup D-Sub Connector, DB9 Female, Tray of 50	44.30	40.76	37.21	CALL
SD15S-TRAY	Solder Cup D-Sub Connector, DB15 Female, Tray of 70	70.10	64.49	58.88	CALL
SD25S-TRAY	Solder Cup D-Sub Connector, DB25 Female, Tray of 50	59.70	54.92	50.15	CALL
SD37S-TRAY	Solder Cup D-Sub Connector, DB37 Female, Tray of 40	143.25	131.79	120.33	CALL
SD50S-TRAY	Solder Cup D-Sub Connector, DB50 Female, Tray of 40	181.75	167.21	152.67	CALL

Solder Cup High-Density D-Subminiature Connectors - Accept up to 22 AWG Wires

SDH15P-TRAY	Solder Cup D-Sub Connector, HD15 Male, Tray of 50	69.30	63.76	58.21	CALL
SDH26P-TRAY	Solder Cup D-Sub Connector, HD26 Male, Tray of 70	161.70	148.76	135.83	CALL
SDH44P-TRAY	Solder Cup D-Sub Connector, HD44 Male, Tray of 50	198.30	182.44	166.57	CALL
SDH62P-TRAY	Solder Cup D-Sub Connector, HD62 Male, Tray of 40	192.50	177.10	161.70	CALL
SDH78P-TRAY	Solder Cup D-Sub Connector, HD78 Male, Tray of 40	231.00	212.52	194.04	CALL
SDH15S-TRAY	Solder Cup D-Sub Connector, HD15 Female, Tray of 50	73.15	67.30	61.45	CALL
SDH26S-TRAY	Solder Cup D-Sub Connector, HD26 Female, Tray of 70	169.80	156.22	142.63	CALL
SDH44S-TRAY	Solder Cup D-Sub Connector, HD44 Female, Tray of 50	206.00	189.52	173.04	CALL
SDH62S-TRAY	Solder Cup D-Sub Connector, HD62 Female, Tray of 40	198.70	182.80	166.91	CALL
SDH78S-TRAY	Solder Cup D-Sub Connector, HD78 Female, Tray of 40	240.25	221.03	201.81	CALL

Insertion Style D-Sub Connectors Accept Industry Standard Pins and Sockets




C&P9M-TRAY	Insertion Type D-Sub Connector, DB9 Male, Tray of 50	26.95	24.79	22.64	CALL
C&P15M-TRAY	Insertion Type D-Sub Connector, DB15 Male, Tray of 50	30.80	28.34	25.87	CALL
C&P25M-TRAY	Insertion Type D-Sub Connector, DB25 Male, Tray of 50	34.65	31.88	29.11	CALL
C&P37M-TRAY	Insertion Type D-Sub Connector, DB37 Male, Tray of 40	75.50	69.46	63.42	CALL
C&P50M-TRAY	Insertion Type D-Sub Connector, DB50 Male, Tray of 40	124.75	114.77	104.79	CALL
C&P9F-TRAY	Insertion Type D-Sub Connector, DB9 Female, Tray of 50	30.80	28.34	25.87	CALL
C&P15F-TRAY	Insertion Type D-Sub Connector, DB15 Female, Tray of 50	34.65	31.88	29.11	CALL
C&P25F-TRAY	Insertion Type D-Sub Connector, DB25 Female, Tray of 50	38.50	35.42	32.34	CALL
C&P37F-TRAY	Insertion Type D-Sub Connector, DB37 Female, Tray of 40	78.55	72.27	65.98	CALL
C&P50F-TRAY	Insertion Type D-Sub Connector, DB50 Female, Tray of 40	127.85	117.62	107.39	CALL

Item #	Description	1-9	10-24	25-99	100+
Crimp & Poke Contacts - Choose Pins or Sockets, Flash or 30µ (0.762µm)					
CPM10	Crimp & Poke Male Pins - Gold Flash, Pkg/10	2.80	2.58	2.35	CALL
CPM100	Crimp & Poke Male Pins - Gold Flash, Reel/100	16.80	15.46	14.11	CALL
CPM10-30U	Crimp & Poke Male Pins - 30µ (0.762µm) Gold, Pkg/10	3.65	3.36	3.07	CALL
CPM100-30U	Crimp & Poke Male Pins - 30µ (0.762µm) Gold, Reel/100	21.85	20.10	18.35	CALL
CPF10	Crimp & Poke Female Sockets - Gold Flash, Pkg/10	3.40	3.13	2.86	CALL
CPF100	Crimp & Poke Female Sockets - Gold Flash, Reel/100	20.20	18.58	16.97	CALL
CPF10-30U	Crimp & Poke Female Sockets - 30µ (0.762µm) Gold, Pkg/10	4.20	3.86	3.53	CALL
CPF100-30U	Crimp & Poke Female Sockets - 30µ (0.762µm) Gold, Reel/100	25.20	23.18	21.17	CALL

Insertion/Extraction Tools for Crimp & Poke Type Contacts - Professional and Economy Versions

Two insertion/extraction tools are available for inserting contacts into D-Subs. Professional model is made for multiple insertions and is built on a larger, more ergonomic tool body. The economy version is also available when limited insertions are necessary.

TDT	Economy Contact Insertion/Extraction Tool	2.95	2.89	2.83	CALL
TDTPRO	Professional Contact Insertion/Extraction Tool	24.95	24.45	23.95	CALL



How to crimp D-Sub contacts using hand tool CP3127CT

STEP 1

Strip the wire to 3/32" (0.2cm). You can use part #HTC2030.

STEP 2

Squeeze tool handles together to release ratchet.

STEP 3

Slide the contact locator down from the top of the tool.

STEP 4

Then from the back, push the contact locator forward between tool crimp jaws.

STEP 5

Orient the contact so open side of wire and insulation barrels are facing up and insert contact into locator.

STEP 6

Slide locator back placing contact between crimping jaws. Then squeeze tool handles together until ratchet engages (listen for clicking sound).

STEP 7

Insert wire over contact and against wire stop. Squeeze tool handles together until ratchet releases.

STEP 8

Slide locator down, push forward and remove crimped contact.

D-Subminiature Contact Crimp Tool - For Crimp & Poke Series Pins and Sockets

Professional grade tool crimps D-Subminiature pins and sockets for 20-30 AWG wires. Spring loaded holding mechanism centers and holds pin in place until crimping cycle is complete. Highest quality. See the Tip above for crimping instructions.

CP3127CT	D-Sub Contact Crimp Tool	132.00	129.36	126.72	CALL
----------	--------------------------	--------	--------	--------	------

D-Sub Hood Covers - Offering a Better Selection for Your Varied Cable Making Needs

L-com offers a better selection of D-Sub hoods than ever before. We've discovered in our own cable production that needs are varied because users are more demanding in style selection than traditional plastic or metal hoods. They are supplied as kits with appropriate hardware for male mating. Order hex standoffs separately for female adaptation.

Plastic D-Sub Hoods - Features One Piece Foldover Hinge Design

One piece unshielded hoods are available for DB9, DB15, DB25 and DB50 sizes. They are constructed of Black plastic with long knurled thumbscrews. They feature a side snap lock for connector security and metal screw down strain relief. Attractive appearance.

SD121-09	Hinged Hood Kit, DB9 Black	1.58	1.45	1.33	CALL
SD121-15	Hinged Hood Kit, DB15 Black	1.68	1.55	1.41	CALL
SD121-25	Hinged Hood Kit, DB25 Black	1.79	1.65	1.50	CALL
SD121-50	Hinged Hood Kit, DB50 Black	2.26	2.08	1.90	CALL

Plastic Hoods - Mate with D-Subminiature Connectors for Cabling

Molded plastic hoods are made of flame retardant materials. The metalized version is chrome plated providing conductivity and an RFI/EMI shield. A cable strain relief is also included.

SDC9G	Assembled Hood Kit, DB9 Gray	0.95	0.87	0.80	CALL
SDC15G	Assembled Hood Kit, DB15 Gray	1.10	1.01	0.92	CALL
SDC25G	Assembled Hood Kit, DB25 Gray	1.16	1.07	0.97	CALL
SDC37G	Assembled Hood Kit, DB37 Gray	1.31	1.21	1.10	CALL
SDC9B	Assembled Hood Kit, DB9 Black	1.00	0.92	0.84	CALL
SDC15B	Assembled Hood Kit, DB15 Black	1.16	1.07	0.97	CALL
SDC25B	Assembled Hood Kit, DB25 Black	1.21	1.11	1.02	CALL
SDC9M	Assembled Hood Kit, DB9 Metalized Chrome	1.16	1.07	0.97	CALL
SDC15M	Assembled Hood Kit, DB15 Metalized Chrome	1.37	1.26	1.15	CALL
SDC25M	Assembled Hood Kit, DB25 Metalized Chrome	1.47	1.35	1.23	CALL

Metalized Plastic D-Sub Hoods - Low Profile and Contemporary Style and Finish


These hoods are offered in three basic sizes, in attractive matte metalized (shielded) finish. Well constructed with metal strain relief bar, two screw closure and long knurled thumbscrews.

SDRS09HOT	Assembled Hood Kit, DB9 Matte Chrome	2.10	1.93	1.76	CALL
SDRS15HOT	Assembled Hood Kit, DB15 Matte Chrome	2.21	2.03	1.86	CALL
SDRS25HOT	Assembled Hood Kit, DB25 Matte Chrome	2.31	2.13	1.94	CALL

Replacement grommets also sold separately.




SDC25AG



SDRA9AG



Replacement grommets also sold separately, GROM Series



SDG

SDF1
Pkg/50SDK
Pkg/50


WPD109

WPD115


WPD125



MK02

CTB
Pkg/100

CTM-1.5



TUBEXP-0.5



SPVFP301-ASST

TAP1181-3/4

Item #	Description	1-9	10-24	25-99	100+
D-Sub Metal Hood Kits - Choice of Five Grommets to Satisfy all Size Requirements					
Cast alloy metal construction with a matte nickel plate finish over tin and copper for the best conductivity. Kit includes a set of five grommets and 4-40 thread mounting screws.					
SDC9AG	Assembled Hood Kit, DB9 Metal	2.82	2.65	2.48	CALL
SDC15AG	Assembled Hood Kit, DB15 Metal	4.08	3.84	3.59	CALL
SDC25AG	Assembled Hood Kit, DB25 Metal	4.29	4.03	3.78	CALL
SDC37AG	Assembled Hood Kit, DB37 Metal	5.66	5.32	4.98	CALL
SDC50AG	Assembled Hood Kit, DB50 Metal	5.97	5.61	5.25	CALL

4-40 Thumbscrews for SDC Metal and Plastic D-Sub Hood Kits

Nickel plated steel, knurled, slotted thumbscrews are now available for the entire SDC family of D-Sub hoods.

04X44S	SDC Thumbscrew, 4-40 Thread	0.48	0.44	0.40	CALL
--------	-----------------------------	------	------	------	------

Right Angle D-Sub Metal Hood Kits - Low Profile with Thumbscrews

Right angle hoods offered for applications requiring a 90 degree cable exit. Cast alloy metal construction with a nickel plated finish.

SDRA9AG	Right Angle Assembled Hood Kit, DB9 Metal	4.61	4.33	4.06	CALL
SDRA15AG	Right Angle Assembled Hood Kit, DB15 Metal	4.82	4.53	4.24	CALL
SDRA25AG	Right Angle Assembled Hood Kit, DB25 Metal	5.13	4.82	4.51	CALL

Replacement Grommets for SDC and SDRA Metal Backshells

These grommets are the same as supplied with the SDC and SDRA metal backshell kits. Five different sizes are offered per backshell size to best fit cable diameter used.

GROM-9&15	Replacement Grommets, SDC & SDRA 9/15 Metal Backshells	0.79	0.73	0.66	CALL
GROM-25	Replacement Grommets, SDC & SDRA 25 Metal Backshells	0.79	0.73	0.66	CALL
GROM-37&50	Replacement Grommets, SDC 37/50 Metal Backshells	0.95	0.87	0.80	CALL

4-40 Hex Jack Screws - Difficult to Find Hardware for Mounting D-Sub Connectors

SDG250	Jack Screw Kit, .25 inch (0.6cm) Thread, .232 inch (0.6cm) Screwlock, Pkg/50	14.45	13.58	12.72	CALL
SDG300	Jack Screw Kit, .30 inch (0.8cm) Thread, .232 inch (0.6cm) Screwlock, Pkg/50	14.45	13.58	12.72	CALL
SDG400	Jack Screw Kit, .40 inch (1.0cm) Thread, .232 inch (0.6cm) Screwlock, Pkg/50	14.45	13.58	12.72	CALL
SDG400S	Jack Screw Kit, .40 inch (1.0cm) Thread, .197 inch (0.5cm) Screwlock, Pkg/50	14.45	13.58	12.72	CALL
SDG400XS	Jack Screw Kit, .40 inch (1.0cm) Thread, .160 inch (0.4cm) Screwlock, Pkg/50	14.88	13.99	13.09	CALL
SDG450XS	Jack Screw Kit, .45 inch (1.1cm) Thread, .160 inch (0.4cm) Screwlock, Pkg/50	14.88	13.99	13.09	CALL
SDG500	Jack Screw Kit, .50 inch (1.3cm) Thread, .232 inch (0.6cm) Screwlock, Pkg/50	14.45	13.58	12.72	CALL

Hex Standoff 4-40 Thread - Needed with Hood Kits to Convert Male to Female

SDH	Hex Standoffs, .232 inch (0.6cm) Hex, Pkg/50	10.15	9.54	8.93	CALL
SDHS	Hex Standoffs, .195 inch (0.5cm) Hex, Pkg/50	10.15	9.54	8.93	CALL
SDH-160	Hex Standoffs, .160 inch (0.4cm) Hex, Pkg/50	9.85	9.26	8.67	CALL

4-40 Screw and Retainer Pair - For Use on Male D-Sub Connectors with Metal Tabs

SDF1	Screws and Retainers, Chromate, Pkg/50	13.80	12.97	12.14	CALL
------	--	-------	-------	-------	------

4-40 Screw and Guard - Replacement for Cable Connector Hoods Such as SDC Series

SDK	Screws and Guards, Nickel Plate, Pkg/50	6.30	5.80	5.29	CALL
-----	---	------	------	------	------

Stainless Wall Plates - Accept a Variety of D-Sub Connectors

Wall plates that accept common D-Sub connectors are found to be useful by many installers.

WPD109	Stainless Wall Plate, One DB9/HD15 Opening	3.09	2.90	2.72	CALL
WPD115	Stainless Wall Plate, One DB15/HD26 Opening	3.09	2.90	2.72	CALL
WPD125	Stainless Wall Plate, One DB25/HD44 Opening	3.09	2.90	2.72	CALL

Rotary Cable Strippers - Cut Cable Jackets

These tools offer an economical and consistent cable jacket strip every time. Featuring easy to adjust cutting depth, these tools strip both around the cable perimeter and lengthwise. HT-325 strips cable jackets ranging from 0.125" (0.3cm) to 1.0" (2.5cm). MK02 strips cable jackets ranging from 0.18" (0.5cm) to 1.12" (2.8cm). Choose HT-325 for light duty use and MK02 for heavier duty use.

MK02	Round Cable Stripper	36.19	35.47	34.74	CALL
HT-325	Economy Round Cable Jacket Stripper	16.05	15.73	15.41	CALL

Cable Ties and Cable Mounts

Cable ties come in handy to secure cable assemblies in different applications. Four different sizes, in packages of 100 pieces each. Color is black. Cable tie mounts allow the user to secure wire and/or cable quickly and easily to a surface. Mounts can be secured with screws or adhesive. Material is UL94V-2 rated nylon, color is black.

CTB-05	6 inch (20.3cm) Cable Ties, Pkg/100	8.00	7.52	7.04	CALL
CTB-07	8 inch (15.2cm) Cable Ties, Pkg/100	9.15	8.60	8.05	CALL
CTB-09	8.5 inch (21.6cm) Cable Ties, Pkg/100	10.30	9.68	9.06	CALL
CTB-12	11.5 inch (29.2cm) Cable Ties, Pkg/100	11.45	10.76	10.08	CALL
CTM-0.75	Black Cable Tie Mount, 0.75" (1.9cm), Pkg/10	4.35	4.00	3.65	CALL
CTM-1.5	Black Cable Tie Mount, 1.50" (3.8cm), Pkg/10	8.35	7.68	7.01	CALL

Expandable Sleeving - Pkg/100ft (30.5m), Polyester Material with VW-1 Flammability Rating

Polyester expandable flexible tubing is ideal for protecting wire and/or cable. The open weave design allows for flexible routing, high resistance to abrasion and broad range of expansion. Available in .125" (0.3cm), .25" (0.6cm) and .5" (1.3cm) diameters, color is black with white tracer.

TUBEXP-0.125	Expandable Braid Sleeving, .125" (0.3cm) Diameter, 100ft (30.5m)	22.45	20.65	18.86	CALL
TUBEXP-0.25	Expandable Braid Sleeving, .25" (0.6cm) Diameter, 100ft (30.5m)	28.20	25.94	23.69	CALL
TUBEXP-0.5	Expandable Braid Sleeving, .5" (1.3cm) Diameter, 100ft (30.5m)	38.55	35.47	32.38	CALL

Item #	Description	List Price
3M Heat Shrink Tubing Kits		
3M's popular kits are versatile assortments of flexible polyolefin heat shrink tubing used in a variety of electronic and electrical applications. Each kit is packaged in a plastic box.		
SPVFP301-BLK	Heat Shrink Kit, Black Colors	66.99
SPVFP301-ASST	Heat Shrink Kit, Assorted Colors	66.99

3M Copper Foil Shielding Tape with Conductive Adhesive

TAP1181-3/8	Copper Foil Shielding Tape, 2.6 MIL x 3/8 inch (1.0cm) W x 18 Yards (16.5m)	17.99
TAP1181-3/4	Copper Foil Shielding Tape, 2.6 MIL x 3/4 inch (1.9cm) W x 18 Yards (16.5m)	35.29

Item #	Description	List Price
--------	-------------	------------

Greenlee Ratchet Kits and Wrench

Three options are available to use with the punches below. 34941 is a 1 inch hex ratchet wrench only. 7238SB includes the ratchet wrench plus several dies. LS50L11A is a battery operated tool with a 360 degree rotating head capable of punching holes in half the time required for manual ratchets.

PUNHT-34941	Ratchet Wrench (Greenlee # 34941)	66.95
PUNHT-7238SB	Ratchet Wrench & Die Set Kit (Greenlee # 7238SB)	458.35
PUNHT-LS50L11A	Battery Powered Ratchet Kit (Greenlee # LS50L11A)	1611.95

Greenlee Punches - Punch Holes in Metal Boxes or Panels

Easy to use Greenlee holemaking punches for small to medium sized projects. All kits include punch, die and draw stud. 3 new punch driver options available.

PUNDHOLE0.5	Punch, D-Hole 0.5" Diameter (Greenlee # 60077)	211.15
PUNDB9	Punch, DB9/HDB15 Hole (Greenlee # 229)	520.15
PUNDB15	Punch, DB15/HDB26 Hole (Greenlee # 231)	520.15
PUNDB25	Punch, DB25/HDB44 Hole (Greenlee # RS232)	520.15
PUNDB37	Punch, DB37/HDB62 Hole (Greenlee # 234)	561.35
PUNDB50	Punch, DB50/HDB78 Hole (Greenlee # 238)	561.35

Bulk Multiconductor Data Cable - 24 AWG Stranded Conductors

This is one of the most popular choices for data cable applications. Conductors are 24 AWG 7/32 stranded conductors with PVC insulation. Jacket is also PVC, color is chrome gray. Foil shielding with tinned drain wire. Choose from 4, 9, 15 or 25 conductors and 100 foot coils or 500 and 1,000 foot (30.5m, 152.4m & 304.8m) spools. UL and CSA Listed.

CS4-100	4 Conductor 24 AWG Bulk Cable, 100ft (30.5m) Coil	26.46
CS4-500	4 Conductor 24 AWG Bulk Cable, 500ft (152.4m) Spool	132.30
CS4-1000	4 Conductor 24 AWG Bulk Cable, 1000ft (304.8m) Spool	264.60
CS9-100	9 Conductor 24 AWG Bulk Cable, 100ft (30.5m) Coil	37.49
CS9-500	9 Conductor 24 AWG Bulk Cable, 500ft (152.4m) Spool	187.43
CS9-1000	9 Conductor 24 AWG Bulk Cable, 1000ft (304.8m) Spool	374.85
CS15-100	15 Conductor 24 AWG Bulk Cable, 100ft (30.5m) Coil	55.13
CS15-500	15 Conductor 24 AWG Bulk Cable, 500ft (152.4m) Spool	275.63
CS15-1000	15 Conductor 24 AWG Bulk Cable, 1000ft (304.8m) Spool	551.25
CS25-100	25 Conductor 24 AWG Bulk Cable, 100ft (30.5m) Coil	88.20
CS25-500	25 Conductor 24 AWG Bulk Cable, 500ft (152.4m) Spool	441.00
CS25-1000	25 Conductor 24 AWG Bulk Cable, 1000ft (304.8m) Spool	882.00

Bulk Twisted Pair Data Cable - Double Shielded, 26 AWG Stranded Conductors

Twisted pair bulk cable features difficult to find 26 AWG conductors with foil, drain wire and braid shield as well as a flexible PVC jacket. Choose from 5, 12.5, 19, or 25 pairs in 100, 500 or 1,000 foot (30.5m, 152.4m & 304.8m) spools. Jacket color is light gray.

CSTP5-100	5 Pair 26 AWG Bulk Cable, 100ft (30.5m) Spool	62.37
CSTP5-500	5 Pair 26 AWG Bulk Cable, 500ft (152.4m) Spool	311.85
CSTP5-1000	5 Pair 26 AWG Bulk Cable, 1000ft (304.8m) Spool	594.00
CSTP12.5-100	12.5 Pair 26 AWG Bulk Cable, 100ft (30.5m) Spool	150.15
CSTP12.5-500	12.5 Pair 26 AWG Bulk Cable, 500ft (152.4m) Spool	750.75
CSTP12.5-1000	12.5 Pair 26 AWG Bulk Cable, 1000ft (304.8m) Spool	1430.00
CSTP19-100	19 Pair 26 AWG Bulk Cable, 100ft (30.5m) Spool	184.80
CSTP19-500	19 Pair 26 AWG Bulk Cable, 500ft (152.4m) Spool	924.00
CSTP19-1000	19 Pair 26 AWG Bulk Cable, 1000ft (304.8m) Spool	1760.00
CSTP25-100	25 Pair 26 AWG Bulk Cable, 100ft (30.5m) Spool	311.85
CSTP25-500	25 Pair 26 AWG Bulk Cable, 500ft (152.4m) Spool	1559.25

Low Smoke Zero Halogen Data Cable - Double Shielded, 24 AWG Stranded Conductors

Low smoke zero halogen cable reduces the amount of toxic and corrosive gasses emitted during combustion. Typically used in poorly ventilated areas, low smoke zero halogen is becoming very popular with military contractors. Cable construction features 24 AWG stranded tinned copper conductors with high density polyethylene insulation, overall aluminum polyester foil shield with tinned copper braid and a 24 AWG drain wire. Cable jacket color is Black. Choose from 9, 15, or 25 conductor cable and 100, 500, or 1,000 foot (30.5m, 152.4m & 304.8m) put ups. L-com will manufacture cable assemblies featuring low smoke zero halogen cable with modest minimum requirements.

CSLSZH09-100	9 Conductor 24 AWG LSZH Bulk Cable, 100ft (30.5m) Coil	86.44
CSLSZH09-500	9 Conductor 24 AWG LSZH Bulk Cable, 500ft (152.4m) Spool	432.18
CSLSZH09-1000	9 Conductor 24 AWG LSZH Bulk Cable, 1000ft (304.8m) Spool	864.36
CSLSZH15-100	15 Conductor 24 AWG LSZH Bulk Cable, 100ft (30.5m) Coil	148.18
CSLSZH15-500	15 Conductor 24 AWG LSZH Bulk Cable, 500ft (152.4m) Spool	740.88
CSLSZH15-1000	15 Conductor 24 AWG LSZH Bulk Cable, 1000ft (304.8m) Spool	1481.76
CSLSZH25-100	25 Conductor 24 AWG LSZH Bulk Cable, 100ft (30.5m) Coil	185.22
CSLSZH25-500	25 Conductor 24 AWG LSZH Bulk Cable, 500ft (152.4m) Spool	926.10
CSLSZH25-1000	25 Conductor 24 AWG LSZH Bulk Cable, 1000ft (304.8m) Spool	1852.20


Heavy Duty Double Shielded Multiconductor Data Cable - 20 AWG Conductors, Foil + Braid Shield

Large gauge cable is now available for applications requiring higher current than typical data systems use. Features a dark gray UL2464 listed PVC jacket, aluminum mylar foil shield, tinned copper braid and 20 AWG stranded conductors. Available in 100, 500 or 1,000 foot (30.5m, 152.4m and 304.8m) spools.


CSCPMS09-100	9 Conductor 20 AWG Double Shielded Bulk Cable, 100ft (30.5m) Coil	229.32
CSCPMS09-500	9 Conductor 20 AWG Double Shielded Bulk Cable, 500ft (152.4m) Spool	1087.80
CSCPMS09-1000	9 Conductor 20 AWG Double Shielded Bulk Cable, 1000ft (304.8m) Spool	2058.00
CSCPMS15-100	15 Conductor 20 AWG Double Shielded Bulk Cable, 100ft (30.5m) Coil	352.80
CSCPMS15-500	15 Conductor 20 AWG Double Shielded Bulk Cable, 500ft (152.4m) Spool	1705.20
CSCPMS15-1000	15 Conductor 20 AWG Double Shielded Bulk Cable, 1000ft (304.8m) Spool	3234.00
CSCPMS25-100	25 Conductor 20 AWG Double Shielded Bulk Cable, 100ft (30.5m) Coil	617.40
CSCPMS25-500	25 Conductor 20 AWG Double Shielded Bulk Cable, 500ft (152.4m) Spool	2940.00
CSCPMS25-1000	25 Conductor 20 AWG Double Shielded Bulk Cable, 1000ft (304.8m) Spool	5586.00




Multiconductor




Bulk Twisted Pair



Low Smoke Zero Halogen



PVC Large Gauge



USB Connectors Tutorial

What is USB?

Universal Serial Bus is a high speed connectivity standard enabling simple plug and play connections to devices such as printers, digital cameras, camcorders, keyboards and mice. The standard is supported by many leading suppliers of computers and peripherals. An attractive advantage of USB is that the devices are hot pluggable meaning a live connection/disconnection without data loss or interruption. Currently there are two relevant revisions of USB,

2.0 and 3.0. USB 3.0 is an emerging standard that allows large amounts of data or video to be transferred up to 10 times faster than USB 2.0. However, USB 2.0 is still much more common in the marketplace and is expected to remain relevant for applications that do not require large amounts of data to be moved. It is important to note that in order to take advantage of the increased bandwidth USB 3.0 provides all components must be 3.0 compliant - host, cables

and peripherals. Otherwise the bandwidth will perform to the lowest rated component.


Applications

Initially USB products were used mainly to link computers and their associated peripherals. Today USB is used in nearly every market including communications, entertainment, medical and automotive.

USB Connectors

The USB specification requires a host system to be equipped with an A type jack. The B/mini B type jack is typically found on peripheral devices requiring detachable cables. Therefore, detachable USB cables are configured as an A to B/mini B male combination which prevents improper bus configurations and topology miswiring.

For a complete listing of USB Connectors, see the Connector Chart on the inside back cover of this catalog or online at L-com.com/ConnectorChart



2.0 Type A Jack




2.0 Type B Jack



3.0 Type A Jack



3.0 Type B Jack



2.0 Mini Type B Jack
(4 position)



2.0 Mini Type B Jack
(5 position)




2.0 Micro Type B Jack




3.0 Micro Type B Jack

USB 2.0 Cable Construction

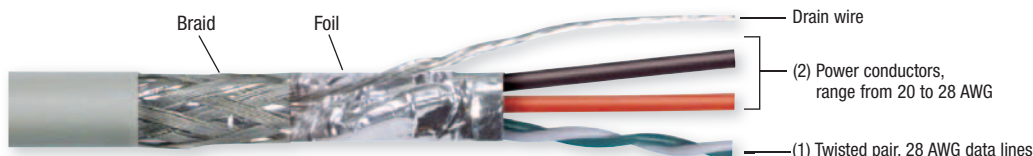

USB 3.0 Cable Construction

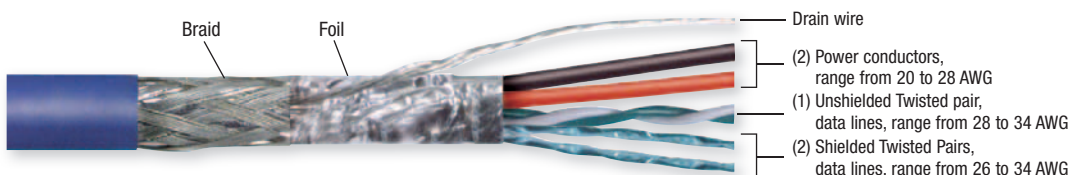

USB 3.0 adds two shielded data pairs to the USB 2.0 cable specifications. This addition allows for the faster performance in downloading data or video. Similar concept to changing a 2 lane highway to a 6 lane highway - much more traffic can pass through!

USB Cable Types and Features

Premium: 20 AWG power leads provide maximum current/power transfer.

Light gray color.

Deluxe: 26 AWG power leads, industry standard. Gray color.

Black Deluxe: 24 AWG power leads. Black color.

Mini: 28 AWG power leads. Black color.

Latching A: Provides lock down mating retention with any USB type A jack.

See tip on [page 108](#) for details.

LSZH: Low Smoke Zero Halogen material significantly reduces the amount of toxic and corrosive gases emitted during combustion. 20 AWG power leads provide maximum current/power transfer. Black color.

Panel Mount: Efficiently allows cables to be passed through a panel or enclosure.

Various styles and options available.

IP67: Water / dust proof connectors provide protection in wet and dirty environments.

See tip on [page 115](#) for IP rating detail.

Coil: Retractable polyurethane cord provides longer life and saves space when compared to standard cables.

Rotating / Flex: Ratcheting connector holds cables in place in any position the user prefers. Ideal for travel or any confined space.

USB 3.0: Latest USB revision provides up to 10 times greater bandwidth than revision 2.0.

Item #	Description	Color	1-9	10-24	25-99	100+
USB 3.0 Cables - Type A to Type A Connectors						
USB 3.0 cables are up to 10 times faster than USB 2.0 - 4.8 Gbps versus 480 Mbps. The increased bandwidth substantially reduces the time required for transferring large amounts of data or video. For example, an HD movie that would require 14 minutes to download with USB 2.0 devices and cables would take approximately 70 seconds using USB 3.0 equipment. The key change in the cables allowing for more speed is the addition of two data pairs bringing the number of conductors to eight.						
CAU3AA-03M	USB 3.0 Cable, Type A/A, 0.3m	Blue	11.00	10.12	9.24	CALL
CAU3AA-05M	USB 3.0 Cable, Type A/A, 0.5m	Blue	11.30	10.40	9.49	CALL
CAU3AA-075M	USB 3.0 Cable, Type A/A, 0.75m	Blue	11.75	10.81	9.87	CALL
CAU3AA-1M	USB 3.0 Cable, Type A/A, 1.0m	Blue	12.10	11.13	10.16	CALL
CAU3AA-2M	USB 3.0 Cable, Type A/A, 2.0m	Blue	13.65	12.56	11.47	CALL
CAU3AA-5M	USB 3.0 Cable, Type A/A, 5.0m	Blue	18.40	16.93	15.46	CALL

USB 3.0 Cables - Type A to Type B Connectors

CAU3AB-03M	USB 3.0 Cable, Type A/B, 0.3m	Blue	11.50	10.58	9.66	CALL
CAU3AB-05M	USB 3.0 Cable, Type A/B, 0.5m	Blue	11.85	10.90	9.95	CALL
CAU3AB-1M	USB 3.0 Cable, Type A/B, 1.0m	Blue	12.60	11.59	10.58	CALL
CAU3AB-3M	USB 3.0 Cable, Type A/B, 3.0m	Blue	15.75	14.49	13.23	CALL
CAU3AB-5M	USB 3.0 Cable, Type A/B, 5.0m	Blue	18.90	17.39	15.88	CALL

USB 3.0 Compliant Cables - Type A to Micro B Connectors

CAU3AMICB-03M	USB 3.0 Cable, Type A/Micro B, 0.3m	Blue	12.85	11.82	10.79	CALL
CAU3AMICB-05M	USB 3.0 Cable, Type A/Micro B, 0.5m	Blue	13.15	12.10	11.05	CALL
CAU3AMICB-075M	USB 3.0 Cable, Type A/Micro B, 0.75m	Blue	13.55	12.47	11.38	CALL
CAU3AMICB-1M	USB 3.0 Cable, Type A/Micro B, 1.0m	Blue	13.95	12.83	11.72	CALL
CAU3AMICB-2M	USB 3.0 Cable, Type A/Micro B, 2.0m	Blue	15.50	14.26	13.02	CALL
CAU3AMICB-3M	USB 3.0 Cable, Type A/Micro B, 3.0m	Blue	17.10	15.73	14.36	CALL
CAU3AMICB-5M	USB 3.0 Cable, Type A/Micro B, 5.0m	Blue	20.25	18.63	17.01	CALL

USB 3.0 Compliant Extension Cables - Type A Male to Female Connectors

CAU3AX-03M	USB 3.0 Extension Cable, Type A Male/Female, 0.3m	Blue	12.05	11.09	10.12	CALL
CAU3AX-05M	USB 3.0 Extension Cable, Type A Male/Female, 0.5m	Blue	12.35	11.36	10.37	CALL
CAU3AX-075M	USB 3.0 Extension Cable, Type A Male/Female, 0.75m	Blue	12.80	11.78	10.75	CALL
CAU3AX-1M	USB 3.0 Extension Cable, Type A Male/Female, 1.0m	Blue	13.15	12.10	11.05	CALL
CAU3AX-3M	USB 3.0 Extension Cable, Type A Male/Female, 3.0m	Blue	16.30	15.00	13.69	CALL

USB 3.0 Low Smoke Zero Halogen (LSZH) Cable Assemblies - Type A to A or A to B Connectors

L-com's CAU3ZAB series of USB 3.0 cables feature Low Smoke Zero Halogen cable jackets which reduce the amount of toxic and corrosive gases emitted during combustion.

Low Smoke Zero Halogen (LSZH) USB 3.0 Cables - Type A to A Connectors

CAU3ZAA-03M	LSZH USB 3.0 Cable, Type A/A, 0.3m	Black	14.39	13.53	12.66	CALL
CAU3ZAA-05M	LSZH USB 3.0 Cable, Type A/A, 0.5m	Black	15.09	14.18	13.28	CALL
CAU3ZAA-1M	LSZH USB 3.0 Cable, Type A/A, 1.0m	Black	16.79	15.78	14.78	CALL
CAU3ZAA-2M	LSZH USB 3.0 Cable, Type A/A, 2.0m	Black	20.09	18.88	17.68	CALL
CAU3ZAA-3M	LSZH USB 3.0 Cable, Type A/A, 3.0m	Black	23.49	22.08	20.67	CALL
CAU3ZAA-5M	LSZH USB 3.0 Cable, Type A/A, 5.0m	Black	30.19	28.38	26.57	CALL

Low Smoke Zero Halogen (LSZH) USB 3.0 Cables - Type A to B Connectors

CAU3ZAB-03M	LSZH USB 3.0 Cable, Type A/B, 0.3m	Black	15.39	14.47	13.54	CALL
CAU3ZAB-05M	LSZH USB 3.0 Cable, Type A/B, 0.5m	Black	16.19	15.22	14.25	CALL
CAU3ZAB-1M	LSZH USB 3.0 Cable, Type A/B, 1.0m	Black	17.79	16.72	15.66	CALL
CAU3ZAB-2M	LSZH USB 3.0 Cable, Type A/B, 2.0m	Black	21.09	19.82	18.56	CALL
CAU3ZAB-3M	LSZH USB 3.0 Cable, Type A/B, 3.0m	Black	24.49	23.02	21.55	CALL
CAU3ZAB-5M	LSZH USB 3.0 Cable, Type A/B, 5.0m	Black	31.19	29.32	27.45	CALL

Low Smoke Zero Halogen (LSZH) USB 3.0 Cables - Type A to Micro B Connectors

CAU3ZAMICB-03M	LSZH USB 3.0 Cable, Type A/Micro B, 0.3m	Black	15.99	15.03	14.07	CALL
CAU3ZAMICB-05M	LSZH USB 3.0 Cable, Type A/Micro B, 0.5m	Black	16.69	15.69	14.69	CALL
CAU3ZAMICB-1M	LSZH USB 3.0 Cable, Type A/Micro B, 1.0m	Black	18.29	17.19	16.10	CALL
CAU3ZAMICB-2M	LSZH USB 3.0 Cable, Type A/Micro B, 2.0m	Black	21.69	20.39	19.09	CALL
CAU3ZAMICB-3M	LSZH USB 3.0 Cable, Type A/Micro B, 3.0m	Black	24.99	23.49	21.99	CALL
CAU3ZAMICB-5M	LSZH USB 3.0 Cable, Type A/Micro B, 5.0m	Black	31.69	29.79	27.89	CALL

USB 3.0 Vision Cable Assemblies with Thumbscrews

These cables are manufactured per the USB3 Vision standard. In addition to supporting the machine vision camera market, the screw mount hardware is beneficial in many applications where standard USB connectors can become dislodged due to jostling, vibration, etc. L-com is a member of the AIA (Automated Imaging Association) trade group.

USB 3.0 Cables - Type A with Thumbscrews to Standard Type A

CAVISU3AA-03M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 0.3m	Blue	15.10	14.19	13.29	CALL
CAVISU3AA-05M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 0.5m	Blue	15.50	14.57	13.64	CALL
CAVISU3AA-1M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 1.0m	Blue	16.50	15.51	14.52	CALL
CAVISU3AA-2M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 2.0m	Blue	18.50	17.39	16.28	CALL
CAVISU3AA-3M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 3.0m	Blue	20.50	19.27	18.04	CALL
CAVISU3AA-5M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type A, 5.0m	Blue	24.50	23.03	21.56	CALL

USB 3.0 Cables - Type A with Thumbscrews to Standard Type B

CAVISU3AB-03M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 0.3m	Blue	16.10	15.13	14.17	CALL
CAVISU3AB-05M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 0.5m	Blue	16.50	15.51	14.52	CALL
CAVISU3AB-1M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 1.0m	Blue	17.50	16.45	15.40	CALL
CAVISU3AB-2M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 2.0m	Blue	19.50	18.33	17.16	CALL
CAVISU3AB-3M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 3.0m	Blue	21.50	20.21	18.92	CALL
CAVISU3AB-5M	USB 3.0 Cable, Type A with Thumbscrews/Standard Type B, 5.0m	Blue	25.50	23.97	22.44	CALL

USB 3.0 Cables - Type Micro B with Thumbscrews to Standard Type A

CAVISU3AMICB-03M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 0.3m	Blue	17.10	16.07	15.05	CALL
CAVISU3AMICB-05M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 0.5m	Blue	17.50	16.45	15.40	CALL
CAVISU3AMICB-1M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 1.0m	Blue	18.50	17.39	16.28	CALL
CAVISU3AMICB-2M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 2.0m	Blue	20.50	19.27	18.04	CALL
CAVISU3AMICB-3M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 3.0m	Blue	22.50	21.15	19.80	CALL
CAVISU3AMICB-5M	USB 3.0 Cable, Type Micro B with Thumbscrews/Standard Type A, 5.0m	Blue	26.50	24.91	23.32	CALL

More lengths available.
Go to L-com.com

CAU3AB-M

CAU3AMICB-M

CAU3AX-M

CAU3ZAB-M

CAU3ZAMICB-M

CAVISU3AA-2-M

CAVISU3AMICB-M

More lengths available.
Go to L-com.com



Item #	Description	Color	1-9	10-24	25-99	100+
USB 3.0 Cables - Type A and B with Thumbscrews						
CAVISU3AB-2-03M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 0.3m	Blue	17.10	16.07	15.05	CALL
CAVISU3AB-2-05M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 0.5m	Blue	17.50	16.45	15.40	CALL
CAVISU3AB-2-1M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 1.0m	Blue	18.50	17.39	16.28	CALL
CAVISU3AB-2-2M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 2.0m	Blue	20.50	19.27	18.04	CALL
CAVISU3AB-2-3M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 3.0m	Blue	22.50	21.15	19.80	CALL
CAVISU3AB-2-5M	USB 3.0 Cable, Type A/Type B with Thumbscrews, 5.0m	Blue	26.50	24.91	23.32	CALL
USB 3.0 Cables - Type A and Micro B with Thumbscrews						
CAVISU3AMICB-2-03M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 0.3m	Blue	17.10	16.07	15.05	CALL
CAVISU3AMICB-2-05M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 0.5m	Blue	17.50	16.45	15.40	CALL
CAVISU3AMICB-2-1M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 1.0m	Blue	18.50	17.39	16.28	CALL
CAVISU3AMICB-2-2M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 2.0m	Blue	20.50	19.27	18.04	CALL
CAVISU3AMICB-2-3M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 3.0m	Blue	22.50	21.15	19.80	CALL
CAVISU3AMICB-2-5M	USB 3.0 Cable, Type A/Type Micro B with Thumbscrews, 5.0m	Blue	26.50	24.91	23.32	CALL
Premium USB 2.0 Cables - Type A to Type A Con., PVC Jacket, 30μ (0.762μm) Gold, 20 AWG Power Leads						
Premium USB 2.0 cables contain 20 AWG power wires for maximum power transfer.						
CSMUAA-03M	Premium USB Cable, Type A/A, 0.3m	Lt. Gray	7.75	7.13	6.51	CALL
CSMUAA-05M	Premium USB Cable, Type A/A, 0.5m	Lt. Gray	7.95	7.31	6.68	CALL
CSMUAA-1M	Premium USB Cable, Type A/A, 1.0m	Lt. Gray	8.45	7.77	7.10	CALL
CSMUAA-2M	Premium USB Cable, Type A/A, 2.0m	Lt. Gray	9.45	8.69	7.94	CALL
CSMUAA-4M	Premium USB Cable, Type A/A, 4.0m	Lt. Gray	11.95	10.99	10.04	CALL
CSMUAA-5M	Premium USB Cable, Type A/A, 5.0m	Lt. Gray	12.45	11.45	10.46	CALL
Premium USB 2.0 Cables - Type A to Type B Con., PVC Jacket, 30μ (0.762μm) Gold, 20 AWG Power Leads						
CSMUAB-03M	Premium USB Cable, Type A/B, 0.3m	Lt. Gray	6.75	6.21	5.67	CALL
CSMUAB-075M	Premium USB Cable, Type A/B, 0.75m	Lt. Gray	7.20	6.62	6.05	CALL
CSMUAB-1M	Premium USB Cable, Type A/B, 1.0m	Lt. Gray	7.45	6.85	6.26	CALL
CSMUAB-2M	Premium USB Cable, Type A/B, 2.0m	Lt. Gray	8.45	7.77	7.10	CALL
CSMUAB-3M	Premium USB Cable, Type A/B, 3.0m	Lt. Gray	9.45	8.69	7.94	CALL
CSMUAB-4M	Premium USB Cable, Type A/B, 4.0m	Lt. Gray	10.45	9.61	8.78	CALL
CSMUAB-5M	Premium USB Cable, Type A/B, 5.0m	Lt. Gray	11.45	10.53	9.62	CALL
Premium USB 2.0 Ext. Cables - Type A Male to Female, PVC Jacket, 30μ (0.762μm) Gold, 20 AWG Power Leads						
CSMUAX-05M	Premium USB Extension Cable, Type A Male/Female, 0.5m	Lt. Gray	7.45	7.15	6.85	CALL
CSMUAX-1M	Premium USB Extension Cable, Type A Male/Female, 1.0m	Lt. Gray	7.95	7.63	7.31	CALL
CSMUAX-2M	Premium USB Extension Cable, Type A Male/Female, 2.0m	Lt. Gray	8.95	8.59	8.23	CALL
CSMUAX-3M	Premium USB Extension Cable, Type A Male/Female, 3.0m	Lt. Gray	9.95	9.55	9.15	CALL
Deluxe USB 2.0 Cables - Type A to A or A to B Connectors, 30μ (0.762μm) Gold, 26 AWG Power Leads						
L-com's standard USB cable offering, the ECUSB series, provides high performance at competitive prices. These quality constructed cables feature USB 2.0 Compliant 26 AWG power leads and are finished in an attractive medium gray color.						
ECUSBAA-05M	Deluxe USB Cable, Type A/A, 0.5m	Gray	4.85	4.37	3.88	CALL
ECUSBAA-1M	Deluxe USB Cable, Type A/A, 1.0m	Gray	5.25	4.73	4.20	CALL
ECUSBAA-2M	Deluxe USB Cable, Type A/A, 2.0m	Gray	6.05	5.45	4.84	CALL
ECUSBAA-3M	Deluxe USB Cable, Type A/A, 3.0m	Gray	6.85	6.17	5.48	CALL
ECUSBAA-4M	Deluxe USB Cable, Type A/A, 4.0m	Gray	7.65	6.89	6.12	CALL
ECUSBAA-5M	Deluxe USB Cable, Type A/A, 5.0m	Gray	8.45	7.60	6.76	CALL
ECUSBAB-05M	Deluxe USB Cable, Type A/B, 0.5m	Gray	4.35	3.91	3.48	CALL
ECUSBAB-075M	Deluxe USB Cable, Type A/B, 0.75m	Gray	4.55	4.09	3.64	CALL
ECUSBAB-1M	Deluxe USB Cable, Type A/B, 1.0m	Gray	4.75	4.28	3.80	CALL
ECUSBAB-2M	Deluxe USB Cable, Type A/B, 2.0m	Gray	5.55	5.00	4.44	CALL
ECUSBAB-3M	Deluxe USB Cable, Type A/B, 3.0m	Gray	6.35	5.71	5.08	CALL
ECUSBAB-5M	Deluxe USB Cable, Type A/B, 5.0m	Gray	7.95	7.16	6.36	CALL
Deluxe USB Extension Cables - Type A Male to Female, 30 Microinches (0.762μm) Gold, 26 AWG Power Leads						
ECUSBAX-03M	Deluxe USB Extension Cable, Type A Male/Female, 0.3m	Gray	4.70	4.51	4.32	CALL
ECUSBAX-05M	Deluxe USB Extension Cable, Type A Male/Female, 0.5m	Gray	4.85	4.66	4.46	CALL
ECUSBAX-075M	Deluxe USB Extension Cable, Type A Male/Female, 0.75m	Gray	5.05	4.85	4.65	CALL
ECUSBAX-1M	Deluxe USB Extension Cable, Type A Male/Female, 1.0m	Gray	5.25	5.04	4.83	CALL
ECUSBAX-2M	Deluxe USB Extension Cable, Type A Male/Female, 2.0m	Gray	6.05	5.81	5.57	CALL
ECUSBAX-3M	Deluxe USB Extension Cable, Type A Male/Female, 3.0m	Gray	6.85	6.58	6.30	CALL
Premium USB 2.0 Cables - Type A to A or A to B Connectors, Clear Jacket and Mold						
These sharp looking cables highlight L-com's high quality standards when "looking under the hood". A metal shielding can under the mold and high coverage braid shield protect your data even in the noisiest electrical environments. These cables use the same design as the popular CSMUAB series featuring 20 AWG power conductors enabling maximum power transfer from host to peripheral.						
CSMUCLRAA-03M	Premium USB Cable, Type A/A, 0.3m	Clear	7.85	7.22	6.59	CALL
CSMUCLRAA-05M	Premium USB Cable, Type A/A, 0.5m	Clear	8.05	7.41	6.76	CALL
CSMUCLRAA-1M	Premium USB Cable, Type A/A, 1.0m	Clear	8.65	7.96	7.27	CALL
CSMUCLRAA-2M	Premium USB Cable, Type A/A, 2.0m	Clear	9.85	9.06	8.27	CALL
CSMUCLRAA-3M	Premium USB Cable, Type A/A, 3.0m	Clear	11.05	10.17	9.28	CALL
CSMUCLRAA-5M	Premium USB Cable, Type A/A, 5.0m	Clear	13.45	12.37	11.30	CALL
CSMUCLRAB-03M	Premium USB Cable, Type A/B, 0.3m	Clear	6.85	6.30	5.75	CALL
CSMUCLRAB-05M	Premium USB Cable, Type A/B, 0.5m	Clear	7.05	6.49	5.92	CALL
CSMUCLRAB-1M	Premium USB Cable, Type A/B, 1.0m	Clear	7.65	7.04	6.43	CALL
CSMUCLRAB-2M	Premium USB Cable, Type A/B, 2.0m	Clear	8.85	8.14	7.43	CALL
CSMUCLRAB-3M	Premium USB Cable, Type A/B, 3.0m	Clear	10.05	9.25	8.44	CALL
CSMUCLRAB-5M	Premium USB Cable, Type A/B, 5.0m	Clear	12.45	11.45	10.46	CALL
Premium USB 2.0 Cables - Type A to A or A to B Connectors, Black, 30μ (0.762μm) Gold, 24 AWG Power Leads						
CAUBLKAA-03M	Premium USB Cable, Type A/A, 0.3m	Black	5.50	5.06	4.62	CALL
CAUBLKAA-05M	Premium USB Cable, Type A/A, 0.5m	Black	5.70	5.24	4.79	CALL
CAUBLKAA-1M	Premium USB Cable, Type A/A, 1.0m	Black	6.15	5.66	5.17	CALL
CAUBLKAA-3M	Premium USB Cable, Type A/A, 3.0m	Black	7.95	7.31	6.68	CALL
CAUBLKAA-5M	Premium USB Cable, Type A/A, 5.0m	Black	9.75	8.97	8.19	CALL
CAUBLKAB-03M	Premium USB Cable, Type A/B, 0.3m	Black	5.00	4.60	4.20	CALL
CAUBLKAB-05M	Premium USB Cable, Type A/B, 0.5m	Black	5.20	4.78	4.37	CALL
CAUBLKAB-1M	Premium USB Cable, Type A/B, 1.0m	Black	5.65	5.20	4.75	CALL
CAUBLKAB-3M	Premium USB Cable, Type A/B, 3.0m	Black	7.45	6.85	6.26	CALL
CAUBLKAB-5M	Premium USB Cable, Type A/B, 5.0m	Black	9.25	8.51	7.77	CALL

Item #	Description	Color	1-9	10-24	25-99	100+
High Flex USB 2.0 Cables - Type A to A and A to B Connectors						
Designed for applications where ordinary USB cables fail, this exclusive ultra flexible cable family is rated for 10,000 flex cycles minimum. Standard USB cable fails at approximately 1,000 bend cycles. The special bulk cable uses a polyurethane jacket plus high strand count data (28 AWG) and power (24 AWG) conductors to achieve the extra durability. Available with type A-A and A-B connector options in lengths from 0.3 to 5 meters.						
CAUAAHF-03M	High Flex USB Cable, Type A/A, 0.3m	Black	11.70	10.76	9.83	CALL
CAUAAHF-1M	High Flex USB Cable, Type A/A, 1.0m	Black	13.75	12.65	11.55	CALL
CAUAAHF-2M	High Flex USB Cable, Type A/A, 2.0m	Black	16.80	15.46	14.11	CALL
CAUAAHF-3M	High Flex USB Cable, Type A/A, 3.0m	Black	19.80	18.22	16.63	CALL
CAUAAHF-5M	High Flex USB Cable, Type A/A, 5.0m	Black	25.85	23.78	21.71	CALL
CAUABHF-03M	High Flex USB Cable, Type A/B, 0.3m	Black	11.70	10.76	9.83	CALL
CAUABHF-1M	High Flex USB Cable, Type A/B, 1.0m	Black	13.75	12.65	11.55	CALL
CAUABHF-2M	High Flex USB Cable, Type A/B, 2.0m	Black	16.80	15.46	14.11	CALL
CAUABHF-3M	High Flex USB Cable, Type A/B, 3.0m	Black	19.80	18.22	16.63	CALL
CAUABHF-5M	High Flex USB Cable, Type A/B, 5.0m	Black	25.85	23.78	21.71	CALL

Low Smoke Zero Halogen USB Cable - Type A to A and A to B Connectors, 30 Microinches (0.762µm) Gold

Low Smoke Zero Halogen cable reduces the amount of toxic and corrosive gases emitted during combustion. Typically used in poorly ventilated areas, Low Smoke Zero Halogen is becoming very popular where the protection of people and equipment from toxic and corrosive gases is critical.

CSUZAA-03M	LSZH USB Cable, Type A/A, 0.3m	Black	13.60	12.51	11.42	CALL
CSUZAA-05M	LSZH USB Cable, Type A/A, 0.5m	Black	14.25	13.11	11.97	CALL
CSUZAA-075M	LSZH USB Cable, Type A/A, 0.75m	Black	15.10	13.89	12.68	CALL
CSUZAA-1M	LSZH USB Cable, Type A/A, 1.0m	Black	15.90	14.63	13.36	CALL
CSUZAA-2M	LSZH USB Cable, Type A/A, 2.0m	Black	19.20	17.66	16.13	CALL
CSUZAA-5M	LSZH USB Cable, Type A/A, 5.0m	Black	29.10	26.77	24.44	CALL
CSUZAB-03M	LSZH USB Cable, Type A/B, 0.3m	Black	13.60	12.51	11.42	CALL
CSUZAB-05M	LSZH USB Cable, Type A/B, 0.5m	Black	14.25	13.11	11.97	CALL
CSUZAB-075M	LSZH USB Cable, Type A/B, 0.75m	Black	15.10	13.89	12.68	CALL
CSUZAB-1M	LSZH USB Cable, Type A/B, 1.0m	Black	15.90	14.63	13.36	CALL
CSUZAB-3M	LSZH USB Cable, Type A/B, 3.0m	Black	22.50	20.70	18.90	CALL
CSUZAB-5M	LSZH USB Cable, Type A/B, 5.0m	Black	29.10	26.77	24.44	CALL

USB Cable - Type A to Micro B 5 Position, PVC Jacket, 30 Microinches (0.762µm) Gold

CSMUAMICB-03M	Premium USB Cable, Type A/Micro B 5 Position, 0.3m	Black	7.60	6.99	6.38	CALL
CSMUAMICB-05M	Premium USB Cable, Type A/Micro B 5 Position, 0.5m	Black	7.85	7.22	6.59	CALL
CSMUAMICB-1M	Premium USB Cable, Type A/Micro B 5 Position, 1.0m	Black	8.40	7.73	7.06	CALL
CSMUAMICB-2M	Premium USB Cable, Type A/Micro B 5 Position, 2.0m	Black	9.60	8.83	8.06	CALL
CSMUAMICB-3M	Premium USB Cable, Type A/Micro B 5 Position, 3.0m	Black	10.80	9.94	9.07	CALL

Premium USB 2.0 Extension Cables - Micro B 5 Position Male to Female

L-com's CSMUMICBX series cables are designed to extend devices such as cell phone chargers or other USB 2.0 Micro B enabled peripherals - no more laying your phone on the floor to charge it because the cord is too short. All 5 connector positions are connected to insure proper functionality in every application. These cables feature foil plus braid shielding to provide maximum protection against EMI/RFI.

CSMUMICBX-03M	Premium USB Cable, Micro B 5 Position Male/Female, 0.3m	Black	8.60	7.91	7.22	CALL
CSMUMICBX-05M	Premium USB Cable, Micro B 5 Position Male/Female, 0.5m	Black	8.80	8.10	7.39	CALL
CSMUMICBX-075M	Premium USB Cable, Micro B 5 Position Male/Female, 0.75m	Black	9.10	8.37	7.64	CALL
CSMUMICBX-1M	Premium USB Cable, Micro B 5 Position Male/Female, 1.0m	Black	9.40	8.65	7.90	CALL
CSMUMICBX-2M	Premium USB Cable, Micro B 5 Position Male/Female, 2.0m	Black	10.60	9.75	8.90	CALL
CSMUMICBX-3M	Premium USB Cable, Micro B 5 Position Male/Female, 3.0m	Black	11.80	10.86	9.91	CALL

USB Cable - Type A to Mini B 4 Position, PVC Jacket, 30 Microinches (0.762µm) Gold

CSMUAMB4-05M	Premium USB Cable, Type A/Mini B 4 Position, 0.5m	Black	8.70	8.00	7.31	CALL
CSMUAMB4-1M	Premium USB Cable, Type A/Mini B 4 Position, 1.0m	Black	9.40	8.65	7.90	CALL
CSMUAMB4-2M	Premium USB Cable, Type A/Mini B 4 Position, 2.0m	Black	10.70	9.84	8.99	CALL
CSMUAMB4-3M	Premium USB Cable, Type A/Mini B 4 Position, 3.0m	Black	12.05	11.09	10.12	CALL

USB Cable - Type A to Mini B 5 Position, PVC Jacket, 30 Microinches (0.762µm) Gold

CSMUAMB5-03M	Premium USB Cable, Type A/Mini B 5 Position, 0.3m	Black	7.60	6.99	6.38	CALL
CSMUAMB5-075M	Premium USB Cable, Type A/Mini B 5 Position, 0.75m	Black	8.10	7.45	6.80	CALL
CSMUAMB5-1M	Premium USB Cable, Type A/Mini B 5 Position, 1.0m	Black	8.40	7.73	7.06	CALL
CSMUAMB5-2M	Premium USB Cable, Type A/Mini B 5 Position, 2.0m	Black	9.60	8.83	8.06	CALL
CSMUAMB5-3M	Premium USB Cable, Type A/Mini B 5 Position, 3.0m	Black	10.80	9.94	9.07	CALL

USB Extension Cable - Mini B 5 Position Male to Female

L-com's CSMUMB5X series cables are designed to connect devices such as GPS units and other USB Mini B 5 position peripherals. All 5 mini B positions are connected to insure proper functionality in every application. We offer these Mini B5 extension cables in off the shelf lengths of 0.3, 1, 2, and 3 meters. These cables feature foil plus braid shielding to provide maximum protection against EMI/RFI.

CSMUMB5X-03M	Premium USB Extension Cable, Mini B 5 Position Male/Female, 0.3m	Black	8.65	7.96	7.27	CALL
CSMUMB5X-1M	Premium USB Extension Cable, Mini B 5 Position Male/Female, 1.0m	Black	9.55	8.79	8.02	CALL
CSMUMB5X-2M	Premium USB Extension Cable, Mini B 5 Position Male/Female, 2.0m	Black	10.80	9.94	9.07	CALL
CSMUMB5X-3M	Premium USB Extension Cable, Mini B 5 Position Male/Female, 3.0m	Black	12.05	11.09	10.12	CALL

Variable Length USB Coil Cable - Mini B 5 Position Male to Female

This innovative USB coil cable from L-com features a retracted length of 0.5 meters and an expanded length of two meters and can be used with GPS systems as well as cameras and other peripherals using the USB Mini B5 interface. All 5 mini B positions are connected to insure proper functionality in every application. The tough, durable polyurethane jacket enhances recoil memory and 30 microinch gold (0.762µm) plated contacts provide reliable connections with repeated mating cycles.

COILMB5EXT-2M	USB Coil Cable, Mini B 5 Position Male/Female, 0.5m to 2.0m	Black	12.65	11.64	10.63	CALL
---------------	---	-------	-------	-------	-------	------

New, shorter lengths 0.3m and 0.75m now available



What is the difference between a USB Type A or B connector?

Type A jacks are found on the host and on hubs.

Type B jacks are found on peripherals requiring detachable cables.


USB 2.0 Type A



USB 2.0 Type B



USB 3.0 Type A




USB 3.0 Type B



More lengths available.
Go to L-com.com



CAUALAL



CAUALB



CAUZALAL-M



CAUZALB-M




CSMUAXMT-2M


New, shorter lengths 0.3m and
0.75m now available



How does the latching USB connector work?



STEP 1
Insert the latching USB connector into the USB jack.



STEP 2
The latches on each side of the connector lock into the channel cut-outs of any USB jack. **Note:** It may be necessary to rock the latching connector slightly to set the latches into the channels.



STEP 3
To remove the latching USB connector, simply depress the release mechanisms on the sides of the backshell and pull apart.

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

USB Cable Assemblies with Latching Connectors

These unique cable assemblies feature a latching Type A USB plug which provides lock down mating retention with any USB Type A jack. Two styles are available – latching A to latching A and latching A to standard B. Fully shielded and USB 2.0 compliant, this cable contains two 24 AWG power conductors and one 28 AWG pair for the data lines. Please note latching Type B plugs are available as custom products but require a custom Type B jack.

USB 2.0 Cable Assemblies with Latching Type A to Latching Type A Connectors

CAUALAL-05M	USB Cable, Latching Type A/Latching Type A, 0.5m	Black	12.30	11.32	10.33	CALL
CAUALAL-075M	USB Cable, Latching Type A/Latching Type A, 0.75m	Black	12.55	11.55	10.54	CALL
CAUALAL-1M	USB Cable, Latching Type A/Latching Type A, 1.0m	Black	12.80	11.78	10.75	CALL
CAUALAL-2M	USB Cable, Latching Type A/Latching Type A, 2.0m	Black	13.70	12.60	11.51	CALL
CAUALAL-4M	USB Cable, Latching Type A/Latching Type A, 4.0m	Black	15.60	14.35	13.10	CALL
CAUALAL-5M	USB Cable, Latching Type A/Latching Type A, 5.0m	Black	16.55	15.23	13.90	CALL

USB 2.0 Cable Assemblies with Latching Type A to Standard Type B Connectors

CAUALB-03M	USB Cable, Latching Type A/Standard Type B, 0.3m	Black	10.50	9.66	8.82	CALL
CAUALB-05M	USB Cable, Latching Type A/Standard Type B, 0.5m	Black	10.75	9.89	9.03	CALL
CAUALB-075M	USB Cable, Latching Type A/Standard Type B, 0.75m	Black	11.00	10.12	9.24	CALL
CAUALB-1M	USB Cable, Latching Type A/Standard Type B, 1.0m	Black	11.20	10.30	9.41	CALL
CAUALB-2M	USB Cable, Latching Type A/Standard Type B, 2.0m	Black	12.15	11.18	10.21	CALL
CAUALB-3M	USB Cable, Latching Type A/Standard Type B, 3.0m	Black	13.10	12.05	11.00	CALL
CAUALB-5M	USB Cable, Latching Type A/Standard Type B, 5.0m	Black	15.00	13.80	12.60	CALL

LSZH USB 2.0 Cable Assemblies with Latching Type A to Latching Type A Connectors

These Low Smoke Zero Halogen cable assemblies feature two latching Type A USB plugs which provide lock down mating retention with any USB Type A jack. Fully shielded and USB 2.0 compliant, these cables contain two 24 AWG power conductors and one 28 AWG pair for the data lines.

CAUZALAL-03M	LSZH USB Cable, Latching Type A/Latching Type A, 0.3m	Black	15.59	14.65	13.72	CALL
CAUZALAL-05M	LSZH USB Cable, Latching Type A/Latching Type A, 0.5m	Black	16.19	15.22	14.25	CALL
CAUZALAL-1M	LSZH USB Cable, Latching Type A/Latching Type A, 1.0m	Black	17.69	16.63	15.57	CALL
CAUZALAL-3M	LSZH USB Cable, Latching Type A/Latching Type A, 3.0m	Black	23.49	22.08	20.67	CALL
CAUZALAL-4M	LSZH USB Cable, Latching Type A/Latching Type A, 4.0m	Black	26.29	24.71	23.14	CALL
CAUZALAL-5M	LSZH USB Cable, Latching Type A/Latching Type A, 5.0m	Black	29.19	27.44	25.69	CALL

LSZH USB 2.0 Cable Assemblies with Latching Type A to Standard Type B Connectors

CAUZALB-05M	LSZH USB Cable, Latching Type A/Standard Type B, 0.5m	Black	14.49	13.62	12.75	CALL
CAUZALB-075M	LSZH USB Cable, Latching Type A/Standard Type B, 0.75m	Black	15.29	14.37	13.46	CALL
CAUZALB-1M	LSZH USB Cable, Latching Type A/Standard Type B, 1.0m	Black	15.89	14.94	13.98	CALL
CAUZALB-2M	LSZH USB Cable, Latching Type A/Standard Type B, 2.0m	Black	18.79	17.66	16.54	CALL
CAUZALB-3M	LSZH USB Cable, Latching Type A/Standard Type B, 3.0m	Black	21.69	20.39	19.09	CALL
CAUZALB-5M	LSZH USB Cable, Latching Type A/Standard Type B, 5.0m	Black	27.49	25.84	24.19	CALL

Mountable USB Extension Cable - Type A Male to Type A Female Connectors, 30 Microinches Gold

Tired of trying to connect your USB cable to the hard to access port on the back of your PC? Try this convenient cable and make this problem go away. Featuring a USB Type A plug for the PC connection and a unique USB Type A jack, the user can mount this jack to any surface with either screws or double sided foam tape (both are provided). Fully shielded and USB 2.0 compliant, this cable contains two 20 AWG power conductors plus one 28 AWG twisted pair for the data lines and rugged molded backshells. Cable length is 2 meters (6.6 feet).


CSMUAXMT-2M	Premium USB Type A Male/Female Mounting Extension Cable, 2.0m	Lt. Gray	11.55	10.63	9.70	CALL
-------------	---	----------	-------	-------	------	------



USB armored cables explained

Metal Coupling Nut


Heavy duty construction ensures that the crush resistant jacket remains in place

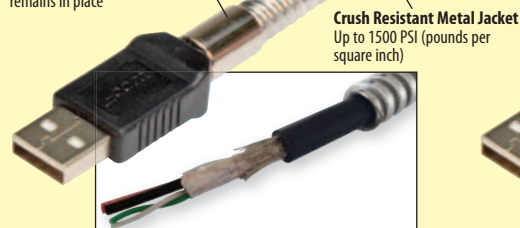

Crush Resistant Metal Jacket
Up to 1500 PSI (pounds per square inch)

Crush Resistant Plastic Jacket

Up to 800 PSI (pounds per square inch)

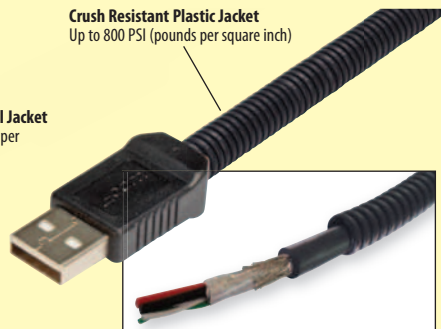

Uses our Premium bulk cable including PVC cable jacket and 20 AWG power leads under the armor.

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Metal Armored USB Cables - Type A to A and A to B Connectors, Revision 2.0 Compliant

These unique cables feature a stainless steel crush resistant jacket over our premium USB 2.0 cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 1500 PSI (pounds per square inch). The 20 AWG USB power wires allow for maximum power transfer.

CSMUAA-MT-03M	Metal Armored USB Cable, Type A/A, 0.3m	Black	17.40	16.36	15.31	CALL
CSMUAA-MT-05M	Metal Armored USB Cable, Type A/A, 0.5m	Black	18.65	17.53	16.41	CALL
CSMUAA-MT-1M	Metal Armored USB Cable, Type A/A, 1.0m	Black	21.80	20.49	19.18	CALL
CSMUAA-MT-2M	Metal Armored USB Cable, Type A/A, 2.0m	Black	28.10	26.41	24.73	CALL
CSMUAA-MT-3M	Metal Armored USB Cable, Type A/A, 3.0m	Black	34.40	32.34	30.27	CALL
CSMUAA-MT-4M	Metal Armored USB Cable, Type A/A, 4.0m	Black	40.70	38.26	35.82	CALL
CSMUAA-MT-5M	Metal Armored USB Cable, Type A/A, 5.0m	Black	47.00	44.18	41.36	CALL
CSMUAB-MT-03M	Metal Armored USB Cable, Type A/B, 0.3m	Black	17.40	16.36	15.31	CALL
CSMUAB-MT-05M	Metal Armored USB Cable, Type A/B, 0.5m	Black	18.65	17.53	16.41	CALL
CSMUAB-MT-1M	Metal Armored USB Cable, Type A/B, 1.0m	Black	21.80	20.49	19.18	CALL
CSMUAB-MT-2M	Metal Armored USB Cable, Type A/B, 2.0m	Black	28.10	26.41	24.73	CALL
CSMUAB-MT-3M	Metal Armored USB Cable, Type A/B, 3.0m	Black	34.40	32.34	30.27	CALL
CSMUAB-MT-4M	Metal Armored USB Cable, Type A/B, 4.0m	Black	40.70	38.26	35.82	CALL
CSMUAB-MT-5M	Metal Armored USB Cable, Type A/B, 5.0m	Black	47.00	44.18	41.36	CALL

Plastic Armored USB Cables - Type A to A and A to B Connectors, Revision 2.0 Compliant

These unique cables feature an external PVC crush resistant jacket over our premium USB 2.0 cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 800 PSI (Pounds per Square Inch). The 20 AWG USB power wires allow for maximum power transfer.

CSMUAA-PL-03M	Plastic Armored USB Cable, Type A/A, 0.3m	Black	13.65	13.10	12.56	CALL
CSMUAA-PL-05M	Plastic Armored USB Cable, Type A/A, 0.5m	Black	14.25	13.68	13.11	CALL
CSMUAA-PL-1M	Plastic Armored USB Cable, Type A/A, 1.0m	Black	15.75	15.12	14.49	CALL
CSMUAA-PL-2M	Plastic Armored USB Cable, Type A/A, 2.0m	Black	18.75	18.00	17.25	CALL
CSMUAA-PL-3M	Plastic Armored USB Cable, Type A/A, 3.0m	Black	21.75	20.88	20.01	CALL
CSMUAA-PL-4M	Plastic Armored USB Cable, Type A/A, 4.0m	Black	24.75	23.76	22.77	CALL
CSMUAA-PL-5M	Plastic Armored USB Cable, Type A/A, 5.0m	Black	27.75	26.64	25.53	CALL
CSMUAB-PL-03M	Plastic Armored USB Cable, Type A/B, 0.3m	Black	13.65	13.10	12.56	CALL
CSMUAB-PL-05M	Plastic Armored USB Cable, Type A/B, 0.5m	Black	14.25	13.68	13.11	CALL
CSMUAB-PL-1M	Plastic Armored USB Cable, Type A/B, 1.0m	Black	15.75	15.12	14.49	CALL
CSMUAB-PL-2M	Plastic Armored USB Cable, Type A/B, 2.0m	Black	18.75	18.00	17.25	CALL
CSMUAB-PL-3M	Plastic Armored USB Cable, Type A/B, 3.0m	Black	21.75	20.88	20.01	CALL
CSMUAB-PL-4M	Plastic Armored USB Cable, Type A/B, 4.0m	Black	24.75	23.76	22.77	CALL
CSMUAB-PL-5M	Plastic Armored USB Cable, Type A/B, 5.0m	Black	27.75	26.64	25.53	CALL

Angled USB 2.0 Cable Assemblies - Choice of 4 Mold Options, all Lengths and Styles at L-com.com

Molded, angled connector hoods solve difficult connection issues in tight places. Four mold options each for standard A and B style connectors are now available. These high quality constructed cables feature USB 2.0 compliant 24 AWG power leads and are finished in an attractive black color. Custom configuration options are available with modest minimum requirements, please contact our Sales Team for a quote.

Please use the grid below to determine which family of cables best fits your application.

	A UP	A DOWN	A LEFT	A RIGHT	A STRAIGHT
B UP	CABLK90UA-UB	X	X	X	CAABLK-90UB
B DOWN	X	CABLK90DA-DB	X	X	CAABLK-90DB
B LEFT	X	X	CABLK90LA-LB	CABLK90RA-LB	CAABLK-90LB
B RIGHT	X	X	CABLK90LA-RB	CABLK90RA-RB	CAABLK-90RB
B STRAIGHT	CABLK90UA-B	CABLK90DA-B	CABLK90LA-B	CABLK90RA-B	X

Below are a few options, see L-com.com for complete product offering and pricing.

Deluxe USB 2.0 Cable Assemblies - Left Angle Type A to Left Angle Type B, 30 Microinches (0.762µm) Gold

CABLK90LA-LB-03M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 0.3m	Black	7.02	6.46	5.90	CALL
CABLK90LA-LB-05M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 0.5m	Black	7.20	6.62	6.05	CALL
CABLK90LA-LB-1M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 1.0m	Black	7.65	7.04	6.43	CALL
CABLK90LA-LB-2M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 2.0m	Black	8.55	7.87	7.18	CALL
CABLK90LA-LB-3M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 3.0m	Black	9.45	8.69	7.94	CALL
CABLK90LA-LB-5M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 5.0m	Black	11.25	10.35	9.45	CALL

Deluxe USB 2.0 Cable Assemblies - Standard Type A to Right Angle Type B, 30 Microinches (0.762µm) Gold

CAABLK-90RB-03M	USB Cable, Standard Type A Male/Right Angle Type B Male, 0.3m	Black	6.50	5.98	5.46	CALL
CAABLK-90RB-05M	USB Cable, Standard Type A Male/Right Angle Type B Male, 0.5m	Black	6.70	6.16	5.63	CALL
CAABLK-90RB-1M	USB Cable, Standard Type A Male/Right Angle Type B Male, 1.0m	Black	7.15	6.58	6.01	CALL
CAABLK-90RB-2M	USB Cable, Standard Type A Male/Right Angle Type B Male, 2.0m	Black	8.05	7.41	6.76	CALL
CAABLK-90RB-3M	USB Cable, Standard Type A Male/Right Angle Type B Male, 3.0m	Black	8.95	8.23	7.52	CALL
CAABLK-90RB-5M	USB Cable, Standard Type A Male/Right Angle Type B Male, 5.0m	Black	10.75	9.89	9.03	CALL

Deluxe USB 2.0 Cable Assemblies - Down Angle Type A to Down Angle Type B, 30 Microinches (0.762µm) Gold

CABLK90DA-DB-03M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 0.3m	Black	7.02	6.46	5.90	CALL
CABLK90DA-DB-05M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 0.5m	Black	7.20	6.62	6.05	CALL
CABLK90DA-DB-1M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 1.0m	Black	7.65	7.04	6.43	CALL
CABLK90DA-DB-2M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 2.0m	Black	8.55	7.87	7.18	CALL
CABLK90DA-DB-3M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 3.0m	Black	9.45	8.69	7.94	CALL
CABLK90DA-DB-5M	USB Cable, Down Angle Type A Male/Down Angle Type B Male, 5.0m	Black	11.25	10.35	9.45	CALL

USB Cable Assembly Male Connector Dust Covers - Pkg/10

These hard to find covers are perfect for protecting unused USB cable assembly connectors from physical damage, dirt and dust. Made from PVC, they attach easily and stay in place with a snug friction fit.

CVRUSB-A	USB Protective Cover for USB 2.0 and 3.0 Type A Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB-B	USB Protective Cover for USB 2.0 Type B Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL





Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Angled USB 2.0 Cable Assemblies - Choice of 24 Options, all Lengths and Styles at L-com.com

Molded, angled connector hoods solve difficult connection issues in tight places. Four mold options each for standard A and B style connectors are available. These high quality constructed cables feature USB 2.0 compliant 26 AWG power leads and are finished in an attractive gray color. Custom configuration options are available with modest minimum requirements, please contact your Customer Service Representative for a quote.

All families are available in lengths of 0.3, 0.5, 0.75, 1, 2, 3, 4, and 5 meters:

Please use the grid below to determine which family of cables best fits your application

	A UP	A DOWN	A LEFT	A RIGHT	A STRAIGHT
B UP	CA90UA-90UB	CA90DA-90UB	CA90LA-UB	CA90RA-UB	CAA-90UB
B DOWN	CA90UA-90DB	CA90DA-90DB	CA90LA-DB	CA90RA-DB	CAA-90DB
B LEFT	CA90UA-90LB	CA90DA-90LB	CA90LA-90LB	CA90RA-LB	CAA-90LB
B RIGHT	CA90UA-90RB	CA90DA-90RB	CA90LA-RB	CA90RA-90RB	CAA-90RB
B STRAIGHT	CA90UA-B	CA90DA-B	CA90LA-B	CA90RA-B	X

Here are some examples, please go to L-com.com for complete product offering and pricing.

Deluxe USB 2.0 Cable Assemblies - Left Angle Type A to Down Angle Type B, 30 Microinches (0.762μm) Gold

CA90LA-DB-03M	USB Cable, Left Angle Type A Male/Down Angle Type B Male, 0.3m	6.70	6.16	5.63	CALL
CA90LA-DB-075M	USB Cable, Left Angle Type A Male/Down Angle Type B Male, 0.75m	7.05	6.49	5.92	CALL
CA90LA-DB-1M	USB Cable, Left Angle Type A Male/Down Angle Type B Male, 1.0m	7.25	6.67	6.09	CALL
CA90LA-DB-2M	USB Cable, Left Angle Type A Male/Down Angle Type B Male, 2.0m	8.05	7.41	6.76	CALL
CA90LA-DB-5M	USB Cable, Left Angle Type A Male/Down Angle Type B Male, 5.0m	10.45	9.61	8.78	CALL

Deluxe USB 2.0 Cable Assemblies - Down Angle Type A to Left Angle Type B, 30 Microinches (0.762μm) Gold

CA90DA-90LB-03M	USB Cable, Down Angle Type A Male/Left Angle Type B Male, 0.3m	6.70	6.16	5.63	CALL
CA90DA-90LB-075M	USB Cable, Down Angle Type A Male/Left Angle Type B Male, 0.75m	7.05	6.49	5.92	CALL
CA90DA-90LB-1M	USB Cable, Down Angle Type A Male/Left Angle Type B Male, 1.0m	7.25	6.67	6.09	CALL
CA90DA-90LB-2M	USB Cable, Down Angle Type A Male/Left Angle Type B Male, 2.0m	8.05	7.41	6.76	CALL
CA90DA-90LB-5M	USB Cable, Down Angle Type A Male/Left Angle Type B Male, 5.0m	10.45	9.61	8.78	CALL

Deluxe USB 2.0 Cable Assemblies - Standard Type A to Down Angle Type B, 30 Microinches (0.762μm) Gold

CAA-90DB-03M	USB Cable, Standard Type A Male/Down Angle Type B Male, 0.3m	6.20	5.70	5.21	CALL
CAA-90DB-075M	USB Cable, Standard Type A Male/Down Angle Type B Male, 0.75m	6.55	6.03	5.50	CALL
CAA-90DB-1M	USB Cable, Standard Type A Male/Down Angle Type B Male, 1.0m	6.75	6.21	5.67	CALL
CAA-90DB-2M	USB Cable, Standard Type A Male/Down Angle Type B Male, 2.0m	7.55	6.95	6.34	CALL
CAA-90DB-3M	USB Cable, Standard Type A Male/Down Angle Type B Male, 3.0m	8.35	7.68	7.01	CALL
CAA-90DB-5M	USB Cable, Standard Type A Male/Down Angle Type B Male, 5.0m	9.95	9.15	8.36	CALL




Defining angled USB cable assemblies

Angled connector hoods help connect USB cables in tight places. L-com now offers four options each for standard A and B style connectors. The photos below detail the connector position relative to the cable entry direction.


A Style Connectors

For A style connectors, the position of the connector dielectric* is key in determining the correct angle for your application. *Note: The connector dielectric is the plastic material that contains the contacts

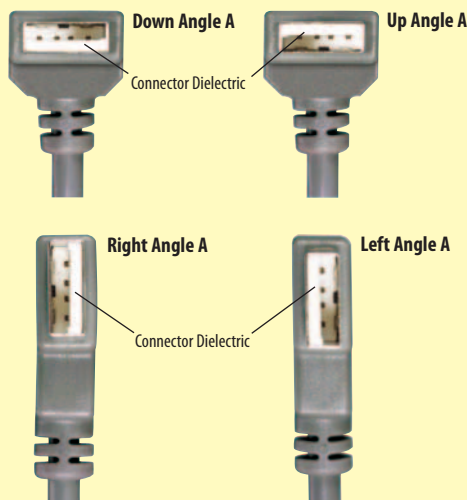

B Style Connectors

For B style connectors, the angled corners of the connector are key in determining the correct angle for your application.

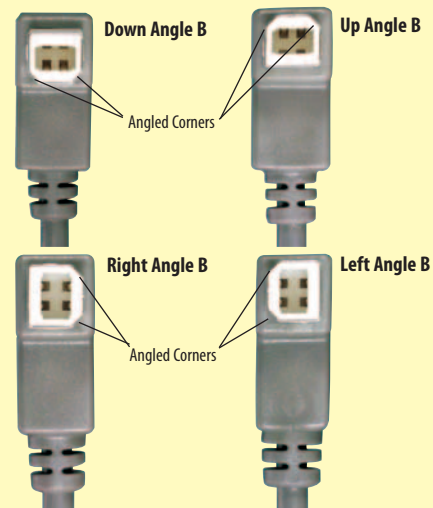

More lengths available.
Go to L-com.com

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

45 Degree Angled USB 2.0 Cable Assemblies - Choice of 6 Options, all Lengths and Styles at L-com.com

L-com has added 45 degree angled USB cables to complement our extensive 90 degree angled offering. 45 degree bends offer an alternative in applications where 90 degree bends can't clear nearby obstacles. Two mold options each for standard A and B style connectors are now available. These high quality constructed cables feature USB 2.0 compliant 26 AWG power leads and are finished in an attractive gray color. Custom configuration options are available with modest minimum requirements, please contact our Sales Team for a quote. All families are available in lengths of 0.3, 0.5, 0.75, 1, 2, 3 and 5 meters.

Please use the grid below to determine which family of cables best fits your application

	A STRAIGHT	A LEFT	A RIGHT
B STRAIGHT	X	CA45LA-B	CA45RA-B
B LEFT	CAA-45LB	CA45LA-45LB	X
B RIGHT	CAA-45RB	X	CA45RA-45RB

USB 2.0 Cable Assemblies - Left Angle Type A to Left Angle Type B

CA45LA-45LB-03M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 0.3m	7.00	6.44	5.88	CALL
CA45LA-45LB-075M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 0.75m	7.35	6.76	6.17	CALL
CA45LA-45LB-1M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 1.0m	7.55	6.95	6.34	CALL
CA45LA-45LB-3M	USB Cable, Left Angle Type A Male/Left Angle Type B Male, 3.0m	9.15	8.42	7.69	CALL

USB 2.0 Cable Assemblies - Left Angle Type A to Straight Type B

CA45LA-B-03M	USB Cable, Left Angle Type A Male/Straight Type B Male, 0.3m	6.50	5.98	5.46	CALL
CA45LA-B-075M	USB Cable, Left Angle Type A Male/Straight Type B Male, 0.75m	6.85	6.30	5.75	CALL
CA45LA-B-1M	USB Cable, Left Angle Type A Male/Straight Type B Male, 1.0m	7.05	6.49	5.92	CALL
CA45LA-B-3M	USB Cable, Left Angle Type A Male/Straight Type B Male, 3.0m	8.65	7.96	7.27	CALL

USB 2.0 Cable Assemblies - Right Angle Type A to Right Angle Type B

CA45RA-45RB-03M	USB Cable, Right Angle Type A Male/Right Angle Type B Male, 0.3m	7.00	6.44	5.88	CALL
CA45RA-45RB-075M	USB Cable, Right Angle Type A Male/Right Angle Type B Male, 0.75m	7.35	6.76	6.17	CALL
CA45RA-45RB-2M	USB Cable, Right Angle Type A Male/Right Angle Type B Male, 2.0m	8.35	7.68	7.01	CALL
CA45RA-45RB-5M	USB Cable, Right Angle Type A Male/Right Angle Type B Male, 5.0m	10.75	9.89	9.03	CALL

USB 2.0 Cable Assemblies - Right Angle Type A to Straight Type B

CA45RA-B-03M	USB Cable, Right Angle Type A Male/Straight Type B Male, 0.3m	6.50	5.98	5.46	CALL
CA45RA-B-075M	USB Cable, Right Angle Type A Male/Straight Type B Male, 0.75m	6.85	6.30	5.75	CALL
CA45RA-B-1M	USB Cable, Right Angle Type A Male/Straight Type B Male, 1.0m	7.05	6.49	5.92	CALL
CA45RA-B-3M	USB Cable, Right Angle Type A Male/Straight Type B Male, 3.0m	8.65	7.96	7.27	CALL

USB 2.0 Cable Assemblies - Straight Type A to Left Angle Type B

CAA-45LB-03M	USB Cable, Straight Type A Male/Left Type B Male, 0.3m	6.50	5.98	5.46	CALL
CAA-45LB-075M	USB Cable, Straight Type A Male/Left Type B Male, 0.75m	6.85	6.30	5.75	CALL
CAA-45LB-1M	USB Cable, Straight Type A Male/Left Type B Male, 1.0m	7.05	6.49	5.92	CALL
CAA-45LB-3M	USB Cable, Straight Type A Male/Left Type B Male, 3.0m	8.65	7.96	7.27	CALL

USB 2.0 Cable Assemblies - Straight Type A to Right Angle Type B

CAA-45RB-03M	USB Cable, Straight Type A Male/Right Type B Male, 0.3m	6.50	5.98	5.46	CALL
CAA-45RB-075M	USB Cable, Straight Type A Male/Right Type B Male, 0.75m	6.85	6.30	5.75	CALL
CAA-45RB-1M	USB Cable, Straight Type A Male/Right Type B Male, 1.0m	7.05	6.49	5.92	CALL
CAA-45RB-3M	USB Cable, Straight Type A Male/Right Type B Male, 3.0m	8.65	7.96	7.27	CALL



Defining 45 Degree Angled USB Cable Assemblies

L-com has added four new angled options to our existing, extensive offering of 90 degree angled USB cable assemblies. The photos below detail the connector position relative to the cable entry direction.


A Style Connectors

For A style connectors, the position of the connector dielectric* is key in determining the correct angle for your application. *Note: The connector dielectric is the plastic material that contains the contacts.


B Style Connectors

For B style connectors, the angled corners of the connector are key in determining the correct angle for your application.


Right Angle A

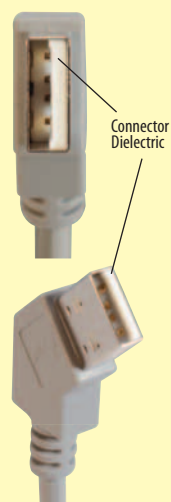


Left Angle A

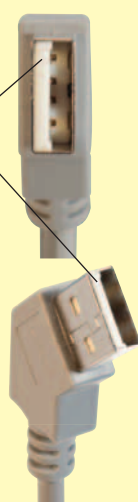

Right Angle B

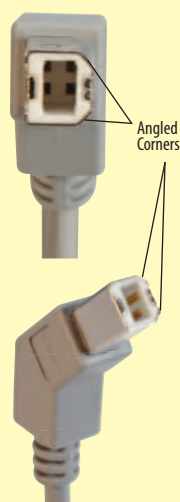

Left Angle B

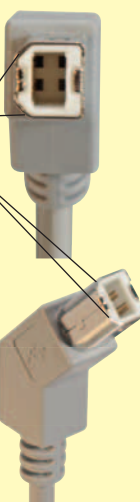

CA45LA-45LB

CA45LA-B

CA45RA-45RB

CA45RA-B

CAA-45LB

CAA-45RB

More lengths available.
Go to L-com.com

More lengths available.
Go to L-com.com




Item #	Description	1-9	10-24	25-99	100+
Angled USB 2.0 Mini B and Micro B Cable Assemblies - Eight Options to Choose From					
Molded, angled connector hoods solve difficult connection issues in tight places. Four mold options each for USB mini B5 and micro B style connectors are now available. These high quality constructed cables feature USB 2.0 compliant 28 AWG power leads and are finished in an attractive black color.					
USB 2.0 Cable Assemblies - Up and Down Angle Mini B5 to Straight Type A					
CAA-90UMB5-03M	USB Cable, Up Angle Mini B5 Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90UMB5-05M	USB Cable, Up Angle Mini B5 Male/Straight Type A Male, 0.5m	9.10	8.37	7.64	CALL
CAA-90UMB5-1M	USB Cable, Up Angle Mini B5 Male/Straight Type A Male, 1.0m	9.65	8.88	8.11	CALL
CAA-90UMB5-3M	USB Cable, Up Angle Mini B5 Male/Straight Type A Male, 3.0m	11.95	10.99	10.04	CALL
CAA-90DMB5-03M	USB Cable, Down Angle Mini B5 Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90DMB5-075M	USB Cable, Down Angle Mini B5 Male/Straight Type A Male, 0.75m	9.35	8.60	7.85	CALL
CAA-90DMB5-1M	USB Cable, Down Angle Mini B5 Male/Straight Type A Male, 1.0m	9.65	8.88	8.11	CALL
CAA-90DMB5-3M	USB Cable, Down Angle Mini B5 Male/Straight Type A Male, 3.0m	11.95	10.99	10.04	CALL
USB 2.0 Cable Assemblies - Left and Right Angle Mini B5 to Straight Type A					
CAA-90LMB5-03M	USB Cable, Left Angle Mini B5 Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90LMB5-05M	USB Cable, Left Angle Mini B5 Male/Straight Type A Male, 0.5m	9.10	8.37	7.64	CALL
CAA-90LMB5-2M	USB Cable, Left Angle Mini B5 Male/Straight Type A Male, 2.0m	10.80	9.94	9.07	CALL
CAA-90LMB5-5M	USB Cable, Left Angle Mini B5 Male/Straight Type A Male, 5.0m	14.25	13.11	11.97	CALL
CAA-90RMB5-03M	USB Cable, Right Angle Mini B5 Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90RMB5-075M	USB Cable, Right Angle Mini B5 Male/Straight Type A Male, 0.75m	9.35	8.60	7.85	CALL
CAA-90RMB5-3M	USB Cable, Right Angle Mini B5 Male/Straight Type A Male, 3.0m	11.95	10.99	10.04	CALL
CAA-90RMB5-5M	USB Cable, Right Angle Mini B5 Male/Straight Type A Male, 5.0m	14.25	13.11	11.97	CALL
USB 2.0 Cable Assemblies - Up and Down Angle Micro B to Straight Type A					
CAA-90UMICB-03M	USB Cable, Up Angle Micro B Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90UMICB-05M	USB Cable, Up Angle Micro B Male/Straight Type A Male, 0.5m	9.10	8.37	7.64	CALL
CAA-90UMICB-1M	USB Cable, Up Angle Micro B Male/Straight Type A Male, 1.0m	9.65	8.88	8.11	CALL
CAA-90UMICB-3M	USB Cable, Up Angle Micro B Male/Straight Type A Male, 3.0m	11.95	10.99	10.04	CALL
CAA-90DMICB-05M	USB Cable, Down Angle Micro B Male/Straight Type A Male, 0.5m	9.10	8.37	7.64	CALL
CAA-90DMICB-075M	USB Cable, Down Angle Micro B Male/Straight Type A Male, 0.75m	9.35	8.60	7.85	CALL
CAA-90DMICB-2M	USB Cable, Down Angle Micro B Male/Straight Type A Male, 2.0m	10.80	9.94	9.07	CALL
CAA-90DMICB-5M	USB Cable, Down Angle Micro B Male/Straight Type A Male, 5.0m	14.25	13.11	11.97	CALL
USB 2.0 Cable Assemblies - Left and Right Angle Micro B to Straight Type A					
CAA-90LMICB-03M	USB Cable, Left Angle Micro B Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90LMICB-075M	USB Cable, Left Angle Micro B Male/Straight Type A Male, 0.75m	9.35	8.60	7.85	CALL
CAA-90LMICB-2M	USB Cable, Left Angle Micro B Male/Straight Type A Male, 2.0m	10.80	9.94	9.07	CALL
CAA-90LMICB-5M	USB Cable, Left Angle Micro B Male/Straight Type A Male, 5.0m	14.25	13.11	11.97	CALL
CAA-90RMICB-03M	USB Cable, Right Angle Micro B Male/Straight Type A Male, 0.3m	8.85	8.14	7.43	CALL
CAA-90RMICB-05M	USB Cable, Right Angle Micro B Male/Straight Type A Male, 0.5m	9.10	8.37	7.64	CALL
CAA-90RMICB-1M	USB Cable, Right Angle Micro B Male/Straight Type A Male, 1.0m	9.65	8.88	8.11	CALL
CAA-90RMICB-5M	USB Cable, Right Angle Micro B Male/Straight Type A Male, 5.0m	14.25	13.11	11.97	CALL




Defining angled USB cable assemblies

Angled connector hoods help connect USB cables in tight places. L-com now offers four options each for Mini B and Micro B 2.0 style connectors. The photos below detail the connector position relative to the cable entry direction.

For Micro B 5 position connectors, the two latches on the connector are key in determining the correct angle for your application. Reference the location of the latches in the photos below:

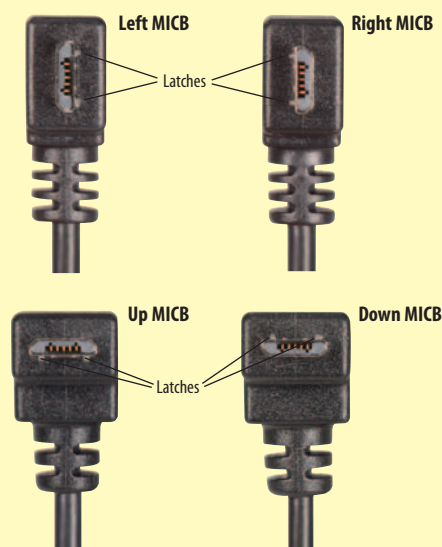

For Mini B 5 position connectors, the shape of the connector is key in determining the correct angle for your application. Reference the longer side of the connector in the photos below:

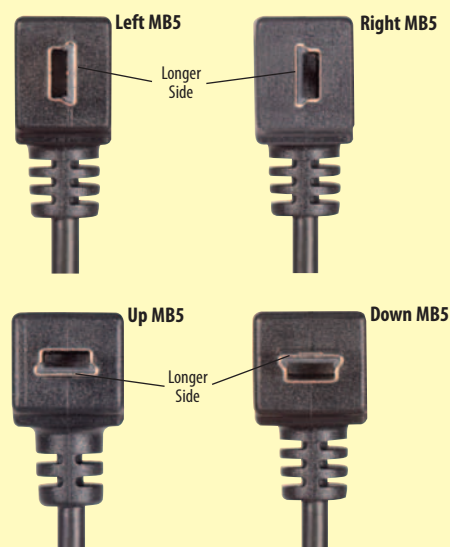

New, shorter lengths 0.3m and 0.75m now available

Item #	Description	Color	1-9	10-24	25-99	100+
USB Type A Female Panel Mount to Type A Male Cable Assembly						
These USB 2.0 panel mount cables are perfect for use inside a box or enclosure. The USB female side is flange-style panel mountable with an alternative, smaller body compared to the popular ECF504 series.						
UPMAA-03M	USB Cable, Type A Female Panel Mount/Type A Male, 0.3m	Lt. Gray	8.50	7.82	7.14	CALL
UPMAA-05M	USB Cable, Type A Female Panel Mount/Type A Male, 0.5m	Lt. Gray	8.70	8.00	7.31	CALL
UPMAA-075M	USB Cable, Type A Female Panel Mount/Type A Male, 0.75m	Lt. Gray	9.00	8.28	7.56	CALL
UPMAA-1M	USB Cable, Type A Female Panel Mount/Type A Male, 1.0m	Lt. Gray	9.25	8.51	7.77	CALL
UPMAA-2M	USB Cable, Type A Female Panel Mount/Type A Male, 2.0m	Lt. Gray	10.25	9.43	8.61	CALL
UPMAA-3M	USB Cable, Type A Female Panel Mount/Type A Male, 3.0m	Lt. Gray	11.30	10.40	9.49	CALL

USB Type A Female Panel Mount with Ground Wire to Type A Male Cable Assembly

This version adds a ground wire giving the user the option to electrically ground the USB female connector to their panel or enclosure. The #6 spade lug easily attaches to a screw or similar hardware.

UPMAAGND-03M	USB Cable, Type A Female Panel Mount with Ground Wire/Type A Male, 0.3m	Lt. Gray	9.00	8.28	7.56	CALL
UPMAAGND-05M	USB Cable, Type A Female Panel Mount with Ground Wire/Type A Male, 0.5m	Lt. Gray	9.20	8.46	7.73	CALL
UPMAAGND-1M	USB Cable, Type A Female Panel Mount with Ground Wire/Type A Male, 1.0m	Lt. Gray	9.75	8.97	8.19	CALL
UPMAAGND-2M	USB Cable, Type A Female Panel Mount with Ground Wire/Type A Male, 2.0m	Lt. Gray	10.75	9.89	9.03	CALL
UPMAAGND-3M	USB Cable, Type A Female Panel Mount with Ground Wire/Type A Male, 3.0m	Lt. Gray	11.80	10.86	9.91	CALL

USB Type A Female Panel Mount to Type B Male Cable Assembly

UPMAB-03M	USB Cable, Type A Female Panel Mount/Type B Male, 0.3m	Lt. Gray	8.70	8.00	7.31	CALL
UPMAB-05M	USB Cable, Type A Female Panel Mount/Type B Male, 0.5m	Lt. Gray	8.90	8.19	7.48	CALL
UPMAB-075M	USB Cable, Type A Female Panel Mount/Type B Male, 0.75m	Lt. Gray	9.15	8.42	7.69	CALL
UPMAB-1M	USB Cable, Type A Female Panel Mount/Type B Male, 1.0m	Lt. Gray	9.40	8.65	7.90	CALL
UPMAB-2M	USB Cable, Type A Female Panel Mount/Type B Male, 2.0m	Lt. Gray	10.45	9.61	8.78	CALL
UPMAB-5M	USB Cable, Type A Female Panel Mount/Type B Male, 5.0m	Lt. Gray	13.60	12.51	11.42	CALL

USB Type B Female Panel Mount to Type A Male Cable Assembly

UPMBA-03M	USB Cable, Type B Female Panel Mount/Type A Male, 0.3m	Lt. Gray	8.70	8.00	7.31	CALL
UPMBA-05M	USB Cable, Type B Female Panel Mount/Type A Male, 0.5m	Lt. Gray	8.90	8.19	7.48	CALL
UPMBA-2M	USB Cable, Type B Female Panel Mount/Type A Male, 2.0m	Lt. Gray	10.45	9.61	8.78	CALL
UPMBA-3M	USB Cable, Type B Female Panel Mount/Type A Male, 3.0m	Lt. Gray	11.50	10.58	9.66	CALL
UPMBA-5M	USB Cable, Type B Female Panel Mount/Type A Male, 5.0m	Lt. Gray	13.60	12.51	11.42	CALL

USB Type B Female Panel Mount to Type B Male Cable Assembly

UPMBB-03M	USB Cable, Type B Female Panel Mount/Type B Male, 0.3m	Lt. Gray	8.70	8.00	7.31	CALL
UPMBB-05M	USB Cable, Type B Female Panel Mount/Type B Male, 0.5m	Lt. Gray	8.90	8.19	7.48	CALL
UPMBB-1M	USB Cable, Type B Female Panel Mount/Type B Male, 1.0m	Lt. Gray	9.40	8.65	7.90	CALL
UPMBB-2M	USB Cable, Type B Female Panel Mount/Type B Male, 2.0m	Lt. Gray	10.45	9.61	8.78	CALL
UPMBB-4M	USB Cable, Type B Female Panel Mount/Type B Male, 4.0m	Lt. Gray	12.55	11.55	10.54	CALL

USB Type A Female Panel Mount to 5 Pin Female 0.100" (2.54mm) Header Connector

UPMA5-03M	USB Cable, Type A Female Panel Mount/5 Pin Female, 0.3m	Gray	7.45	6.85	6.26	CALL
UPMA5-05M	USB Cable, Type A Female Panel Mount/5 Pin Female, 0.5m	Gray	7.60	6.99	6.38	CALL
UPMA5-075M	USB Cable, Type A Female Panel Mount/5 Pin Female, 0.75m	Gray	7.80	7.18	6.55	CALL
UPMA5-1M	USB Cable, Type A Female Panel Mount/5 Pin Female, 1.0m	Gray	8.00	7.36	6.72	CALL
UPMA5-2M	USB Cable, Type A Female Panel Mount/5 Pin Female, 2.0m	Gray	8.85	8.14	7.43	CALL

USB Type B Female Panel Mount to 5 Pin Female 0.100" (2.54mm) Header Connector

UPMB5-03M	USB Cable, Type B Female Panel Mount/5 Pin Female, 0.3m	Gray	7.55	6.95	6.34	CALL
UPMB5-075M	USB Cable, Type B Female Panel Mount/5 Pin Female, 0.75m	Gray	7.95	7.31	6.68	CALL
UPMB5-1M	USB Cable, Type B Female Panel Mount/5 Pin Female, 1.0m	Gray	8.15	7.50	6.85	CALL
UPMB5-2M	USB Cable, Type B Female Panel Mount/5 Pin Female, 2.0m	Gray	9.00	8.28	7.56	CALL
UPMB5-3M	USB Cable, Type B Female Panel Mount/5 Pin Female, 3.0m	Gray	9.85	9.06	8.27	CALL

Panel Mount USB Cable- Type A or B Female Panel Mount to Female 5 Position 2mm Pitch Housing

UPMAS-2MM-03M	USB Cable, Type A Female Panel Mount/5 Position 2mm Female, 0.3m	Gray	7.80	7.18	6.55	CALL
UPMAS-2MM-05M	USB Cable, Type A Female Panel Mount/5 Position 2mm Female, 0.5m	Gray	8.15	7.50	6.85	CALL
UPMAS-2MM-1M	USB Cable, Type A Female Panel Mount/5 Position 2mm Female, 1.0m	Gray	8.35	7.68	7.01	CALL
UPMAS-2MM-2M	USB Cable, Type A Female Panel Mount/5 Position 2mm Female, 2.0m	Gray	9.15	8.42	7.69	CALL
UPMAS-2MM-3M	USB Cable, Type A Female Panel Mount/5 Position 2mm Female, 3.0m	Gray	9.95	9.15	8.36	CALL
UPMBS-2MM-03M	USB Cable, Type B Female Panel Mount/5 Position 2mm Female, 0.3m	Gray	7.90	7.27	6.64	CALL
UPMBS-2MM-05M	USB Cable, Type B Female Panel Mount/5 Position 2mm Female, 0.5m	Gray	8.05	7.41	6.76	CALL
UPMBS-2MM-075M	USB Cable, Type B Female Panel Mount/5 Position 2mm Female, 0.75m	Gray	8.25	7.59	6.93	CALL
UPMBS-2MM-1M	USB Cable, Type B Female Panel Mount/5 Position 2mm Female, 1.0m	Gray	8.45	7.77	7.10	CALL
UPMBS-2MM-2M	USB Cable, Type B Female Panel Mount/5 Position 2mm Female, 2.0m	Gray	9.25	8.51	7.77	CALL

USB Type A or B Female Panel Mount Connectors to 24" (61.0cm) Wire Leads

This option features a bulkhead Type A or B Jack with 24 inches of un-terminated 24 AWG lead wires.

UPMA-LEADS	USB Type A Panel Mount Connector, 24in (61.0cm) Leads	Gray	7.85	7.22	6.59	CALL
UPMB-LEADS	USB Type B Panel Mount Connector, 24in (61.0cm) Leads	Gray	7.85	7.22	6.59	CALL

USB 3.0 Type A Female Panel Mount to Type A Male Cable Assembly


USB 3.0 versions of our popular UPM style panel mount USB adapter cables are now available. This series features a bulkhead Type A 3.0 jack to a molded Type A 3.0 plug attached via USB 3.0 compliant cable.

UPMAA-30-03M	USB 3.0 Cable, Type A Female Panel Mount/Type A Male, 0.3m	Blue	18.19	17.10	16.01	CALL
UPMAA-30-05M	USB 3.0 Cable, Type A Female Panel Mount/Type A Male, 0.5m	Blue	18.59	17.47	16.36	CALL
UPMAA-30-1M	USB 3.0 Cable, Type A Female Panel Mount/Type A Male, 1.0m	Blue	19.69	18.51	17.33	CALL
UPMAA-30-2M	USB 3.0 Cable, Type A Female Panel Mount/Type A Male, 2.0m	Blue	21.69	20.39	19.09	CALL
UPMAA-30-3M	USB 3.0 Cable, Type A Female Panel Mount/Type A Male, 3.0m	Blue	23.69	22.27	20.85	CALL

USB 3.0 Type A Female Shielded Panel Mount Coupler to Type A Male Connector, 30μ (0.762μm) Gold

This series features a bulkhead Type A 3.0 jack to a molded Type A 3.0 plug attached via USB 3.0 compliant cable. Integral to this design is a multi-layered PCB that maintains USB 3.0 speed and performance. USB 3.0 systems are up to 10 times faster than USB 2.0 - 4.8 Gbps versus 480 Mbps.

ECF504-30-03AAS	USB 3.0 Type A Coupler, Female Bulkhead/Type A Male, 0.3m	Blue	20.99	20.15	19.31	CALL
ECF504-30-05AAS	USB 3.0 Type A Coupler, Female Bulkhead/Type A Male, 0.5m	Blue	21.39	20.53	19.68	CALL
ECF504-30-075AAS	USB 3.0 Type A Coupler, Female Bulkhead/Type A Male, 0.75m	Blue	21.89	21.01	20.14	CALL
ECF504-30-1AAS	USB 3.0 Type A Coupler, Female Bulkhead/Type A Male, 1.0m	Blue	22.39	21.49	20.60	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

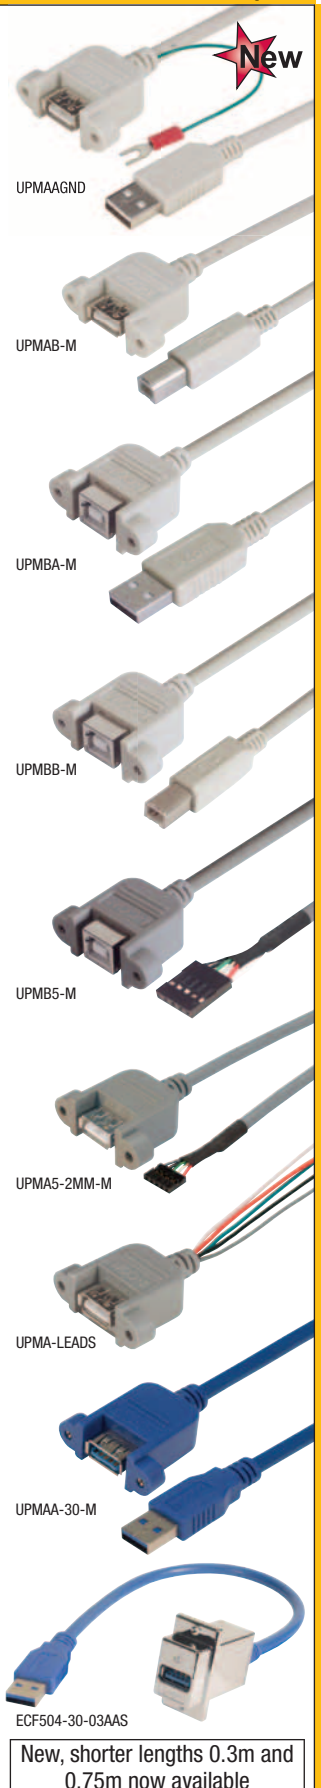

New, shorter lengths 0.3m and 0.75m now available

Best Seller



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Waterproof USB Cable Assemblies - IEC IP67 Rated, Revision 2.0 Compliant

Standard USB connectors are not intended to withstand contaminants such as water and dust. Our Waterproof USB cable assemblies utilize rugged, molded or metal outer shells and a threaded coupling with an O-ring seal and are IEC IP67 rated. Assemblies are offered in a variety of lengths and connector options. All feature revision 2.0 compliant fully shielded cable and threaded couplings. Color is black.

Waterproof USB Cable Assemblies - Panel Mount Type A Male to Standard Type B Male

WPUSAB-2M	USB Cable, Waterproof Panel Mt. Type A Male/Standard Type B Male, 2.0m	21.53	21.10	20.24	CALL
WPUSAB-5M	USB Cable, Waterproof Panel Mt. Type A Male/Standard Type B Male, 5.0m	24.93	24.43	23.43	CALL

Waterproof USB Cable Assemblies - Panel Mount Type A Female to Standard Type A Male

WPUSBAX-05M	USB Cable, Waterproof Panel Mt. Type A Female/Standard Type A Male, 0.5m	18.95	18.57	17.81	CALL
WPUSBAX-1M	USB Cable, Waterproof Panel Mt. Type A Female/Standard Type A Male, 1.0m	19.47	19.08	18.30	CALL
WPUSBAX-2M	USB Cable, Waterproof Panel Mt. Type A Female/Standard Type A Male, 2.0m	20.55	20.14	19.32	CALL
WPUSBAX-3M	USB Cable, Waterproof Panel Mt. Type A Female/Standard Type A Male, 3.0m	21.63	21.20	20.33	CALL
WPUSBAX-5M	USB Cable, Waterproof Panel Mt. Type A Female/Standard Type A Male, 5.0m	23.79	23.31	22.36	CALL

Waterproof USB Cable Assemblies - Panel Mount Type B Female to Standard Type A Male

WPUSBBA-05M	USB Cable, Waterproof Panel Mt. Type B Female / Standard Type A Male, 0.5m	18.95	18.57	17.81	CALL
WPUSBBA-1M	USB Cable, Waterproof Panel Mt. Type B Female / Standard Type A Male, 1.0m	19.47	19.08	18.30	CALL
WPUSBBA-2M	USB Cable, Waterproof Panel Mt. Type B Female / Standard Type A Male, 2.0m	20.55	20.14	19.32	CALL
WPUSBBA-3M	USB Cable, Waterproof Panel Mt. Type B Female / Standard Type A Male, 3.0m	21.63	21.20	20.33	CALL
WPUSBBA-5M	USB Cable, Waterproof Panel Mt. Type B Female / Standard Type A Male, 5.0m	23.79	23.31	22.36	CALL

Waterproof USB Cable Assemblies - Panel Mount Type B Male to Standard Type B Male

WPUSBBB-2M	USB Cable, Waterproof Panel Mt. Type B Male/Standard Type B Male, 2.0m	21.53	21.10	20.24	CALL
WPUSBBB-5M	USB Cable, Waterproof Panel Mt. Type B Male/Standard Type B Male, 5.0m	24.93	24.43	23.43	CALL

Waterproof USB Jacks with 10" (25.4cm) Wire Leads - Type A and Type B Available

These cables are ideal for enclosures or panels that are exposed to harsh environments. Wire leads are 24 AWG and can easily be soldered into a PCB or terminated with a variety of connectors.

WPUSBAF	USB Jack, Waterproof Type A with 10" (25.4cm) Wire Leads	17.00	15.98	14.96	CALL
WPUSBRF	USB Jack, Waterproof Type B with 10" (25.4cm) Wire Leads	17.00	15.98	14.96	CALL

Non-Shielded USB Covers and Replacement Nuts/Gaskets

Protect unused IP67 ports with waterproof covers. Choose among two lanyard styles - chain or rubber. L-com also offers easy to install replacement gaskets and nuts for its popular IP67 rated USB and Firewire cable assemblies. The covers, nuts and gaskets are compatible with WPUSBAX, WPUSBBA, WPUSBBF, WPUSBAF and WP946PMF product families.

WPUSB-CVR	Waterproof USB/Firewire Cover with Metal Lanyard	4.94	4.64	4.35	CALL
WPCVR-USB-1394	Waterproof USB/Firewire Cover with Rubber Lanyard	4.94	4.64	4.35	CALL
WPNUIT-13/16-28	USB Replacement Hex Nut, Pkg/10	6.27	5.77	5.27	CALL
WPGASKET-13/16	USB Replacement Rubber Gasket, Pkg/10	2.77	2.55	2.33	CALL

Waterproof USB Cable. Mini B 5 Female to Mini B 5 Male

L-com's exclusive Waterproof USB Mini B 5 position cable assemblies are designed for the most demanding industrial applications where dust and moisture are present.

WPUSBMB5X-05M	Waterproof USB Cable, Mini B 5 Female / Mini B 5 Male, 0.5m	20.96	20.54	19.70	CALL
WPUSBMB5X-2M	Waterproof USB Cable, Mini B 5 Female / Mini B 5 Male, 2.0m	22.66	22.21	21.30	CALL
WPUSBMB5X-5M	Waterproof USB Cable, Mini B 5 Female / Mini B 5 Male, 5.0m	26.06	25.54	24.50	CALL

Waterproof Cover for WPUSBMB5X Series

WPUSBMINI-CVR	USB Cover for WPUSBMB5X Series Cables	5.30	4.98	4.66	CALL
---------------	---------------------------------------	------	------	------	------

Waterproof USB Field Installable Connectors - Revision 2.0 Compliant, IP67 Rated

Available in type A or B styles, these connectors are a perfect complement to our popular IP67 USB cable assemblies. Solder connectors and a sealing nut that conforms to any USB cable diameter allows the user to make their own water/dust proof cable assemblies. In addition, these connectors are panel mountable and mate with our male IP67 cable assemblies as well as our IP67 covers. L-com will manufacture custom cable assemblies using these connectors with short lead times and low minimum quantity requirements.

WPUSBCN-A-2.0	Waterproof Panel Mount USB 2.0 Type A Connector, Female	13.03	12.25	11.47	CALL
WPUSBCN-B-2.0	Waterproof Panel Mount USB 2.0 Type B Connector, Female	13.03	12.25	11.47	CALL

USB Cable, Shielded Waterproof Panel Mount Type A Female to Standard Type A Male

Fully shielded versions of our popular IP67 rated USB cables are now available. These cables feature a die cast steel panel mountable female USB A connector and a standard male USB A connector. The steel housing allows for efficient grounding to a panel or enclosure. Mates with shielded male IP67 rated cable series WPUSBABSH or cover and seal with part number WPCVFR-SHLD-USB.

WPUSBXSH-05M	USB Cable, Shld. Waterproof Panel Mnt. Type A Female/Std. Type A Male, 0.5m	36.77	35.30	33.83	CALL
WPUSBXSH-1M	USB Cable, Shld. Waterproof Panel Mnt. Type A Female/Std. Type A Male, 1.0m	37.34	35.85	34.35	CALL
WPUSBXSH-2M	USB Cable, Shld. Waterproof Panel Mnt. Type A Female/Std. Type A Male, 2.0m	38.42	36.88	35.35	CALL
WPUSBXSH-3M	USB Cable, Shld. Waterproof Panel Mnt. Type A Female/Std. Type A Male, 3.0m	39.50	37.92	36.34	CALL
WPUSBXSH-5M	USB Cable, Shld. Waterproof Panel Mnt. Type A Female/Std. Type A Male, 5.0m	41.66	39.99	38.33	CALL

USB Cable, Shielded Waterproof Type A Male to Standard Type B Male

These cables feature a male USB A connector with a metal coupling nut and a standard male USB B connector. The type A connector is designed to mate with our WPU5BAXSH cable series to provide a completely shielded IP67 solution.

WPUSBABSH-05M	USB Cable, Shielded Waterproof Type A Male/Standard Type B Male, 0.5m	31.36	29.48	27.60	CALL
WPUSBABSH-2M	USB Cable, Shielded Waterproof Type A Male/Standard Type B Male, 2.0m	33.01	31.03	29.05	CALL
WPUSBABSH-5M	USB Cable, Shielded Waterproof Type A Male/Standard Type B Male, 5.0m	36.26	34.08	31.91	CALL

Shielded Waterproof Cap for WPUSBAXSH Series

WPCVR-SHLD-USB	Shielded Waterproof Cap for WPUSBAXSH Series	7.36	6.77	6.18	CALL
----------------	--	------	------	------	------

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

USB Keystone Feed Through Couplers - Type A to A, A to B, and B to A Connectors, Fully Shielded

L-com's shielded USB keystone couplers can be easily installed into panels, wall plate openings and enclosures. Three options are available, all with female connectors - A/B, A/A & B/A. The stamped metal shell and one piece design provides maximum protection from data corrupting EMI/RFI. Contact us today for special pricing for your larger projects

UADKEY-AA	USB Keystone Coupler, Type A Female/Type A Female	Silver	9.40	8.65	7.90	CALL
UADKEY-AB	USB Keystone Coupler, Type A Female/Type B Female	Silver	9.40	8.65	7.90	CALL
UADKEY-BA	USB Keystone Coupler, Type B Female/Type A Female	Silver	9.40	8.65	7.90	CALL

Flanged Panel Mounted USB 2.0 Coupler - Type A to A, A to B, and B to A Connectors, Fully Shielded

These unique products combine L-com's fully shielded keystone couplers with a solid die-cast metal mounting frame allowing for mounting in virtually any panel thickness. Three coupler options are available - A to A, A to B, and B to A. 4-40 machine screws are provided.

ECF504-AA	USB Keystone Flanged Coupler, Type A Female/Type A Female	Silver	10.76	9.90	9.04	CALL
ECF504-AB	USB Keystone Flanged Coupler, Type A Female/Type B Female	Silver	10.76	9.90	9.04	CALL
ECF504-BA	USB Keystone Flanged Coupler, Type B Female/Type A Female	Silver	10.76	9.90	9.04	CALL

USB Surge/Lightning Protectors - Type A to A and A to B Connectors, Panel Mountable

The L-com AL-ECF504 series USB surge protectors are commercial quality devices designed to protect a computer's sensitive USB port from surges and spikes from attached devices. To ensure USB 2.0 speeds, these device use ultra-low capacitance diodes to protect the data lines. In addition, a protection device clamps the power lines to safe levels. They can be mounted on an enclosure, panel mounted or used in-line as a stand alone product. Mounting screws must be purchased separately.

AL-ECF504-AB	USB Surge/Lightning Protector, Type A/B	Silver	18.71	17.59	16.46	CALL
AL-ECF504-AA12	USB Type A Female Bulkhead/Type A Male, 12in (30.5cm) Pigtail*	Lt. Gray	20.79	19.54	18.30	CALL
AL-ECF504-AB12	USB Type A Female Bulkhead/Type B Male, 12in (30.5cm) Pigtail*	Lt. Gray	20.79	19.54	18.30	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

*Also available in lengths of 24in (61.0cm), 36in (91.4cm), 48in (121.9cm) and 72in (182.9cm). See web site for details.

USB 2.0 Manual Switch Box - (1) Type B and (2) Type A Ports

This handy switch box allows the user to share two USB devices with one computer. Equipped with one Type B I/O port and two type A ports. Lightweight design and all metal case provides easy set up and durability.

SWIT-USB2-BAA	USB Manual Switch Box		13.59	13.32	13.05	CALL
---------------	-----------------------	--	-------	-------	-------	------

USB Type A and B Female Field Termination Connector

The USB field termination female connectors provide an easy and convenient way to perform field termination for USB applications. USB 2.0 standard A and B connector styles are available. Separate connection points are provided for all 4 positions of the connector plus the ground. Terminal block design with set screws provides reliable electrical connections utilizing no special tools. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable using 4-40 screws provided.

USBAFT	USB Field Termination Connector, Type A Female		6.99	6.57	6.15	CALL
USBBFT	USB Field Termination Connector, Type B Female		6.99	6.57	6.15	CALL

USB Protective Covers with Lanyard - for Type A and B Jacks - Pkg/10

These new covers add a lanyard feature to enhance our existing USB cover product line. They are perfect for protecting unused USB female ports in our panel mount couplers or any expensive equipment from physical damage, dirt and dust. The lanyard is perfectly sized to fit the 4-40 screws used in our ECF and UPM panel mount products. Made from soft polyethylene, these covers attach easily and stay in place with a snug friction fit. Color is black.

CAP-A-USB-LAN	USB Protective Cover with Lanyard for USB Type A Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL
CAP-B-USB-LAN	USB Protective Cover with Lanyard for USB Type B Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL







Waterproof Connectors - Where are they used and how are they rated?

Where are they used?

Applications for these connectors are numerous and include automotive, communication, industrial and medical instruments. Dust and moisture are the two most common contaminants that enter through exposed data ports, damaging or destroying electronic equipment. Fortunately, specially sealed cables and connectors are available from L-com to protect these ports from dust and moisture.

L-com offers a number of protected interfaces including:

D-subminiature for many serial and parallel devices  WPDB Series	RJ45 for industrial Ethernet applications  ECRK Series	USB for device interconnection and data transfer  WPUSB Series	Fiber Optic for industrial networks / harsh environments  FODLC-IND Series
--	--	--	--

How are they rated?

The most popular system to rate the environmental protection of a particular connector is the Ingress Protection Rating (commonly known as IP Rating).

The IP Rating is a number ranging from 1 to 3 digits.

- The first digit rates protection against ingress of solid objects
- The second digit rates protection against ingress of liquids
- The third digit rates protection against impact damage

The chart at right details the first two digit ratings:

Note: Many products, including L-com products, are not rated for impact. Larger value digits indicate greater protection against that substance/force.

IP		Solids		Liquids	
0	Non-Protected	0	Non-Protected	0	Non-Protected
1	≥ 50mm diameter	1	Vertical Dripping	1	Vertical Dripping
2	≥ 12.5mm diameter	2	Dripping (15° tilted)	2	Dripping (15° tilted)
3	≥ 2.5mm diameter	3	Spraying (up to 60°)	3	Spraying (up to 60°)
4	≥ 1.0mm diameter	4	Splashing (from any direction)	4	Splashing (from any direction)
5	Dust-protected	5	Jetting (from any direction)	5	Jetting (from any direction)
6	Dust-tight	6	Powerful Jetting (from any direction)	6	Powerful Jetting (from any direction)
		7	Temporary Immersion (30 min., 1m)	7	Temporary Immersion (30 min., 1m)
		8	Continuous Immersion (user defined)	8	Continuous Immersion (user defined)

Dust Protected - Dust may not be totally prevented, however, it must not interfere with the operation of the device or impair safety.
Dust Tight - No ingress of dust allowed.



UADKEY-AA



UADKEY-AB



UADKEY-BA



ECF504-AA



ECF504-AB



ECF504-BA




AL-ECF504-AB



SWIT-USB2-BAA



USBAFT



USBBFT



CAP-A-USB-LAN



CAP-A-USB-LAN Attached



CAP-B-USB-LAN



CAP-B-USB-LAN Attached



ECF504-12AAS



ECF504-12BBS



ECF504-5M



ECF504-B-5M



ECF504-AAL




ECF504-BAL



ECF504-UABS




ECF504-UAA



ECJ504-UA

Rear View



CAP-A-USB-LAN

CAP-B-USB-LAN

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

USB Type A Female Shielded Panel Mount Coupler to USB Type A Male Connector, 30µ (0.762µm) Gold

These options feature a bulkhead Type A jack to a molded Type A plug and USB 2.0 compliant cable. Assemblies are fully shielded and can be used in virtually any panel thickness. Recommended 4-40 mounting screws must be purchased separately.

ECF504-12AAS	USB Type A Coupler, Female Bulkhead / Male, 12in (30.5cm)	Silver	10.56	10.35	9.93	CALL
ECF504-24AAS	USB Type A Coupler, Female Bulkhead / Male, 24in (61.0cm)	Silver	11.02	10.80	10.36	CALL
ECF504-36AAS	USB Type A Coupler, Female Bulkhead / Male, 36in (91.4cm)	Silver	11.33	11.10	10.65	CALL
ECF504-72AAS	USB Type A Coupler, Female Bulkhead / Male, 72in (182.9cm)	Silver	12.26	12.01	11.52	CALL
ECF504-120AAS	USB Type A Coupler, Female Bulkhead / Male, 120in (304.8cm)	Silver	13.54	13.27	12.73	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

USB Type B Female Shielded Panel Mount Coupler to USB Type B Male Connector, 30µ (0.762µm) Gold

Another unique panel mount USB option features a bulkhead Type B jack to a molded Type B plug attached via USB 2.0 compliant cable. These cables can be directly connected to a mating connector inside an enclosure. These assemblies are fully shielded and use L-com's popular ECF504 style housing that can be used with virtually any panel thickness. The recommended 4-40 mounting screws must be purchased separately (P/N ECF440). Custom lengths available upon request with minimal quantity requirements.

ECF504-12BBS	USB Type B Coupler, Female Bulkhead / Male, 12in (30.5cm)	Silver	10.76	10.54	10.11	CALL
ECF504-24BBS	USB Type B Coupler, Female Bulkhead / Male, 24in (61.0cm)	Silver	11.23	11.01	10.56	CALL
ECF504-36BBS	USB Type B Coupler, Female Bulkhead / Male, 36in (91.4cm)	Silver	11.54	11.31	10.85	CALL
ECF504-72BBS	USB Type B Coupler, Female Bulkhead / Male, 72in (183.0cm)	Silver	12.51	12.26	11.76	CALL
ECF504-120BBS	USB Type B Coupler, Female Bulkhead / Male, 120in (305.0cm)	Silver	13.80	13.52	12.97	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

USB Type A or B Female Panel Mount Coupler to 5 Meter Un-terminated Pigtail Cable

These additions to the popular USB panel mount adapter line allow users the flexibility to configure their own assembly. They feature a shielded bulkhead Type A or B Jack with 5 meters of un-terminated USB 2.0 compliant cable. Users can cut the cable to the desired length and hard wire or terminate it with their connector of choice. L-com can custom terminate these cable ends with modest minimum requirements. Recommended 4-40 mounting screws must be purchased separately.

ECF504-5M	USB Type A Female Panel Mount Coupler / 5.0m Cable	Silver	12.93	12.67	12.15	CALL
ECF504-B-5M	USB Type B Female Panel Mount Coupler / 5.0m Cable	Silver	12.93	12.67	12.15	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

USB 2.0 Type A or B Female Panel Mount to Male Latching Type A Connector

Another unique panel mount USB option features a bulkhead Type A or Type B jack to a latching Type A plug attached via USB 2.0 compliant cable. These cables can be directly connected to a mating connector inside an enclosure to provide lock down mating retention with any USB Type A jack. These assemblies are fully shielded and use L-com's popular ECF504 style housing that can be used with virtually any panel thickness. The recommended 4-40 mounting screws must be purchased separately (P/N ECF440). Twisted pair data lines help reduce crosstalk while 20 AWG power conductors enable maximum power transfer from host to peripheral. Custom lengths available upon request with minimal quantity requirements.

ECF504-12AAL	USB Type A Coupler, Female Bulkhead / Latching Male, 12in (30.5cm)	Black	13.54	13.27	12.73	CALL
ECF504-24AAL	USB Type A Coupler, Female Bulkhead / Latching Male, 24in (61.0cm)	Black	13.96	13.68	13.12	CALL
ECF504-36AAL	USB Type A Coupler, Female Bulkhead / Latching Male, 36in (91.4cm)	Black	14.42	14.13	13.55	CALL
ECF504-72AAL	USB Type A Coupler, Female Bulkhead / Latching Male, 72in (183.0cm)	Black	15.71	15.40	14.77	CALL
ECF504-120AAL	USB Type A Coupler, Female Bulkhead / Latching Male, 120in (305.0cm)	Black	17.46	17.11	16.41	CALL
ECF504-12BAL	USB Type B Coupler, Female Bulkhead / Latching Male, 12in (30.5cm)	Black	13.54	13.27	12.73	CALL
ECF504-24BAL	USB Type B Coupler, Female Bulkhead / Latching Male, 24in (61.0cm)	Black	13.96	13.68	13.12	CALL
ECF504-36BAL	USB Type B Coupler, Female Bulkhead / Latching Male, 36in (91.4cm)	Black	14.42	14.13	13.55	CALL
ECF504-72BAL	USB Type B Coupler, Female Bulkhead / Latching Male, 72in (183.0cm)	Black	15.71	15.40	14.77	CALL
ECF504-120BAL	USB Type B Coupler, Female Bulkhead / Latching Male, 120in (305.0cm)	Black	17.46	17.11	16.41	CALL

Panel Mounted USB Type Couplers, 30 Microinches (0.762µm) Gold

These couplers are great for connecting USB style connectors into panels, etc. Available in many USB connector combinations with your choice of shielded and unshielded versions. Unshielded is available in Black or Ivory, shielded is Silver. Recommended 4-40 mounting screws must be purchased separately.

ECF504-UAA	USB Type A / Type A Coupler	Ivory	6.44	6.31	6.05	CALL
ECF504-UAB	USB Type A / Type B Coupler	Ivory	6.44	6.31	6.05	CALL
ECF504-UBA	USB Type B / Type A Coupler	Ivory	6.44	6.31	6.05	CALL
ECF504B-UAA	USB Type A / Type A Coupler	Black	6.44	6.31	6.05	CALL
ECF504B-UAB	USB Type A / Type B Coupler	Black	6.44	6.31	6.05	CALL
ECF504B-UBA	USB Type B / Type A Coupler	Black	6.44	6.31	6.05	CALL
ECF504-UAAS	USB Type A / Type A Coupler, Shielded	Silver	7.52	7.37	7.07	CALL
ECF504-UBAS	USB Type A / Type B Coupler, Shielded	Silver	7.52	7.37	7.07	CALL
ECF504-BAS	USB Type B / Type A Coupler, Shielded	Silver	7.52	7.37	7.07	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

USB Type A and B Panel Couplers with 10" Wire Leads, 30 Microinches (0.762µm) Gold

Similar to our ECF504 USB coupler except with wire leads in the rear to connect to equipment. Choose from USB Type A or B jacks in Black or Ivory. Wires are 20 AWG (2 power) and 24 AWG (2 signal) stranded wires with an additional drain to shield. Recommended 4-40 mounting screws must be purchased separately.

ECJ504-UA	USB Type A Jack, 10" (25.4cm) Leads	Ivory	5.80	5.68	5.45	CALL
ECJ504-UB	USB Type B Jack, 10" (25.4cm) Leads	Ivory	5.80	5.68	5.45	CALL
ECJ504B-UA	USB Type A Jack, 10" (25.4cm) Leads	Black	5.80	5.68	5.45	CALL
ECJ504B-UB	USB Type B Jack, 10" (25.4cm) Leads	Black	5.80	5.68	5.45	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/100		5.00	4.60	4.20	CALL

USB Protective Covers with Lanyard - for Type A and B Jacks - Pkg/10

These covers add a lanyard feature to enhance our existing USB cover product line. They are perfect for protecting unused USB female ports in our panel mount couplers or any expensive equipment from physical damage, dirt and dust. The lanyard is perfectly sized to fit the 4-40 screws used in our ECF and UPM panel mount products. Made from soft polyethylene, these covers attach easily and stay in place with a snug friction fit. Color is black.

CAP-A-USB-LAN	USB Protective Cover with Lanyard for USB Type A Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL
CAP-B-USB-LAN	USB Protective Cover with Lanyard for USB Type B Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL

Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

USB Coil Cable - Type A Latching Connector to Type B Connector, 12.5 Feet (3.8m) Extended

This unique cable assembly features a polyurethane jacketed coil cable plus a latching Type A USB connector providing improved mating retention with any USB Type A jack. The latches lock into the channels on each side of a USB jack when fully mated. Retracted length is approximately 2.5 feet (0.8m) expanding to 12.5 feet (3.8m). Fully shielded and USB 2.0 compliant, this cable contains two 28 AWG power conductors plus one 28 AWG twisted pair for data lines.

COILUAB	USB Coil Cable, Latching Type A Male/Type B Male	Black	18.65	17.90	17.16	CALL
---------	--	-------	-------	-------	-------	------

Variable Length USB Coil Cable - Mini B 5 Position Male to Female

This innovative USB coil cable from L-com features a retracted length 0.5 meters and an expanded length of two meters and can be used with GPS systems as well as cameras and other peripherals using the USB Mini B5 interface. All 5 mini B positions are connected to insure proper functionality in every application. The tough, durable polyurethane jacket enhances recoil memory and 30 microinch (0.762µm) gold plated contacts provide reliable connections with repeated mating cycles.

COILMB5EXT-2M	USB Coil Cable, Mini B 5 Position Male/Female, 0.5m to 2.0m	Black	12.65	11.64	10.63	CALL
---------------	---	-------	-------	-------	-------	------

USB 2.0 Adapters - Molded and Fully Shielded

These adapters provide an economical way for users to solve gender and connector type mismatches among standard USB connectors.

UAD010MF	USB Adapter, Type A Male/Type B Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD011FM	USB Adapter, Type A Female/Type B Male	Lt. Gray	4.80	4.70	4.51	CALL
UAD012FF	USB Adapter, Type B Female/Type B Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD013FF	USB Adapter, Type A Female/Type B Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD014MM	USB Adapter, Type A Male/Type A Male	Lt. Gray	4.80	4.70	4.51	CALL
UAD015FF	USB Adapter, Type A Female/Type A Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD016MM	USB Adapter, Type B Male/Type B Male	Lt. Gray	4.80	4.70	4.51	CALL
UAD017FM	USB Adapter, Type A Female/Mini DIN 6 Male	Green	4.80	4.70	4.51	CALL
UAD018MF	USB Adapter, Type A Male/Mini DIN 6 Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD019FM	USB Adapter, Type A Female/Mini-B5 Male	Black	4.80	4.70	4.51	CALL
UAD026MF	USB Adapter, Type A Male/Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD027MF	USB Adapter, Type B Male/Female	Lt. Gray	4.80	4.70	4.51	CALL

USB 2.0 Micro B Adapters

UAD030MF	USB Adapter, Micro B Male/Mini B5 Female	Black	4.80	4.70	4.51	CALL
UAD031MM	USB Adapter, Micro B Male/Standard A Male	Black	4.80	4.70	4.51	CALL
UAD032FM	USB Adapter, Micro B Male/Standard A Female	Lt. Gray	4.80	4.70	4.51	CALL
UAD033FM	USB Adapter, Micro B Male/Standard B Female	Lt. Gray	4.80	4.70	4.51	CALL

USB 3.0 Adapters

UAD035MF	USB 3.0 Socket Saver, Type A Male/Type A Female	Blue	9.80	9.60	9.21	CALL
UAD036FF	USB 3.0 Gender Changer, Type A Female/Type A Female	Blue	9.80	9.60	9.21	CALL
UAD037MM	USB 3.0 Gender Changer, Type A Male/Type A Male	Blue	9.80	9.60	9.21	CALL

USB Type A Low Profile Right Angle Adapters

L-com's UADAA90 series low profile right angle USB adapters are perfect for tight fit applications. Two exit options are available allowing cables to exit in opposite directions. These USB adapters are a much lower cost solution when compared to rotating USB adapters.

UADAA90-1	Right Angle USB Adapter, Type A Male/Female, Exit 1	Lt. Gray	5.69	5.23	4.78	CALL
UADAA90-2	Right Angle USB Adapter, Type A Male/Female, Exit 2	Lt. Gray	5.69	5.23	4.78	CALL

USB Type B Low Profile Right Angle Adapters

L-com's UADBB90 series low profile right angle USB adapters feature two exit options allowing cables to exit in opposite directions. Our UADBB90 series USB adapters are a much lower cost solution when compared to rotating USB adapters. Additionally, these robust 90° USB adapters feature 20 AWG power leads for maximum power transfer and 100% shielding throughout for protection against data corrupting EMI/RFI.

UADBB90-1	Right Angle USB Adapter, Type B Male/Female, Exit 1	Lt. Gray	5.69	5.23	4.78	CALL
UADBB90-2	Right Angle USB Adapter, Type B Male/Female, Exit 2	Lt. Gray	5.69	5.23	4.78	CALL

USB 2.0 Mini B5 or Micro B Male to Female Low Profile Right Angle Adapters

L-com's low profile right angle USB adapters are perfect for tight fit applications. Two exit options are available allowing cables to exit in opposite directions. Additionally, these robust 90° USB adapters feature 30 microinch (0.762µm) gold plated contacts to stand up to many mating cycles and 100% shielding throughout for protection against data corrupting EMI/RFI.


UAD2.0MB5-1	Right Angle USB Adapter, Mini B Male/Female, Exit 1	Black	5.69	5.23	4.78	CALL
UAD2.0MB5-2	Right Angle USB Adapter, Mini B Male/Female, Exit 2	Black	5.69	5.23	4.78	CALL
UAD2.0MICB-1	Right Angle USB Adapter, Micro B Male/Female, Exit 1	Black	5.69	5.23	4.78	CALL
UAD2.0MICB-2	Right Angle USB Adapter, Micro B Male/Female, Exit 2	Black	5.69	5.23	4.78	CALL








COILUAB



COILMB5EXT-2M

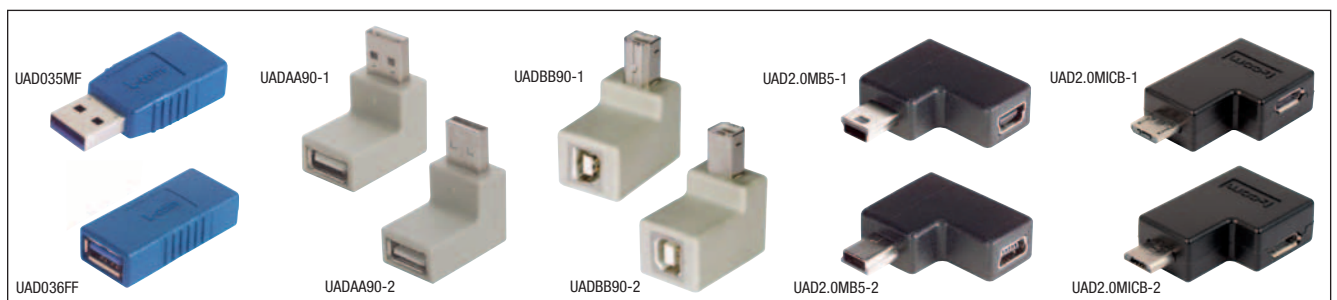



Item #	Description	Color	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

USB Revision 2.0 Compliant Bulk Cable

This cable will support the 480 Mbps transmission rate of a USB 2.0 network and is also backward compatible with older, slower USB networks. USB bulk cable features two 20 AWG power conductors plus one 28 AWG twisted pair for the data lines.

CSUSB-100	USB Revision 2.0 Compliant Bulk Cable, 100ft (30.5m) Spool	Lt. Gray	56.79	53.38	49.98	CALL
CSUSB-500	USB Revision 2.0 Compliant Bulk Cable, 500ft (152.4m) Spool	Lt. Gray	260.49	244.86	229.23	CALL
CSUSB-1000	USB Revision 2.0 Compliant Bulk Cable, 1000ft (304.8m) Spool	Lt. Gray	457.26	429.82	402.39	CALL

USB Revision 2.0 Compliant Bulk Cable

USB bulk cable features two 24 or 28 AWG power conductors plus one 28 AWG twisted pair for the data lines.

CBL-USB2-2824-100	USB Revision 2.0 Compliant Bulk Cable, 100ft (30.5m) Spool	Black	40.94	38.48	36.03	CALL
CBL-USB2-2824-500	USB Revision 2.0 Compliant Bulk Cable, 500ft (152.4m) Spool	Black	187.41	176.17	164.92	CALL
CBL-USB2-2824-1000	USB Revision 2.0 Compliant Bulk Cable, 1000ft (304.8m) Spool	Black	335.04	314.94	294.84	CALL
CBL-USB2-2828-100	USB Revision 2.0 Compliant Bulk Cable, 100ft (30.5m) Spool	Black	28.44	26.73	25.03	CALL
CBL-USB2-2828-500	USB Revision 2.0 Compliant Bulk Cable, 500ft (152.4m) Spool	Black	122.73	115.37	108.00	CALL
CBL-USB2-2828-1000	USB Revision 2.0 Compliant Bulk Cable, 1000ft (304.8m) Spool	Black	221.43	208.14	194.86	CALL

LSZH USB Revision 2.0 Compliant Bulk Cable

Halogen free USB bulk cable features two 20 AWG power conductors plus one 28 AWG twisted pair for the data lines. A flexible LSZH jacket covers the braid, foil and drain wire shield.

CBL-USBZ-2820-100	LSZH USB Revision 2.0 Compliant Bulk Cable, 100ft (30.5m) Spool	Black	119.27	112.11	104.96	CALL
CBL-USBZ-2820-500	LSZH USB Revision 2.0 Compliant Bulk Cable, 500ft (152.4m) Spool	Black	562.16	528.43	494.70	CALL
CBL-USBZ-2820-1000	LSZH USB Revision 2.0 Compliant Bulk Cable, 1000ft (304.8m) Spool	Black	1022.06	960.74	899.41	CALL

USB Connectors and Hoods, Type A and B

USB connectors and hoods are now available for custom lengths and applications. Connectors feature gold plated solder contacts, nickel-plated steel shells and a UL94V-0 rated housing.

USBCN2.0-A	USB Type A Connector		1.63	1.60	1.53	CALL
USBCN2.0-B	USB Type B Connector		1.63	1.60	1.53	CALL
USBHD2.0-Z-A	LSZH USB Type A Hood	Black	1.05	1.03	0.99	CALL
USBHD2.0-Z-B	LSZH USB Type B Hood	Black	1.05	1.03	0.99	CALL
USBHD2.0-A	USB Type A Hood	Lt. Gray	0.74	0.73	0.70	CALL
USBHD2.0-B	USB Type B Hood	Lt. Gray	0.74	0.73	0.70	CALL

USB Type A and B Female Field Termination Connector

The USB field termination female connectors provide an easy and convenient way to perform field termination for USB applications. USB 2.0 standard A and B connector styles are available. Separate connection points are provided for all 4 positions of the connector plus the ground. Terminal block design with set screws provides reliable electrical connections utilizing no special tools. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable using 4-40 screws provided.

USBAFT	USB Field Termination Connector, Type A Female		6.99	6.57	6.15	CALL
USBFT	USB Field Termination Connector, Type B Female		6.99	6.57	6.15	CALL

USB Panel Mountable PCB Connectors - Type A and B

This unique L-com design allows an easy, efficient way to mount USB 2.0 Type A and B PCB connectors using 4-40 screws. 30 microinch gold plated contacts insure many mating cycles without compromising performance. These are the same connectors used in our field termination terminal block connectors. PCB connectors sold in packages of 10.

UC-A-PMT	USB Panel Mount Type A PCB Connector	Silver	14.29	13.43	12.58	CALL
UC-B-PMT	USB Panel Mount Type B PCB Connector	Silver	14.29	13.43	12.58	CALL

USB Type A, B, Mini B5 and Micro B Female Connector Covers - Protect Unused Ports, Pkg/10

These covers are perfect for protecting unused female ports in our panel mount couplers or any expensive equipment from physical damage, dirt and dust. Made from soft ABS, these covers attach easily and stay in place with a snug friction fit.

CAPUSB-A	USB Protective Cover for Type A Jacks, Pkg/10	Black	7.51	6.91	6.31	CALL
CAPUSB-B	USB Protective Cover for Type B Jacks, Pkg/10	Black	7.51	6.91	6.31	CALL
CAPUSB-MB5	USB Protective Cover for Type Mini B5 Jacks, Pkg/10	Black	7.51	6.91	6.31	CALL
CAPUSB-MICB	USB Protective Cover for Type Micro B Jacks, Pkg/10	Black	7.51	6.91	6.31	CALL

USB Cable Assembly Male Connector Dust Covers - Pkg/10


These hard to find covers are perfect for protecting unused USB cable assembly connectors from physical damage, dirt and dust. Made from PVC, they attach easily and stay in place with a snug friction fit.

CVRUSB-A	USB Protective Cover for USB 2.0 and 3.0 Type A Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB-B	USB Protective Cover for USB 2.0 Type B Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB-MB4	USB Protective Cover for USB 2.0 Type Mini B4 Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB-MB5	USB Protective Cover for USB 2.0 Type Mini B5 Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB-MICB	USB Protective Cover for USB 2.0 Type Micro B Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB3.0-B	USB Protective Cover for USB 3.0 Type B Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL
CVRUSB3.0-MICB	USB Protective Cover for USB 3.0 Type Micro B Plugs, Pkg/10	Black	6.35	5.84	5.33	CALL


USB Protective Covers with Lanyard - for Type A and B Jacks - Pkg/10

These new covers add a lanyard feature to enhance our existing USB cable product line. They are perfect for protecting unused USB female ports in our panel mount couplers or any expensive equipment from physical damage, dirt and dust. The lanyard is perfectly sized to fit the 4-40 screws used in our ECF and UPM panel mount products. Made from soft polyethylene, these covers attach easily and stay in place with a snug friction fit.

CAP-A-USB-LAN	USB Protective Cover with Lanyard for USB Type A Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL
CAP-B-USB-LAN	USB Protective Cover with Lanyard for USB Type B Jacks, Pkg/10	Black	7.82	7.19	6.57	CALL

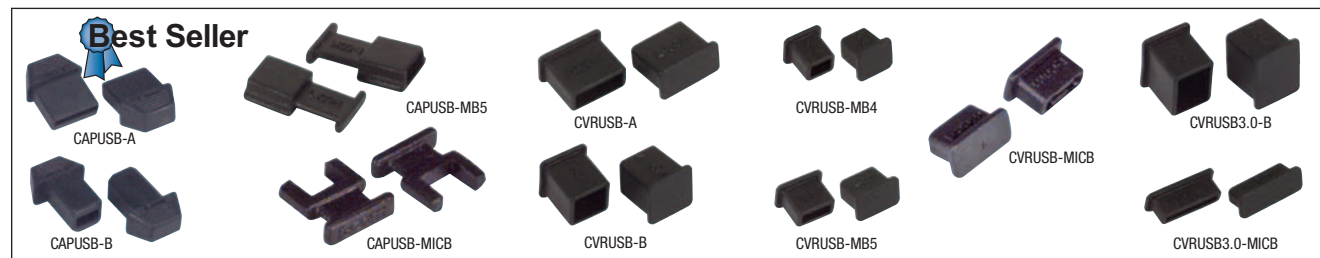

Typical USB Isolation Application

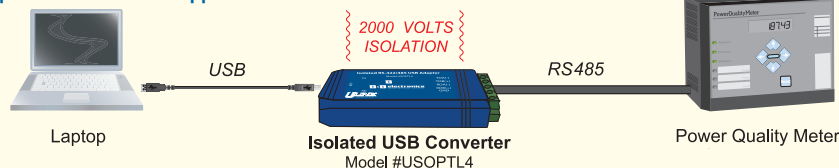

Item #	Description	List Price
--------	-------------	------------

B&B Electronics Isolated and Non-Isolated Inline USB to RS232/RS422/RS485 Converters

Universal Serial Bus (USB) has become the connectivity workhorse of today's PCs, replacing the familiar serial ports. But many commercial and industrial devices still use RS232 interfaces. To connect these devices to modern PCs you need robust and reliable conversion solutions. At the same time, USB ports are becoming more common on commercial and industrial equipment such as point-of-sale peripherals, medical devices, scientific instrumentation, laboratory equipment and other devices. Sometimes these are used in environments where surges, spikes and ground loops are likely to occur. Get the extended range and multi-drop capability of RS232 or RS422/485 from the USB port of your PC. Isolated models protect PCs and laptops from dangerous surges and spikes on the network. Windows automatically configures the serial output as an additional COM port, compatible with your Windows application. **As an authorized B&B Electronics reseller, we can bid on RFQs for any B&B Electronics part numbers. Contact us to request a non-obligatory quote.**

USOPTL4	B&B Electronics USB to RS422/485 Term Block, 2kV Isolation	127.00
US09ML2	B&B Electronics USB to RS232 to DB9 Male, 2kV Isolation	127.00
USPTL4	B&B Electronics USB to RS422/485 Term Block	97.00

B&B Electronics USB Isolators

At just 2.0 x 1.7 x 0.8 inches (5.1 x 4.3 x 2.0 cm), these little isolators pack a powerful punch against electrical noise, surges and spikes - up to 4kV isolation. Protect expensive PCs and equipment from damaging electrical storms, power surges and other high EMI/RFI disturbances. This isolation barrier eliminates ground loops which are disruptive in measurement applications. The UH401 provides 4kV isolation and is UL 60601-1 recognized, making it appropriate for use with medical equipment. The UH401-2KV provides 2kV isolation. Both models are USB bus powered and provide up to 100mA of current to attached downstream devices when they are attached to a full power (500mA) USB host port. **As an authorized B&B Electronics reseller, we can bid on RFQs for any B&B Electronics part numbers. Contact us to request a non-obligatory quote.**

UH401	B&B Electronics USB to USB 1 Port Isolator, 4kV	117.00
UH401-2KV	B&B Electronics USB to USB 1 Port Isolator, 2kV	97.00



USB Conversion

USB has quickly become the defacto PC / Peripheral data interface of the 21st century. Data transfer speeds have rapidly increased from the original USB 1.1 specification of 12 Mbps (Released in 1998) to the then astounding Hi-Speed USB 2.0 specification of 480 Mbps (Released in 2000) and now the revolutionary SuperSpeed USB 3.0 specification of 5 Gbps (Released in 2008) is finally becoming more common on most new Desktop/Laptop computers, external storage devices and peripherals.

However, there are a wide array of legacy devices that many still need to interact with due to infrastructure demands or upgrade costs. The versatility of the USB protocol allows for a variety of conversion products to accommodate these devices and allows them to communicate with today's computer equipment.

USB conversion products are available to replicate the standard RS232 serial port(s) found on older computer systems. Conversion products are also available to replicate IEEE-1284 parallel printer ports as well as older PS/2 Mini-Din Keyboard and Mouse interfaces that were also quite common on older computers, allowing for the continued use of older peripherals. There are even conversion products available for more exotic industrial interfaces like IEEE-488 (GPIB).

USB to RS232 Converter Cable

This easy to install USB to serial converter allows you to connect a USB port on a PC or laptop to legacy RS232 devices such as PDAs, GPS systems etc. This USB to serial converter features DB9 male connectors for the RS232 connection and a USB type A Male connector for the PC or Laptop connection. Each USB to serial converter ships with a driver/installation CD.

UMC-201	USB to RS232 Converter Cable, 1 meter	31.98
---------	---------------------------------------	-------

USB to RS232 Converters 2 and 4 Port

These easy to install converters allow you to connect a USB port on a PC or laptop to legacy RS232 devices such as PDAs, GPS systems etc. These converters feature DB9 male connectors for the RS232 connection and a USB type A Male connector for the PC or laptop connection. Each converter ships with a driver/installation CD.

UMC-102	USB to RS232 Converter, 2 RS232 DB9 Male	46.98
UMC-104	USB to RS232 Converter, 4 RS232 DB9 Male	78.98

USB to IEEE 1284 Printer Port Converter Cable

UC1284B is a USB to parallel port converter. It converts the USB on PCs, notebook PCs and handheld computing devices into a parallel port for printer connection.

UC1284B	USB to IEEE 1284 Printer Port Converter Cable, 6.0ft (1.8m)	28.98
---------	---	-------

Tripp Lite USB to PS/2 Adapter

Tripp Lite's TL-U219-000R USB to PS/2 adapter is a fast, easy way to connect a PS/2 keyboard and mouse to the USB ports on a computer. This USB converter includes foil shielding for reliable error-free data communication. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

TL-U219-000R	Tripp Lite USB to PS/2 Adapter	19.98
--------------	--------------------------------	-------

USB to GPIB Converter Cable

The USB-488 is a USB to GPIB converter module that converts any PC with a USB interface into a full-function, IEEE 488.2 Bus Controller. The unit performs all of the basic IEEE-488.1 functions such as talker, listener and system controller. Its IEEE-488.2 controller routines make it fully compliant with the IEEE 488.2 specification. The USB-488 module is a Plug and Play USB peripheral that supports Microsoft Windows 98SE / ME / 2000 / XP operating systems. The driver includes National Instruments' style 488.1 'ib' and 488.2 command Sets. Additionally the driver provides support for Visual Basic and C/C++ language programs and is compatible with National Instruments' VISA and LabView.

USB-488	USB to GPIB Converter Cable	514.98
---------	-----------------------------	--------



USOPTL4



US09ML2



UH401



UMC-201



UMC-102

UMC-104
(Front view)UMC-104
(Back view)

UC1284B



TL-U219-000R



USB-488



USB-HUB-3.0



ST4300USBM



ST7300USBM



US421A



TL-U233-006-MP-R



TL-U344-001-R



TL-U344-001-DP



TL-U026-016



W01-EXT-USB-50



W02-EXT-USB2-50

Item #	Description	List Price
--------	-------------	------------

USB 3.0 4 Port Hub

Perfect for sharing USB 3.0 resources such as USB scanners, card reader, and USB attached external storage, the USB-HUB-3.0 provides lightning fast USB connections at an affordable price. This plug and play USB 3.0 hub installs in seconds and is compatible with Windows SE/ME/2000/XP/VISTA/7. Ships with 5V DC power supply and 3.5 foot (1.07m) USB 3.0 cable.

USB-HUB-3.0	4 Port USB 3.0 Hub	41.98
-------------	--------------------	-------

4 Port Rugged Industrial USB 3.0 Hub (Mountable)

The ST4300USBM Mountable 4-Port Industrial USB Hub (USB 3.0) offers a simple way to expand a system's current USB capability by providing 4 additional external USB 3.0 ports from a single USB 3.0 host connection, with speeds up to 5 Gbps.

ST4300USBM	4 Port USB 3.0 Industrial Hub	114.98
------------	-------------------------------	--------

7 Port Rugged Industrial USB 3.0 Hub (Mountable)

The ST7300USBM Mountable 7-Port Industrial USB Hub (USB 3.0) offers a simple way to expand a systems current USB capability by providing 7 additional external USB 3.0 ports from a single USB 3.0 host connection, with speeds up to 5 Gbps. Designed for extreme operating environments, this industrial-grade hub provides reliability under almost any condition and can be securely mounted to most surfaces. Fully compliant with the SuperSpeed USB 3.0 specification, this industrial USB hub is backward compatible with USB 2.0 and 1.x specifications for simultaneous support of older USB peripherals or even older systems without USB capabilities.

ST7300USBM	7 Port USB 3.0 Industrial Hub	149.98
------------	-------------------------------	--------

USB 2.0 Manual Switch Box -(1) Type B and (2) Type A Ports

This handy switch box allows the user to share two USB devices with one computer. Equipped with one Type B I/O port and two type A ports. Lightweight design and all metal case provides easy set up and durability.

SWIT-USB2-BAA	USB Manual Switch Box	13.59
---------------	-----------------------	-------

ATEN 2/4 Port USB 2.0 Peripheral Switch

The US221A/US421A is a 2/4 Port USB 2.0 Peripheral Switch that allows up to 2/4 computers to share the use of a single USB peripheral device (such as a printer, scanner, mass storage drive, etc.) on a one-at-a-time basis. **As an authorized ATEN reseller, we can bid on RFQs for any ATEN part numbers. Contact us to request a non-obligatory quote.**

US221A	ATEN 2.0 2-Port A/B Switch	27.98
US421A	ATEN 2.0 4-Port A/B/C/D Switch	37.98

Tripp Lite USB 2.0 Data Transfer Cable

Tripp Lite's U233-006-MP-R 6 ft. High-Speed USB Windows / Mac File Transfer Cables is the premier file and data sharing solution for Windows and MAC users. The GoSuite utility software is already embedded on the High-Speed USB File Transfer Cable and will automatically load onto your system. Transfer e-mail, music, photos, videos and document files from one computer to another, at speeds up to 480 Mbps. Compatible with Mac OS X 10.4 through 10.9, and Windows 2000 through 8 operating systems, the U233-006-MP-R is ideal for those transferring important files to a new computer and also allows you to quickly transfer music or video files to a friend's computer. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

TL-U233-006-MP-R	Tripp Lite USB 2.0 Data Transfer Cable	37.95
------------------	--	-------

Tripp Lite USB 3.0 to Video Adapters (VGA/DVI/HDMI/DP), Add Additional Video Output Options to your PCs

Tripp Lite's U344-001 Series of Video Adapters enables you to add additional video outputs to your Notebook/Laptop or Desktop PCs. Using USB 3.0's High Speed and Bandwidth; they provide reliable and high quality images in a simple 2-step process. First step is to install the driver software; the second is to connect the selected video adapter to your computer with a standard USB 3.0 cable assembly. You can connect up to six adapters to one computer allowing you to set up multiple screen solutions and providing enhanced flexibility in how you choose to display your data and greatly improving productivity. The VGA/DVI & HDMI models support max resolutions up to (2048X1152) and the DisplayPort model supports a max resolution of (2560x1600). Small physical footprint enhances portability. USB Port Powered, no external power required, fully supports Windows XP/Vista/7/8 as well as Intel Based Mac's using OS 10.8 and above. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

TL-U344-001-R	USB 3.0 to VGA/DVI Adapter, Max Resolution (2048X1152)	88.00
TL-U344-001-HD-R	USB 3.0 to HDMI Adapter, Max Resolution (2048X1152)	100.00
TL-U344-001-DP	USB 3.0 to DisplayPort Adapter, Max Resolution (2560x1600)	114.00

Tripp Lite USB 2.0 Active Extension Cable Type A Male - Female 5 Meter

The TL-U026-016 is a 16 ft. USB certified 2.0 active extension cable that is Bus Powered and can be used to increase the length of a USB device without the worry of signal loss and potential performance problems. USB limits a cable's length to 16 feet. Any length over 16 feet requires the use of an active cable such as this one. This cable has a signal booster built in. The overall cable length can be extended up to 80 feet by daisy chaining up to 5 of these active cables. The cable must be plugged directly into a USB port, either on the PC or a hub. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

TL-U026-016	Tripp Lite USB 2.0 Active Extension Cable, Type A Male - Female, 5.0m	24.98
-------------	---	-------

USB Extender - Extends USB Signals to 50 Meters

Extend USB signals up to 50 meters using standard Cat5e (or better) cable. This competitively priced USB extender features a built in buffer and actively regenerates USB signals to preserve data integrity. These extenders are great for use with security and surveillance video, PC digital audio systems and other devices with USB interface that are located in far away locations.

W01-EXT-USB-50	USB Extender	43.98
----------------	--------------	-------

USB 2.0 Extender - Extends up to 50 Meters over UTP

Send USB 2.0 signals up to 50 meters using standard Cat5e/6 solid conductor cables. Our competitively priced, plug and play USB extender features a built in buffer and actively regenerates USB signals to preserve data integrity. These extenders are great for use with security and surveillance video, PC digital audio systems and other devices with USB interface that are located in remote locations.

W02-EXT-USB2-50	USB 2.0 Extender	98.00
-----------------	------------------	-------

Item #	Description	List Price
--------	-------------	------------

Icron Technologies USB 3.0 Spectra™ 3001-15

Icron's USB 3.0 Spectra™ 3001-15 is the industry's first active copper cable that extends USB 3.0 up to 49ft/15m at 5Gbps throughput. The cable features a locking connector per AIA USB3 Vision™ specification and an LED indicator at the device connection point for operating verification. The Spectra 3001-15 is bus powered thus allowing users to avoid the need for an additional power outlet to support USB 3.0 peripherals such as cameras and storage devices. This cable is ideal for industrial and commercial applications such as machine vision, medical imaging and post-production editing. Additionally, the Spectra 3001-15 comes with a two-year warranty and includes the ExtremeUSB® suite of features such as transparent USB extension, true plug and play (no software drivers) and compatibility with all major operating systems including Windows® 8. **Note: Backward compatibility to USB 2.0/1.1 is not supported. Contact your L-com sales representative for details.**

ICR3001-15	Icron USB 3.0 Spectra 3001-15, 15 Meter Active Extension Cable	284.49
------------	--	--------

Icron Technologies USB 3.0 Spectra™ 3022

Icron's USB 3.0 Spectra™ 3022 is a two-port SuperSpeed extension solution, enabling USB 3.0 connections at up to 5Gbps over 330ft/100m of multimode fiber optic cable. The Spectra 3022 features two locking USB 3.0 ports per AIA USB3 Vision™ specification and delivers 900mA of power to each port. This extender is ideal for industrial and commercial applications such as machine vision, medical imaging and post-production editing. The Spectra 3022 comes with a two-year warranty and includes the ExtremeUSB® suite of features such as transparent USB extension, true plug and play (no software drivers), and compatibility with all major operating systems including Windows® 8. Optional mounting kit and UK, European and Australian power versions are also available. **Note: Backward compatibility to USB 2.0/1.1 is not supported. Contact your L-com sales representative for details.**

ICR3022	Icron USB 3.0 Spectra 3022 2-Port Cat5e (or better) Extender System (100m Max)	773.50
---------	--	--------

Icron Technologies USB 2.0 Ranger® 2304

Icron's USB 2.0 Ranger® 2304 is a four-port USB 2.0 high speed extension solution, enabling USB 2.0 connections up to 480Mbps over 330ft/100m of Cat 5e cabling. The Ranger 2304 is optimized for read/write devices such as external hard drives and provides connections for up to 31 devices and hubs. Isochronous peripherals such as webcams and audio devices are supported. The Ranger 2304 comes with a two-year warranty and includes the ExtremeUSB® suite of features such as transparent USB extension, true plug and play (no software drivers) and compatibility with all major operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR2304	Icron USB 2.0 Ranger 2304 4-Port Cat5e (or better) Extender System (100m Max)	414.50
---------	---	--------

Icron Technologies USB 2.0 Ranger® 2304-LAN

Icron's USB 2.0 Ranger 2304-LAN is a four-port USB 2.0 high-speed extension solution with the ability to connect USB 2.0 peripherals such as flash drives, keyboards, mice and interactive whiteboards to host computers across a Local Area Network (LAN) using existing Ethernet cabling. The Ranger 2304-LAN can support up to 31 USB devices or hubs over LAN. Please note that isochronous peripherals (such as webcams and audio devices) are not supported. The Ranger 2304-LAN comes with a two-year warranty and includes the ExtremeUSB® suite of features such as true plug and play (no software drivers required) and compatibility with all leading operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR2304-LAN	Icron USB 2.0 Ranger 2304-LAN 4-Port, USB 2.0 Ethernet LAN Extender Cat5e (or better) Extender System (100m Max)	471.50
-------------	--	--------

Icron Technologies USB 2.0 Ranger® 2201/2204

Icron's USB 2.0 Ranger® 2201 and 2204 provide high speed USB 2.0 connections at up to 480Mbps over 330ft/100m of Cat 5e cabling. The Ranger 2201 provides a remote single port while the Ranger 2204 provides four ports delivering 500mA of power and supporting all USB 1.1 and 2.0 device types such as web cams, hard drives, printers, audio devices, touch screens and game controllers. Both extenders come with a two-year warranty and include the ExtremeUSB® suite of features such as true plug and play (no software drivers required) and compatibility with all leading operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR2201	Icron USB 2.0 Ranger 2201 1-Port Cat5e (or better) Extender System (100m Max)	338.50
ICR2204	Icron USB 2.0 Ranger 2204 4-Port Cat5e (or better) Extender System (100m Max)	344.50

Icron Technologies USB 2.0 Ranger® 2211/2212

Icron's USB 2.0 Ranger® 2211 and 2212 enable USB 2.0 connections at up to 480 Mbps over 330ft/100m of Cat 5e cabling. The Ranger 2211 offers a single USB port and is designed for power to be applied at the LEX or the REX unit which maximizes the flexibility in the installation process. The 2212 supports two USB ports and provides power from the LEX unit to the REX unit. Both extenders come with a two-year warranty and include the ExtremeUSB® suite of features such as true plug and play (no software drivers required) and compatibility with all leading operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR2211	Icron USB 2.0 Ranger 2211 1-Port Solid Cat5e (or better) Extender System with Flexible Power (100m Max)	332.00
ICR2212	Icron USB 2.0 Ranger 2212 2-Port Solid Cat5e (or better) Extender System with Remote Power (100m Max)	382.00

Icron Technologies USB 2.0 Ranger® 2224/2244

Ideal for industrial and commercial applications which require USB device extension over extra long distances, Icron's USB 2.0 Ranger® 2224 and 2244 extend USB 2.0 at 480-Mbps over fiber. The Ranger 2224 can extend connections up to 1,640ft/500m over multimode fiber and the Ranger 2244 up to 6.2mi/10km over single-mode fiber. Both extenders have four ports at the REX unit, standard Duplex LC fiber interface and come with a two-year warranty. Additionally, the extenders include the ExtremeUSB® suite of features such as true plug and play (no software drivers required) and compatibility with all leading operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR2224	Icron USB 2.0 Ranger 2224 4-Port Multimode Duplex LC Extender System (500m Max)	899.00
ICR2244	Icron USB 2.0 Ranger 2244 4-Port Single mode Duplex LC Extender System (10km Max)	999.00

Icron Technologies USB 1.1 Rover® 1850/2850

A favorite among the education market, Icron's USB 1.1 Rover® extenders provide connections up to 280ft/85m over Cat5e cabling and are ideal for USB 1.1 peripherals such as keyboard, mice, video game controllers and interactive whiteboards, including all SMART Boards and Promethean ActivBoards. The Rover 1850 has one port where as the Rover 2850 features two ports. Both extender models are bus powered, compact, and support full-speed USB 1.1 peripherals up to 12Mbps. Additionally, these extenders come with a three-year warranty and include the ExtremeUSB® suite of features such as transparent USB extension, true plug and play (no software drivers), and compatibility with all major operating systems including Windows® 8. **UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR1850	Icron USB 1.1 Rover 1850 1-Port Solid Cat5e (or better) Port Powered Extender System (85m low speed)	73.50
ICR2850	Icron USB 1.1 Rover 2850 2-Port Solid Cat5e (or better) Port Powered Extender System (85m low speed)	83.00

Icron Technologies EL5100/5200 KVM Extenders

Icron's EL5100 and 5200 KVM extender systems provide uncompressed HD video and USB 2.0 connections up to 330ft/100m over a single Cat5e cable, making them ideal for medical imaging, digital signage or industrial kiosk applications. Both systems offer three USB ports along with a single video port (EL5100 for DVI; EL5200 for HDMI) and support USB 2.0 throughput up to 30Mbps, suitable for applications using keyboards, mice and USB 1.1 web cameras. The EL5200 supports HDMI video features such as 1080p, 4K, 30p, Deep Color and CEC/HDCP pass-through. Both KVM extenders come with a two-year warranty and include the ExtremeUSB® suite of features such as transparent USB extension, true plug and play (no software drivers required) and compatibility with all leading operating systems including Windows® 8. **Optional mounting kit and UK, European and Australian power versions are also available. Contact your L-com sales representative for details.**

ICR-EL5100-NA	Icron EL5100 DVI/USB 2.0/USB Cat5e (or better) KVM Extender (100m Max)	916.00
ICR-EL5200-NA	Icron EL5200 HDMI/USB 2.0/USB Cat5e (or better) KVM Extender (100m Max)	916.00



Firewire, DIN, SCSI, SATA Tutorial

What is Firewire?

Firewire is a high speed communication interconnect standard defined by IEEE-1394. It was originally developed to connect PCs to other PCs or to peripherals such as digital cameras, camcorders, scanners, etc. An attractive advantage is the devices are hot pluggable (live connection/disconnection without data loss or interruption).

What is SCSI?

Small Computer System Interface or SCSI is a standard and interface for transferring data between PCs and peripherals such as disk drives. Some SCSI interfaces are also found on peripherals such as scanners and CD drives.

What is SATA?

SATA or Serial ATA is a storage interface used to connect laptop and desktop computers or external mass storage devices such as a hard disk drives or optical drives. SATA can support data transfer rates as high as 3.0 Gbps per device (depending on hardware used).

What is eSATA?

eSATA or external SATA, was developed in 2004 to provide external high speed connectivity to external storage devices. eSATA technology supports hot plugging and a maximum cable length of 2 meters.

What are DIN and Mini DIN?

DIN stands for Deutsches Institut für Normung which is the German standards organization that

developed this interface. DIN connectors are available in many configurations from 3 to 9 positions. Also there are several different versions of the 5 pin connector where the angle of the arc swept between the first and last pin can be 180°, 240° or 270°. The most common uses for DIN connectors are analog audio, AT keyboard and mouse connections and MIDI applications.

Mini DIN connectors were also developed by Deutsches Institut für Normung. These connectors are similar to the DIN series but feature a smaller diameter connector and are available in different styles (pin counts and pin orientation). Some popular applications for Mini DIN connectors include S-Video and PS/2 Keyboard and mouse interconnects.

Common Connector Types

• SATA, eSATA,



Serial ATA Latching




Serial ATA




External Serial ATA

• Firewire



- Type 1 (6 position) connectors are typically located on computers and hubs.



- Type 2 (4 position) connectors are commonly found on peripheral devices.



- Type B (9 position) connectors are commonly found on computers and hubs.

• DIN and Mini DIN



- 6 Pin Mini DIN PS/2 Keyboards and Mice



- 5 Pin DIN AT Keyboards



- 8 Pin Mini DIN Macintosh Peripherals

• SCSI



.8mm Male



HPDB50 Male



HPDB68 Male



DB50 Male



CN50 Male



CN50 Female

Common Applications

SCSI, SATA, eSATA



Hard Disk Drive




External Storage

Firewire



Camera




Scanner



Camcorder

DIN and Mini DIN



Keyboard and Mouse



MIDI



S-Video

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Serial ATA (SATA) Cable Assemblies with Latching Connectors - Straight and Right Angle Connectors

L-com's latching Serial ATA cable assemblies provide a secure connection every time. These SATA assemblies feature two shielded 26 AWG pairs in a PVC jacket, gold plated contacts and two straight polarized seven position connectors. Both straight to straight and straight to right angle versions are offered. Custom lengths are available with modest minimum requirements. Call us today with your custom SATA requirements.

CASATAL-8	Latching Serial ATA Cable, Straight/Straight, 8.0in (20.3cm)	3.95	3.63	3.32	CALL
CASATAL-12	Latching Serial ATA Cable, Straight/Straight, 12.0in (30.4cm)	4.15	3.82	3.49	CALL
CASATAL-16	Latching Serial ATA Cable, Straight/Straight, 16.0in (40.6cm)	4.40	4.05	3.70	CALL
CASATAL-18	Latching Serial ATA Cable, Straight/Straight, 18.0in (45.7cm)	4.50	4.14	3.78	CALL
CASATAL-24	Latching Serial ATA Cable, Straight/Straight, 24.0in (61.0cm)	4.85	4.46	4.07	CALL
CASATAL-36	Latching Serial ATA Cable, Straight/Straight, 36.0in (91.4cm)	5.55	5.11	4.66	CALL
CASATARL-8	Latching Serial ATA Cable, Straight/Right Angle, 8.0in (20.3cm)	4.50	4.14	3.78	CALL
CASATARL-12	Latching Serial ATA Cable, Straight/Right Angle, 12.0in (30.4cm)	4.70	4.32	3.95	CALL
CASATARL-16	Latching Serial ATA Cable, Straight/Right Angle, 16.0in (40.6cm)	4.90	4.51	4.12	CALL
CASATARL-18	Latching Serial ATA Cable, Straight/Right Angle, 18.0in (45.7cm)	5.00	4.60	4.20	CALL
CASATARL-24	Latching Serial ATA Cable, Straight/Right Angle, 24.0in (61.0cm)	5.40	4.97	4.54	CALL
CASATARL-36	Latching Serial ATA Cable, Straight/Right Angle, 36.0in (91.4cm)	6.05	5.57	5.08	CALL

Low Smoke, Zero Halogen SATA Cable Assemblies with Latching Connectors

Low smoke, zero halogen options are now available to complement our existing PVC family. Low smoke zero halogen cable reduces the amount of toxic and corrosive gases emitted during combustion. Typically used in poorly ventilated areas, low smoke zero halogen is very popular with military contractors and anywhere the protection of people and equipment from toxic and corrosive gases is critical. The cables feature two shielded 26 AWG pairs in a LSZH cable jacket, gold plated contacts and two straight polarized seven position connectors.

CASATAZL-03M	LSZH Latching Serial ATA Cable, Straight/Straight, 0.3m	6.75	6.21	5.67	CALL
CASATAZL-05M	LSZH Latching Serial ATA Cable, Straight/Straight, 0.5m	7.25	6.67	6.09	CALL
CASATAZL-1M	LSZH Latching Serial ATA Cable, Straight/Straight, 1.0m	8.75	8.05	7.35	CALL

Serial ATA Cable Assemblies - Straight to Straight and Straight to Right Angle Connectors

These cables feature two shielded 26 AWG pairs in a PVC jacket, gold plated contacts and polarized seven position connectors. Available in straight to straight and straight to right angle connector orientations in lengths of 0.5 and 1 meter.

CASATA-05M	Serial ATA Cable, Straight/Straight, 0.5m	4.50	4.14	3.78	CALL
CASATA-1M	Serial ATA Cable, Straight/Straight, 1.0m	5.55	5.11	4.66	CALL
CASATAR-05M	Serial ATA Cable, Straight/Right Angle, 0.5m	5.00	4.60	4.20	CALL
CASATAR-1M	Serial ATA Cable, Straight/Right Angle, 1.0m	6.05	5.57	5.08	CALL

Serial ATA Extension Cable Assemblies (SATA) - Male to Female Connectors

These handy cables can be used to extend SATA cables as well as to create space in tightly packed areas where bulky disk-on-modules (DOMs) are difficult to connect. These cables feature a bright red PVC jacket, gold contacts and are fully shielded.

CASATAEXT-12	Serial ATA Extension Cable, 12" (30.4cm)	4.80	4.42	4.03	CALL
CASATAEXT-20	Serial ATA Extension Cable, 20" (50.8cm)	5.35	4.92	4.49	CALL

External Serial ATA Cable Assemblies - Fully Shielded, Protect Against EMI/RFI

L-com's CAESA series of external Serial ATA cables provide fast data transfer speeds for external storage devices. SATA is now available "outside the box". These fully shielded cables provide extra protection from EMI/RFI and support speeds up to three Gigabits per second.

CAESA-05M	External Serial ATA Cable Assembly, 0.5m	7.55	7.10	6.64	CALL
CAESA-1M	External Serial ATA Cable Assembly, 1.0m	8.60	8.08	7.57	CALL
CAESA-2M	External Serial ATA Cable Assembly, 2.0m	11.15	10.48	9.81	CALL

External Serial ATA to Latching SATA II Cable Assemblies, Fully Shielded

L-com's CAESA2 series of External SATA to SATA II latching cable assemblies connect eSATA external drives / enclosures to SATA II enabled systems.

CAESA2-05M	eSATA to SATA II Latching Cable Assembly, 0.5m	8.00	7.52	7.04	CALL
CAESA2-1M	eSATA to SATA II Latching Cable Assembly, 1.0m	9.15	8.60	8.05	CALL
CAESA2-2M	eSATA to SATA II Latching Cable Assembly, 2.0m	11.45	10.76	10.08	CALL

SATA and eSATA Connector Covers for Male and Female Connectors, Pkg/10



These hard to find covers are perfect for protecting unused connector ports in any equipment as well as cable assembly connectors. These covers attach easily and stay in place with a snug friction fit. Color is black.

CVRSATA	Protective Cover for SATA Cable Assembly Connector, Pkg/10	6.35	5.84	5.33	CALL
CVR-ESATA	Protective Cover for eSATA Cable Assembly Connector, Pkg/10	6.35	5.84	5.33	CALL
CAPSATA	Protective Cover for SATA Computer/Connector Ports, Pkg/10	7.50	6.90	6.30	CALL
CAP-ESATA	Protective Cover for eSATA Computer/Connector Ports, Pkg/10	7.50	6.90	6.30	CALL


Slim SATA Cables

Slim SATA cables are now available for slimline SATA drives. A compact power and data connector plugs directly into the slimline data drive and splits into a standard latching SATA cable plus a 4 position power connector.

CASSA-8	Slim SATA Cable, 8" (20.3cm)	8.65	7.96	7.27	CALL
CASSA-18	Slim SATA Cable, 18" (45.7cm)	9.20	8.46	7.73	CALL



Ultra SCSI-5

CA2000MM
CA2060MM

Premium Grade SCSI-3

CAF900MM
(with Ferrites)

LSZH SCSI-3




CAUZ900MM

SCSI-2




CA801

Differential SCSI-1



CA751MM




DGB50F

DGC50F



CAA910MF

CAA908MF




CAA261MF



TS-SCSI3

Codes for SCSI Connector Ends

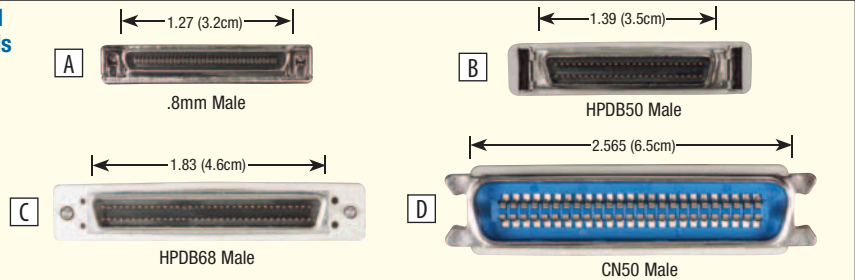

Item #	Description	# Pairs	Code	1-9	10-24	25-99	100+
--------	-------------	---------	------	-----	-------	-------	------

Ultra SCSI (SCSI-5) Cables with .8mm Pitch High-Density Connectors, Offset Backshells

Many SCSI devices utilize the VHDCI (Very High Density Cable Interconnect) standard. The high performance standard and the mechanical precision of this connector system make workmanship absolutely critical.

CA2000MM-05M	Ultra SCSI Cable, .8mm Male/Male, 0.5m	34	A-A	83.71	82.04	78.69	CALL
CA2000MM-1M	Ultra SCSI Cable, .8mm Male/Male, 1.0m	34	A-A	88.66	86.89	83.34	CALL
CA2000MM-2M	Ultra SCSI Cable, .8mm Male/Male, 2.0m	34	A-A	98.51	96.54	92.60	CALL
CA2000MM-3M	Ultra SCSI Cable, .8mm Male/Male, 3.0m	34	A-A	108.35	106.18	101.85	CALL
CA2060MM-05M	Ultra SCSI Cable, .8mm Male/HPDB68 Male, 0.5m	34	A-C	75.85	74.33	71.30	CALL
CA2060MM-1M	Ultra SCSI Cable, .8mm Male/HPDB68 Male, 1.0m	34	A-C	80.91	79.29	76.06	CALL
CA2060MM-2M	Ultra SCSI Cable, .8mm Male/HPDB68 Male, 2.0m	34	A-C	91.03	89.21	85.57	CALL
CA2060MM-3M	Ultra SCSI Cable, .8mm Male/HPDB68 Male, 3.0m	34	A-C	101.15	99.13	95.08	CALL

Standard Grade SCSI-3 Cables - Fully Molded and Shielded

All SCSI-3 cables are fully populated with 34 twisted pairs. The high density DB68 connectors utilize 2-56 threaded screws for mounting.

CA900MM-05M	SCSI-3 Cable, HPDB68 Male/Male, 0.5m	34	C-C	39.82	36.63	33.45	CALL
CA900MM-1M	SCSI-3 Cable, HPDB68 Male/Male, 1.0m	34	C-C	44.99	41.39	37.79	CALL
CA900MM-2M	SCSI-3 Cable, HPDB68 Male/Male, 2.0m	34	C-C	55.39	50.96	46.53	CALL

Premium Grade SCSI-3 Cables with Ferrite Cores - Reduce Noise Problems

Frequent OEM requests have prompted us to add a premium SCSI-3 cable utilizing ferrite cores to the line. Molded ferrites reduce radiated emissions and undesirable currents within the shield. These cables can be helpful in passing today's tough emissions standards.

CAF900MM-05M	SCSI-3 Cable, HPDB68 Male/Male with Ferrites, 0.5m	34	C-C	53.68	49.39	45.09	CALL
CAF900MM-1M	SCSI-3 Cable, HPDB68 Male/Male with Ferrites, 1.0m	34	C-C	58.85	54.14	49.43	CALL
CAF900MM-2M	SCSI-3 Cable, HPDB68 Male/Male with Ferrites, 2.0m	34	C-C	69.25	63.71	58.17	CALL
CAF900MM-3M	SCSI-3 Cable, HPDB68 Male/Male with Ferrites, 3.0m	34	C-C	79.64	73.27	66.90	CALL

Low Smoke Zero Halogen SCSI-3 Cable Assemblies

These cables meet the requirements of SCSI-3 systems. The high density DB68 SCSI connectors use 2-56 threaded thumbscrews for mounting. Cable assembly construction features 30 microinch gold plated copper alloy contacts, die cast zinc alloy hoods, 28 AWG polypropylene insulated conductors, foil/braid shield and a LSZH outer jacket. Color is Black. L-com will manufacture custom cable assemblies with modest minimum requirements.

CAUZ900MM-1M	LSZH SCSI-3 Cable, HPDB68 Male/Male, 1.0m	34	C-C	112.85	106.08	99.31	CALL
CAUZ900MM-2M	LSZH SCSI-3 Cable, HPDB68 Male/Male, 2.0m	34	C-C	132.87	124.90	116.93	CALL
CAUZ900MM-3M	LSZH SCSI-3 Cable, HPDB68 Male/Male, 3.0m	34	C-C	152.78	143.61	134.45	CALL

SCSI-2 Computer Cables - Molded, Shielded and Compatible with Differential SCSI-2

These differential SCSI-2 cables utilize 25 twisted pair cable and half pitch DB50 connectors. Half pitch connector housings connect via spring locking latches. All cables are fully molded and have foil and copper braid shielding. Lengths are measured in meters.

CA801-05M	SCSI-2 Molded Cable HPDB50 Male/Male, 0.5m	B-B	32.44	30.49	28.55	CALL
CA801-1M	SCSI-2 Molded Cable HPDB50 Male/Male, 1.0m	B-B	37.39	35.15	32.90	CALL
CA801-2M	SCSI-2 Molded Cable HPDB50 Male/Male, 2.0m	B-B	49.93	46.93	43.94	CALL
CA801-3M	SCSI-2 Molded Cable HPDB50 Male/Male, 3.0m	B-B	61.15	57.48	53.81	CALL

Differential SCSI-1 Cables - Fully Populated, 25 Twisted Pairs, Molded and Shielded

These differential SCSI-1 cables are built to the 25 pair standard used with most SCSI-1 equipment. The differential interface on the equipment allows longer distances to be achieved by sending information simultaneously along two pairs of wires. CN50 cables are fully molded and utilize 26 AWG twisted pairs with foil shielding throughout. Cable length is measured in meters.

CA751MM-05M	SCSI-1 Molded Cable, CN50 Male/Male, 0.5m	D-D	38.49	36.18	33.87	CALL
CA751MM-1M	SCSI-1 Molded Cable, CN50 Male/Male, 1.0m	D-D	47.84	44.97	42.10	CALL
CA751MM-2M	SCSI-1 Molded Cable, CN50 Male/Male, 2.0m	D-D	66.43	62.44	58.46	CALL
CA751MM-3M	SCSI-1 Molded Cable, CN50 Male/Male, 3.0m	D-D	85.02	79.92	74.82	CALL

SCSI Gender Changers and Adapters

Several models are now offered to satisfy most common applications. Gender changers allow mating of similar cables. Adapters allow the user to match various SCSI cable systems.

DGB50F	Gender Changer, DB50 Female/Female	10.95	9.86	8.76	CALL
DGB50M	Gender Changer, DB50 Male/Male	10.95	9.86	8.76	CALL
DGC50F	50 Pin Gender Changer, CN50 Female/Female	13.29	12.23	11.16	CALL
DGC50M	50 Pin Gender Changer, CN50 Male/Male	13.29	12.23	11.16	CALL
CAA910MF	SCSI Adapter, CN50 Male/HPDB50 Female	36.63	34.43	32.23	CALL
CAA908MF	SCSI Adapter, HPDB68 Male/HPDB50 Female	37.90	35.63	33.35	CALL
CAA261MF	SCSI Adapter, .8mm CN68 Male/HPDB68 Female	50.55	47.52	44.48	CALL

2-56 SCSI-3 Replacement Thumbscrews, Pkg / 10

These thumbscrews are designed for all L-com's molded SCSI-3/HPDB68 cable assemblies. Material is steel with nickel finish.

TS-SCSI3	2-56 SCSI-3 Replacement Thumbscrews, Pkg / 10	4.75	4.46	4.18	CALL
----------	---	------	------	------	------

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

IEEE-1394 Firewire Cable Assemblies - Transmission Rates to 400 Mbps

Highest quality Firewire cables allow for transfer rates up to 400 Mbps and meet the IEEE-1394 specification. These cables allow for simple Plug and Play connections for devices such as printers, scanners, digital cameras and other firewire peripherals. They can also be used to link two computers together for file sharing. Twisted pair data lines help reduce crosstalk while 22 AWG power conductors enable maximum power transfer from host to peripheral.

IEEE-1394 Firewire Cable, Type 1 to Type 1, PVC Jacket, 30 Microinches (0.762µm) Gold

CSM94-05M	IEEE-1394 Firewire Cable, Type 1/Type 1, 0.5m	12.99	11.95	10.91	CALL
CSM94-1M	IEEE-1394 Firewire Cable, Type 1/Type 1, 1.0m	14.79	13.61	12.42	CALL
CSM94-2M	IEEE-1394 Firewire Cable, Type 1/Type 1, 2.0m	18.39	16.92	15.45	CALL
CSM94-3M	IEEE-1394 Firewire Cable, Type 1/Type 1, 3.0m	21.89	20.14	18.39	CALL
CSM94-5M	IEEE-1394 Firewire Cable, Type 1/Type 1, 5.0m	28.99	26.67	24.35	CALL

IEEE-1394 Firewire Cable, Type 1 to Type 2, PVC Jacket, 30 Microinches (0.762µm) Gold

CSM94-05M2	IEEE-1394 Firewire Cable, Type 1/Type 2, 0.5m	12.99	11.95	10.91	CALL
CSM94-1M2	IEEE-1394 Firewire Cable, Type 1/Type 2, 1.0m	14.79	13.61	12.42	CALL
CSM94-2M2	IEEE-1394 Firewire Cable, Type 1/Type 2, 2.0m	18.39	16.92	15.45	CALL
CSM94-3M2	IEEE-1394 Firewire Cable, Type 1/Type 2, 3.0m	21.89	20.14	18.39	CALL
CSM94-5M2	IEEE-1394 Firewire Cable, Type 1/Type 2, 5.0m	28.99	26.67	24.35	CALL

IEEE-1394 Firewire Extension Cable, Type 1 Connectors, PVC Jacket, 30 Microinches (0.762µm) Gold

CSM94X-1M	IEEE-1394 Firewire Extension Cable, Type 1/Type 1, 1.0m	16.59	15.26	13.94	CALL
CSM94X-2M	IEEE-1394 Firewire Extension Cable, Type 1/Type 1, 2.0m	20.09	18.48	16.88	CALL
CSM94X-3M	IEEE-1394 Firewire Extension Cable, Type 1/Type 1, 3.0m	23.69	21.79	19.90	CALL

IEEE-1394b Firewire Cable Assemblies - Transmission Rates to 800 Mbps

This version of Firewire cable assemblies utilizes a 9 position connector that is compliant with the IEEE-1394b standard. These cables can double the transmission rates of the traditional IEEE-1394a cable assemblies. Cable construction features two individually shielded 26 AWG data pairs plus two 22 AWG power conductors with an overall foil/braid shield and molded backshells. Color is Black.

IEEE-1394b Firewire Cable, Type B to Type 1, PVC Jacket, 30 Microinches (0.762µm) Gold

CSM94B1-1M	IEEE-1394b Firewire Cable, Type B/Type 1, 1.0m	21.80	20.06	18.31	CALL
CSM94B1-2M	IEEE-1394b Firewire Cable, Type B/Type 1, 2.0m	26.40	24.29	22.18	CALL
CSM94B1-3M	IEEE-1394b Firewire Cable, Type B/Type 1, 3.0m	31.00	28.52	26.04	CALL
CSM94B1-5M	IEEE-1394b Firewire Cable, Type B/Type 1, 5.0m	40.20	36.98	33.77	CALL

IEEE-1394b Firewire Cable, Type B to Type B, PVC Jacket, 30 Microinches (0.762µm) Gold

CSM94BB-1M	IEEE-1394b Firewire Cable, Type B/Type B, 1.0m	21.80	20.06	18.31	CALL
CSM94BB-2M	IEEE-1394b Firewire Cable, Type B/Type B, 2.0m	26.40	24.29	22.18	CALL
CSM94BB-3M	IEEE-1394b Firewire Cable, Type B/Type B, 3.0m	31.00	28.52	26.04	CALL
CSM94BB-5M	IEEE-1394b Firewire Cable, Type B/Type B, 5.0m	40.20	36.98	33.77	CALL

Waterproof IEEE-1394 Firewire Cable Assemblies - IP67 Rated, Male to Female

L-com now offers IP67 solutions for your harsh environment IEEE-1394 Firewire applications. These robust assemblies feature a specialized IP67 rated 6 position female connector on one end and a standard 6 pin male connector on the other end. These assemblies are perfect for applications where dust and moisture are prevalent and can be used to connect to enclosures, panels, or directly to peripherals or PCs.

WP946PMF-05M	IEEE-1394 Waterproof Firewire Cable, Male/Female, 0.5m	21.30	20.87	20.02	CALL
WP946PMF-2M	IEEE-1394 Waterproof Firewire Cable, Male/Female, 2.0m	23.00	22.54	21.62	CALL
WP946PMF-5M	IEEE-1394 Waterproof Firewire Cable, Male/Female, 5.0m	26.45	25.92	24.86	CALL

IEEE-1394 Firewire Latching Cable Assemblies, Type 1 to Type 1

These assemblies utilize L-com's CN1394L-1 latching Type 1/6 position connector on both ends of the cable. The latching connector provides mechanical retention to mating connectors providing a secure connection every time. It is easy to un-mate by depressing the release mechanism and supports Firewire 400 Mbps speeds. L-com can manufacture custom cable assemblies with low minimum quantity requirements and short lead times.

CSM94L-05M	IEEE-1394 Firewire Latching Cable, Type 1 Male/Type 1 Male, 0.5m	22.39	21.94	21.49	CALL
CSM94L-1M	IEEE-1394 Firewire Latching Cable, Type 1 Male/Type 1 Male, 1.0m	24.09	23.61	23.13	CALL
CSM94L-2M	IEEE-1394 Firewire Latching Cable, Type 1 Male/Type 1 Male, 2.0m	27.79	27.23	26.68	CALL
CSM94L-3M	IEEE-1394 Firewire Latching Cable, Type 1 Male/Type 1 Male, 3.0m	31.39	30.76	30.13	CALL
CSM94L-5M	IEEE-1394 Firewire Latching Cable, Type 1 Male/Type 1 Male, 5.0m	38.59	37.82	37.05	CALL

IEEE-1394 Firewire Latching Male Connector, Type 1 (6 Position)

L-com's CN1394L-1 IEEE-1394 Firewire connector is a unique latching male connector that provides mechanical retention to mating connectors providing a secure connection. This latching connector is easy to un-mate by depressing the release mechanism and supports Firewire 400 Mbps speeds. L-com can manufacture custom cable assemblies using this connector with low minimum quantity requirements and short lead times. Or, do it yourself with these easy to solder connectors.

CN1394L-1	IEEE-1394 Firewire Connector, Type 1 Male	12.60	11.84	11.09	CALL
-----------	---	-------	-------	-------	------

IEEE-1394 Firewire Shielded Panel Mount Couplers, Type 1 Connectors

This coupler provides a practical and cost effective way to feed Firewire cables through a panel or enclosure. A unique mounting flange makes these units usable in virtually any panel thickness. Features two Type 1 (6 position) female connectors and metal housing. Recommended 4-40 mounting screws must be purchased separately.

ECF504-94MS	IEEE-1394 Firewire Shielded Coupler, Type 1 Connectors	10.89	10.67	10.24	CALL
ECF440	Machine Screws, 4-40 x 5/16", Pkg/1300	5.00	4.60	4.20	CALL

IEEE-1394 Firewire Connector Covers, 4 and 6 Position - Protect Unused Ports, Pkg/10

These covers are perfect for protecting unused female ports in our panel mount couplers or any expensive equipment from physical damage, dirt and dust. Made from soft ABS, these covers attach easily and stay in place with a snug friction fit. Color is Black.

CAP1394-4P	IEEE-1394 Firewire Protective Cover for Type 2 Jacks, Pkg/10	7.50	6.90	6.30	CALL
CAP1394-6P	IEEE-1394 Firewire Protective Cover for Type 1 Jacks, Pkg/10	7.50	6.90	6.30	CALL






DIN and Mini DIN Cables for Computer Keyboards, Mice and Other Uses

These Premium DK Series are the finest DIN /Mini DIN cables on the market. As the illustration reveals, the painstaking attention to detail beneath the surface makes the difference. All DK cables listed are wired straight-thru, fully populated, double shielded (copper braid and aluminum mylar), 24 AWG and fully over molded. Color: Gray.

Common DIN and Mini DIN Jack Uses

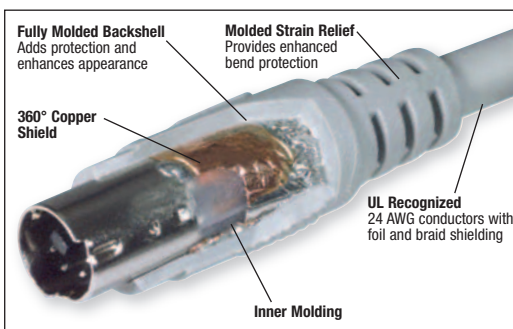

Item #	Description	1-9	10-24	25-99	100+
Premium DIN 5 Cables - Fully Populated - Double Shielded					
DK225MM-3	Molded Cable, DIN 5 Male / Male, 3.0ft (0.9m)	7.67	7.21	6.75	CALL
DK225MM-6	Molded Cable, DIN 5 Male / Male, 6.0ft (1.8m)	11.07	10.41	9.74	CALL
DK225MM-10	Molded Cable, DIN 5 Male / Male, 10.0ft (3.0m)	15.60	14.66	13.73	CALL
DK225MM-20	Molded Cable, DIN 5 Male / Male, 20.0ft (6.0m)	26.93	25.31	23.70	CALL
DK225MM-25	Molded Cable, DIN 5 Male / Male, 25.0ft (7.6m)	32.60	30.64	28.69	CALL
DK225MF-3	Molded Extension Cable, DIN 5, Male / Female, 3.0ft (0.9m)	7.67	7.21	6.75	CALL
DK225MF-6	Molded Extension Cable, DIN 5, Male / Female, 6.0ft (1.8m)	11.07	10.41	9.74	CALL
DK225MF-10	Molded Extension Cable, DIN 5, Male / Female, 10.0ft (3.0m)	15.60	14.66	13.73	CALL
DK225MF-20	Molded Extension Cable, DIN 5, Male / Female, 20.0ft (6.0m)	26.93	25.31	23.70	CALL
DK225MF-25	Molded Extension Cable, DIN 5, Male / Female, 25.0ft (7.6m)	32.60	30.64	28.69	CALL
Premium Mini DIN 6 Cables - Fully Populated - Double Shielded					
DK226MM-1	Molded Cable, Mini DIN 6 Male / Male, 1.0ft (0.3m)	7.88	7.41	6.93	CALL
DK226MM-2	Molded Cable, Mini DIN 6 Male / Male, 2.0ft (0.6m)	9.01	8.47	7.93	CALL
DK226MM-3	Molded Cable, Mini DIN 6 Male / Male, 3.0ft (0.9m)	10.15	9.54	8.93	CALL
DK226MM-6	Molded Cable, Mini DIN 6 Male / Male, 6.0ft (1.8m)	13.54	12.73	11.92	CALL
DK226MM-10	Molded Cable, Mini DIN 6 Male / Male, 10.0ft (3.0m)	18.08	17.00	15.91	CALL
DK226MM-15	Molded Cable, Mini DIN 6 Male / Male, 15.0ft (4.6m)	23.74	22.32	20.89	CALL
DK226MM-20	Molded Cable, Mini DIN 6 Male / Male, 20.0ft (6.0m)	29.41	27.65	25.88	CALL
DK226MM-25	Molded Cable, Mini DIN 6 Male / Male, 25.0ft (7.6m)	35.07	32.97	30.86	CALL
DK226MF-3	Molded Extension Cable, Mini DIN 6 Male / Female, 3.0ft (0.9m)	10.15	9.54	8.93	CALL
DK226MF-6	Molded Extension Cable, Mini DIN 6 Male / Female, 6.0ft (1.8m)	13.54	12.73	11.92	CALL
DK226MF-10	Molded Extension Cable, Mini DIN 6 Male / Female, 10.0ft (3.0m)	18.08	17.00	15.91	CALL
DK226MF-15	Molded Extension Cable, Mini DIN 6 Male / Female, 15.0ft (4.6m)	23.74	22.32	20.89	CALL
DK226MF-20	Molded Extension Cable, Mini DIN 6 Male / Female, 20.0ft (6.0m)	29.41	27.65	25.88	CALL
DK226MF-25	Molded Extension Cable, Mini DIN 6 Male / Female, 25.0ft (7.6m)	35.07	32.97	30.86	CALL
Premium Mini DIN 8 Cables - Fully Populated - Double Shielded					
DK238MM-1	Molded Cable, Mini DIN 8 Male / Male, 1.0ft (0.3m)	9.89	9.30	8.70	CALL
DK238MM-2	Molded Cable, Mini DIN 8 Male / Male, 2.0ft (0.6m)	11.02	10.36	9.70	CALL
DK238MM-3	Molded Cable, Mini DIN 8 Male / Male, 3.0ft (0.9m)	12.15	11.42	10.69	CALL
DK238MM-6	Molded Cable, Mini DIN 8 Male / Male, 6.0ft (1.8m)	15.55	14.62	13.68	CALL
DK238MM-10	Molded Cable, Mini DIN 8 Male / Male, 10.0ft (3.0m)	20.09	18.88	17.68	CALL
DK238MM-15	Molded Cable, Mini DIN 8 Male / Male, 15.0ft (4.6m)	25.75	24.20	22.66	CALL
DK238MM-20	Molded Cable, Mini DIN 8 Male / Male, 20.0ft (6.0m)	31.42	29.53	27.65	CALL
DK238MM-25	Molded Cable, Mini DIN 8 Male / Male, 25.0ft (7.6m)	37.08	34.86	32.63	CALL
DK238MF-3	Molded Extension Cable, Mini DIN 8 Male / Female, 3.0ft (0.9m)	12.15	11.42	10.69	CALL
DK238MF-6	Molded Extension Cable, Mini DIN 8 Male / Female, 6.0ft (1.8m)	15.55	14.62	13.68	CALL
DK238MF-10	Molded Extension Cable, Mini DIN 8 Male / Female, 10.0ft (3.0m)	20.09	18.88	17.68	CALL
DK238MF-15	Molded Extension Cable, Mini DIN 8 Male / Female, 15.0ft (4.6m)	25.75	24.20	22.66	CALL
DK238MF-20	Molded Extension Cable, Mini DIN 8 Male / Female, 20.0ft (6.0m)	31.42	29.53	27.65	CALL
DK238MF-25	Molded Extension Cable, Mini DIN 8 Male / Female, 25.0ft (7.6m)	37.08	34.86	32.63	CALL
Economy Mini DIN Cables - Shielded, Molded, Fully Populated					
These cables provide an economical choice suitable for many applications and are comparable with most cables on the market. Available with Mini DIN 6 or 8 position connectors. Construction features durable PVC mold, 28 AWG conductors and 360 degree foil shield. Color: Gray.					
Economy Mini DIN 6 Cables - Male to Male and Male to Female					
CSMD6MM-3	Economy Molded Cable, Mini DIN 6 Male / Male, 3.0ft (0.9m)	5.05	4.75	4.44	CALL
CSMD6MM-6	Economy Molded Cable, Mini DIN 6 Male / Male, 6.0ft (1.8m)	6.23	5.86	5.48	CALL
CSMD6MM-10	Economy Molded Cable, Mini DIN 6 Male / Male, 10.0ft (3.0m)	7.83	7.36	6.89	CALL
CSMD6MM-25	Economy Molded Cable, Mini DIN 6 Male / Male, 25.0ft (7.6m)	13.80	12.97	12.14	CALL
CSMD6MF-3	Economy Molded Cable, Mini DIN 6 Male / Female, 3.0ft (0.9m)	5.05	4.75	4.44	CALL
CSMD6MF-6	Economy Molded Cable, Mini DIN 6 Male / Female, 6.0ft (1.8m)	6.23	5.86	5.48	CALL
CSMD6MF-10	Economy Molded Cable, Mini DIN 6 Male / Female, 10.0ft (3.0m)	7.83	7.36	6.89	CALL
CSMD6MF-25	Economy Molded Cable, Mini DIN 6 Male / Female, 25.0ft (7.6m)	13.80	12.97	12.14	CALL
Economy Mini DIN 8 Cables - Male to Male and Male to Female					
CSMD8MM-3	Economy Molded Cable, Mini DIN 8 Male / Male, 3.0ft (0.9m)	6.39	6.01	5.62	CALL
CSMD8MM-6	Economy Molded Cable, Mini DIN 8 Male / Male, 6.0ft (1.8m)	8.09	7.60	7.12	CALL
CSMD8MM-10	Economy Molded Cable, Mini DIN 8 Male / Male, 10.0ft (3.0m)	10.35	9.73	9.11	CALL
CSMD8MM-25	Economy Molded Cable, Mini DIN 8 Male / Male, 25.0ft (7.6m)	18.85	17.72	16.59	CALL
CSMD8MF-3	Economy Molded Cable, Mini DIN 8 Male / Female, 3.0ft (0.9m)	6.39	6.01	5.62	CALL
CSMD8MF-6	Economy Molded Cable, Mini DIN 8 Male / Female, 6.0ft (1.8m)	8.09	7.60	7.12	CALL
CSMD8MF-10	Economy Molded Cable, Mini DIN 8 Male / Female, 10.0ft (3.0m)	10.35	9.73	9.11	CALL
CSMD8MF-25	Economy Molded Cable, Mini DIN 8 Male / Female, 25.0ft (7.6m)	18.85	17.72	16.59	CALL

DIN and Mini DIN Adapters and Connectors

These adapters are an L-com exclusive. Useful in many applications including S-video, computer mice, keyboards and instrumentation. A unique design permits easy mounting in standard size 0.5" (1.3cm) and 0.75" (1.9cm) circular or D shaped openings allowing the use of common punch tooling. Adapter bodies are machined from solid brass. Bright nickel plating provides corrosion resistance and a quality appearance. Gold plated contacts ensure reliable connections. Custom versions will be considered with modest minimums, please contact our Sales Group for assistance.



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DIN and Mini DIN Feed-thru Adapters - Panel and Wall Plate Mountable

These exclusive adapters offer a unique design suitable for panel mounting DIN and Mini DIN adapters. Female-Female gender.

MD44FF	Feed-Thru Adapter, Mini DIN 4, Female/Female	9.24	8.50	7.76	CALL
MD66FF	Feed-Thru Adapter, Mini DIN 6, Female/Female	10.03	9.23	8.43	CALL
MD88FF	Feed-Thru Adapter, Mini DIN 8, Female/Female	10.34	9.51	8.69	CALL
DD55F	Feed-Thru Adapter, DIN 5, Female/Female	10.34	9.51	8.69	CALL

Mini DIN Bulkhead Jack to Flying Leads

Machined adapters utilize 4, 6 or 8 26 AWG color coded wires for chassis termination.

MD44FJF	Mini DIN 4 Bulkhead Jack/Leads, Front Mount	10.30	9.48	8.65	CALL
MD66FJF	Mini DIN 6 Bulkhead Jack/Leads, Front Mount	11.18	10.29	9.39	CALL
MD88FJF	Mini DIN 8 Bulkhead Jack/Leads, Front Mount	11.50	10.58	9.66	CALL
MD44FJR	Mini DIN 4 Bulkhead Jack/Leads, Rear Mount	10.30	9.48	8.65	CALL
MD66FJR	Mini DIN 6 Bulkhead Jack/Leads, Rear Mount	11.18	10.29	9.39	CALL
MD88FJR	Mini DIN 8 Bulkhead Jack/Leads, Rear Mount	11.50	10.58	9.66	CALL

Mini DIN Bulkhead Adapter Styles



Mini DIN 6 and 8 Gender Changers

DMB536F	Gender Changer, Mini DIN 6 Female/Female	4.99	4.69	4.39	CALL
DMB538F	Gender Changer, Mini DIN 8 Female/Female	4.99	4.69	4.39	CALL

Premium Mini DIN 6 Y Cable - Fully Populated - Double Shielded - Male to (2) Female

K23-MDY	Molded Y Cable, Mini DIN 6 Male/2 Mini DIN 6 Female, 1.25 ft (0.381m)	9.42	8.67	7.91	CALL
---------	---	------	------	------	------

Mini DIN 4-S-Video Jack for Field Termination


The MD44FT Field Termination Mini DIN 4 Female jack offers a quick and easy field termination using common tools. Terminal blocks with set screws ensure reliable electrical connections. The terminal block area is clearly marked making field termination virtually foolproof. This unit is designed to fit common 0.5" (1.3cm) circular or D style openings. The undercut PCB area provides a convenient area to secure a cable tie wrap resulting in a neat dressing for the terminated cable. Custom configurations will be considered with modest minimums.

MD44FT	Mini DIN 4 Female Field Termination Jack	7.65	7.04	6.43	CALL
--------	--	------	------	------	------




Typical installation of an MD44FT field installable jack

STEP 1



Prepare coaxial lines.

STEP 2



Insert center conductors, shields and tighten set screws.

STEP 3




Secure cable with cable tie to connector.

STEP 4



Attach to faceplate and install.



Interface Modules - DIN Rail Mountable, with Shielded D-Sub and RJ45 Connectors

These DIN rail mountable interface modules feature a unique series of plated through holes that allow for the insertion of electronic components inline or across any circuit. Modules are available with shielded DB9, DB15, DB25 and DB37 female connectors. Also listed is a shielded RJ45 jack version. Terminal block connectors accept 26-12 AWG wire, are easily terminated and do not require crimp ferrules. Please inquire on any custom modifications required.

RBMIDB09F	Interface Module, DB9 Female	65.19	63.89	62.58	CALL
RBMIDB15F	Interface Module, DB15 Female	73.49	72.02	70.55	CALL
RBMIDB25F	Interface Module, DB25 Female	85.29	83.58	81.88	CALL
RBMIDB37F	Interface Module, DB37 Female	100.69	98.68	96.66	CALL
RBMIRJ45F	Interface Module, RJ45 Jack	59.29	58.10	56.92	CALL

IEEE-488 GPIB Tutorial

What are GPIB cables?

GPIB cables consist of 12 twisted pairs of copper wire and utilize a Centronics 24 style male/female connector.

How are GPIB cables used?

They are used in a bus or star architecture where the connectors "piggy back" each other and then connect primarily test and measurement equipment to PCs and other devices.

Where are GPIB cables used?

GPIB cables are typically used in test and measurement applications and are also used in DAQ (data acquisition) applications.

IEEE-488 Cabling Terms

Adapter: A device used to interconnect two different connector types.

American Wire Gauge (AWG): A U.S. standard set of non-ferrous wire conductor sizes. Typical data wiring is AWG number 24, 26 or 28. The higher the gauge number, the smaller the diameter and thinner the wire.

Backshell (Hood): A mechanical backing that is sometimes put onto a connector. The device protects the conductors and can be assembled or injection molded.

Bus: Also called a "Daisy Chain". A network topology where each node is connected to one another in line. A major disadvantage is that when there is a break in the bus the entire network goes down.

Cable: A set of insulated wires or conductors within an extruded jacket. Many types of cable utilize shielding around the wires and under the cable jacket.

Cable Assembly: A piece of cable that has been terminated with one or more connectors.

Conductor: A metal path, usually copper, that passes electricity. When discussing data cabling, "wire" and "conductor" are synonymous.

Connector: Electromechanical coupling device that provides an electrical interface that can be mated and unmated.

Contact: The specific points of contact within a connector. Contacts can be male (pins) or female (sockets).

Coupler: A device used to connect two similar connector types.

Crosstalk: The coupling of electromagnetic fields from conductors into adjacent conductors. Crosstalk is controlled by twisting the conductors into a pair or by separating/shielding conductors.

Electromagnetic Interference (EMI): Unwanted electromagnetic or electrical energy that causes unwanted responses in electronic equipment.

GPIB: General Purpose Interface Bus. Common name for IEEE-488.

HPIB: Hewlett Packard Interface Bus. Common name for IEEE-488.

IEEE-488: Institute of Electrical and Electronics Engineers interface standard number 488.

Injection Molding: The process used to inject molten polymer into a mold. Connector backshells are often injection molded.

Insulation: A material with very high resistivity used to protect conductors. Insulation is usually extruded over the wire or conductor after the drawing process.

Insulation Displacement Contact: A means of terminating wires without the need of stripping down to the bare wire.

Jack: The female receptacle-usually found on equipment.

Plug: Popular term for a male gender connector of varied types.


Shielding: A conductive foil or braid that covers insulated wires in a cable. The shield provides electrical grounding and protection from external electromagnetic interference (EMI). Shielding is also used to control internal electromagnetic radiation.

Strain Relief: A method of protecting the wire to contact point from flexing or pulling.

Twisted Pair: Two insulated conductors twisted at a fixed rate of twists per unit of length, typically used in balanced circuits where nominal impedance and crosstalk are critical characteristics.


Wire: Conductive material, typically copper, that has been drawn down to a specific size and coated with an insulating material. A "bare wire" utilizes no insulator coating.

In-Line / Linear Configuration

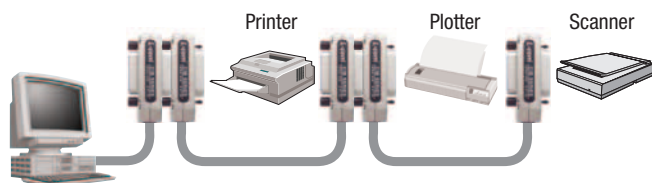

IEEE-488 Connector Specifications

The IEEE-488 GPIB connector utilizes 24 contacts in a parallel configuration.




PLUG (male)

JACK (female)



Physical / Star Configuration

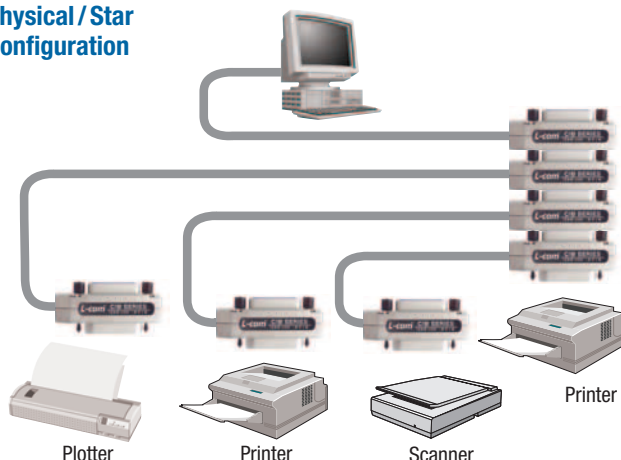

IEEE-488 Cable Construction

- 24 conductors with twisted pairs
- Braid Shield with a minimum 85% coverage
- Centronics style 24 position male to female piggy back connectors allowing for easy daisy chaining
- Metric mating hardware, M3.5 x 0.6



L-com IEEE-488 Cable Assembly Options

L-com offers three different cable options to best satisfy customer needs and maximize value:


	MOLDED	DELUXE	PREMIUM
Backshell Detail	PVC molded backshell over internal steel shell enclosure	Die cast aluminum, nickel plated backshell	Die cast aluminum, nickel plated backshell
Connector Detail	Stamped steel, nickel plated connectors	Die cast alloy, nickel plated connectors	Die cast alloy, nickel plated connectors
Contact Plating	30 microinch (0.762µm) gold plated contacts	30 microinch (0.762µm) gold plated contacts	30 microinch (0.762µm) gold plated contacts
Cable Shielding	One braid and one foil /mylar overall shield	One braid and one foil /mylar overall shield plus one inner foil /mylar shield	One braid and one foil /mylar overall shield plus one inner braid and one inner foil /mylar shield

L-com is the Originator




L-com was the first to introduce molded, in-line, male only GPIB cables. Acceptance was immediate and soon users demanded upgraded models with metal connector shells and better cable shielding gradations. Now the female version has been added to complete the series.

We complied with your wishes and we're proud to offer the latest premium and deluxe versions of single ended cables listed as standard items.

We urge you to try this wiring concept and to discover the many real advantages.

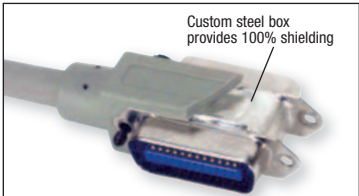

Molded Cable Makeup
CMB / CIM / CMB / CMC / CMD Series

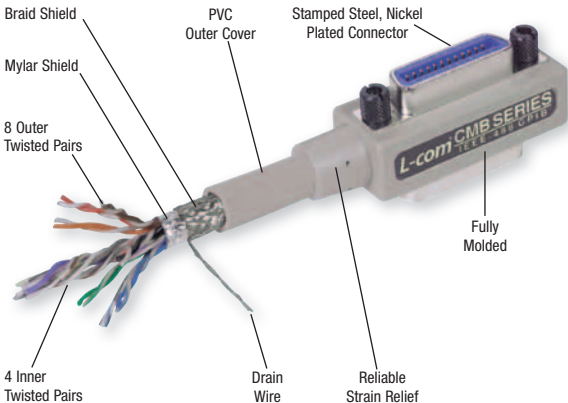


The Industry Standard

Hewlett Packard set the criteria in the design of optimum IEEE-488 GPIB cables with three shields, twisted pairs and metal shells, offering maximum performance.

L-com agreed with this need and developed a comparable cable type that we call the CIF Series. This family of IEEE-488 GPIB cables is directly interchangeable with HP, AMP and Amphenol.

The Deluxe Series is by far your best buy compared to any of the GPIB cables on the market today.

Deluxe Cable Makeup
CIF Series


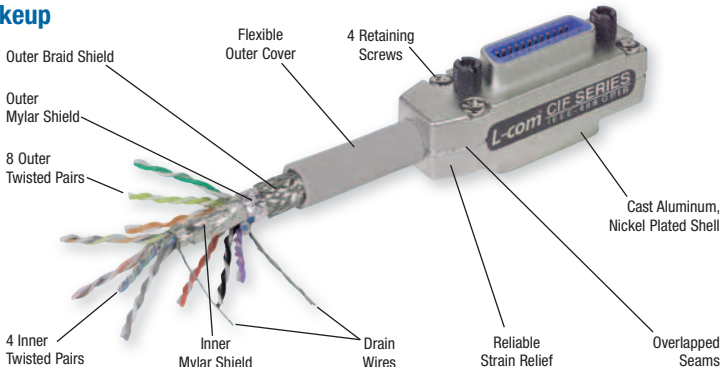


L-com offers the Most Value

A reminder that the difference in cost between good quality wiring components and the IEEE-488 cables offered by discounters is very little indeed. When you consider the total value of the equipment that will be tied into a system, the cost of cables, adapters and accessories becomes only a small part of the total investment.






In many applications, it is wise to use the premier cables on the market, L-com's Premium Series. Our cables and accessories are of the highest quality and our prices are realistic. We feel confident that if you compare Quality, Variety, Service and Price you will find that L-com definitely comes out on top on all counts.

Premium Cable Makeup
CIB / CBC / CBD / CBX Series

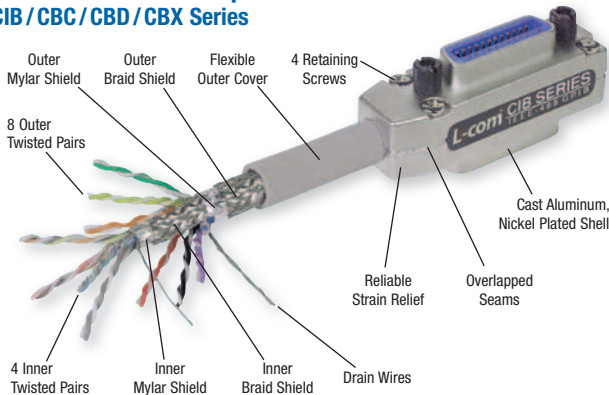

L-com Molded Grade Cable Assemblies

Cables listed on this page utilize **Two Shields** and a fully molded backshell. They are the most economical choice and are the most common substitute to competitor models.



Item #	Description	Connector Orientation	1-9	10-24	25-99	100+
Molded Grade IEEE-488 GPIB Cables - Double Shielded with Molded Backshells						
L-com offers many IEEE-488 cable assembly options. The most economical choice uses double shielded cable that is adequate for many applications. Featuring all-molded connector ends which contribute to a long life expectancy and are impervious to breakage at the point where the cable enters the connector housing. A unique stamped steel internal enclosure provides 100% shielding and a robust strain relief. Considerable savings can be realized using this cable, particularly in volume applications.						
The CMB Cable Series meets all standards of the IEEE-488 interface, conforms with normal mounting procedures and is directly compatible with HP, AMP and Amphenol.						
CMB24-05M	Molded IEEE-488 Cable, 0.5m	Normal / Normal	70.97	69.55	66.71	CALL
CMB24-1M	Molded IEEE-488 Cable, 1.0m	Normal / Normal	75.17	73.67	70.66	CALL
CMB24-2M	Molded IEEE-488 Cable, 2.0m	Normal / Normal	83.67	82.00	78.65	CALL
CMB24-3M	Molded IEEE-488 Cable, 3.0m	Normal / Normal	92.18	90.34	86.65	CALL
CMB24-4M	Molded IEEE-488 Cable, 4.0m	Normal / Normal	100.68	98.67	94.64	CALL
CMB24-5M	Molded IEEE-488 Cable, 5.0m	Normal / Normal	109.19	107.01	102.64	CALL
CMB24-6M	Molded IEEE-488 Cable, 6.0m	Normal / Normal	117.69	115.34	110.63	CALL
CMB24-8M	Molded IEEE-488 Cable, 8.0m	Normal / Normal	134.60	131.91	126.52	CALL

Molded IEEE-488 GPIB Cables - Two Reverse Entry Connectors to Overcome Difficult Mounting

There are times when the use of a standard GPIB cable is not desirable because of obstructions from other nearby instruments, etc. In some cases it may be more advantageous to have the cable enter the connector housing from the opposite direction. An obvious advantage is when it is used as an extension cable.

CIM24-05M	Molded IEEE-488 Cable, 0.5m	Reverse / Reverse	74.22	69.77	65.31	CALL
CIM24-1M	Molded IEEE-488 Cable, 1.0m	Reverse / Reverse	78.63	73.91	69.19	CALL
CIM24-2M	Molded IEEE-488 Cable, 2.0m	Reverse / Reverse	87.45	82.20	76.96	CALL
CIM24-3M	Molded IEEE-488 Cable, 3.0m	Reverse / Reverse	96.38	90.60	84.81	CALL
CIM24-4M	Molded IEEE-488 Cable, 4.0m	Reverse / Reverse	105.20	98.89	92.58	CALL
CIM24-5M	Molded IEEE-488 Cable, 5.0m	Reverse / Reverse	114.12	107.27	100.43	CALL
CIM24-6M	Molded IEEE-488 Cable, 6.0m	Reverse / Reverse	123.05	115.67	108.28	CALL
CIM24-8M	Molded IEEE-488 Cable, 8.0m	Reverse / Reverse	140.79	132.34	123.90	CALL

Molded IEEE-488 GPIB Cables - With One Reverse Entry Connector to One Normal Entry

GPIB users realize the virtues of reverse entry and have asked us to provide half and half types. L-com offers GPIB cables that are useful for connecting rack equipment when GPIB receptacles do not orientate properly to allow shortest distance and an orderly appearance.

CIMB24-03M	Molded IEEE-488 Cable, 0.3m	Normal / Reverse	72.44	68.09	63.75	CALL
CIMB24-05M	Molded IEEE-488 Cable, 0.5m	Normal / Reverse	74.22	69.77	65.31	CALL
CIMB24-1M	Molded IEEE-488 Cable, 1.0m	Normal / Reverse	78.63	73.91	69.19	CALL

Molded CMC Series IEEE-488 GPIB Cables - Feature One Inline GPIB Male Termination

These molded GPIB cables are similar in construction and electrical specifications to our popular CMB24 series except that one end terminates to a straight male connector. This is sometimes preferred when there is no apparent need to have the exposed female end. It also eliminates the need for capping the exposed connector. Quite useful when the traditional right angle cable gets in the way of other cables such as in a computer back plane. Both ends of these cables utilize a stamped steel internal closure providing 100% shielding and a robust strain relief.

CMC24-05M	Molded IEEE-488 Cable, 0.5m	Normal / Inline	61.31	57.63	53.95	CALL
CMC24-1M	Molded IEEE-488 Cable, 1.0m	Normal / Inline	65.51	61.58	57.65	CALL
CMC24-2M	Molded IEEE-488 Cable, 2.0m	Normal / Inline	72.75	68.38	64.02	CALL
CMC24-3M	Molded IEEE-488 Cable, 3.0m	Normal / Inline	81.26	76.38	71.51	CALL
CMC24-4M	Molded IEEE-488 Cable, 4.0m	Normal / Inline	88.50	83.19	77.88	CALL
CMC24-5M	Molded IEEE-488 Cable, 5.0m	Normal / Inline	97.01	91.19	85.37	CALL
CMC24-10M	Molded IEEE-488 Cable, 10.0m	Normal / Inline	135.86	127.71	119.56	CALL

Molded CMD Series IEEE-488 GPIB Cables - Have Two Inline GPIB Male Terminations

We've gone one step further with these molded CMD series cables and equipped both ends of the cable with a molded single ended GPIB connector.

CMD24-05M	Molded IEEE-488 Cable, 0.5m	Inline / Inline	42.51	39.96	37.41	CALL
CMD24-1M	Molded IEEE-488 Cable, 1.0m	Inline / Inline	46.92	44.10	41.29	CALL
CMD24-2M	Molded IEEE-488 Cable, 2.0m	Inline / Inline	62.15	58.42	54.69	CALL
CMD24-3M	Molded IEEE-488 Cable, 3.0m	Inline / Inline	70.97	66.71	62.45	CALL
CMD24-4M	Molded IEEE-488 Cable, 4.0m	Inline / Inline	79.89	75.10	70.30	CALL
CMD24-5M	Molded IEEE-488 Cable, 5.0m	Inline / Inline	88.82	83.49	78.16	CALL
CMD24-10M	Molded IEEE-488 Cable, 10.0m	Inline / Inline	133.13	125.14	117.15	CALL



The chart below will help you to find the connector orientation style that you need.

Normal Orientation




This is the standard for most GPIB cable assemblies

Reverse Orientation



Great for extending GPIB cable runs

Inline Orientation



Helpful for connecting to GPIB equipment

Item #	Description	Connector Orientation	1-9	10-24	25-99	100+
--------	-------------	-----------------------	-----	-------	-------	------

Deluxe Grade IEEE-488 GPIB Cables - Three Shields Plus Cast Aluminum Shells

Two foil shields plus one copper braid shield (over 90% coverage) provide low capacitance to maintain the IEEE specifications of these cables. Designed and built to handle your system's data rate, up to the 1 Mbyte/s IEEE maximum. All technical features found in our Premium CIB24 Series are incorporated in this series, the only exception is one less shield. This series is as good as, or better than, other name brand IEEE-488 cables on the market today. This is truly the best buy because you get industry standard features at realistic prices. No other IEEE-488 cables of this grade are available at a competitive price. The CIF24 Series IEEE-488 cables may be used to connect two compatible devices such as a personal computer and a plotter. They can be Daisy-Chain to several computer peripherals or may be used to integrate a system of programmable test instruments and control devices. Each end of every cable has a male/female connector and readily accepts a male terminated cable.

CIF24-03M	Deluxe IEEE-488 Cable, 0.3m	Normal/Normal	100.26	98.25	94.24	CALL
CIF24-05M	Deluxe IEEE-488 Cable, 0.5m	Normal/Normal	102.26	100.21	96.12	CALL
CIF24-1M	Deluxe IEEE-488 Cable, 1.0m	Normal/Normal	107.09	104.95	100.66	CALL
CIF24-2M	Deluxe IEEE-488 Cable, 2.0m	Normal/Normal	116.85	114.51	109.84	CALL
CIF24-3M	Deluxe IEEE-488 Cable, 3.0m	Normal/Normal	129.77	127.17	121.98	CALL
CIF24-4M	Deluxe IEEE-488 Cable, 4.0m	Normal/Normal	139.53	136.74	131.16	CALL
CIF24-5M	Deluxe IEEE-488 Cable, 5.0m	Normal/Normal	149.30	146.31	140.34	CALL
CIF24-6M	Deluxe IEEE-488 Cable, 6.0m	Normal/Normal	158.96	155.78	149.42	CALL
CIF24-8M	Deluxe IEEE-488 Cable, 8.0m	Normal/Normal	178.49	174.92	167.78	CALL

Premium Grade IEEE-488 GPIB Cables - 4 Shields, Aluminum Nickel Plated Shells

These cables have two copper braid shields coupled with two foil shields to work to reduce the amount of radiated emissions. This helps many systems to pass FCC Part 15, MIL-STD-461A, VDE 0871 and VDE 0875. All wires are twisted pairs to maintain a low capacitance within the 150 pF/m IEEE specification. Besides superior electrical characteristics, this cable has been designed to last a very long time. Care has been given to offer a cable with extreme flexibility that is equipped with a superior strain relief. This prevents the cable from coming apart when it is bent at a sharp angle, which has been a common fault with many IEEE-488 cables on the market today. Cast aluminum, nickel plated shells are used to prevent corrosion and have overlapping seams rather than being butt-jointed. One could hope for nothing else in the makeup of the best IEEE-488 cable. All this offered at a realistic price.

CIB24-03M	Premium IEEE-488 Cable, 0.3m	Normal/Normal	107.30	105.15	100.86	CALL
CIB24-05M	Premium IEEE-488 Cable, 0.5m	Normal/Normal	110.34	108.13	103.72	CALL
CIB24-1M	Premium IEEE-488 Cable, 1.0m	Normal/Normal	117.90	115.54	110.83	CALL
CIB24-2M	Premium IEEE-488 Cable, 2.0m	Normal/Normal	133.02	130.36	125.04	CALL
CIB24-2.5M	Premium IEEE-488 Cable, 2.5m	Normal/Normal	140.58	137.77	132.15	CALL
CIB24-3M	Premium IEEE-488 Cable, 3.0m	Normal/Normal	158.96	155.78	149.42	CALL
CIB24-4M	Premium IEEE-488 Cable, 4.0m	Normal/Normal	174.18	170.70	163.73	CALL
CIB24-5M	Premium IEEE-488 Cable, 5.0m	Normal/Normal	189.30	185.51	177.94	CALL
CIB24-6M	Premium IEEE-488 Cable, 6.0m	Normal/Normal	197.91	193.95	186.04	CALL
CIB24-8M	Premium IEEE-488 Cable, 8.0m	Normal/Normal	226.05	221.53	212.49	CALL
CIB24-10M	Premium IEEE-488 Cable, 10.0m	Normal/Normal	254.19	249.11	238.94	CALL
CIB24-12M	Premium IEEE-488 Cable, 12.0m	Normal/Normal	282.33	276.68	265.39	CALL
CIB24-15M	Premium IEEE-488 Cable, 15.0m	Normal/Normal	324.44	317.95	304.97	CALL
CIB24-18M	Premium IEEE-488 Cable, 18.0m	Normal/Normal	366.65	359.32	344.65	CALL

Premium Grade CBC24 Series IEEE-488 GPIB Cables - With One Inline GPIB Male Termination

This premium series has one conventional male-female connector. The other end terminates to a straight male-only connector, a feature sometimes preferred when there is no need to have a female end exposed. This cable is most useful when the dual-right angle connectors get in the way of other system cables and particularly in a computer back plane.

CBC24-05M	Premium IEEE-488 Cable, 0.5m	Normal/Inline	102.78	96.61	90.45	CALL
CBC24-1M	Premium IEEE-488 Cable, 1.0m	Normal/Inline	108.14	101.65	95.16	CALL
CBC24-2M	Premium IEEE-488 Cable, 2.0m	Normal/Inline	118.95	111.81	104.68	CALL
CBC24-3M	Premium IEEE-488 Cable, 3.0m	Normal/Inline	129.77	121.98	114.20	CALL
CBC24-4M	Premium IEEE-488 Cable, 4.0m	Normal/Inline	140.58	132.15	123.71	CALL
CBC24-5M	Premium IEEE-488 Cable, 5.0m	Normal/Inline	151.40	142.32	133.23	CALL
CBC24-8M	Premium IEEE-488 Cable, 8.0m	Normal/Inline	183.84	172.81	161.78	CALL

Premium Grade CBD24 Series IEEE-488 GPIB Cables - With Two Inline GPIB Male Terminations







We've also provided this premium series IEEE-488 cable equipped with two single ended male ends. This cable type is not only useful in many applications, but also saves money. It has the same specifications as the basic CIB24 series. All connector guards are cast metal, not stamped metal.


CBD24-05M	Premium IEEE-488 Cable, 0.5m	Inline/Inline	97.32	91.48	85.64	CALL
CBD24-1M	Premium IEEE-488 Cable, 1.0m	Inline/Inline	102.78	96.61	90.45	CALL
CBD24-2M	Premium IEEE-488 Cable, 2.0m	Inline/Inline	113.60	106.78	99.97	CALL
CBD24-3M	Premium IEEE-488 Cable, 3.0m	Inline/Inline	124.41	116.95	109.48	CALL
CBD24-4M	Premium IEEE-488 Cable, 4.0m	Inline/Inline	135.23	127.12	119.00	CALL
CBD24-5M	Premium IEEE-488 Cable, 5.0m	Inline/Inline	146.04	137.28	128.52	CALL
CBD24-8M	Premium IEEE-488 Cable, 8.0m	Inline/Inline	178.49	167.78	157.07	CALL

Premium Grade CBX24 IEEE-488 GPIB Extension Cables - One Inline Male to One Inline Female Connector




The world's first true IEEE-488 extension cable adds versatility to the inline series as an everyday means of interconnection. A useful cable for those situations which require a longer cable.

CBX24-1M	Premium IEEE-488 Extension Cable, 1.0m	Inline/Inline	102.78	96.61	90.45	CALL
CBX24-2M	Premium IEEE-488 Extension Cable, 2.0m	Inline/Inline	113.60	106.78	99.97	CALL
CBX24-3M	Premium IEEE-488 Extension Cable, 3.0m	Inline/Inline	124.41	116.95	109.48	CALL

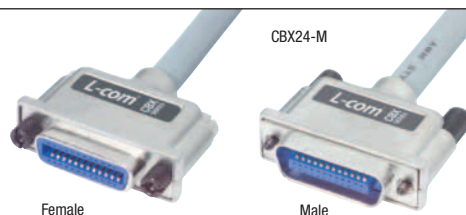




Exclusive



Item #	Description	Connector Orientation	1-9	10-24	25-99	100+
IEEE-488 GPIB Bulkhead Adapters - The Easiest Way to Feed GPIB Cables Through Panels						
IEEE-488 bulkhead adapters originated because of a need by design and test engineers. Because of user concerns for ground loops, we offer another version of the popular CIB24BF with an insulated mounting bracket rather than a metal one. Model CIB24BF-I features a fiberglass mounting bracket.						
CIB24BA	IEEE-488 Bulkhead Adapter, Male/Female	Normal	40.48	37.24	34.00	CALL
CIB24BF	IEEE-488 Bulkhead Adapter, Female/Female	Normal	43.01	39.57	36.13	CALL
CIB24BF-I	IEEE-488 Bulkhead Adapter, Insulated, Female/Female	Normal	44.28	40.74	37.20	CALL

Recommended Panel Openings for IEEE-488 GPIB Bulkhead Adapters

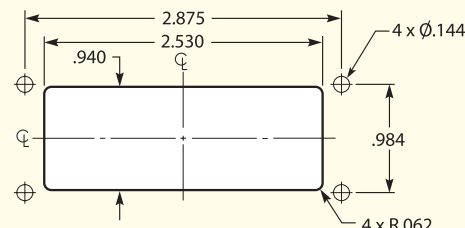

L-com reverse entry adapters solve cable extension problems in the field.

Before:

Typical GPIB cables with normal entry are difficult to extend.

A



After:

A reverse entry adapter solves the problem.

B



IEEE-488 GPIB Reverse Entry Adapters - The Ultimate Solution for Many Difficult Situations

A twist has been added to IEEE-488 networking by the introduction of reverse entry adapters.

CIB24BFR	Reverse Entry IEEE-488 Bulkhead Adapter, Female/Female	Reverse	43.01	39.57	36.13	CALL
CIB24BFR-I	Reverse Entry IEEE-488 Bulkhead Adapter, Insulated, Female/Female	Reverse	44.28	40.74	37.20	CALL

IEEE-488 GPIB Reverse GPIB Adapter - For Easy Extension of Two Standard IEEE-488 Cables

CIB24XFR	180° Reverse IEEE-488 Adapter, Female/Female	Reverse	32.89	30.26	27.63	CALL
----------	--	---------	-------	-------	-------	------

IEEE-488 GPIB Reverse Extender - Changes Cable Direction 180° and Extends Port

CIB24XR	180° Reverse IEEE-488 Extender, Male/Female	Reverse	32.89	30.26	27.63	CALL
---------	---	---------	-------	-------	-------	------

IEEE-488 GPIB Transfer Switches - Compact Metal Construction and Rotary Switching

An economy transfer switch that is fully shielded to afford maximum RFI/EMI protection. Two models are offered, the traditional A-B two position type and an A-B-C-D switch box.

CTS1224GAB	2 Way IEEE-488 Switch Box, A or B to I/O	118.91	111.78	104.64	CALL
CTS2424-4GPN	4 Way IEEE-488 Switch Box, A, B, C or D to I/O	132.83	124.86	116.89	CALL

Item #	Description	List Price
--------	-------------	------------

USB-488 USB to GPIB Converter Cable


The USB-488 is a USB to GPIB Controller Module that converts any PC with a USB interface into a full-function, IEEE 488.2 Bus Controller.

USB-488	USB to GPIB Converter Cable	514.98
---------	-----------------------------	--------



IEEE-488 GPIB Connector Specifications

The IEEE-488 GPIB connector utilizes 24 contacts in a parallel configuration.

PLUG (male)



JACK (female)

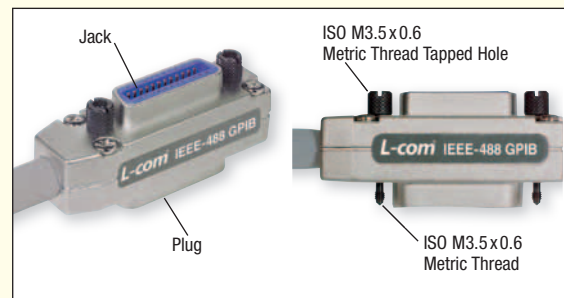

Item #	Description	Connector Orientation	1-9	10-24	25-99	100+
--------	-------------	-----------------------	-----	-------	-------	------

IEEE-488 GPIB Extender - This Handy Device Provides a One Inch Added Clearance

Our GPIB extender is sometimes used to provide a one inch extension allowing right angle cables that extra margin to clear adjoining obstacles.

CIB24X	IEEE-488 Extension Adapter, Male / Female	Normal	30.36	27.93	25.50	CALL
--------	---	--------	-------	-------	-------	------

IEEE-488 GPIB Extender -With Modified Male Guard Eliminates Thick Panel Interference

This unique extender has a modified male connector flange that is intentionally made shorter. This shorter flange prevents problems in applications requiring plugging into a receptacle that is mounted on a thick panel that interferes and will not allow the connector to seat properly.

CIB24XM	Modified IEEE-488 Extender, Male / Female	Normal	32.89	30.26	27.63	CALL
---------	---	--------	-------	-------	-------	------

IEEE-488 GPIB Slim-line Extenders - Provide One Inch Additional Clearance, Fits Narrow PC Ports

These handy, hard to find extenders are normally used to provide a one inch extension allowing right angle cables that extra margin to clear nearby obstacles. Special 0.73" (1.9cm) height allows for use with computers having narrow port openings.

CIB24XC	Slim-line IEEE-488 Extender, Male / Female	Normal	34.16	31.43	28.69	CALL
CIB24XCR	Reverse Entry IEEE-488 Slim-line Extender, Male / Female	Reverse	37.95	34.91	31.88	CALL

IEEE-488 GPIB Ultra Slim-line Extender - No Frills, Fully Shielded, Cast Body

There's a growing need for a slimmer IEEE-488 extender that will clear narrow PC port openings. The CIB24XE slimline extender fills that need with an overall width of 0.62 inches (1.6cm). Connectors are cast aluminum with nickel plating and shielding is maintained with copper foil.

CIB24XE	IEEE-488 Ultra Slim-line Extender-Cast, Male / Female	Normal	24.04	22.12	20.19	CALL
---------	---	--------	-------	-------	-------	------

IEEE-488 GPIB Socket/Connectors - Standard 24 Pin, Mates with all IEEE-488 Interfaces

These GPIB socket/connectors are ideal for production or replacement use and meet the highest quality standards. Contacts are gold plated for the best connectivity, mating hardware is plated with Black oxide. All plastic materials are UL94V-0 flammability rated. Quantity pricing is available upon request.

CIB24S	Female IEEE-488 Connector, Solder Lug Terminals		8.02	7.38	6.74	CALL
CIB24SPC	Female IEEE-488 Connector, Straight PC Terminals		8.02	7.38	6.74	CALL
CIB24SRA	Female IEEE-488 Connector, Right Angle PC Terminals		8.02	7.38	6.74	CALL

IEEE-488 GPIB Connector Shielding Covers - Protect Against Contamination, Physical Damage & RFI

L-com offers two cast aluminum covers that mate to the exposed end of the GPIB cable connector. These covers have many uses such as in production or shipping to protect against dirt or damage to the exposed connector.

CIB24C	IEEE-488 Connector Cover, Mates Female GPIB Connectors		8.02	7.38	6.74	CALL
CIB24CB	IEEE-488 Connector Cover, As Above but Black Anodized Finish		8.02	7.38	6.74	CALL
CIB24CM	IEEE-488 Connector Cover, Mates Male GPIB Connectors		8.02	7.38	6.74	CALL

IEEE-488 GPIB Inline Connector Kit - A Good Way to Retrofit Defective Cables

This unique GPIB inline connector kit allows the user to assemble their own inline IEEE-488 connectors. It includes a solder style male connector, two piece cast aluminum housing, two thumbscrews and a cable clamp. By using this inline connector kit, fast field cable terminations can be realized.

CB24SM	IEEE-488 Inline Male Connector Kit		17.26	15.88	14.50	CALL
--------	------------------------------------	--	-------	-------	-------	------

IEEE-488 GPIB Thumbscrews

These handy GPIB thumbscrews are available in packages of 20 and can be used with L-com's Molded, Deluxe and Premium GPIB cable assemblies.

GPIB-TMBSC-14	IEEE-488 GPIB Thumbscrew, Molded Normal and Reverse Connectors, Pkg/20		13.92	13.36	12.81	CALL
GPIB-TMBSC-15	IEEE-488 GPIB Thumbscrew, Assembled Inline Connectors, Pkg/20		13.92	13.36	12.81	CALL
GPIB-TMBSC-16	IEEE-488 GPIB Thumbscrew, Molded Inline Connectors, Pkg/20		13.92	13.36	12.81	CALL
GPIB-TMBSC-18	IEEE-488 GPIB Thumbscrew, Assembled Normal Connectors, Pkg/20		13.92	13.36	12.81	CALL

Universal Series Sub-Panel with IEEE-488 GPIB Feed-Thru

This is the most efficient way of passing an IEEE-488 cable through a panel to provide access from outside the console. There are two basic feed-thru models available. The BFB model will accept a male terminated cable on each side with normal orientation. The BFRB version reverses cable direction. (See page 132 for further explanation).

USP24BFB	Universal Sub-Panel, IEEE-488 Bulkhead Adapter, Normal Entry		38.95	37.39	35.83	CALL
USP24BFRB	Universal Sub-Panel, IEEE-488 Bulkhead Adapter, Reverse Entry		38.95	37.39	35.83	CALL
UPR35-6B	Universal Master Rack Panel with 6 Openings, Black Color		27.95	26.83	25.71	CALL

Note: Full details on Universal Series found on page 238 & 239

IEEE-488 Multi-Tap Bus Strips - Four or Eight GPIB Receptacles with Optional Mounting Brackets

Our multi-tap bus strips simplify and expedite instrument relocations and changeovers by eliminating bulky cable assembly piggy-backing. Four or eight female connectors wired in parallel with locking standoffs accept GPIB cables in a single plane. Built of heavy chrome plated steel and fully shielded to minimize RFI/EMI disturbances. Supplied with rubber feet that rest on any flat surface and optional mounting brackets.

CIB24MT	Multi-Tap Bus Strip with 4 IEEE-488 Receptacles		44.00	43.56	43.12	CALL
CIB24MT2	Multi-Tap Bus Strip with 8 IEEE-488 Receptacles		98.00	97.02	96.04	CALL

Rack Mounted IEEE-488 GPIB Multi-Tap Bus Strip - Brings Order to Multiple Interconnections

This is a standard 3.5" (8.9cm) x 19" (48.3cm) rack panel containing an eight outlet IEEE-488 distribution panel. This eliminates tangled interconnection cabling so common in GPIB bus systems.

PR35MT2	GPIB Multi-Tap with 8 Receptacles on Rack Panel		200.00	192.00	184.00	CALL
---------	---	--	--------	--------	--------	------



Audio / Video Tutorial

What are Audio / Video products?

Audio/Video products consist of cables, adapters, converters and extenders which utilize various video and audio interfaces to transmit and receive video and/or audio signals.





How are Audio / Video products used?

The primary function of Audio/Video cables is the interconnection between a signal generating device such as a CPU (Central Processing Unit) and a display device such as a monitor.

Where are Audio / Video products used?

Audio/Video products are used in a wide variety of video and/or audio signal transmission applications found in homes, businesses, government, industrial, and military applications.

Common Audio / Video Interfaces

	HDMI (High Definition Multimedia Interface)	DP (DisplayPort)	DVI (Digital Video Interface)	SVGA (Super Video Graphics Array)
				
Standards Group	HDMI Licensing, LLC. (Consortium of consumer electronics manufacturers)	VESA (Video Electronics Standards Association)	DDWG (Digital Display Work Group)	VESA (Video Electronics Standards Association)
Maximum Channels	8	8	6 (Dual Link)	N/A
Maximum Resolution	HDTV 720P and 1080P	1080p	QXGA (2048 x 1536)	800 x 600
Analog / Digital Combination	No	No	DVI-I (24 + 4 Pin) Yes	No
Digital / Audio	Yes	Yes	No	No

DVI Connector Configuration Chart

Shown are a number of DVI connector interfaces that can be identified by the pin configurations. They include DVI-A (analog only), DVI-D (digital only) and DVI-I (analog and digital). In addition, single link and dual link configurations exist for both DVI-D and DVI-I. Shown are the major configurations illustrating the distinguishing features for each type of DVI interface.

ANALOG AND DIGITAL



DVI-I Single Link

Three rows of 6 pins and two contacts above and below the flat blade.



DVI-I Dual Link

Three rows of 8 pins and two contacts above and below the flat blade.


ANALOG ONLY



DVI-A

One row of 5 pins, one row of 3 pins and one row of 4 pins with two contacts above and below the flat blade.

DIGITAL ONLY



DVI-D Single Link

Three rows of 6 pins and no contacts above or below the flat blade.



DVI-D Dual Link

Three rows of 8 pins and no contacts above or below the flat blade.

Predictable Performance from L-com

As a member of both VESA and HDMI Licensing LLC., L-com ensures our audio/video products comply with the latest standards and undergo the required performance testing to provide our customers with best in class products. Our commitment to the highest quality components, manufacturing processes, and testing ensures predictable performance every time.



Competitors non-certified, low cost cable.
Blurred, ghosted image.



L-com certified and tested cable.
Clear, crisp image.



HDMI® Certification

HDMI Licensing, LLC. is the governing body that controls the HDMI standards and sets forth specific performance criteria for HDMI products. In order to manufacture and market HDMI products legally, a manufacturer must be an active member and their products must pass rigorous testing to ensure optimal performance. Since 2009, L-com has been a member of the HDMI Licensing group to guarantee our customers receive only the highest quality HDMI products.



VESA Member

The Video Electronic Standards Associations (VESA) supports and sets industry-wide interface standards for the PC, workstation, and consumer electronics industries. As a member of VESA, L-com builds and certifies its products to the standards VESA governs ensuring our customers receive quality interoperable solutions.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Premium High Speed HDMI® Male to Male Cable Assemblies - 30 Microinch (0.762µm) Gold Plated Contacts

L-com's HDCAMM series HDMI cables offer a cost effective way to support myriad HDMI applications. Each cable is functionally tested to ensure top performance and features rugged over mold connectors, PVC jackets, and double shielding which protects your A/V signals from EMI/RFI. Available in six standard off the shelf lengths, these cables are perfect for all your HDMI applications. As an HDMI adopter, L-com's HDMI cables are certified by HDMI Licensing LLC. Custom cable lengths are available upon request.


HDCAMM-0.5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.5m	18.95	17.43	15.92	CALL
HDCAMM-1	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 1.0m	22.95	21.11	19.28	CALL
HDCAMM-2	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 2.0m	26.95	24.79	22.64	CALL
HDCAMM-3	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 3.0m	30.95	28.47	26.00	CALL
HDCAMM-4	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 4.0m	34.95	32.15	29.36	CALL
HDCAMM-5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 5.0m	38.95	35.83	32.72	CALL

Premium High Speed HDMI® Cable Assemblies with Colored Over Molds - 30µ (0.762µm) Gold Plated Contacts


L-com offers an extensive line of high speed HDMI cables with Ethernet featuring different colored connector over molds. Color coding helps with visual identification of attached services/equipment. These color coded HDMI cables support the latest HDMI features including 3D over HDMI and Ethernet Channel.



BK




BL



GR



OR



YL

Ordering is easy, add the desired color code to the part number. EX: HDCABL-1

HDCA ___-0.5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.5m	18.65	17.53	16.41	CALL
HDCA ___-1	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 1.0m	23.05	21.67	20.28	CALL
HDCA ___-2	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 2.0m	27.45	25.80	24.16	CALL
HDCA ___-3	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 3.0m	31.85	29.94	28.03	CALL
HDCA ___-4	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 4.0m	36.25	34.07	31.90	CALL
HDCA ___-5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 5.0m	40.65	38.21	35.77	CALL

Deluxe High Speed HDMI® Male to Male Cable Assemblies - Gold Plated Contacts, Fully Shielded

L-com's CGHDMM series HDMI cable products offer a very cost effective way to support myriad HDMI applications.

CGHDMM-0.3	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.3m	10.85	9.98	9.11	CALL
CGHDMM-0.5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.5m	11.45	10.53	9.62	CALL
CGHDMM-1	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 1.0m	12.95	11.91	10.88	CALL
CGHDMM-2	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 2.0m	15.95	14.67	13.40	CALL
CGHDMM-3	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 3.0m	18.95	17.43	15.92	CALL
CGHDMM-4	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 4.0m	21.95	20.19	18.44	CALL
CGHDMM-5	High Speed HDMI Cable with Ethernet, HDMI Male/HDMI Male, 5.0m	24.95	22.95	20.96	CALL

High Speed HDMI® Cable with Ethernet - Panel Mount HDMI® Female to Male

L-com's unique PMHDMF-XX series panel mount HDMI cable family features fully molded female HDMI panel mount connectors to address multiple panel and enclosure applications requiring HDMI connectivity. As an HDMI Adopter, L-com's HDMI cables are certified by HDMI Licensing LLC. To perform to the latest HDMI specification. These HDMI cable products support HDMI Ethernet Channel, Audio Return Channel, 3D over HDMI, 4K video, and additional color spaces. Additional features include rugged over mold connectors, PVC jackets, and double shielding which protects your A/V signals from EMI/RFI. Available in six off the shelf lengths, these cables are perfect for all your high speed HDMI applications.

PMHDMF-0.5	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 0.5m	19.90	18.71	17.51	CALL
PMHDMF-1	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 1.0m	24.10	22.65	21.21	CALL
PMHDMF-2	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 2.0m	28.30	26.60	24.90	CALL
PMHDMF-3	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 3.0m	32.50	30.55	28.60	CALL
PMHDMF-4	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 4.0m	36.70	34.50	32.30	CALL
PMHDMF-5	High Speed HDMI Cable with Ethernet, Male/Panel Mount Female, 5.0m	40.90	38.45	35.99	CALL

High Speed HDMI® to Mini HDMI® Cable Assemblies

Our HDMI to Mini HDMI cables are perfect for connecting standard HDMI interfaces to Mini HDMI peripherals such as camcorders, displays and digital cameras. By utilizing these assemblies there is no need to purchase a separate standalone adapter.

MHD-HD-0.5	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 0.5m	17.80	16.73	15.66	CALL
MHD-HD-1	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 1.0m	22.00	20.68	19.36	CALL
MHD-HD-2	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 2.0m	26.20	24.63	23.06	CALL
MHD-HD-3	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 3.0m	30.40	28.58	26.75	CALL
MHD-HD-4	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 4.0m	34.60	32.52	30.45	CALL
MHD-HD-5	High Speed HDMI Cable with Ethernet, HDMI Male/Mini HDMI Male, 5.0m	38.80	36.47	34.14	CALL

Deluxe DVI to HDMI® Cables - DVI-D Single Link


Our DVI to HDMI cable products bridge the gap between older DVI video technologies to the newer High Definition HDMI standard. This series of DVI to HDMI cables allows connection of a digital video signal from a DVI-D interface to a HDMI interface. L-com's Deluxe series of cable assemblies offer high performance at a very affordable price. These cables are fully shielded to reduce the adverse effects of EMI/RFI. Furthermore these cables feature gold flash plated contacts to keep costs down while providing reduced signal loss.

CGHD-DVI-MM-1	Deluxe DVI to HDMI Cable, HDMI Male/DVI-D Male, Single Link, 1.0m	12.95	11.91	10.88	CALL
CGHD-DVI-MM-2	Deluxe DVI to HDMI Cable, HDMI Male/DVI-D Male, Single Link, 2.0m	18.95	17.43	15.92	CALL
CGHD-DVI-MM-3	Deluxe DVI to HDMI Cable, HDMI Male/DVI-D Male, Single Link, 3.0m	24.95	22.95	20.96	CALL
CGHD-DVI-MM-4	Deluxe DVI to HDMI Cable, HDMI Male/DVI-D Male, Single Link, 4.0m	30.95	28.47	26.00	CALL
CGHD-DVI-MM-5	Deluxe DVI to HDMI Cable, HDMI Male/DVI-D Male, Single Link, 5.0m	36.95	33.99	31.04	CALL



Premium HDMI® to DVI-D Cable Assemblies - Fully Molded

High Definition Multimedia Interface (HDMI) is the latest interface for the connection of audio/video equipment. HDMI is fully backwards compatible with DVI video signals. This series of cable allows connection of the digital video signal from a DVI-D interface to a HDMI interface. Available in 5 standard lengths from 1 to 5 meters.

HD-DVI-MM-1	HDMI Cable, HDMI Male/DVI-D Male, Single Link, 1.0m	18.95	17.81	16.68	CALL
HD-DVI-MM-2	HDMI Cable, HDMI Male/DVI-D Male, Single Link, 2.0m	24.95	23.45	21.96	CALL
HD-DVI-MM-3	HDMI Cable, HDMI Male/DVI-D Male, Single Link, 3.0m	30.95	29.09	27.24	CALL
HD-DVI-MM-4	HDMI Cable, HDMI Male/DVI-D Male, Single Link, 4.0m	36.95	34.73	32.52	CALL
HD-DVI-MM-5	HDMI Cable, HDMI Male/DVI-D Male, Single Link, 5.0m	42.95	40.37	37.80	CALL



HDCAGR





See page 138 for
Angled Tip

Item #	Description	1-9	10-24	25-99	100+
L-com High Speed HDMI® 90° Angled Cable Assemblies - PVC Jacket, 4 Exit Options Available					
L-com's HDRA series cables are perfect for tight fit and confined space HDMI applications. These rugged cable assemblies feature a standard HDMI Male connector on one end and an angled HDMI Male connector on the other. These angled HDMI cables are designed for use in enclosures, cabinets or other confined spaces where standard HDMI connectors will not fit.					
HDRA-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 0.5m	18.95	17.81	16.68	CALL
HDRA-1	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 1.0m	22.95	21.57	20.20	CALL
HDRA-2	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 2.0m	26.95	25.33	23.72	CALL
HDRA-3	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 3.0m	30.95	29.09	27.24	CALL
HDRA-5	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 5.0m	38.95	36.61	34.28	CALL
HDRA2-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 0.5m	18.95	17.81	16.68	CALL
HDRA2-1	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 1.0m	22.95	21.57	20.20	CALL
HDRA2-2	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 2.0m	26.95	25.33	23.72	CALL
HDRA2-4	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 4.0m	34.95	32.85	30.76	CALL
HDRA2-5	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 5.0m	38.95	36.61	34.28	CALL
HDRA3-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 0.5m	18.95	17.81	16.68	CALL
HDRA3-1	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 1.0m	22.95	21.57	20.20	CALL
HDRA3-2	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 2.0m	26.95	25.33	23.72	CALL
HDRA3-3	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 3.0m	30.95	29.09	27.24	CALL
HDRA3-4	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 4.0m	34.95	32.85	30.76	CALL
HDRA3-5	High Speed HDMI Cable with Ethernet, Straight Male/Top Exit Male, 5.0m	38.95	36.61	34.28	CALL
HDRA4-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 0.5m	18.95	17.81	16.68	CALL
HDRA4-1	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 1.0m	22.95	21.57	20.20	CALL
HDRA4-2	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 2.0m	26.95	25.33	23.72	CALL
HDRA4-3	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 3.0m	30.95	29.09	27.24	CALL
HDRA4-4	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 4.0m	34.95	32.85	30.76	CALL
HDRA4-5	High Speed HDMI Cable with Ethernet, Straight Male/Bottom Exit Male, 5.0m	38.95	36.61	34.28	CALL

L-com High Speed HDMI® Angled Cable Assemblies - Low Smoke Zero Halogen Jacket

L-com's HDRA series Low Smoke Zero Halogen cables are perfect for tight fit and confined space HDMI applications.

HDRA2-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 0.5m	20.95	19.69	18.44	CALL
HDRA2-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 1.0m	24.95	23.45	21.96	CALL
HDRA2-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 2.0m	28.95	27.21	25.48	CALL
HDRA2-3	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 3.0m	32.95	30.97	29.00	CALL
HDRA2-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 5.0m	40.95	38.49	36.04	CALL
HDRA22-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 0.5m	20.95	19.69	18.44	CALL
HDRA22-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 1.0m	24.95	23.45	21.96	CALL
HDRA22-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 2.0m	28.95	27.21	25.48	CALL
HDRA22-4	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 4.0m	36.95	34.73	32.52	CALL
HDRA22-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 5.0m	40.95	38.49	36.04	CALL
HDRA23-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 0.5m	20.95	19.69	18.44	CALL
HDRA23-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 1.0m	24.95	23.45	21.96	CALL
HDRA23-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 2.0m	28.95	27.21	25.48	CALL
HDRA23-3	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 3.0m	32.95	30.97	29.00	CALL
HDRA23-4	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 4.0m	36.95	34.73	32.52	CALL
HDRA23-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Top Exit Male, 5.0m	40.95	38.49	36.04	CALL
HDRA24-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 0.5m	20.95	19.69	18.44	CALL
HDRA24-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 1.0m	24.95	23.45	21.96	CALL
HDRA24-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 2.0m	28.95	27.21	25.48	CALL
HDRA24-3	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 3.0m	32.95	30.97	29.00	CALL
HDRA24-4	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 4.0m	36.95	34.73	32.52	CALL
HDRA24-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Bottom Exit Male, 5.0m	40.95	38.49	36.04	CALL

L-com High Speed HDMI® 45° Angled Cable Assemblies - PVC Jacket - Left or Right Exit

L-com's HDCA45 series 45 degree angle HDMI cable assemblies are perfect for tight fit and confined space HDMI applications. These rugged 45 degree angle HDMI cable assemblies feature a standard HDMI Male A connector on one end and a 45 degree angle HDMI Male A connector on the other. L-com's 45 degree angle HDMI cables are designed for use in enclosures, cabinets or other confined spaces where standard HDMI connector will not fit. These HDMI cables support HDMI Ethernet Channel, Audio Return Channel, 3D over HDMI, 4K video, and additional color spaces.

HDCA453MM-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 0.5m	21.95	20.19	18.44	CALL
HDCA453MM-1	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 1.0m	25.95	23.87	21.80	CALL
HDCA453MM-2	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 2.0m	29.95	27.55	25.16	CALL
HDCA453MM-3	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 3.0m	33.95	31.23	28.52	CALL
HDCA453MM-4	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 4.0m	37.95	34.91	31.88	CALL
HDCA453MM-5	High Speed HDMI Cable with Ethernet, Straight Male/Left Exit Male, 5.0m	41.95	38.59	35.24	CALL
HDCA454MM-0.5	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 0.5m	21.95	20.19	18.44	CALL
HDCA454MM-1	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 1.0m	25.95	23.87	21.80	CALL
HDCA454MM-2	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 2.0m	29.95	27.55	25.16	CALL
HDCA454MM-3	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 3.0m	33.95	31.23	28.52	CALL
HDCA454MM-4	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 4.0m	39.95	36.75	33.56	CALL
HDCA454MM-5	High Speed HDMI Cable with Ethernet, Straight Male/Right Exit Male, 5.0m	41.95	38.59	35.24	CALL

L-com High Speed HDMI® 45° Angled Cable Assemblies - Low Smoke Zero Halogen Jacket - Left or Right Exit

L-com's HDCA45 series 45 degree angle HDMI cable assemblies with Low Smoke Zero Halogen jackets are perfect for tight fit and confined spaces.

HDCA2453MM-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 0.5m	23.95	22.03	20.12	CALL
HDCA2453MM-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 1.0m	27.95	25.71	23.48	CALL
HDCA2453MM-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 2.0m	31.95	29.39	26.84	CALL
HDCA2453MM-3	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 3.0m	35.95	33.07	30.20	CALL
HDCA2453MM-4	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 4.0m	39.95	36.75	33.56	CALL
HDCA2453MM-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Left Exit Male, 5.0m	43.95	40.43	36.92	CALL
HDCA2454MM-0.5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 0.5m	23.95	22.03	20.12	CALL
HDCA2454MM-1	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 1.0m	27.95	25.71	23.48	CALL
HDCA2454MM-2	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 2.0m	31.95	29.39	26.84	CALL
HDCA2454MM-3	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 3.0m	35.95	33.07	30.20	CALL
HDCA2454MM-4	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 4.0m	39.95	36.75	33.56	CALL
HDCA2454MM-5	High Speed HDMI LSZH Cable with Ethernet, Straight Male/Right Exit Male, 5.0m	43.95	40.43	36.92	CALL

HDMI® Dust Covers - Male and Female

L-com's HDMI dust covers protect unused HDMI connectors on cable assemblies and HDMI receptacles on HDMI equipment including HDMI hubs, HDMI Extenders, HDMI splitters, and more. We offer both male and female HDMI dust covers in packages of 10.

CVRHD-M	HDMI Dust Cover, Male, Pkg/10	6.15	5.90	5.66	CALL
CVRHD-F	HDMI Dust Cover, Female, Pkg/10	6.15	5.90	5.66	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

High Speed Metal Armored HDMI® Cables with Ethernet

These unique cables feature crush resistant jackets over our premium HDMI cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 1500 PSI (Pounds per Square Inch). Additional features include rugged over mold connectors including a space saving right angle end, 30 microinch (0.762µm) gold plated contacts and double shielding to protect A/V signals from EMI/RFI.

HDCAMT-0.5	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.5m	29.35	28.18	27.00	CALL
HDCAMT-1	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 1.0m	33.55	32.21	30.87	CALL
HDCAMT-2	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 2.0m	41.95	40.27	38.59	CALL
HDCAMT-3	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 3.0m	50.35	48.34	46.32	CALL
HDCAMT-4	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 4.0m	58.75	56.40	54.05	CALL
HDCAMT-5	High Speed Metal Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 5.0m	67.15	64.46	61.78	CALL
HDCARAMT-0.5	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 0.5m	29.95	28.75	27.55	CALL
HDCARAMT-1	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 1.0m	33.95	32.59	31.23	CALL
HDCARAMT-2	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 2.0m	41.95	40.27	38.59	CALL
HDCARAMT-3	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 3.0m	49.95	47.95	45.95	CALL
HDCARAMT-4	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 4.0m	57.95	55.63	53.31	CALL
HDCARAMT-5	High Speed Metal Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 5.0m	65.95	63.31	60.67	CALL

High Speed Plastic Armored HDMI® Cables with Ethernet

These unique cables feature a hardened PVC crush resistant jacket over our premium HDMI cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 800 PSI (Pounds per Square Inch). Additional features include rugged over mold connectors including a space saving right angle end, 30 microinch (0.762µm) gold plated contacts and double shielding which protects your A/V signals from EMI/RFI.

HDCAPL-0.5	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 0.5m	25.15	24.14	23.14	CALL
HDCAPL-1	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 1.0m	28.30	27.17	26.04	CALL
HDCAPL-2	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 2.0m	34.60	33.22	31.83	CALL
HDCAPL-3	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 3.0m	40.90	39.26	37.63	CALL
HDCAPL-4	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 4.0m	47.20	45.31	43.42	CALL
HDCAPL-5	High Speed Plastic Armored HDMI Cable with Ethernet, HDMI Male/HDMI Male, 5.0m	53.50	51.36	49.22	CALL
HDCARAPL-0.5	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 0.5m	27.15	26.06	24.98	CALL
HDCARAPL-1	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 1.0m	30.30	29.09	27.88	CALL
HDCARAPL-2	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 2.0m	36.60	35.14	33.67	CALL
HDCARAPL-3	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 3.0m	42.90	41.18	39.47	CALL
HDCARAPL-4	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 4.0m	49.20	47.23	45.26	CALL
HDCARAPL-5	High Speed Plastic Armored HDMI Cable with Ethernet, 90° HDMI Male/HDMI Male, 5.0m	55.50	53.28	51.06	CALL




HDMI armored cables explained

Same premium quality HDMI components used in L-com's HDCA cable assemblies

High performance HDMI with added benefit of extra durability. Great for applications where standard cables may be damaged due to excessive force.

Metal Coupling Nut


Heavy duty construction ensures that the crush resistant jacket remains in place

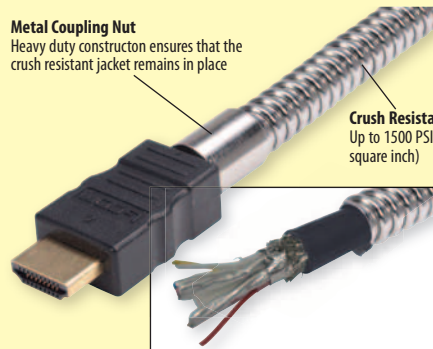

Crush Resistant Metal Jacket
Up to 1500 PSI (pounds per square inch)

Plastic Coupling Nut

Heavy duty plastic construction ensures that the crush resistant jacket remains in place

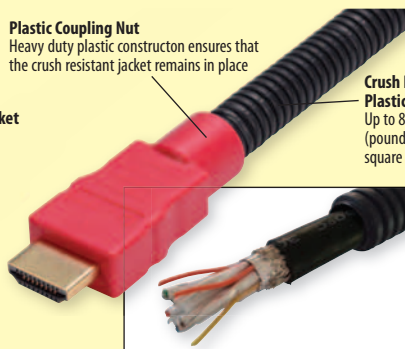

Crush Resistant Plastic Jacket
Up to 800 PSI (pounds per square inch)

Uses our Premium bulk cable including PVC cable jacket and braid/foil shield under the armor.

L-com High Speed HDMI® Repeater Cable


L-com's new RHDCA series HDMI repeater cables extend the length of HDMI signals up to 20 meters (RHDCA-20) without the use of an external converter/booster. These unique HDMI repeater cables make A/V installations easy and aesthetically pleasing as the repeater module is built right into the connector over mold. These cables support High Speed HDMI which is designed to handle video resolutions of 1080p and beyond, including advanced display technologies like 3D and 4K.

RHDCA-10	High Speed HDMI Repeater Cable, Male/Male, 10.0m	104.95	102.85	100.75	CALL
RHDCA-12	High Speed HDMI Repeater Cable, Male/Male, 12.0m	115.50	113.19	110.88	CALL
RHDCA-15	High Speed HDMI Repeater Cable, Male/Male, 15.0m	126.00	123.48	120.96	CALL
RHDCA-20	High Speed HDMI Repeater Cable, Male/Male, 20.0m	141.75	138.91	136.08	CALL



How to use L-com RHDCA Series High Speed HDMI® Repeater Cables

Unlike standard HDMI cable assemblies, L-Com RHDCA cable assemblies require a specific connector designation. The connector marked "DISPLAY END" must be plugged into the intended display (TV, Monitor, etc). The connector which only includes the HDMI® logo must be plugged into the content source (Blu-Ray player, laptop, etc).

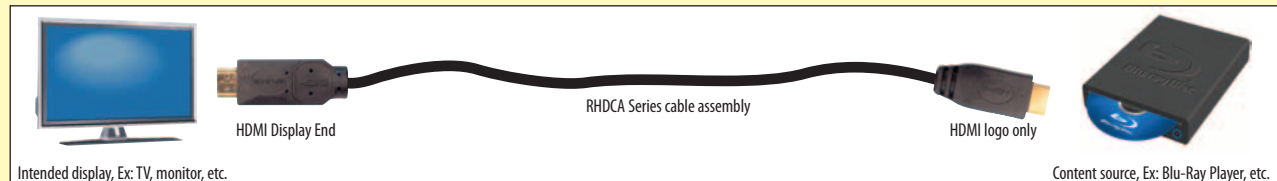



CTL DVI-HD-MM



CG DVI-HD15-MM



HD DVI-MM



CGHD DVI-MM

Item #	Description	1-9	10-24	25-99	100+
Premium DVI-A to HD15 Cable Assemblies with Ferrites					
CTL DVI-HD-MM-3	DVI Cable, DVI-A Male / HD15 Male, 3.0ft (0.9m)	19.95	18.35	16.76	CALL
CTL DVI-HD-MM-5	DVI Cable, DVI-A Male / HD15 Male, 5.0ft (1.5m)	22.95	21.11	19.28	CALL
CTL DVI-HD-MM-10	DVI Cable, DVI-A Male / HD15 Male, 10.0ft (3.0m)	27.95	25.71	23.48	CALL
CTL DVI-HD-MM-15	DVI Cable, DVI-A Male / HD15 Male, 15.0ft (4.6m)	32.95	30.31	27.68	CALL

Deluxe DVI-A to HD15 Cable Assemblies with Ferrites

CG DVI-HD15-MM-3	DVI Cable, DVI-A Male / HD15 Male, 3.0ft (0.9m)	12.95	11.91	10.88	CALL
CG DVI-HD15-MM-5	DVI Cable, DVI-A Male / HD15 Male, 5.0ft (1.5m)	14.95	13.75	12.56	CALL
CG DVI-HD15-MM-10	DVI Cable, DVI-A Male / HD15 Male, 10.0ft (3.0m)	19.95	18.35	16.76	CALL
CG DVI-HD15-MM-15	DVI Cable, DVI-A Male / HD15 Male, 15.0ft (4.6m)	24.95	22.95	20.96	CALL

Premium HDMI® to DVI-D Cable Assemblies - Fully Molded

High Definition Multimedia Interface (HDMI) is the latest interface for the connection of audio/video equipment. HDMI is fully backwards compatible with DVI video signals. This series of cable allows connection of the digital video signal from a DVI-D interface to a HDMI interface. Available in 5 standard lengths from 1 to 5 meters.

HD DVI-MM-1	HDMI Cable, HDMI Male / DVI-D Male, Single Link, 1.0m	18.95	17.81	16.68	CALL
HD DVI-MM-2	HDMI Cable, HDMI Male / DVI-D Male, Single Link, 2.0m	24.95	23.45	21.96	CALL
HD DVI-MM-3	HDMI Cable, HDMI Male / DVI-D Male, Single Link, 3.0m	30.95	29.09	27.24	CALL
HD DVI-MM-4	HDMI Cable, HDMI Male / DVI-D Male, Single Link, 4.0m	36.95	34.73	32.52	CALL
HD DVI-MM-5	HDMI Cable, HDMI Male / DVI-D Male, Single Link, 5.0m	42.95	40.37	37.80	CALL

Deluxe DVI to HDMI® Cables - DVI-D Single Link

Our DVI to HDMI cable products bridge the gap between older DVI video technologies to the newer High Definition HDMI standard. This series of DVI to HDMI cables allows connection of a digital video signal from a DVI-D interface to a HDMI interface. L-com's Deluxe series of cable assemblies offer high performance at a very affordable price. These cables are fully shielded to reduce the adverse effects of EMI/RFI. Furthermore these cables feature gold flash plated contacts to keep costs down while providing reduced signal loss.

CGHD DVI-MM-1	Deluxe DVI to HDMI Cable, HDMI Male / DVI-D Male, Single Link, 1.0m	12.95	11.91	10.88	CALL
CGHD DVI-MM-2	Deluxe DVI to HDMI Cable, HDMI Male / DVI-D Male, Single Link, 2.0m	18.95	17.43	15.92	CALL
CGHD DVI-MM-3	Deluxe DVI to HDMI Cable, HDMI Male / DVI-D Male, Single Link, 3.0m	24.95	22.95	20.96	CALL
CGHD DVI-MM-4	Deluxe DVI to HDMI Cable, HDMI Male / DVI-D Male, Single Link, 4.0m	30.95	28.47	26.00	CALL
CGHD DVI-MM-5	Deluxe DVI to HDMI Cable, HDMI Male / DVI-D Male, Single Link, 5.0m	36.95	33.99	31.04	CALL




Defining 45° angled cable assemblies

L-com has added two new options to our existing offering of angled HDMI cable assemblies. The photos below detail the connector position relative to the cable entry direction.


HDMI Style Connectors

For HDMI style connectors, the position of the connector's long side is key in determining the correct angle for your application.

Right Exit
HDRA454



Left Exit
HDRA453




Defining 90° angled cable assemblies

Angled connector hoods help connect cables in tight places. L-com now offers four options each for HDMI and DVI style connectors. The photos below detail the connector position relative to the cable entry direction.

HDMI Style Connectors

For HDMI style connectors, the position of the connector's long side is key in determining the correct angle for your application.

Right Exit
HDRA



Left Exit
HDRA2



Top Exit
HDRA3




Bottom Exit
HDRA4




DVI Style Connectors

For DVI style connectors, both Single Link and Dual Link types, the flat blade of the connector is key in determining the correct angle for your application.


Bottom Exit
DVID_-RA



Top Exit
DVID_-RA2



Left Exit
DVID_-RA3



Right Exit
DVID_-RA4



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DVI Products

DVI (Digital Video Interface) is a widely used interface specifically designed for the transmission of digital video signals. L-com's DVI cable assemblies and adapters are offered in various interface combinations and gender configurations to address a broad range of connection applications.

Premium DVI-D Single Link Cable Assemblies with Ferrites

CTLDVIMM-3	DVI Cable, DVI-D Single Link, Male/Male, 3.0ft (0.9m)	20.95	19.27	17.60	CALL
CTLDVIMM-5	DVI Cable, DVI-D Single Link, Male/Male, 5.0ft (1.5m)	22.95	21.11	19.28	CALL
CTLDVIMM-10	DVI Cable, DVI-D Single Link, Male/Male, 10.0ft (3.0m)	27.95	25.71	23.48	CALL
CTLDVIMM-15	DVI Cable, DVI-D Single Link, Male/Male, 15.0ft (4.6m)	32.95	30.31	27.68	CALL

Deluxe DVI-D Single Link Cable Assemblies - Dual Ferrite Beads, Gold Plated Contacts

L-com's Deluxe DVI-D DVI cable assemblies offer high performance at a very affordable price.

CGDVIMM-1	DVI Cable, DVI-D Single Link, Male/Male, 1.0ft (0.3m)	10.95	10.07	9.20	CALL
CGDVIMM-3	DVI Cable, DVI-D Single Link, Male/Male, 3.0ft (0.9m)	12.95	11.91	10.88	CALL
CGDVIMM-5	DVI Cable, DVI-D Single Link, Male/Male, 5.0ft (1.5m)	14.95	13.75	12.56	CALL
CGDVIMM-10	DVI Cable, DVI-D Single Link, Male/Male, 10.0ft (3.0m)	19.95	18.35	16.76	CALL
CGDVIMM-15	DVI Cable, DVI-D Single Link, Male/Male, 15.0ft (4.6m)	24.95	22.95	20.96	CALL

Premium DVI-D Dual Link Cable Assemblies with Ferrites - 30 Microinches (0.762µm) Gold Plated Contacts

CTLDVI-DL-MM-3	DVI Cable, DVI-D Dual Link, Male/Male, 3.0ft (0.9m)	28.95	26.63	24.32	CALL
CTLDVI-DL-MM-5	DVI Cable, DVI-D Dual Link, Male/Male, 5.0ft (1.5m)	30.95	28.47	26.00	CALL
CTLDVI-DL-MM-10	DVI Cable, DVI-D Dual Link, Male/Male, 10.0ft (3.0m)	35.95	33.07	30.20	CALL
CTLDVI-DL-MM-15	DVI Cable, DVI-D Dual Link, Male/Male, 15.0ft (4.6m)	40.95	37.67	34.40	CALL

Deluxe DVI-D Dual Link Cable Assemblies - Dual Ferrite Beads, Gold Plated Contacts

CGDVI-DL-MM-1	DVI Cable, DVI-D Dual Link, Male/Male, 1.0ft (0.3m)	15.95	14.67	13.40	CALL
CGDVI-DL-MM-3	DVI Cable, DVI-D Dual Link, Male/Male, 3.0ft (0.9m)	17.95	16.51	15.08	CALL
CGDVI-DL-MM-5	DVI Cable, DVI-D Dual Link, Male/Male, 5.0ft (1.5m)	19.95	18.35	16.76	CALL
CGDVI-DL-MM-10	DVI Cable, DVI-D Dual Link, Male/Male, 10.0ft (3.0m)	24.95	22.95	20.96	CALL
CGDVI-DL-MM-15	DVI Cable, DVI-D Dual Link, Male/Male, 15.0ft (4.6m)	29.95	27.55	25.16	CALL

Premium DVI-I Single Link Cable Assemblies with Ferrites

CTLDVI-ISL-MM-3	DVI Cable, DVI-I Single Link, Male/Male, 3.0ft (0.9m)	31.95	29.39	26.84	CALL
CTLDVI-ISL-MM-5	DVI Cable, DVI-I Single Link, Male/Male, 5.0ft (1.5m)	34.95	32.15	29.36	CALL
CTLDVI-ISL-MM-10	DVI Cable, DVI-I Single Link, Male/Male, 10.0ft (3.0m)	39.95	36.75	33.56	CALL
CTLDVI-ISL-MM-15	DVI Cable, DVI-I Single Link, Male/Male, 15.0ft (4.6m)	44.95	41.35	37.76	CALL

Deluxe DVI-I Single Link Cable Assemblies with Ferrites

CGDVI-ISL-MM-3	DVI Cable, DVI-I Single Link, Male/Male, 3.0ft (0.9m)	13.95	12.83	11.72	CALL
CGDVI-ISL-MM-5	DVI Cable, DVI-I Single Link, Male/Male, 5.0ft (1.5m)	15.95	14.67	13.40	CALL
CGDVI-ISL-MM-10	DVI Cable, DVI-I Single Link, Male/Male, 10.0ft (3.0m)	20.95	19.27	17.60	CALL
CGDVI-ISL-MM-15	DVI Cable, DVI-I Single Link, Male/Male, 15.0ft (4.6m)	25.95	23.87	21.80	CALL

Premium DVI-I Dual Link Cable Assemblies with Ferrites

CTLDVI-I-MM-3	DVI Cable, DVI-I Dual Link, Male/Male, 3.0ft (0.9m)	33.95	31.23	28.52	CALL
CTLDVI-I-MM-5	DVI Cable, DVI-I Dual Link, Male/Male, 5.0ft (1.5m)	36.95	33.99	31.04	CALL
CTLDVI-I-MM-10	DVI Cable, DVI-I Dual Link, Male/Male, 10.0ft (3.0m)	41.95	38.59	35.24	CALL
CTLDVI-I-MM-15	DVI Cable, DVI-I Dual Link, Male/Male, 15.0ft (4.6m)	46.95	43.19	39.44	CALL

Deluxe DVI-I Dual Link Cable Assemblies with Ferrites

CGDVI-I-MM-3	DVI Cable, DVI-I Dual Link, Male/Male, 3.0ft (0.9m)	18.45	16.97	15.50	CALL
CGDVI-I-MM-5	DVI Cable, DVI-I Dual Link, Male/Male, 5.0ft (1.5m)	20.45	18.81	17.18	CALL
CGDVI-I-MM-10	DVI Cable, DVI-I Dual Link, Male/Male, 10.0ft (3.0m)	25.45	23.41	21.38	CALL
CGDVI-I-MM-15	DVI Cable, DVI-I Dual Link, Male/Male, 15.0ft (4.6m)	30.45	28.01	25.58	CALL

Premium DVI-D Single Link LSZH Cable Assemblies with Ferrites

CTLDVIMMLZ-3	DVI LSZH Cable, DVI-D Single Link, Male/Male, 3.0ft (0.9m)	15.95	14.99	14.04	CALL
CTLDVIMMLZ-5	DVI LSZH Cable, DVI-D Single Link, Male/Male, 5.0ft (1.5m)	17.95	16.87	15.80	CALL
CTLDVIMMLZ-10	DVI LSZH Cable, DVI-D Single Link, Male/Male, 10.0ft (3.0m)	22.95	21.57	20.20	CALL
CTLDVIMMLZ-15	DVI LSZH Cable, DVI-D Single Link, Male/Male, 15.0ft (4.6m)	27.95	26.27	24.60	CALL

Premium DVI-D Dual Link LSZH Cable Assemblies with Ferrites

CTLDVIDMMLZ-3	DVI LSZH Cable, DVI-D Dual Link, Male/Male, 3.0ft (0.9m)	22.95	21.57	20.20	CALL
CTLDVIDMMLZ-5	DVI LSZH Cable, DVI-D Dual Link, Male/Male, 5.0ft (1.5m)	26.95	25.33	23.72	CALL
CTLDVIDMMLZ-10	DVI LSZH Cable, DVI-D Dual Link, Male/Male, 10.0ft (3.0m)	36.95	34.73	32.52	CALL
CTLDVIDMMLZ-15	DVI LSZH Cable, DVI-D Dual Link, Male/Male, 15.0ft (4.6m)	46.95	44.13	41.32	CALL

DVI Dust Covers - Male and Female

L-com's DVI dust covers protect unused DVI connectors on cable assemblies and DVI receptacles on DVI equipment including DVI KVM switches, DVI Extenders, DVI splitters, and more! We offer both male and female DVI dust covers in packages of 10.

CVRDVI-M	DVI Dust Cover, Male, Pkg/10	6.15	5.90	5.66	CALL
CVRDVI-F	DVI Dust Cover, Female, Pkg/10	6.15	5.90	5.66	CALL



CTLDVIMM



CGDVIMM



CTLDVI-DL-MM



CGDVI-DL-MM



CGDVI-ISL-MM



CTLDVIMMLZ



CTLDVIDMMLZ



CVRDVI-M

CVRDVI-F

**HDMI and DVI - Premium vs. Deluxe**

L-com offers two levels of product to give our customers choices based on their cable assembly needs. The Premium offering is superior to industry standard cables. The Deluxe offering is comparable or slightly superior to industry standard cables depending on the quality and workmanship of the factory assembling them.

HDMI Deluxe

- Gold flash contact plating
- Nickel plated connector shell

HDMI Premium





- 30 microinch gold contact plating
- Gold flash plated connector shell

DVI Deluxe

- Gold flash contact plating
- 360° copper tape wrap under mold

DVI Premium

- 30 microinch gold contact plating
- Custom steel enclosure under mold

See [page 138](#) for angled tipDVIDS-RA1
DVIDS-RA2
DVIDS-RA3
DVIDS-RA4
DVIDS-RA5
DVIDS-RA6
DVIDS-RA7
DVIDS-RA8

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DVI-D Angled Cable Assemblies

L-com's angled DVI cables are perfect for tight fit and confined space DVI applications. These rugged cable assemblies feature a standard, straight DVI connector on one end and an angled DVI connector on the other. Four angled options available for both Single Link and Dual Link. These right angle DVI cables are designed for use in enclosures, cabinets or other confined spaces where standard DVI connectors will not fit.

DVI-D Single Link Right Angle Cable Assemblies

DVIDS-RA-1	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 1.0ft (0.3m)	18.75	17.63	16.50	CALL
DVIDS-RA-3	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 3.0ft (0.9m)	20.50	19.27	18.04	CALL
DVIDS-RA-5	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
DVIDS-RA-10	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 10.0ft (3.0m)	25.75	24.20	22.66	CALL
DVIDS-RA-15	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 15.0ft (4.6m)	30.00	28.20	26.40	CALL
DVIDS-RA2-1	DVI-D Cable Single Link, Straight Male/Top Exit Male, 1.0ft (0.3m)	18.75	17.63	16.50	CALL
DVIDS-RA2-3	DVI-D Cable Single Link, Straight Male/Top Exit Male, 3.0ft (0.9m)	20.50	19.27	18.04	CALL
DVIDS-RA2-5	DVI-D Cable Single Link, Straight Male/Top Exit Male, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
DVIDS-RA2-10	DVI-D Cable Single Link, Straight Male/Top Exit Male, 10.0ft (3.0m)	25.75	24.20	22.66	CALL
DVIDS-RA2-15	DVI-D Cable Single Link, Straight Male/Top Exit Male, 15.0ft (4.6m)	30.00	28.20	26.40	CALL
DVIDS-RA3-1	DVI-D Cable Single Link, Straight Male/Left Exit Male, 1.0ft (0.3m)	18.75	17.63	16.50	CALL
DVIDS-RA3-3	DVI-D Cable Single Link, Straight Male/Left Exit Male, 3.0ft (0.9m)	20.50	19.27	18.04	CALL
DVIDS-RA3-5	DVI-D Cable Single Link, Straight Male/Left Exit Male, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
DVIDS-RA3-10	DVI-D Cable Single Link, Straight Male/Left Exit Male, 10.0ft (3.0m)	25.75	24.20	22.66	CALL
DVIDS-RA3-15	DVI-D Cable Single Link, Straight Male/Left Exit Male, 15.0ft (4.6m)	30.00	28.20	26.40	CALL
DVIDS-RA4-1	DVI-D Cable Single Link, Straight Male/Right Exit Male, 1.0ft (0.3m)	18.75	17.63	16.50	CALL
DVIDS-RA4-3	DVI-D Cable Single Link, Straight Male/Right Exit Male, 3.0ft (0.9m)	20.50	19.27	18.04	CALL
DVIDS-RA4-5	DVI-D Cable Single Link, Straight Male/Right Exit Male, 5.0ft (1.5m)	22.00	20.68	19.36	CALL
DVIDS-RA4-10	DVI-D Cable Single Link, Straight Male/Right Exit Male, 10.0ft (3.0m)	25.75	24.20	22.66	CALL
DVIDS-RA4-15	DVI-D Cable Single Link, Straight Male/Right Exit Male, 15.0ft (4.6m)	30.00	28.20	26.40	CALL

DVI-D Dual Link Right Angle Cable Assemblies

DVIDD-RA-1	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 1.0ft (0.3m)	23.25	21.86	20.46	CALL
DVIDD-RA-3	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 3.0ft (0.9m)	26.00	24.44	22.88	CALL
DVIDD-RA-5	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 5.0ft (1.5m)	28.75	27.02	25.30	CALL
DVIDD-RA-10	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 10.0ft (3.0m)	35.50	33.37	31.24	CALL
DVIDD-RA-15	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 15.0ft (4.6m)	42.75	40.18	37.62	CALL
DVIDD-RA2-1	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 1.0ft (0.3m)	23.25	21.86	20.46	CALL
DVIDD-RA2-3	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 3.0ft (0.9m)	26.00	24.44	22.88	CALL
DVIDD-RA2-5	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 5.0ft (1.5m)	28.75	27.02	25.30	CALL
DVIDD-RA2-10	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 10.0ft (3.0m)	35.50	33.37	31.24	CALL
DVIDD-RA2-15	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 15.0ft (4.6m)	42.75	40.18	37.62	CALL
DVIDD-RA3-1	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 1.0ft (0.3m)	23.25	21.86	20.46	CALL
DVIDD-RA3-3	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 3.0ft (0.9m)	26.00	24.44	22.88	CALL
DVIDD-RA3-5	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 5.0ft (1.5m)	28.75	27.02	25.30	CALL
DVIDD-RA3-10	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 10.0ft (3.0m)	35.50	33.37	31.24	CALL
DVIDD-RA3-15	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 15.0ft (4.6m)	42.75	40.18	37.62	CALL
DVIDD-RA4-1	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 1.0ft (0.3m)	23.25	21.86	20.46	CALL
DVIDD-RA4-3	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 3.0ft (0.9m)	26.00	24.44	22.88	CALL
DVIDD-RA4-5	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 5.0ft (1.5m)	28.75	27.02	25.30	CALL
DVIDD-RA4-10	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 10.0ft (3.0m)	35.50	33.37	31.24	CALL
DVIDD-RA4-15	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 15.0ft (4.6m)	42.75	40.18	37.62	CALL

DVI-D Single Link Right Angle Cable Assemblies with Low Smoke Zero Halogen Jackets

DVIDS-RAZ-1	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 1.0ft (0.3m)	21.50	20.21	18.92	CALL
DVIDS-RAZ-3	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 3.0ft (0.9m)	23.50	22.09	20.68	CALL
DVIDS-RAZ-5	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 5.0ft (1.5m)	25.50	23.97	22.44	CALL
DVIDS-RAZ-10	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 10.0ft (3.0m)	30.50	28.67	26.84	CALL
DVIDS-RAZ-15	DVI-D Cable Single Link, Straight Male/Bottom Exit Male, 15.0ft (4.6m)	35.50	33.37	31.24	CALL
DVIDS-RAZ2-1	DVI-D Cable Single Link, Straight Male/Top Exit Male, 1.0ft (0.3m)	21.50	20.21	18.92	CALL
DVIDS-RAZ2-3	DVI-D Cable Single Link, Straight Male/Top Exit Male, 3.0ft (0.9m)	23.50	22.09	20.68	CALL
DVIDS-RAZ2-5	DVI-D Cable Single Link, Straight Male/Top Exit Male, 5.0ft (1.5m)	25.50	23.97	22.44	CALL
DVIDS-RAZ2-10	DVI-D Cable Single Link, Straight Male/Top Exit Male, 10.0ft (3.0m)	30.50	28.67	26.84	CALL
DVIDS-RAZ2-15	DVI-D Cable Single Link, Straight Male/Top Exit Male, 15.0ft (4.6m)	35.50	33.37	31.24	CALL
DVIDS-RAZ3-1	DVI-D Cable Single Link, Straight Male/Left Exit Male, 1.0ft (0.3m)	21.50	20.21	18.92	CALL
DVIDS-RAZ3-3	DVI-D Cable Single Link, Straight Male/Left Exit Male, 3.0ft (0.9m)	23.50	22.09	20.68	CALL
DVIDS-RAZ3-5	DVI-D Cable Single Link, Straight Male/Left Exit Male, 5.0ft (1.5m)	25.50	23.97	22.44	CALL
DVIDS-RAZ3-10	DVI-D Cable Single Link, Straight Male/Left Exit Male, 10.0ft (3.0m)	30.50	28.67	26.84	CALL
DVIDS-RAZ3-15	DVI-D Cable Single Link, Straight Male/Left Exit Male, 15.0ft (4.6m)	35.50	33.37	31.24	CALL
DVIDS-RAZ4-1	DVI-D Cable Single Link, Straight Male/Right Exit Male, 1.0ft (0.3m)	21.50	20.21	18.92	CALL
DVIDS-RAZ4-3	DVI-D Cable Single Link, Straight Male/Right Exit Male, 3.0ft (0.9m)	23.50	22.09	20.68	CALL
DVIDS-RAZ4-5	DVI-D Cable Single Link, Straight Male/Right Exit Male, 5.0ft (1.5m)	25.50	23.97	22.44	CALL
DVIDS-RAZ4-10	DVI-D Cable Single Link, Straight Male/Right Exit Male, 10.0ft (3.0m)	30.50	28.67	26.84	CALL
DVIDS-RAZ4-15	DVI-D Cable Single Link, Straight Male/Right Exit Male, 15.0ft (4.6m)	35.50	33.37	31.24	CALL

DVI-D Dual Link Right Angle Cable Assemblies with Low Smoke Zero Halogen Jackets

DVIDD-RAZ-1	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 1.0ft (0.3m)	26.50	24.91	23.32	CALL
DVIDD-RAZ-3	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 3.0ft (0.9m)	30.00	28.20	26.40	CALL
DVIDD-RAZ-5	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 5.0ft (1.5m)	33.50	31.49	29.48	CALL
DVIDD-RAZ-10	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 10.0ft (3.0m)	42.25	39.71	37.18	CALL
DVIDD-RAZ-15	DVI-D Cable Dual Link, Straight Male/Bottom Exit Male, 15.0ft (4.6m)	51.00	47.94	44.88	CALL
DVIDD-RAZ2-1	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 1.0ft (0.3m)	26.50	24.91	23.32	CALL
DVIDD-RAZ2-3	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 3.0ft (0.9m)	30.00	28.20	26.40	CALL
DVIDD-RAZ2-5	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 5.0ft (1.5m)	33.50	31.49	29.48	CALL
DVIDD-RAZ2-10	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 10.0ft (3.0m)	42.25	39.71	37.18	CALL
DVIDD-RAZ2-15	DVI-D Cable Dual Link, Straight Male/Top Exit Male, 15.0ft (4.6m)	51.00	47.94	44.88	CALL
DVIDD-RAZ3-1	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 1.0ft (0.3m)	26.50	24.91	23.32	CALL
DVIDD-RAZ3-3	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 3.0ft (0.9m)	30.00	28.20	26.40	CALL
DVIDD-RAZ3-5	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 5.0ft (1.5m)	33.50	31.49	29.48	CALL
DVIDD-RAZ3-10	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 10.0ft (3.0m)	42.25	39.71	37.18	CALL
DVIDD-RAZ3-15	DVI-D Cable Dual Link, Straight Male/Left Exit Male, 15.0ft (4.6m)	51.00	47.94	44.88	CALL
DVIDD-RAZ4-1	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 1.0ft (0.3m)	26.50	24.91	23.32	CALL
DVIDD-RAZ4-3	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 3.0ft (0.9m)	30.00	28.20	26.40	CALL
DVIDD-RAZ4-5	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 5.0ft (1.5m)	33.50	31.49	29.48	CALL
DVIDD-RAZ4-10	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 10.0ft (3.0m)	42.25	39.71	37.18	CALL
DVIDD-RAZ4-15	DVI-D Cable Dual Link, Straight Male/Right Exit Male, 15.0ft (4.6m)	51.00	47.94	44.88	CALL

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Metal Armored DVI-D Cable Assemblies

These unique cables feature a stainless steel crush resistant jacket over our premium DVI cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 1500 PSI (Pounds per Square Inch). Additional features include rugged over mold connectors, 30 microinch (0.762µm) gold plated contacts and double shielding which protects your A/V signals from EMI/RFI.

Metal Armored DVI-D Dual Link Cable Assemblies

CTLDVIMT-3	Metal Armored DVI-D Cable Dual Link, Male/Male, 3.0ft (0.9m)	33.95	31.23	28.52	CALL
CTLDVIMT-5	Metal Armored DVI-D Cable Dual Link, Male/Male, 5.0ft (1.5m)	39.95	36.75	33.56	CALL
CTLDVIMT-10	Metal Armored DVI-D Cable Dual Link, Male/Male, 10.0ft (30.m)	54.95	50.55	46.16	CALL
CTLDVIMT-15	Metal Armored DVI-D Cable Dual Link, Male/Male, 15.0ft (4.6m)	69.95	64.35	58.76	CALL

Metal Armored DVI-D Dual Link Cable Assemblies - Right Angle, Bottom

CTLDVIRAMT-3	Metal Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 3.0ft (0.9m)	35.95	33.07	30.20	CALL
CTLDVIRAMT-5	Metal Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 5.0ft (1.5m)	41.95	38.59	35.24	CALL
CTLDVIRAMT-10	Metal Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 10.0ft (30.m)	56.95	52.39	47.84	CALL
CTLDVIRAMT-15	Metal Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 15.0ft (4.6m)	71.95	66.19	60.44	CALL

Metal Armored DVI-D Single Link Cable Assemblies

CTLDVISMT-3	Metal Armored DVI-D Cable Single Link, Male/Male, 3.0ft (0.9m)	29.95	27.55	25.16	CALL
CTLDVISMT-5	Metal Armored DVI-D Cable Single Link, Male/Male, 5.0ft (1.5m)	33.95	31.23	28.52	CALL
CTLDVISMT-10	Metal Armored DVI-D Cable Single Link, Male/Male, 10.0ft (30.m)	43.95	40.43	36.92	CALL
CTLDVISMT-15	Metal Armored DVI-D Cable Single Link, Male/Male, 15.0ft (4.6m)	53.95	49.63	45.32	CALL

Metal Armored DVI-D Single Link Cable Assemblies - Right Angle, Bottom

CTLDVISRAMT-3	Metal Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 3.0ft (0.9m)	31.95	29.39	26.84	CALL
CTLDVISRAMT-5	Metal Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 5.0ft (1.5m)	35.95	33.07	30.20	CALL
CTLDVISRAMT-10	Metal Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 10.0ft (30.m)	45.95	42.27	38.60	CALL
CTLDVISRAMT-15	Metal Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 15.0ft (4.6m)	55.95	51.47	47.00	CALL

Plastic Armored DVI-D Cable Assemblies

These unique cables feature a hardened PVC crush resistant jacket over our premium DVI cable to provide protection in applications where standard cables would be damaged due to excessive force. Crush resistance is 800 PSI (Pounds per Square Inch) minimum. Additional features include rugged over mold connectors, 30 microinch (0.762µm) gold plated contacts and double shielding which protects your A/V signals from EMI/RFI.

Plastic Armored DVI-D Dual Link Cable Assemblies

CTLDVIPL-3	Plastic Armored DVI-D Cable Dual Link, Male/Male, 3.0ft (0.9m)	30.95	29.71	28.47	CALL
CTLDVIPL-5	Plastic Armored DVI-D Cable Dual Link, Male/Male, 5.0ft (1.5m)	33.95	32.59	31.23	CALL
CTLDVIPL-10	Plastic Armored DVI-D Cable Dual Link, Male/Male, 10.0ft (30.m)	41.45	39.79	38.13	CALL
CTLDVIPL-15	Plastic Armored DVI-D Cable Dual Link, Male/Male, 15.0ft (4.6m)	48.95	46.99	45.03	CALL

Plastic Armored DVI-D Dual Link Cable Assemblies - Right Angle, Bottom

CTLDVIRAPL-3	Plastic Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 3.0ft (0.9m)	32.95	31.63	30.31	CALL
CTLDVIRAPL-5	Plastic Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 5.0ft (1.5m)	35.95	34.51	33.07	CALL
CTLDVIRAPL-10	Plastic Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 10.0ft (30.m)	43.45	41.71	39.97	CALL
CTLDVIRAPL-15	Plastic Armored DVI-D Cable Dual Link, Male/Male Right Angle, Bottom, 15.0ft (4.6m)	50.95	48.91	46.87	CALL

Plastic Armored DVI-D Single Link Cable Assemblies

CTLDVISPL-3	Plastic Armored DVI-D Cable Single Link, Male/Male, 3.0ft (0.9m)	25.95	24.91	23.87	CALL
CTLDVISPL-5	Plastic Armored DVI-D Cable Single Link, Male/Male, 5.0ft (1.5m)	27.95	26.83	25.71	CALL
CTLDVISPL-10	Plastic Armored DVI-D Cable Single Link, Male/Male, 10.0ft (30.m)	32.95	31.63	30.31	CALL
CTLDVISPL-15	Plastic Armored DVI-D Cable Single Link, Male/Male, 15.0ft (4.6m)	37.95	36.43	34.91	CALL


Plastic Armored DVI-D Single Link Cable Assemblies - Right Angle, Bottom

CTLDVISRAPL-3	Plastic Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 3.0ft (0.9m)	27.95	26.83	25.71	CALL
CTLDVISRAPL-5	Plastic Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 5.0ft (1.5m)	29.95	28.75	27.55	CALL
CTLDVISRAPL-10	Plastic Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 10.0ft (30.m)	34.95	33.55	32.15	CALL
CTLDVISRAPL-15	Plastic Armored DVI-D Cable Single Link, Male/Male Right Angle, Bottom, 15.0ft (4.6m)	39.95	38.35	36.75	CALL

DVI Dust Covers - Male and Female

L-com's DVI dust covers protect unused DVI connectors on cable assemblies and DVI receptacles on DVI equipment including DVI KVM switches, DVI Extenders, DVI splitters, and more. We offer both male and female DVI dust covers in packages of 10.

CVRDVI-M	DVI Dust Cover, Male, Pkg/10	6.15	5.90	5.66	CALL
CVRDVI-F	DVI Dust Cover, Female, Pkg/10	6.15	5.90	5.66	CALL

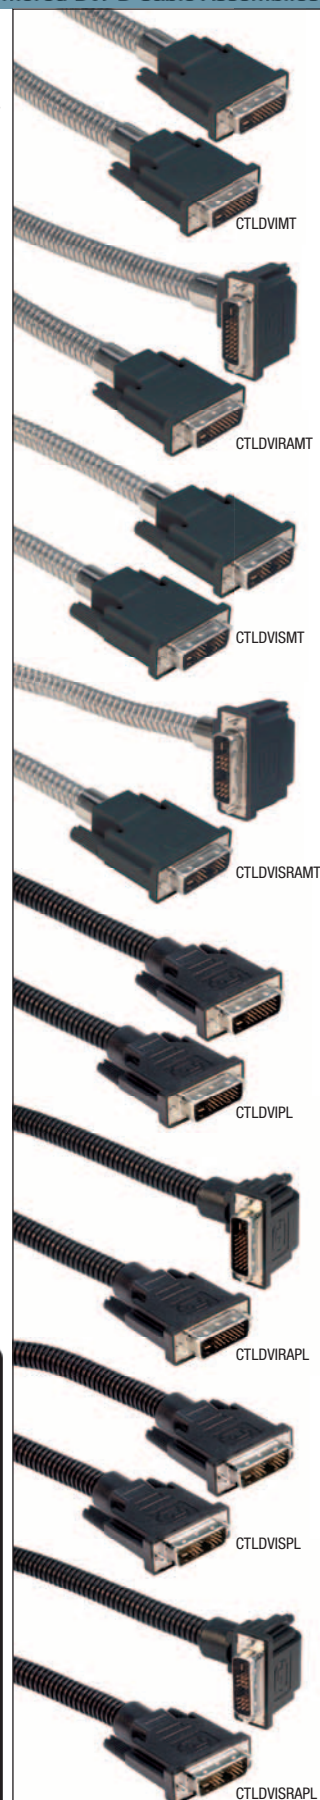

DVI armored cables explained

Crush Resistant Metal Jacket
Up to 1500 PSI (pounds per square inch)

Metal Coupling Nut
Heavy duty construction ensures that the crush resistant jacket remains in place

Crush Resistant Plastic Jacket
Up to 800 PSI (pounds per square inch)

Plastic Coupling Nut
Heavy duty plastic construction ensures that the crush resistant jacket remains in place




Uses our Premium bulk cable including PVC cable jacket and braid/foil shield under the armor.

L-com vs. Our Competitors

Superior performance requires superior construction. The features beneath the surface are the reason many OEMs have chosen L-com as a key supplier of critical cabling. Superior connector termination utilizing an all steel box provides


360° shielding and reliable strain relief. The bulk cable is double shielded and utilizes 3 mini true 75 Ohm coaxial lines for unmatched video performance. Available on L-com CTL premium and deluxe cable assemblies.

CTL3VGA/CGSVGA Cable Makeup

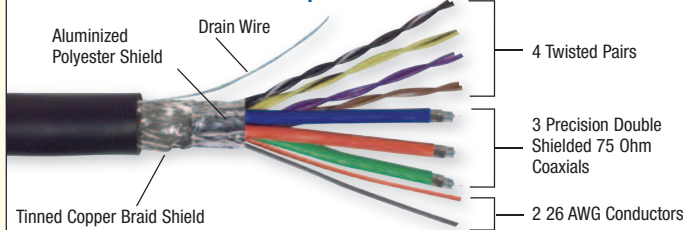

L-com's Construction




A cutaway view of one of L-com's premium cables



CTLF3VGAMM
(with ferrites)



Best Seller



Item #	Description	#Coax	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Premium Grade Black SVGA Cables - HD15M to HD15M or HD15M to HD15F with Coaxial Inners and Ferrites

Premium video assemblies utilize coaxial and twisted pair signal lines plus ferrite cores on either end for optimum video performance.

CTLF3VGAMM-5	SVGA Cable, HD15 Male/Male with Ferrites, 5.0ft (1.5m)	3	32.00	30.72	29.44	CALL
CTLF3VGAMM-10	SVGA Cable, HD15 Male/Male with Ferrites, 10.0ft (3.0m)	3	42.00	40.32	38.64	CALL
CTLF3VGAMM-25	SVGA Cable, HD15 Male/Male with Ferrites, 25.0ft (7.6m)	3	72.00	69.12	66.24	CALL
CTLF3VGAMM-50	SVGA Cable, HD15 Male/Male with Ferrites, 50.0ft (15.2m)	3	122.00	117.12	112.24	CALL
CTLF3VGAMM-100	SVGA Cable, HD15 Male/Male with Ferrites, 100.0ft (30.5m)	3	222.00	213.12	204.24	CALL
CTLF3VGAMM-200	SVGA Cable, HD15 Male/Male with Ferrites, 200.0ft (61.0m)	3	422.00	405.12	388.24	CALL
CTLF3VGAMF-5	SVGA Extension Cable, HD15 Male/Female with Ferrites, 5.0ft (1.5m)	3	32.00	30.72	29.44	CALL
CTLF3VGAMF-10	SVGA Extension Cable, HD15 Male/Female with Ferrites, 10.0ft (3.0m)	3	42.00	40.32	38.64	CALL
CTLF3VGAMF-25	SVGA Extension Cable, HD15 Male/Female with Ferrites, 25.0ft (7.6m)	3	72.00	69.12	66.24	CALL
CTLF3VGAMF-50	SVGA Extension Cable, HD15 Male/Female with Ferrites, 50.0ft (15.2m)	3	122.00	117.12	112.24	CALL
CTLF3VGAMF-100	SVGA Extension Cable, HD15 Male/Female with Ferrites, 100.0ft (30.5m)	3	222.00	213.12	204.24	CALL
CTLF3VGAMF-200	SVGA Extension Cable, HD15 Male/Female with Ferrites, 200.0ft (61.0m)	3	422.00	405.12	388.24	CALL

Premium Grade Black SVGA Cables - HD15M to HD15M with Coaxial Inners

Premium video assemblies utilize coaxial and twisted pair signal lines for low loss of signal.

CTL3VGAMM-3B	SVGA Cable, HD15 Male/Male, 3.0ft (0.9m)	3	21.00	19.74	18.48	CALL
CTL3VGAMM-5B	SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	24.00	22.56	21.12	CALL
CTL3VGAMM-10B	SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	31.50	29.61	27.72	CALL
CTL3VGAMM-20B	SVGA Cable, HD15 Male/Male, 20.0ft (6.1m)	3	46.50	43.71	40.92	CALL
CTL3VGAMM-25B	SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	54.00	50.76	47.52	CALL
CTL3VGAMM-50B	SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	91.50	86.01	80.52	CALL
CTL3VGAMM-100B	SVGA Cable, HD15 Male/Male, 100.0ft (30.5m)	3	166.50	156.51	146.52	CALL
CTL3VGAMM-150B	SVGA Cable, HD15 Male/Male, 150.0ft (45.7m)	3	241.50	227.01	212.52	CALL
CTL3VGAMM-200B	SVGA Cable, HD15 Male/Male, 200.0ft (61.0m)	3	316.50	297.51	278.52	CALL

Premium Grade Black SVGA Extension Cables - HD15M to HD15F with Coaxial Inners

CTL3VGAMF-5B	SVGA Extension Cable, HD15 Male/Female, 5.0ft (1.5m)	3	24.00	22.56	21.12	CALL
CTL3VGAMF-10B	SVGA Extension Cable, HD15 Male/Female, 10.0ft (3.0m)	3	31.50	29.61	27.72	CALL
CTL3VGAMF-20B	SVGA Extension Cable, HD15 Male/Female, 20.0ft (6.1m)	3	46.50	43.71	40.92	CALL
CTL3VGAMF-25B	SVGA Extension Cable, HD15 Male/Female, 25.0ft (7.6m)	3	54.00	50.76	47.52	CALL
CTL3VGAMF-50B	SVGA Extension Cable, HD15 Male/Female, 50.0ft (15.2m)	3	91.50	86.01	80.52	CALL
CTL3VGAMF-75B	SVGA Extension Cable, HD15 Male/Female, 75.0ft (22.9m)	3	129.00	121.26	113.52	CALL
CTL3VGAMF-100B	SVGA Extension Cable, HD15 Male/Female, 100.0ft (30.5m)	3	166.50	156.51	146.52	CALL
CTL3VGAMF-150B	SVGA Extension Cable, HD15 Male/Female, 150.0ft (45.7m)	3	241.50	227.01	212.52	CALL

Premium Grade Gray SVGA Cables - HD15M to HD15M or HD15M to HD15F with Coaxial Inners

These premium cables mate with high resolution color monitors and workstations with HD15 D-Sub connectors. High efficiency coaxial wiring is featured to support critical color lines. All molded construction, fully shielded throughout. OEM quantity pricing and special lengths upon request. Color: Gray.

CTL3VGAMM-3	SVGA Cable, HD15 Male/Male, 3.0ft (0.9m)	3	26.95	24.79	22.64	CALL
CTL3VGAMM-5	SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	28.95	26.63	24.32	CALL
CTL3VGAMM-10	SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	33.95	31.23	28.52	CALL
CTL3VGAMF-5	SVGA Extension Cable, HD15 Male/Female, 5.0ft (1.5m)	3	28.95	26.63	24.32	CALL
CTL3VGAMF-10	SVGA Extension Cable, HD15 Male/Female, 10.0ft (3.0m)	3	33.95	31.23	28.52	CALL
CTL3VGAMF-25	SVGA Extension Cable, HD15 Male/Female, 25.0ft (7.6m)	3	48.95	45.03	41.12	CALL

Standard Grade Black SVGA Cable Assemblies - HD15M to HD15M or HD15M to HD15F

L-com's new competitively priced standard grade SVGA cables feature three 75 Ohm coaxial cables to assure high quality video signal transmission. Fully molded backshells provide durability and long life expectancy. These rugged RoHS compliant assemblies are available in standard off the shelf lengths from 3 to 50 feet (0.9 to 15.2m).

CGSVGAMM-3	SVGA Cable, HD15 Male/Male, 3.0ft (0.9m)	3	11.00	10.12	9.24	CALL
CGSVGAMM-5	SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	12.00	11.04	10.08	CALL
CGSVGAMM-10	SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	18.80	17.30	15.79	CALL
CGSVGAMM-20	SVGA Cable, HD15 Male/Male, 20.0ft (6.1m)	3	32.00	29.44	26.88	CALL
CGSVGAMM-25	SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	35.00	32.20	29.40	CALL
CGSVGAMM-50	SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	69.00	63.48	57.96	CALL
CGSVGAMF-3	SVGA Extension Cable, HD15 Male/Female, 3.0ft (0.9m)	3	11.20	10.30	9.41	CALL
CGSVGAMF-5	SVGA Extension Cable, HD15 Male/Female, 5.0ft (1.5m)	3	12.20	11.22	10.25	CALL
CGSVGAMF-10	SVGA Extension Cable, HD15 Male/Female, 10.0ft (3.0m)	3	19.05	17.53	16.00	CALL
CGSVGAMF-20	SVGA Extension Cable, HD15 Male/Female, 20.0ft (6.1m)	3	33.35	30.68	28.01	CALL
CGSVGAMF-25	SVGA Extension Cable, HD15 Male/Female, 25.0ft (7.6m)	3	35.50	32.66	29.82	CALL
CGSVGAMF-50	SVGA Extension Cable, HD15 Male/Female, 50.0ft (15.2m)	3	69.20	63.66	58.13	CALL


Super Thin SVGA is Ideal for Tight Fitting Spaces

The Super Thin SVGA series offers comparable performance of standard size SVGA assemblies in a much more compact size. Not only is the cable diameter greatly reduced but the depth of the HD15 backshell is also much more shallow than the backshells found on most SVGA assemblies. This results in a SVGA assembly that can be used in tight confines where a standard size SVGA assembly would be difficult if not impossible to use.

Another feature of this series is reversible hardware allowing either panel mount using standoffs or traditional thumbscrews. The combined results of these features is a product series that is both compact and versatile. These features can be utilized to solve many difficult installation problems without sacrificing performance.

The Super Thin small profile construction is also utilized on our SVGA with disconnect series and our low profile KVM cables.

Note: All dimensions are for reference only.


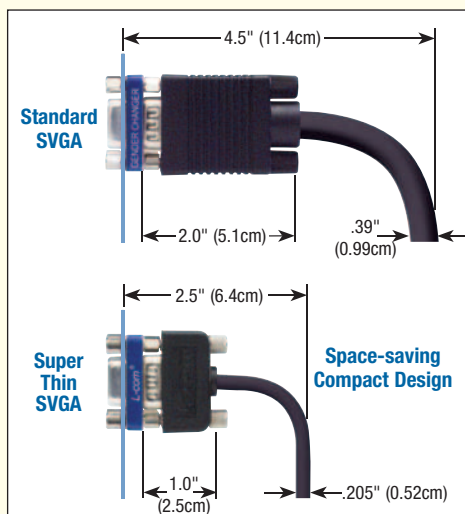


Ultra Flexible

Reversible Hardware

Detail of female end being panel mounted using standoffs

Detail of male end being mounted using thumbscrews



Item #	Description	#Coax	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

Super Thin SVGA Cables with 3 Mini Coaxial Lines - HD15M to HD15M or HD15M to HD15F

Utilize a revolutionary cable made with 3 ultra thin coaxial lines and still measures .205" (0.52cm) in diameter. Another unique feature is user defined mounting hardware. Each cable end is capable of being connected with either male jack screws or hex standoffs with the supplied hardware. Color: Black.

CTL3VGAMM-5T	Super Thin SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	30.90	29.05	27.19	CALL
CTL3VGAMM-10T	Super Thin SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	38.65	36.33	34.01	CALL
CTL3VGAMM-15T	Super Thin SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	46.35	43.57	40.79	CALL
CTL3VGAMM-25T	Super Thin SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	61.80	58.09	54.38	CALL
CTL3VGAMM-50T	Super Thin SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	100.45	94.42	88.40	CALL
CTL3VGAMF-5T	Super Thin SVGA Extension Cable, HD15 Male/Female, 5.0ft (1.5m)	3	30.90	29.05	27.19	CALL
CTL3VGAMF-10T	Super Thin SVGA Extension Cable, HD15 Male/Female, 10.0ft (3.0m)	3	38.65	36.33	34.01	CALL
CTL3VGAMF-15T	Super Thin SVGA Extension Cable, HD15 Male/Female, 15.0ft (4.6m)	3	46.35	43.57	40.79	CALL
CTL3VGAMF-25T	Super Thin SVGA Extension Cable, HD15 Male/Female, 25.0ft (7.6m)	3	61.80	58.09	54.38	CALL
CTL3VGAMF-50T	Super Thin SVGA Extension Cable, HD15 Male/Female, 50.0ft (15.2m)	3	100.45	94.42	88.40	CALL

LSZH Jacket Super Thin SVGA Cables - HD15M to HD15M or HD15M to HD15F Cable Assembly

This series of SVGA cables features both our small diameter Super Thin cable and our LSZH jacket for applications where low smoke is critical. An additional feature of this series is our reversible hardware allowing both panel mount using standoffs or traditional thumbscrews. High quality video signal transmission is assured as a result of the three 75 Ohm coaxial lines used in these premium SVGA assemblies. The low profile configuration of our fully molded HD15 backshell makes these assemblies ideal for tight fit installations. Available in 5 standard lengths from 5 to 50 feet (1.5 to 15.2m).

CTL3VGAMM-5TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	47.40	44.56	41.71	CALL
CTL3VGAMM-10TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	62.85	59.08	55.31	CALL
CTL3VGAMM-15TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	78.30	73.60	68.90	CALL
CTL3VGAMM-25TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	109.20	102.65	96.10	CALL
CTL3VGAMM-50TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	186.45	175.26	164.08	CALL
CTL3VGAMF-5TZ	Super Thin LSZH SVGA Extension Cable, HD15 Male/Female, 5.0ft (1.5m)	3	47.40	44.56	41.71	CALL
CTL3VGAMF-10TZ	Super Thin LSZH SVGA Extension Cable, HD15 Male/Female, 10.0ft (3.0m)	3	62.85	59.08	55.31	CALL
CTL3VGAMF-15TZ	Super Thin LSZH SVGA Extension Cable, HD15 Male/Female, 15.0ft (4.6m)	3	78.30	73.60	68.90	CALL
CTL3VGAMF-25TZ	Super Thin LSZH SVGA Extension Cable, HD15 Male/Female, 25.0ft (7.6m)	3	109.20	102.65	96.10	CALL
CTL3VGAMF-50TZ	Super Thin LSZH SVGA Extension Cable, HD15 Male/Female, 50.0ft (15.2m)	3	186.45	175.26	164.08	CALL

Plenum Jacket Super Thin SVGA Cables - HD15M to HD15M




This series is identical to our Super Thin SVGA cables with one important exception, the cable outer jacket and HD15 connector backshell overmold are made from CMP grade plenum material. Color: Black.

CTL3VGAMM-5TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 5.0ft (1.5m)	3	82.40	80.75	79.10	CALL
CTL3VGAMM-10TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 10.0ft (3.0m)	3	133.90	131.22	128.54	CALL
CTL3VGAMM-15TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	185.40	181.69	177.98	CALL
CTL3VGAMM-25TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	288.40	282.63	276.86	CALL
CTL3VGAMM-50TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	545.90	534.98	524.06	CALL


Thumb screws for Super Thin SVGA Cables, 25 Bag

The CTL-T-SCREW thumb screws are perfect for replacing missing or damaged screws for L-com's Super Thin VGA cable series found on this page and page 144. These field replaceable screws are crafted from rugged steel and are nickel plated. Packaged 25 screws per bag.

CTL-T-SCREW	Replacement Screws for L-com's Super Thin SVGA Cables, Pkg/25	17.55	16.85	16.15	CALL
-------------	---	-------	-------	-------	------

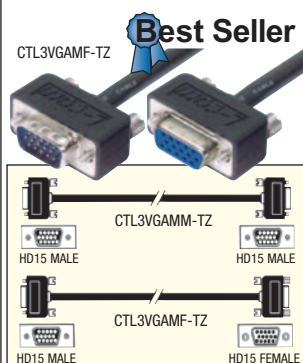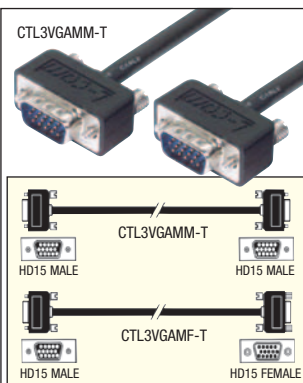

CTL-T-SCREW

Best Seller**Fits through 3/4" conduit****Use the CTLB series cable for running through 3/4" (1.9cm) conduit**

Feed socket end through conduit (3/4" min. dia.) into destination outlet.



Slip shrinkable tubing onto cable, mate the breakaway connector matching alignment arrows and secure.



Attach pre-terminated HD15 connector to faceplate and attach to outlet.

**Online Video**

L-com.com/videos/A04

Item #	Description	#Coax	1-9	10-24	25-99	100+
--------	-------------	-------	-----	-------	-------	------

SVGA Cables with Low Profile Disconnect Feature - HD15 Male to HD15 Male or HD15 Female

Now there is a solution to your difficult installation problems. A fully populated DDC compliant assembly with HD15 male/male or male/female connectors utilizing our Super Thin cable, reversible hardware plus a low profile break connector. The low profile break connector's small size (.75" wide /1.9cm) allows routing through .75" (1.9cm) conduit and through tight spaces that would not accommodate the size of a HD15 connector. Color: Black.

CTLB3VGAMM-15T	Super Thin SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	72.10	66.33	60.56	CALL
CTLB3VGAMM-20T	Super Thin SVGA Cable, HD15 Male/Male, 20.0ft (6.1m)	3	82.40	75.81	69.22	CALL
CTLB3VGAMM-25T	Super Thin SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	92.70	85.28	77.87	CALL
CTLB3VGAMM-50T	Super Thin SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	144.20	132.66	121.13	CALL
CTLB3VGAMM-75T	Super Thin SVGA Cable, HD15 Male/Male, 75.0ft (22.9m)	3	195.70	180.04	164.39	CALL
CTLB3VGAMF-15T	Super Thin SVGA Cable, HD15 Male/Female, 15.0ft (4.6m)	3	72.10	66.33	60.56	CALL
CTLB3VGAMF-20T	Super Thin SVGA Cable, HD15 Male/Female, 20.0ft (6.1m)	3	82.40	77.46	72.51	CALL
CTLB3VGAMF-25T	Super Thin SVGA Cable, HD15 Male/Female, 25.0ft (7.6m)	3	92.70	85.28	77.87	CALL
CTLB3VGAMF-50T	Super Thin SVGA Cable, HD15 Male/Female, 50.0ft (15.2m)	3	144.20	132.66	121.13	CALL
CTLB3VGAMF-75T	Super Thin SVGA Cable, HD15 Male/Female, 75.0ft (22.9m)	3	195.70	180.04	164.39	CALL

LSZH Jacket SVGA Cables with Low Profile Disconnect Feature - HD15 Male to HD15 Male

This series features a fully populated DDC compliant assembly with (2) low profile HD15 male connectors and our low smoke zero halogen Super Thin cable. An additional feature is our unique user defined mounting hardware plus a low profile break connector which allows routing through .75" (1.9cm) conduit and other tight spaces. Offered in standard lengths with a 1 foot (0.3m) lead in length to the low profile connector.

CTLB3VGAMM-15TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	87.55	82.30	77.04	CALL
CTLB3VGAMM-20TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 20.0ft (6.1m)	3	103.00	96.82	90.64	CALL
CTLB3VGAMM-25TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	118.45	111.34	104.24	CALL
CTLB3VGAMM-50TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	195.70	183.96	172.22	CALL
CTLB3VGAMM-75TZ	Super Thin LSZH SVGA Cable, HD15 Male/Male, 75.0ft (22.9m)	3	272.95	256.57	240.20	CALL

Plenum Jacket VGA Cables with Low Profile Disconnect Feature - HD15 Male to HD15 Male

This VGA cable series features a fully populated DDC compliant assembly with (2) low profile HD15 male connectors and our CMP plenum rated Super Thin cable. An additional feature of this series is our unique user defined mounting hardware plus a low profile break connector. The low profile disconnect connector's small size allows routing through .75" (1.9cm) conduit and other tight spaces that would not accommodate the size of a HD15 connector.

CTLB3VGAMM-15TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 15.0ft (4.6m)	3	231.75	227.12	222.48	CALL
CTLB3VGAMM-25TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 25.0ft (7.6m)	3	334.75	328.06	321.36	CALL
CTLB3VGAMM-50TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 50.0ft (15.2m)	3	592.25	580.40	568.56	CALL
CTLB3VGAMM-75TP	Super Thin Plenum SVGA Cable, HD15 Male/Male, 75.0ft (22.9m)	3	849.75	832.75	815.76	CALL

KVM Cables - Integrate HD15 Video and 2 Mini DIN 6 Keyboard and Mouse Lines in One

The CTL3KVM series combines a HD15 (video) cable with two Mini DIN 6 (keyboard and mouse) lines into one assembly. Available in male-male genders for interconnection between a KVM switch and CPU or male-female for connecting between a CPU and the keyboard, monitor and mouse. Color: Black.

CTL3KVM-3	KVM Cable, Male/Male, 3.0ft (0.9m)	52.50	50.40	48.30	CALL
CTL3KVM-5	KVM Cable, Male/Male, 5.0ft (1.5m)	56.65	54.38	52.12	CALL
CTL3KVM-7.5	KVM Cable, Male/Male, 7.5 ft (2.3m)	61.90	59.42	56.95	CALL
CTL3KVM-10	KVM Cable, Male/Male, 10.0ft (3.0m)	67.10	64.42	61.73	CALL
CTL3KVM-20	KVM Cable, Male/Male, 20.0ft (6.1m)	88.00	84.48	80.96	CALL
CTL3KVM-25	KVM Cable, Male/Male, 25.0ft (7.6m)	98.45	94.51	90.57	CALL
CTL3KVM-50	KVM Cable, Male/Male, 50.0ft (15.2m)	150.70	144.67	138.64	CALL
CTL3KVM-100	KVM Cable, Male/Male, 100.0ft (30.5m)	255.20	244.99	234.78	CALL
CTL3KVMF-3	KVM Cable, Male/Female, 3.0ft (0.9m)	54.70	52.51	50.32	CALL
CTL3KVMF-5	KVM Cable, Male/Female, 5.0ft (1.5m)	58.85	56.50	54.14	CALL
CTL3KVMF-7.5	KVM Cable, Male/Female, 7.5 ft (2.3m)	64.10	61.54	58.97	CALL
CTL3KVMF-10	KVM Cable, Male/Female, 10.0ft (3.0m)	69.30	66.53	63.76	CALL
CTL3KVMF-20	KVM Cable, Male/Female, 20.0ft (6.1m)	90.20	86.59	82.98	CALL
CTL3KVMF-25	KVM Cable, Male/Female, 25.0ft (7.6m)	100.65	96.62	92.60	CALL
CTL3KVMF-50	KVM Cable, Male/Female, 50.0ft (15.2m)	152.90	146.78	140.67	CALL
CTL3KVMF-100	KVM Cable, Male/Female, 100.0ft (30.5m)	257.40	247.10	236.81	CALL

**When do you use Plenum Cable?**

In building construction, the space used for air circulation (heating and air conditioning) is called the plenum. This space is also commonly used to route communications cable. This poses a serious hazard in the event of fire due to lack of barriers to contain the smoke and flames. This is why various fire codes and the National Electrical Code (NEC) require the use of fire resistant and low smoke producing cable in these areas. This type of cable is called plenum cable which is made with a fire retardant compound that exhibits self extinguishing characteristics.




What is S-Video (S-VHS)?

The term S-Video is derived from the way the video signal is transmitted. In S-Video the signal is separated into two components hence the term Separate Video or S-Video. Two 75 Ohm coaxial cables and a Mini DIN 4 connector are utilized to transmit the two component signals. One of the coaxial cables carries the Luminance Signal (brightness or Y component) while the second 75 Ohm coaxial cable carries the Chrominance Signal (color or C component). By separating the video signal into two components a better quality picture is produced than composite video that utilizes one coaxial cable to transmit both signals. The term S-VHS is an acronym for Super-Video Home System.

SVHS (S-Video) Jack



R1088 Cable Specification

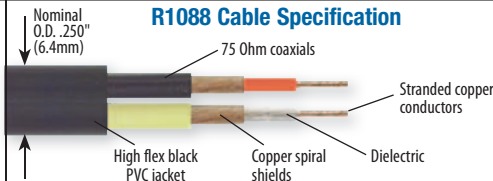

Item #	Description	1-9	10-24	25-99	100+
Molded S-Video Cable Assemblies, 75 Ohm Dual Coaxial in Single Jacket					
CCD234MM-1	Molded Mini DIN 4 Male/Male, 1.0ft (0.3m)	5.80	5.45	5.10	CALL
CCD234MM-2	Molded Mini DIN 4 Male/Male, 2.0ft (0.6m)	6.55	6.16	5.76	CALL
CCD234MM-3	Molded Mini DIN 4 Male/Male, 3.0ft (0.9m)	7.25	6.81	6.38	CALL
CCD234MM-5	Molded Mini DIN 4 Male/Male, 5.0ft (1.5m)	8.75	8.22	7.70	CALL
CCD234MM-7.5	Molded Mini DIN 4 Male/Male, 7.5ft (2.3m)	10.55	9.92	9.28	CALL
CCD234MM-10	Molded Mini DIN 4 Male/Male, 10.0ft (3.0m)	12.40	11.66	10.91	CALL
CCD234MM-20	Molded Mini DIN 4 Male/Male, 20.0ft (6.1m)	19.75	18.56	17.38	CALL
CCD234MM-30	Molded Mini DIN 4 Male/Male, 30.0ft (9.1m)	27.10	25.47	23.85	CALL
CCD234MM-40	Molded Mini DIN 4 Male/Male, 40.0ft (12.2m)	34.45	32.38	30.32	CALL
CCD234MM-50	Molded Mini DIN 4 Male/Male, 50.0ft (15.2m)	41.80	39.29	36.78	CALL
CCD234MF-1	Molded Mini DIN 4 Male/Female, 1.0ft (0.3m)	5.80	5.45	5.10	CALL
CCD234MF-2	Molded Mini DIN 4 Male/Female, 2.0ft (0.6m)	6.55	6.16	5.76	CALL
CCD234MF-3	Molded Mini DIN 4 Male/Female, 3.0ft (0.9m)	7.25	6.81	6.38	CALL
CCD234MF-5	Molded Mini DIN 4 Male/Female, 5.0ft (1.5m)	8.75	8.22	7.70	CALL
CCD234MF-7.5	Molded Mini DIN 4 Male/Female, 7.5ft (2.3m)	10.55	9.92	9.28	CALL
CCD234MF-10	Molded Mini DIN 4 Male/Female, 10.0ft (3.0m)	12.40	11.66	10.91	CALL
CCD234MF-20	Molded Mini DIN 4 Male/Female, 20.0ft (6.1m)	19.75	18.56	17.38	CALL

Assembled S-Video Cable Assemblies - Molded Dual BNC-M, 75 Ohm Dual Coaxial Breakout Cable

CCD244MB-1	Assembled Mini DIN 4 Male/Dual BNC Male, 1.0ft (0.3m)	14.20	13.35	12.50	CALL
CCD244MB-2	Assembled Mini DIN 4 Male/Dual BNC Male, 2.0ft (0.6m)	14.95	14.05	13.16	CALL
CCD244MB-3	Assembled Mini DIN 4 Male/Dual BNC Male, 3.0ft (0.9m)	15.65	14.71	13.77	CALL
CCD244MB-5	Assembled Mini DIN 4 Male/Dual BNC Male, 5.0ft (1.5m)	17.15	16.12	15.09	CALL
CCD244MB-7.5	Assembled Mini DIN 4 Male/Dual BNC Male, 7.5ft (2.3m)	18.95	17.81	16.68	CALL
CCD244MB-10	Assembled Mini DIN 4 Male/Dual BNC Male, 10.0ft (3.0m)	20.80	19.55	18.30	CALL
CCD244MB-20	Assembled Mini DIN 4 Male/Dual BNC Male, 20.0ft (6.1m)	28.15	26.46	24.77	CALL

Premium RCA Audio/Video Molded Cables - 3 RCAs Per End

Premium high flex Thinline 75 Ohm coaxials and fully molded strain reliefs with gold plated connectors provide rugged and reliable connections. Individual legs colored: Yellow, White and Red.

CCR3MM-2	3 Line RCA Cable, RCA Male/Male, 2.0ft (0.6m)	9.30	8.56	7.81	CALL
CCR3MM-3	3 Line RCA Cable, RCA Male/Male, 3.0ft (0.9m)	10.30	9.48	8.65	CALL
CCR3MM-6	3 Line RCA Cable, RCA Male/Male, 6.0ft (1.8m)	13.40	12.33	11.26	CALL
CCR3MM-9	3 Line RCA Cable, RCA Male/Male, 9.0ft (2.7m)	16.50	15.18	13.86	CALL
CCR3MM-12	3 Line RCA Cable, RCA Male/Male, 12.0ft (3.6m)	19.60	18.03	16.46	CALL
CCR3MM-25	3 Line RCA Cable, RCA Male/Male, 25.0ft (7.6m)	33.00	30.36	27.72	CALL

Premium Molded RCA Audio Cable Assembly - 2 RCAs Per End



These high quality dual line coaxial cables with gold plated RCA connectors provide the best in audio transmission. Color coded in Red and White to easily identify the left and right channel.


CCR2MM-2	2 Line Dual RCA Cable, RCA Male/Male, 2.0ft (0.6m)	6.45	6.06	5.68	CALL
CCR2MM-3	2 Line Dual RCA Cable, RCA Male/Male, 3.0ft (0.9m)	6.95	6.53	6.12	CALL
CCR2MM-6	2 Line Dual RCA Cable, RCA Male/Male, 6.0ft (1.8m)	8.50	7.99	7.48	CALL
CCR2MM-9	2 Line Dual RCA Cable, RCA Male/Male, 9.0ft (2.7m)	10.05	9.45	8.84	CALL
CCR2MM-12	2 Line Dual RCA Cable, RCA Male/Male, 12.0ft (3.6m)	11.60	10.90	10.21	CALL
CCR2MM-25	2 Line Dual RCA Cable, RCA Male/Male, 25.0ft (7.6m)	18.30	17.20	16.10	CALL

RCA Female Feed-Thru Adapter - with Red, Green, Blue, Yellow or White Insulators

These RCA feed-thru adapters feature insulators color coded for both video and audio applications. This color coding assists in component hookup to avoid improper connections.


BA400R	Coaxial Adapter, RCA Bulkhead Female/Female, Red Insulator	3.95	3.71	3.48	CALL
BA400G	Coaxial Adapter, RCA Bulkhead Female/Female, Green Insulator	3.95	3.71	3.48	CALL
BA400B	Coaxial Adapter, RCA Bulkhead Female/Female, Blue Insulator	3.95	3.71	3.48	CALL
BA400Y	Coaxial Adapter, RCA Bulkhead Female/Female, Yellow Insulator	3.95	3.71	3.48	CALL
BA400	Coaxial Adapter, RCA Bulkhead Female/Female, White Insulator	3.95	3.71	3.48	CALL
BA400A	Coaxial Adapter, RCA Bulkhead Female/Female, 0.5\" (1.3cm) Circular Hole	3.95	3.71	3.48	CALL

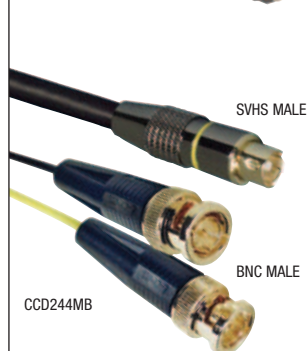



What is DisplayPort?

DisplayPort, like HDMI, is a newer digital display connection capable of producing high resolution images as well as high quality audio signals. DisplayPort is typically used when connecting a computer to a monitor. The connector also features a latching mechanism to prevent the plugs from being unintentionally detached.

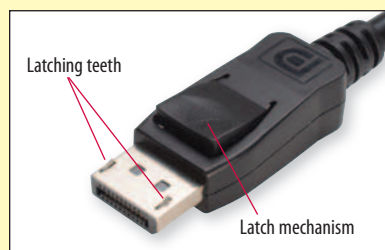

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DisplayPort High Definition Audio/Video Cables

L-com's DisplayPort cables offer a single cable solution providing high definition digital audio and video for computing displays, graphic cards and laptops. DisplayPort replaces DVI and VGA cables and is the new digital display standard for PC computing. It is the HDMI equivalent for computers and provides a simple and easy connection for both high definition digital audio and video.

DPCAMM-0.5	DisplayPort Cable Assembly, Male/Male, 0.5m	24.70	23.22	21.74	CALL
DPCAMM-1	DisplayPort Cable Assembly, Male/Male, 1.0m	26.75	25.14	23.54	CALL
DPCAMM-2	DisplayPort Cable Assembly, Male/Male, 2.0m	30.85	29.00	27.15	CALL
DPCAMM-3	DisplayPort Cable Assembly, Male/Male, 3.0m	35.00	32.90	30.80	CALL
DPCAMM-4	DisplayPort Cable Assembly, Male/Male, 4.0m	39.10	36.75	34.41	CALL
DPCAMM-5	DisplayPort Cable Assembly, Male/Male, 5.0m	43.25	40.66	38.06	CALL
DPCAMM-10	DisplayPort Cable Assembly, Male/Male, 10.0m	63.85	60.02	56.19	CALL
DPCAMM-15	DisplayPort Cable Assembly, Male/Male, 15.0m	84.45	79.38	74.32	CALL

Low Profile DisplayPort High Definition Audio/Video Cables

This cable family is identical to our popular DPCAMM DisplayPort cables except it uses a shorter backshell. The shorter backshell allows these cables to fit in a tighter space without compromising performance. L-com's DisplayPort cable offering provides a single cable solution for high definition digital audio and video for computing displays, graphic cards, and laptops. Seven lengths to choose from ranging from 0.5 to 15 meters.

DPCAMMSB-0.5	DisplayPort Short Body Cable Assembly, Male/Male, 0.5m	20.70	19.46	18.22	CALL
DPCAMMSB-1	DisplayPort Short Body Cable Assembly, Male/Male, 1.0m	22.75	21.38	20.02	CALL
DPCAMMSB-2	DisplayPort Short Body Cable Assembly, Male/Male, 2.0m	26.85	25.24	23.63	CALL
DPCAMMSB-3	DisplayPort Short Body Cable Assembly, Male/Male, 3.0m	30.95	29.09	27.24	CALL
DPCAMMSB-5	DisplayPort Short Body Cable Assembly, Male/Male, 5.0m	39.15	36.80	34.45	CALL
DPCAMMSB-10	DisplayPort Short Body Cable Assembly, Male/Male, 10.0m	63.85	60.02	56.19	CALL
DPCAMMSB-15	DisplayPort Short Body Cable Assembly, Male/Male, 15.0m	84.45	79.38	74.32	CALL

Low Smoke Zero Halogen DisplayPort High Definition Audio/Video Cables

This cable family is identical to our popular DPCAMM DisplayPort cables except it uses Low Smoke Zero Halogen (LSZH) jacketed cable. LSZH cable reduces the amount of toxic and corrosive gases emitted during combustion. Typically used in poorly ventilated areas, low smoke zero halogen is very popular with military contractors and anywhere the protection of people and equipment from toxic and corrosive gases is critical.

DPCA2MM-0.5	DisplayPort LSZH Cable Assembly, Male/Male, 0.5m	25.50	23.97	22.44	CALL
DPCA2MM-1	DisplayPort LSZH Cable Assembly, Male/Male, 1.0m	28.05	26.37	24.68	CALL
DPCA2MM-2	DisplayPort LSZH Cable Assembly, Male/Male, 2.0m	33.15	31.16	29.17	CALL
DPCA2MM-3	DisplayPort LSZH Cable Assembly, Male/Male, 3.0m	38.25	35.95	33.66	CALL
DPCA2MM-5	DisplayPort LSZH Cable Assembly, Male/Male, 5.0m	48.45	45.54	42.64	CALL
DPCA2MM-10	DisplayPort LSZH Cable Assembly, Male/Male, 10.0m	73.95	69.51	65.08	CALL
DPCA2MM-15	DisplayPort LSZH Cable Assembly, Male/Male, 15.0m	99.45	93.48	87.52	CALL

DisplayPort Panel Mount Adapter (Female DP to Female DP)

L-com's DP-FF is a versatile panel mount DisplayPort feed-thru adapter that makes connecting DisplayPort cables through a panel or enclosure a snap. This DisplayPort adapter features two removable 4-40 jackscrews for easy panel mounting.

DP-FF	DisplayPort Panel Mount Adapter, Female/Female	14.99	14.69	14.39	CALL
-------	--	-------	-------	-------	------

DisplayPort to HDMI® Adapter

This plug and play DisplayPort to HDMI adapter is perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into an HDMI enabled display/monitor and you are up and running.

DP-HD-ADPT	DisplayPort to HDMI Adapter, HDMI Female/DisplayPort Male	14.99	14.69	14.39	CALL
------------	---	-------	-------	-------	------

DisplayPort to HDMI® Adapter Cable, 7.25" (18.4cm) Long

These plug and play DisplayPort to HDMI adapters are perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into an HDMI enabled display/monitor and you are up and running.

DP-HD-CBL	DisplayPort to HDMI Adapter Cable, HDMI Female/DisplayPort Male	27.80	27.24	26.69	CALL
-----------	---	-------	-------	-------	------

DisplayPort to DVI Adapter

This plug and play DisplayPort to DVI adapter is perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into a DVI enabled display/monitor and you are up and running.

DP-DVI-ADPT	DisplayPort to DVI Adapter, DVI Female/DisplayPort Male	14.99	14.69	14.39	CALL
-------------	---	-------	-------	-------	------

DisplayPort to DVI Adapter Cable, 7.25" (18.4cm) Long

These plug and play DisplayPort to DVI adapters are perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into a DVI enabled display/monitor and you are up and running.

DP-DVI-CBL	DisplayPort to DVI Adapter Cable, DVI Female/DisplayPort Male	27.80	27.24	26.69	CALL
------------	---	-------	-------	-------	------

DisplayPort to SVGA Adapter Cable, 8.45" (21.5cm) Long


These plug and play DisplayPort to VGA adapters are perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into a VGA enabled display/monitor and you are up and running.

DP-SVGA-CBL	DisplayPort to SVGA Adapter Cable, SVGA Female/DisplayPort Male	30.85	30.23	29.62	CALL
-------------	---	-------	-------	-------	------



Video signal transmission

Video images are transmitted across cables in a variety of ways. From a single coaxial cable (even non coaxial cable in some cases) to the use of as many as 5 coaxial lines to transmit the video image. Basically, the more the video signal is broken down by the use of more transmission lines into individual components, the better the video image. The following is a progressive list on commonly used video signal transmission methods:



Red, Green, Blue (RGB): This method uses 3 to 5 coaxial lines with BNC style connectors or HD15 interface. The video signal is split into three primary colors, Red, Green, Blue with separate lines often used for control signals. This method produces an extremely high quality video image.

Component: Three coaxial lines are used in this method with RCA style connectors. Black and White information is carried on one coaxial line while color differential signals are carried on the two remaining coaxial lines. This method produces a very high quality video image.

S-Video (SVHS): This method utilizes two coaxial lines contained within one outer jacket with a Mini DIN 4 circular connector. One coaxial line carries the Black and White information; the second coaxial line carries all the color information. This produces a high quality video image.

Composite: A single coaxial line with an RCA connector carries both the Black and White as well as the color signal. This method produces a relatively good quality video image.

RF Video: A single coaxial line with a Type F connector. It produces the lowest quality video image of all the interface types.

Item #	Description	# Coax	1-9	10-24	25-99	100+
--------	-------------	--------	-----	-------	-------	------

Premium Grade Black or Gray SVGA Breakout Cables - HD15M to 5 BNC Plugs

This is our best quality VGA cable. It makes use of the most comprehensive shielding to minimize the amount of RF radiation that may escape through the cable. Five 75 Ohm miniature coaxials have a durable double shield composed of aluminum mylar and a copper braid; and another double shield composed of aluminum mylar and copper braid over the 5 coaxials. The connector shell has a full metal shell which is fully over-molded. There is just no better VGA cable made. Color: Black or Gray. **Note:** HD15 connections: Pin #1 Red, 2 Green, 3 Blue, 13 Horizontal, 14 Vertical. All shields terminate to pins 5 thru 10. No connection pins 4, 9, 11, 12 and 15.

CTL5CAT-3B	SVGA Breakout Cable, HD15 Male/5 BNC Male, 3.0ft (0.9m)	5	35.35	32.52	29.69	CALL
CTL5CAT-6B	SVGA Breakout Cable, HD15 Male/5 BNC Male, 6.0ft (1.8m)	5	41.95	38.59	35.24	CALL
CTL5CAT-6BF	SVGA Breakout Cable, HD15 Male/5 BNC Male with Ferrite, 6.0ft (1.8m)	5	44.50	40.94	37.38	CALL
CTL5CAT-12B	SVGA Breakout Cable, HD15 Male/5 BNC Male, 12.0ft (3.6m)	5	55.20	50.78	46.37	CALL
CTL5CAT-3	SVGA Breakout Cable, HD15 Male/5 BNC Male, 3.0ft (0.9m)	5	35.35	32.52	29.69	CALL
CTL5CAT-6	SVGA Breakout Cable, HD15 Male/5 BNC Male, 6.0ft (1.8m)	5	41.95	38.59	35.24	CALL
CTL5CAT-6F	SVGA Breakout Cable, HD15 Male/5 BNC Male with Ferrite, 6.0ft (1.8m)	5	44.50	40.94	37.38	CALL

Premium Grade Gray SVGA Breakout Extension Cables - HD15M to 5 BNC Jacks

Note: HD15 connections: Pin #1 Red, 2 Green, 3 Blue, 13 Sync. All shields terminate to pins 5 thru 10. No connection pins 4, 9, 11, 12 and 15.

CTL5CAR-1.5	SVGA Breakout Ext. Cable, HD15 Male/5 BNC Female, 1.5ft (0.5m)	5	37.05	34.09	31.12	CALL
-------------	--	---	-------	-------	-------	------

Premium Grade Gray SVGA Breakout Extension Cable - HD15M to 4 BNC Jacks

Note: HD15 connections: Pin #1 Red, 2 Green, 3 Blue, 13 Sync. All shields terminate to pins 5 thru 10.

CTL4CAR-1.5	SVGA Breakout Ext. Cable, HD15 Male/4 BNC Female, 1.5ft (0.5m)	4	31.15	28.66	26.17	CALL
-------------	--	---	-------	-------	-------	------

Premium 3 Line Coaxial Cable with BNC Plugs

These extraordinary low loss coaxials are particularly suitable for transmission of RGB signals over extended distances without worry of signal deterioration or crosstalk. Each individual Slimline coaxial has a 75 Ohm impedance and a full shield coverage comprised of a copper braid and mylar shield. Coaxial colors are Red, Green and Blue. Outer appearance is Black including molded strain reliefs.

CTL3B-5B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 5.0ft (1.5m)	3	22.85	21.02	19.19	CALL
CTL3B-7.5B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 7.5ft (2.3m)	3	26.45	24.33	22.22	CALL
CTL3B-10B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 10.0ft (3.0m)	3	29.95	27.55	25.16	CALL
CTL3B-15B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 15.0ft (4.6m)	3	37.05	34.09	31.12	CALL
CTL3B-25B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 25.0ft (7.6m)	3	51.20	47.10	43.01	CALL
CTL3B-50B	Premium Multi-Coaxial Cable, 3 BNC Male/Male, 50.0ft (15.2m)	3	86.65	79.72	72.79	CALL

Premium 4 Line Coaxial Cable with BNC Plugs

Coaxial colors are Red, Green, Black and Blue. Outer appearance is Black including molded strain reliefs.

CTL4B-5B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 5.0ft (1.5m)	4	27.85	25.62	23.39	CALL
CTL4B-7.5B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 7.5ft (2.3m)	4	32.30	29.72	27.13	CALL
CTL4B-10B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 10.0ft (3.0m)	4	36.75	33.81	30.87	CALL
CTL4B-15B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 15.0ft (4.6m)	4	45.70	42.04	38.39	CALL
CTL4B-25B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 25.0ft (7.6m)	4	63.55	58.47	53.38	CALL
CTL4B-50B	Premium Multi-Coaxial Cable, 4 BNC Male/Male, 50.0ft (15.2m)	4	108.15	99.50	90.85	CALL

Premium 5 Line Coaxial Cable with BNC Plugs

Coaxial colors are Red, Green, Black, Gray and Blue. Outer appearance is Black including molded strain reliefs.

CTL5B-5B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 5.0ft (1.5m)	5	33.10	30.45	27.80	CALL
CTL5B-7.5B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 7.5ft (2.3m)	5	38.60	35.51	32.42	CALL
CTL5B-10B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 10.0ft (3.0m)	5	44.10	40.57	37.04	CALL
CTL5B-15B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 15.0ft (4.6m)	5	55.15	50.74	46.33	CALL
CTL5B-25B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 25.0ft (7.6m)	5	77.20	71.02	64.85	CALL
CTL5B-50B	Premium Multi-Coaxial Cable, 5 BNC Male/Male, 50.0ft (15.2m)	5	132.30	121.72	111.13	CALL

Premium 8 Line Coaxial Cable with BNC Plugs




Coaxial colors are Red, Green, Black, White, Gray, Purple, Yellow and Blue. Outer appearance is Black including molded strain reliefs.

CTL8B-5B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 5.0ft (1.5m)	8	82.50	77.55	72.60	CALL
CTL8B-7.5B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 7.5ft (2.3m)	8	88.00	82.72	77.44	CALL
CTL8B-10B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 10.0ft (3.0m)	8	93.50	87.89	82.28	CALL
CTL8B-15B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 15.0ft (4.6m)	8	104.50	98.23	91.96	CALL
CTL8B-20B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 20.0ft (6.1m)	8	115.50	108.57	101.64	CALL
CTL8B-25B	Premium Multi-Coaxial Cable, 8 BNC Male/Male, 25.0ft (7.6m)	8	126.50	118.91	111.32	CALL

L-com 75 Ohm BNC 1U/2U Patch Panels - 19" (48.3cm) Rack Style

These robust BNC patch panels are made from 16 gauge cold rolled steel and finished with a durable black powder coat. These patch panels can be mounted in any 19" (48.3cm) rack or cabinet.

PR175B1675BLK	1.75" (4.4cm) Panel, 16 - 75 Ohm BNC Adapters Insulated	120.95	116.11	111.27	CALL
PR35B3275BLK	3.50" (8.9cm) Panel, 32 - 75 Ohm BNC Adapters Insulated	230.95	221.71	212.47	CALL



More RG59 cable assemblies available. Go to L-com.com



CC59A




CC59A-HR



CC59A-RR



CC59B

Item #	Description	1-9	10-24	25-99	100+
RG59A/U - 75 Ohm Coaxial Cables with Inline Molded BNC and RCA Plugs					
L-com offers a wide variety of RG59A/U cable assemblies utilizing BNC and RCA connectors. RG59A/U cable is one of the most commonly used 75 Ohm cables. In addition to inline configurations L-com offers right angle and female bulkheads. All connectors feature a molded strain relief while the Type F connector features a captivated gold plated center pin for enhanced performance. The stranded center conductor of the RG59A/U cable provides maximum flexibility.					
RG59A/U	 <p>0.240 in. (6.1mm) Nominal</p>	RG59A/U			
		<ul style="list-style-type: none">Center Conductor: 22 (7 x 30) AWG bare compacted copperShielding: Bare copper braid (96% coverage)Insulation: Foam polyethyleneJacket: Black PVCOperating Temperature: -40°C - +80°C			
		NOMINAL ATTENUATION			
		MHz	db/100ft	db/100m	
		50	2.1	6.9	
		100	3.0	9.8	
		200	4.5	14.8	
400	6.6	21.7			
1000	10.9	35.8			
75 Ohm Impedance					

RG59A/U - 75 Ohm Coaxial Cables with Two Inline BNC Plugs


CC59A-05	RG59A Cable, BNC Male/Male, 0.5ft (0.2m)	9.05	8.69	8.33	CALL
CC59A-1	RG59A Cable, BNC Male/Male, 1.0ft (0.3m)	9.30	8.93	8.56	CALL
CC59A-1.5	RG59A Cable, BNC Male/Male, 1.5ft (0.5m)	9.55	9.17	8.79	CALL
CC59A-2	RG59A Cable, BNC Male/Male, 2.0ft (0.6m)	9.80	9.41	9.02	CALL
CC59A-2.5	RG59A Cable, BNC Male/Male, 2.5ft (0.8m)	10.05	9.65	9.25	CALL
CC59A-3	RG59A Cable, BNC Male/Male, 3.0ft (0.9m)	10.30	9.89	9.48	CALL
CC59A-4	RG59A Cable, BNC Male/Male, 4.0ft (1.2m)	10.85	10.42	9.98	CALL
CC59A-5	RG59A Cable, BNC Male/Male, 5.0ft (1.5m)	11.35	10.90	10.44	CALL
CC59A-6	RG59A Cable, BNC Male/Male, 6.0ft (1.8m)	11.85	11.38	10.90	CALL
CC59A-7.5	RG59A Cable, BNC Male/Male, 7.5ft (2.3m)	12.65	12.14	11.64	CALL
CC59A-10	RG59A Cable, BNC Male/Male, 10.0ft (3.0m)	13.95	13.39	12.83	CALL
CC59A-12	RG59A Cable, BNC Male/Male, 12.0ft (3.6m)	14.95	14.35	13.75	CALL
CC59A-15	RG59A Cable, BNC Male/Male, 15.0ft (4.6m)	16.50	15.84	15.18	CALL
CC59A-25	RG59A Cable, BNC Male/Male, 25.0ft (7.6m)	21.65	20.78	19.92	CALL
CC59A-50	RG59A Cable, BNC Male/Male, 50.0ft (15.2m)	34.55	33.17	31.79	CALL
CC59A-75	RG59A Cable, BNC Male/Male, 75.0ft (22.9m)	47.40	45.50	43.61	CALL
CC59A-100	RG59A Cable, BNC Male/Male, 100.0ft (30.5m)	60.30	57.89	55.48	CALL
CC59A-150	RG59A Cable, BNC Male/Male, 150.0ft (45.7m)	86.05	82.61	79.17	CALL
CC59A-200	RG59A Cable, BNC Male/Male, 200.0ft (61m)	111.80	107.33	102.86	CALL

RG59A/U - 75 Ohm Coaxial Cables with Inline BNC to Right Angle BNC Plugs

CC59A-1HR	RG59A Cable, BNC Male/90° Male, 1.0ft (0.3m)	11.95	11.47	10.99	CALL
CC59A-1.5HR	RG59A Cable, BNC Male/90° Male, 1.5ft (0.5m)	12.21	11.72	11.23	CALL
CC59A-2HR	RG59A Cable, BNC Male/90° Male, 2.0ft (0.6m)	12.46	11.96	11.46	CALL
CC59A-2.5HR	RG59A Cable, BNC Male/90° Male, 2.5ft (0.8m)	12.77	12.26	11.75	CALL
CC59A-3HR	RG59A Cable, BNC Male/90° Male, 3.0ft (0.9m)	13.03	12.51	11.99	CALL
CC59A-4HR	RG59A Cable, BNC Male/90° Male, 4.0ft (1.2m)	13.54	13.00	12.46	CALL
CC59A-5HR	RG59A Cable, BNC Male/90° Male, 5.0ft (1.5m)	14.06	13.50	12.94	CALL
CC59A-7.5HR	RG59A Cable, BNC Male/90° Male, 7.5ft (2.3m)	15.40	14.78	14.17	CALL
CC59A-10HR	RG59A Cable, BNC Male/90° Male, 10.0ft (3.0m)	16.74	16.07	15.40	CALL

RG59A/U - 75 Ohm Coaxial Cables with Two Inline RCA Plugs

CC59A-RR-1	RG59A Cable, RCA Male/Male, 1.0ft (0.3m)	5.10	4.90	4.69	CALL
CC59A-RR-3	RG59A Cable, RCA Male/Male, 3.0ft (0.9m)	6.23	5.98	5.73	CALL
CC59A-RR-6	RG59A Cable, RCA Male/Male, 6.0ft (1.8m)	7.93	7.61	7.30	CALL
CC59A-RR-9	RG59A Cable, RCA Male/Male, 9.0ft (2.7m)	9.63	9.24	8.86	CALL
CC59A-RR-12	RG59A Cable, RCA Male/Male, 12.0ft (3.6m)	11.33	10.88	10.42	CALL

<div><div>RG59B/U</div><div></div><div>75 Ohm Impedance</div></div>	<div><div>RG59B/U</div><div><ul style="list-style-type: none">• Center Conductor: 22 AWG solid bare copper covered steel• Shielding: Bare copper braid (95% coverage)• Insulation: Polyethylene• Jacket: Black PVC• Operating Temperature: -40°C - +80°C</div></div>	NOMINAL ATTENUATION		
		MHz	db/100ft	db/100m
		50	2.4	7.9
		100	3.4	11.1
		200	4.9	16.1
		400	7.0	23.0
		1000	12.0	39.3


RG59B/U - 75 Ohm Coaxial Cables with Two Inline BNC Plugs

CC59B-05	RG59B Cable, BNC Male/Male, 0.5ft (0.2m)	9.05	8.69	8.33	CALL
CC59B-1	RG59B Cable, BNC Male/Male, 1.0ft (0.3m)	9.30	8.93	8.56	CALL
CC59B-1.5	RG59B Cable, BNC Male/Male, 1.5ft (0.5m)	9.55	9.17	8.79	CALL
CC59B-2	RG59B Cable, BNC Male/Male, 2.0ft (0.6m)	9.80	9.41	9.02	CALL
CC59B-2.5	RG59B Cable, BNC Male/Male, 2.5ft (0.8m)	10.05	9.65	9.25	CALL
CC59B-3	RG59B Cable, BNC Male/Male, 3.0ft (0.9m)	10.30	9.89	9.48	CALL
CC59B-4	RG59B Cable, BNC Male/Male, 4.0ft (1.2m)	10.85	10.42	9.98	CALL
CC59B-5	RG59B Cable, BNC Male/Male, 5.0ft (1.5m)	11.35	10.90	10.44	CALL
CC59B-6	RG59B Cable, BNC Male/Male, 6.0ft (1.8m)	11.85	11.38	10.90	CALL
CC59B-7.5	RG59B Cable, BNC Male/Male, 7.5ft (2.3m)	12.65	12.14	11.64	CALL
CC59B-10	RG59B Cable, BNC Male/Male, 10.0ft (3.0m)	13.95	13.39	12.83	CALL
CC59B-12	RG59B Cable, BNC Male/Male, 12.0ft (3.6m)	14.95	14.35	13.75	CALL
CC59B-15	RG59B Cable, BNC Male/Male, 15.0ft (4.6m)	16.50	15.84	15.18	CALL
CC59B-25	RG59B Cable, BNC Male/Male, 25.0ft (7.6m)	21.65	20.78	19.92	CALL
CC59B-50	RG59B Cable, BNC Male/Male, 50.0ft (15.2m)	34.55	33.17	31.79	CALL
CC59B-75	RG59B Cable, BNC Male/Male, 75.0ft (22.9m)	47.40	45.50	43.61	CALL
CC59B-100	RG59B Cable, BNC Male/Male, 100.0ft (30.5m)	60.30	57.89	55.48	CALL
CC59B-150	RG59B Cable, BNC Male/Male, 150.0ft (45.7m)	86.05	82.61	79.17	CALL
CC59B-200	RG59B Cable, BNC Male/Male, 200.0ft (61.0m)	111.80	107.33	102.86	CALL



Distinguishing between 50 and 75 Ohm BNC connectors

BNC connectors are one of the few coaxial connectors that are available in two impedance values of 50 and 75 Ohms. You can distinguish the two types by the absence of dielectric material at the interface of the 75 Ohm version as shown.

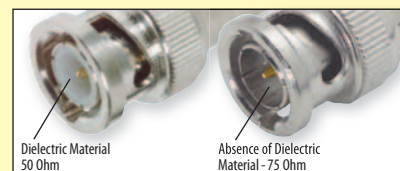

Item #	Description	1-9	10-24	25-99	100+
RG59B/U - 75 Ohm Coaxial Cables with Inline BNC Plug to BNC Jack					
CC59B-MF-1	RG59B Cable, BNC Male / Female Bulkhead, 1.0ft (0.3m)	12.77	12.00	11.24	CALL
CC59B-MF-3	RG59B Cable, BNC Male / Female Bulkhead, 3.0ft (0.9m)	13.80	12.97	12.14	CALL
CC59B-MF-6	RG59B Cable, BNC Male / Female Bulkhead, 6.0ft (1.8m)	15.40	14.48	13.55	CALL
CC59B-MF-10	RG59B Cable, BNC Male / Female Bulkhead, 10.0ft (3.0m)	17.51	16.46	15.41	CALL
CC59B-MF-25	RG59B Cable, BNC Male / Female Bulkhead, 25.0ft (7.6m)	25.49	23.96	22.43	CALL
CC59B-MF-50	RG59B Cable, BNC Male / Female Bulkhead, 50.0ft (15.2m)	38.73	36.41	34.08	CALL

RG59B/U - 75 Ohm Coaxial Cables with One Inline BNC to One Right Angle BNC Plug

CC59B-1HR	RG59B Cable, BNC Male / 90° Male, 1.0ft (0.3m)	12.77	12.26	11.75	CALL
CC59B-1.5HR	RG59B Cable, BNC Male / 90° Male, 1.5ft (0.5m)	13.03	12.51	11.99	CALL
CC59B-2HR	RG59B Cable, BNC Male / 90° Male, 2.0ft (0.6m)	13.34	12.81	12.27	CALL
CC59B-3HR	RG59B Cable, BNC Male / 90° Male, 3.0ft (0.9m)	13.91	13.35	12.80	CALL
CC59B-4HR	RG59B Cable, BNC Male / 90° Male, 4.0ft (1.2m)	14.47	13.89	13.31	CALL
CC59B-5HR	RG59B Cable, BNC Male / 90° Male, 5.0ft (1.5m)	15.04	14.44	13.84	CALL
CC59B-7.5HR	RG59B Cable, BNC Male / 90° Male, 7.5ft (2.3m)	16.43	15.77	15.12	CALL
CC59B-10HR	RG59B Cable, BNC Male / 90° Male, 10.0ft (3.0m)	17.87	17.16	16.44	CALL

RG59B/U - 75 Ohm Coaxial Cables with Two Inline Molded Type F Plugs

CCF59B-1	RG59B Cable, Type F Male / Male, 1.0ft (0.3m)	4.65	4.46	4.28	CALL
CCF59B-3	RG59B Cable, Type F Male / Male, 3.0ft (0.9m)	5.70	5.47	5.24	CALL
CCF59B-6	RG59B Cable, Type F Male / Male, 6.0ft (1.8m)	7.25	6.96	6.67	CALL
CCF59B-9	RG59B Cable, Type F Male / Male, 9.0ft (2.7m)	8.80	8.45	8.10	CALL
CCF59B-12	RG59B Cable, Type F Male / Male, 12.0ft (3.7m)	10.30	9.89	9.48	CALL
CCF59B-25	RG59B Cable, Type F Male / Male, 25.0ft (7.6m)	17.00	16.32	15.64	CALL
CCF59B-50	RG59B Cable, Type F Male / Male, 50.0ft (15.2m)	29.90	28.70	27.51	CALL
CCF59B-100	RG59B Cable, Type F Male / Male, 100.0ft (30.5m)	55.65	53.42	51.20	CALL

Thinline 75 Ohm (.11" / 2.8mm Dia.) Coaxial Cable Assemblies with Two Inline BNC Plugs

Substitute our smaller diameter, more flexible, lighter weight thinline cable assemblies for your traditional 75 Ohm cable assemblies. This coaxial cable features a spiral tinned copper shield and a proprietary air foamed dielectric.

Thinline	Thinline • Center Conductor: 28 AWG (7 x 38) stranded tinned copper wire • Shielding: Tinned copper spiral shield (95% coverage) • Insulation: Foamed polyethylene • Jacket: Black PVC • Operating Temperature: -40°C - +80°C	NOMINAL ATTENUATION		
		MHz	db/100ft	db/100m
75 Ohm Impedance		5	1.4	4.6
		10	2.1	6.9
		30	3.8	12.5
		50	5.1	16.7
		100	7.6	24.9

CTL1B-1	Thinline Cable, BNC Male / Male, 1.0ft (0.3m)	7.25	6.96	6.67	CALL
CTL1B-2.5	Thinline Cable, BNC Male / Male, 2.5ft (0.8m)	8.00	7.68	7.36	CALL
CTL1B-5	Thinline Cable, BNC Male / Male, 5.0ft (1.5m)	9.30	8.93	8.56	CALL
CTL1B-7.5	Thinline Cable, BNC Male / Male, 7.5ft (2.3m)	10.60	10.18	9.75	CALL
CTL1B-10	Thinline Cable, BNC Male / Male, 10.0ft (3.0m)	11.85	11.38	10.90	CALL
CTL1B-15	Thinline Cable, BNC Male / Male, 15.0ft (4.6m)	14.45	13.87	13.29	CALL
CTL1B-25	Thinline Cable, BNC Male / Male, 25.0ft (7.6m)	19.60	18.82	18.03	CALL

RG179B/U - 75 Ohm High Temperature Cable Assemblies with Two Inline BNC Plugs

This 75 Ohm cable features a Brown tinted FEP outer jacket and an operating temperature of 200°C.

RG179B/U	RG179B/U • Center Conductor: 30 AWG (7 x 38) stranded silver plated copper covered steel • Shielding: Silver coated copper braid (95% coverage) • Insulation: TFE teflon • Jacket: Brown FEP • Operating Temperature: -70°C - +200°C	NOMINAL ATTENUATION		
		MHz	db/100ft	db/100m
75 Ohm Impedance		50	8.5	27.9
		100	10.0	32.8
		200	12.5	41.0
		400	16.0	52.5
		1000	24.0	78.7

CC179B-1	RG179 Cable, BNC Male / Male, 1.0ft (0.3m)	22.30	21.41	20.52	CALL
CC179B-1.5	RG179 Cable, BNC Male / Male, 1.5ft (0.5m)	23.07	22.15	21.22	CALL
CC179B-2	RG179 Cable, BNC Male / Male, 2.0ft (0.6m)	23.90	22.94	21.99	CALL
CC179B-2.5	RG179 Cable, BNC Male / Male, 2.5ft (0.8m)	24.67	23.68	22.70	CALL
CC179B-5	RG179 Cable, BNC Male / Male, 5.0ft (1.5m)	28.69	27.54	26.39	CALL
CC179B-7.5	RG179 Cable, BNC Male / Male, 7.5ft (2.3m)	32.65	31.34	30.04	CALL
CC179B-10	RG179 Cable, BNC Male / Male, 10.0ft (3.0m)	36.62	35.16	33.69	CALL
CC179B-15	RG179 Cable, BNC Male / Male, 15.0ft (4.6m)	44.60	42.82	41.03	CALL

RG6/U Quad Shielded - 75 Ohm Coaxial Cable Assemblies with Two Inline Type F Plugs

This series features premium grade RG6 cable with four layers of shielding for enhanced performance coupled with our BAC529 weather resistant Type F male connectors. These Type F connectors utilize both silicone sealant as well as an internal O-ring to achieve performance suitable for both indoor and outdoor applications.

RG6/U Quad Shielded	RG6/U Quad Shielded • Center Conductor: 18 AWG solid bare copper covered steel • Shielding: 2x inner foil (100% coverage); 2x outer aluminum braid (60% coverage) • Insulation: Foam Polyethylene • Jacket: Black PVC • Operating Temperature: -40°C - +80°C	NOMINAL ATTENUATION		
		MHz	db/100ft	db/100m
75 Ohm Impedance		55	1.6	5.2
		211	2.9	9.5
		300	3.4	11.2
		400	4.0	13.1
		1000	6.5	21.3

CC6QF-05	RG6 Cable, Type F Male / Male, 0.5ft (0.2m)	20.60	19.36	18.13	CALL
CC6QF-1	RG6 Cable, Type F Male / Male, 1.0ft (0.3m)	20.90	19.65	18.39	CALL
CC6QF-3	RG6 Cable, Type F Male / Male, 3.0ft (0.9m)	21.90	20.59	19.27	CALL
CC6QF-6	RG6 Cable, Type F Male / Male, 6.0ft (1.8m)	23.45	22.04	20.64	CALL
CC6QF-9	RG6 Cable, Type F Male / Male, 9.0ft (2.7m)	25.00	23.50	22.00	CALL
CC6QF-12	RG6 Cable, Type F Male / Male, 12.0ft (3.7m)	26.55	24.96	23.36	CALL
CC6QF-25	RG6 Cable, Type F Male / Male, 25.0ft (7.6m)	33.25	31.25	29.26	CALL
CC6QF-50	RG6 Cable, Type F Male / Male, 50.0ft (15.2m)	46.10	43.33	40.57	CALL






Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

RG6/U Plenum - 75 Ohm Coaxial Cable Assemblies with Inline BNC Plugs

This series offers the commonly used RG6 cable sizes with a plenum jacket for applications that require this level of fire retardation and low smoke attributes. Offered with BNC male connectors in eight convenient lengths. Custom lengths available with modest minimums.

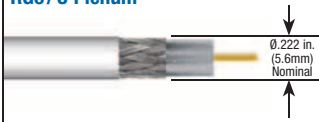RG6/U Plenum		NOMINAL ATTENUATION		
		MHz	db/100ft	db/100m
75 Ohm Impedance	<ul style="list-style-type: none"> Center Conductor: 18 AWG solid bare copper covered steel Shielding: Inner foil (100% coverage); Outer, aluminum braid (60% coverage) Insulation: FFEP - Foam Fluorinated Ethylene Propylene Jacket: White Plenum Operating Temperature: -20°C - +75°C 	50	1.6	4.9
		100	2.2	6.9
		200	3.0	10.2
		400	4.6	14.8
		1000	7.3	23.9

RG6/U Plenum - 75 Ohm Coaxial Cables with Two Inline BNC Plugs

CC6PB-1	RG6 Plenum Cable, BNC Male/Male, 1.0ft (0.3m)	33.53	32.19	30.85	CALL
CC6PB-1.5	RG6 Plenum Cable, BNC Male/Male, 1.5ft (0.5m)	34.61	33.23	31.84	CALL
CC6PB-2	RG6 Plenum Cable, BNC Male/Male, 2.0ft (0.6m)	36.77	35.30	33.83	CALL
CC6PB-2.5	RG6 Plenum Cable, BNC Male/Male, 2.5ft (0.8m)	37.85	36.34	34.82	CALL
CC6PB-5	RG6 Plenum Cable, BNC Male/Male, 5.0ft (1.5m)	43.26	41.53	39.80	CALL
CC6PB-7.5	RG6 Plenum Cable, BNC Male/Male, 7.5ft (2.3m)	48.67	46.72	44.78	CALL
CC6PB-10	RG6 Plenum Cable, BNC Male/Male, 10.0ft (3.0m)	54.08	51.92	49.75	CALL
CC6PB-15	RG6 Plenum Cable, BNC Male/Male, 15.0ft (4.6m)	64.89	62.29	59.70	CALL

Premium 3.5mm (1/8") 3 Conductor Cables for Microphone, Speaker and Other Applications

These low loss premium 3.5mm cable assemblies offer superior performance when compared to similar commercial counterparts. Connectors are gold plated reducing corrosion while maintaining reliable contact. 22 AWG conductors and double shield provide minimum loss even at long lengths.

CTL35MM-3	Stereo Cable, 3.5mm Male/Male, 3.0ft (0.9m)	5.15	4.94	4.74	CALL
CTL35MM-5	Stereo Cable, 3.5mm Male/Male, 5.0ft (1.5m)	6.20	5.95	5.70	CALL
CTL35MM-10	Stereo Cable, 3.5mm Male/Male, 10.0ft (3.0m)	8.80	8.45	8.10	CALL
CTL35MM-25	Stereo Cable, 3.5mm Male/Male, 25.0ft (7.6m)	16.50	15.84	15.18	CALL
CTL35MM-50	Stereo Cable, 3.5mm Male/Male, 50.0ft (15.2m)	29.40	28.22	27.05	CALL
CTL35MM-100	Stereo Cable, 3.5mm Male/Male, 100.0ft (30.5m)	55.15	52.94	50.74	CALL
CTL35MF-3	Stereo Cable, 3.5mm Male/Female, 3.0ft (0.9m)	5.15	4.94	4.74	CALL
CTL35MF-5	Stereo Cable, 3.5mm Male/Female, 5.0ft (1.5m)	6.20	5.95	5.70	CALL
CTL35MF-10	Stereo Cable, 3.5mm Male/Female, 10.0ft (3.0m)	8.80	8.45	8.10	CALL
CTL35MF-25	Stereo Cable, 3.5mm Male/Female, 25.0ft (7.6m)	16.50	15.84	15.18	CALL
CTL35MF-50	Stereo Cable, 3.5mm Male/Female, 50.0ft (15.2m)	29.40	28.22	27.05	CALL
CTL35MF-100	Stereo Cable, 3.5mm Male/Female, 100.0ft (30.5m)	55.15	52.94	50.74	CALL

Super Thin 3.5mm Cables

L-com's CTL35MMT-XX series of high quality stereo cable assemblies produces distortion free audio transmission. Features include gold plated center contacts to minimize signal loss as well as fully molded strain relief for enhanced durability and long life. These super thin 3.5mm cables feature an outside diameter (OD) of only 3.5mm. Available in 7 standard lengths from 3 to 100 feet, custom lengths are also available.

CTL35MMT-3	Stereo ThinLine Audio Cable, Male/Male, 3.0ft (0.9m)	4.00	3.76	3.52	CALL
CTL35MMT-5	Stereo ThinLine Audio Cable, Male/Male, 5.0ft (1.5m)	4.60	4.32	4.05	CALL
CTL35MMT-10	Stereo ThinLine Audio Cable, Male/Male, 10.0ft (3.0m)	6.00	5.64	5.28	CALL
CTL35MMT-15	Stereo ThinLine Audio Cable, Male/Male, 15.0ft (4.5m)	7.50	7.05	6.60	CALL
CTL35MMT-25	Stereo ThinLine Audio Cable, Male/Male, 25.0ft (7.6m)	10.00	9.40	8.80	CALL
CTL35MMT-50	Stereo ThinLine Audio Cable, Male/Male, 50.0ft (15.2m)	17.50	16.45	15.40	CALL
CTL35MMT-100	Stereo ThinLine Audio Cable, Male/Male, 100.0ft (30.5m)	35.00	32.90	30.80	CALL
CTL35MFT-3	Stereo ThinLine Audio Cable, Male/Female, 3.0ft (0.9m)	4.00	3.76	3.52	CALL
CTL35MFT-5	Stereo ThinLine Audio Cable, Male/Female, 5.0ft (1.5m)	4.60	4.32	4.05	CALL
CTL35MFT-10	Stereo ThinLine Audio Cable, Male/Female, 10.0ft (3.0m)	6.00	5.64	5.28	CALL
CTL35MFT-15	Stereo ThinLine Audio Cable, Male/Female, 15.0ft (4.5m)	7.50	7.05	6.60	CALL
CTL35MFT-25	Stereo ThinLine Audio Cable, Male/Female, 25.0ft (7.6m)	10.00	9.40	8.80	CALL
CTL35MFT-50	Stereo ThinLine Audio Cable, Male/Female, 50.0ft (15.2m)	17.50	16.45	15.40	CALL
CTL35MFT-100	Stereo ThinLine Audio Cable, Male/Female, 100.0ft (30.5m)	35.00	32.90	30.80	CALL

ThinLine 3.5mm 4 Circuit TRRS

L-com's CTL354MM-XX series of high quality stereo audio/video cable assemblies produces distortion free audio and video transmissions. The cables are commonly used on Apple's iPod® and iPhone® products and work with other TRRS audio/video applications as well. Features include gold plated center contacts to minimize signal loss as well as fully molded strain relief for enhanced durability and long life. These super thin TRRS cables feature an outside diameter (OD) of only 3.5mm. Available in 8 standard lengths from 3 to 100 feet, custom lengths are also available.

CTL354MM-3	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 3.0ft (0.9m)	5.95	5.59	5.24	CALL
CTL354MM-5	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 5.0ft (1.5m)	7.95	7.47	7.00	CALL
CTL354MM-10	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 10.0ft (3.0m)	12.95	12.17	11.40	CALL
CTL354MM-15	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 15.0ft (4.5m)	17.95	16.87	15.80	CALL
CTL354MM-20	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 20.0ft (6.1m)	22.95	21.57	20.20	CALL
CTL354MM-25	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 25.0ft (7.6m)	27.95	26.27	24.60	CALL
CTL354MM-50	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 50.0ft (15.2m)	49.95	46.95	43.96	CALL
CTL354MM-100	Stereo 4 Circuit TRRS ThinLine Audio Cable, Male/Male, 100.0ft (30.5m)	79.95	75.15	70.36	CALL

Coiled 3.5mm Cables

L-com's line of coiled 3.5mm cables are perfect for variable reach application where access to a 3.5mm jacks can fluctuate. These rugged coiled 3.5mm cables feature black polyurethane jackets which stand up to UV and chemical exposure. The CTL35MMC-XX series cables from L-com can be used in myriad applications where length variation and mobility are required such as medical, industrial, and manufacturing scenarios.

CTL35MMC-0.5	Coiled 3.5mm Stereo Audio Cable, Male/Male, 0.5ft (0.1m) (Relaxed Length)	19.95	19.55	19.15	CALL
CTL35MMC-1	Coiled 3.5mm Stereo Audio Cable, Male/Male, 1.0ft (0.3m) (Relaxed Length)	20.95	20.53	20.11	CALL
CTL35MMC-2	Coiled 3.5mm Stereo Audio Cable, Male/Male, 2.0ft (0.6m) (Relaxed Length)	22.00	21.56	21.12	CALL
CTL35MMC-3	Coiled 3.5mm Stereo Audio Cable, Male/Male, 3.0ft (0.9m) (Relaxed Length)	24.10	23.62	23.14	CALL
CTL35MMC-4	Coiled 3.5mm Stereo Audio Cable, Male/Male, 4.0ft (1.2m) (Relaxed Length)	25.15	24.65	24.14	CALL
CTL35MMC-5	Coiled 3.5mm Stereo Audio Cable, Male/Male, 5.0ft (1.5m) (Relaxed Length)	26.20	25.68	25.15	CALL

3.5mm Audio Bulkhead Coupler

L-com's 3.5mm audio bulkhead coupler offers a practical and economical way to feed audio cables through panels, wall plates and enclosures. The .50" D-hole design and lock washer ensure a secure fit. This versatile coupler is also available pre-mounted on L-com's USP2-35MM and USP4-35MM two port and four port Universal Sub Panels.

BA35FF	3.5mm Audio Bulkhead Coupler	8.15	7.50	6.85	CALL
--------	------------------------------	------	------	------	------

Item #	Description	Cable Type	Attachment	1-9	10-24	25-99	100+
True 75 Ohm BNC Within Series Adapters - To Precisely Match All 75 Ohm Coaxial Cables							
BA016	Coaxial Adapter, BNC Female/Female (Splice)			3.20	3.01	2.82	CALL
BA019	Coaxial T Adapter, BNC Female/Female/Female			5.35	5.03	4.71	CALL
BA035	Coaxial T Adapter, BNC Female/Male/Female			5.35	5.03	4.71	CALL
BA036	Coaxial Adapter, BNC Female/Female Bulkhead			5.35	5.03	4.71	CALL
BA038	Coaxial Adapter, BNC Male/90° Female			5.35	5.03	4.71	CALL
BA039	Coaxial Adapter, BNC Female/Female Bulkhead, Insulated			6.10	5.73	5.37	CALL

BNC Coaxial Connectors, 75 Ohm

BAC026	BNC Male	RG6	Twist On	3.60	3.38	3.17	CALL
BAC032	BNC Male	RG6	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC029	BNC Male	RG6	Crimp (3 Pc)	3.55	3.34	3.12	CALL
BAC042	BNC Male	RG6-Q	Crimp	2.45	2.30	2.16	CALL
BAC024	BNC Male	RG59	Twist On	3.60	3.38	3.17	CALL
BAC027	BNC Male	RG59 (23 AWG C.C.)	Crimp	3.55	3.34	3.12	CALL
BAC027A	BNC Male	RG59 (20 AWG C.C.)	Crimp	3.55	3.34	3.12	CALL
BAC028	BNC Male	RG59 Plenum	Crimp (3 Pc)	3.55	3.34	3.12	CALL
BAC030	BNC Male	RG59	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC031	BNC Male	RG59 Plenum	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC033	BNC Male	RG59	Solder	4.70	4.42	4.14	CALL
BAC543	BNC Male, Right Angle	RG59	Crimp	5.15	4.84	4.53	CALL
BAC706	BNC Male, Right Angle	RG59/6	Crimp	6.25	5.88	5.50	CALL
BAC985	BNC Male, Right Angle	RG59/6	Twist On	6.35	5.97	5.59	CALL
BAC836A-59	BNC Male	RG59/6	Crimp	3.00	2.82	2.64	CALL
BAC551	BNC Male, Right Angle	RG179/RG187	Crimp	5.70	5.36	5.02	CALL
BAC836B-87	BNC Male	RG187/CTL	Crimp	3.00	2.82	2.64	CALL
BAC516	BNC Female	RG6	Crimp	4.35	4.09	3.83	CALL
BAC014	BNC Female	RG59	Twist On	4.35	4.09	3.83	CALL
BAC908-59	BNC Female	RG59/6	Crimp	4.35	4.09	3.83	CALL
BAC552	BNC Female Bulkhead	RG59	Crimp	5.80	5.45	5.10	CALL
BAC550	BNC Female Bulkhead	RG179	Crimp	4.40	4.14	3.87	CALL

Type F Coaxial Connectors, 75 Ohm

BAC-CFS6U	Type F Male, Indoor	RG6	Crimp	1.10	1.03	0.97	CALL
BAC529	Type F Male, Indoor/Outdoor	RG6	Crimp	1.40	1.32	1.23	CALL
BAC-EX6	Type F Male	RG6	Compression	1.65	1.55	1.45	CALL
BAC-CFS59U	Type F Male, Indoor	RG59	Crimp	1.10	1.03	0.97	CALL
BAC530	Type F Male, Indoor/Outdoor	RG59	Crimp	1.40	1.32	1.23	CALL
BAC-EX59	Type F Male	RG59	Compression	1.65	1.55	1.45	CALL
AFM-1700	Type F Male	Low-Loss 195-Series, RG58	Crimp	3.73	3.43	3.13	CALL
BAC520	Type F Female	RG59	Crimp	3.10	2.91	2.73	CALL
BAC535	Type F Female Bulkhead	RG179/RG187	Crimp	2.94	2.76	2.59	CALL

RG59A and RG6 Bulk Cable

RG59A/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 22 (7x30) AWG bare copper Shielding: Bare copper braid (95% coverage) Insulation: Foam polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	3.0	9.8	RG59A-100	RG59A/U, 100ft (30.5m) coil	26.20
	200	4.5	14.8	RG59A-500	RG59A/U, 500ft (152.4m) spool	104.95
	400	6.6	21.7	RG59A-1K	RG59A/U, 1,000ft (304.8m) spl.	209.95
	1000	10.9	35.8			
RG6/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 18 AWG solid bare copper covered steel Shielding: Inner foil (100% coverage); Outer, copper braid (60% coverage) Insulation: Foam Polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	2.1	6.9	RG6-100	RG6/U, 100ft (30.5m) coil	15.70
	200	3.1	10.2	RG6-500	RG6/U, 500ft (152.4m) spool	78.70
	400	4.5	14.8	RG6-1K	RG6/U, 1,000ft (304.8m) spool	178.50
	1000	7.3	23.9			

Deluxe Full Cycle Ratchet with Hex Crimping Tools

Your choice of seven similar crimp tools equipped with specific die sets to perform a wide variety of crimping functions to fit your needs.

HT301A	Deluxe Crimp Tool with .256", .213" and .068" Hex Die	35.95	34.51	33.07	CALL
HT301C	Deluxe Crimp Tool with .319", .256", .213" and .068" Hex Die	44.95	43.15	41.35	CALL
HT301D	Deluxe Crimp Tool with .324", .256", .213" and .068" Hex Die	44.95	43.15	41.35	CALL
HT301G	Deluxe Crimp Tool with .255", .213", .137", .100", .069", .043" Hex Die	41.95	40.27	38.59	CALL
HT301J	Deluxe Crimp Tool with .178", .151", .128", .078", .068", .042" Hex Die	41.95	40.27	38.59	CALL
HT230A	Deluxe Crimp Tool with .255", .213", .187" and .068" Hex Die	39.95	38.35	36.75	CALL
HT-CRIMP02	Deluxe Crimp Tool with .028", .039", .047", .100", .128" and .151" Hex Die	27.95	26.83	25.71	CALL
HT-CRIMP03	Deluxe Crimp Tool with .100", .128" and .429" Hex Die	39.95	38.35	36.75	CALL
HT-CRIMP04	Deluxe Crimp Tool with .068", .213", .256" and .324" Hex Die	27.95	26.83	25.71	CALL
HT-CRIMP600	Deluxe Crimp Tool with .610" Hex Die	33.95	32.59	31.23	CALL

Deluxe Full Cycle Ratchet Crimp Tool Kit

Housed in rugged, high impact cases these handy deluxe ratchet crimp and strip tool kits can satisfy most coaxial crimping needs. These kits include ratchet tool, interchangeable dies, cable cutter and rotary cable stripper. See L-com.com for complete kit contents.

HT330K	Deluxe Crimp Tool Kit, for use with RG Type Cable	159.95	153.55	147.15	CALL
HT-KIT-01	Deluxe Crimp Tool Kit, for use with Low-Loss and RG Type Cable	101.99	97.91	93.83	CALL

Rotary Coaxial Cable Strippers for 400/600 Series

Quickly and accurately cut and trim the coaxial jacket, shield and inner insulation in two easy steps. Just insert the un-stripped end of the coax cable into the tool, spin clockwise 4 or 5 times, then insert into other end of tool, spin clockwise 4 or 5 times again and pull off the unwanted portion.

HT-STRIP400-1	Coax Cable Stripper for 400-Series Cable	61.95	59.47	56.99	CALL
HT-STRIP600-1	Coax Cable Stripper for 600-Series Cable	67.95	65.23	62.51	CALL
HT-STRIP-B1	Replacement Blades for HT-STRIP400-1/HT-STRIP600-1	8.95	8.59	8.23	CALL

Many more connector and adapter options available. Go to L-com.com



0.240 in. (6.1mm) Nominal
RG59A/U

75 Ohm Impedance


0.270 in. (6.9mm) Nominal
RG6/U

75 Ohm Impedance




Best Seller**Installation of Mini DIN bulkhead adapter styles**

Mount adapter from the front of panel, secure threads / nut from the back of the panel.



Mount adapter from the rear of panel, secure threads / nut from the front of the panel.



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Mini DIN Feed-thru Adapters - Panel and Wall Plate Mountable

These exclusive adapters offer a unique design suitable for panel mounting Mini DIN adapters. Female-Female gender.

MD44FF	Mini DIN 4 Feed-Thru Adapter, Female / Female	9.24	8.50	7.76	CALL
MD44FJF	Mini DIN 4 Bulkhead Jack / Leads, Front Mount	10.30	9.48	8.65	CALL
MD44FJR	Mini DIN 4 Bulkhead Jack / Leads, Rear Mount	10.30	9.48	8.65	CALL

Type F Within Series Adapters - 75 Ohm

BA122	Coaxial Adapter, Type F Male / Male	2.15	2.02	1.89	CALL
BA123	Coaxial Adapter, Type F Female / Male, Right Angle	2.15	2.02	1.89	CALL
BA124	Coaxial Adapter, Type F Male Push-on / Female	1.35	1.27	1.19	CALL
BA330A	Coaxial Bulkhead Adapter, Type F Female / Female, (5/1.3cm D-Hole), Insulated	2.15	2.02	1.89	CALL

RCA Female Feed-Thru Adapter - with Red, Green, Blue, Yellow or White Insulators

These RCA feed-thru adapters feature insulators color coded for both video and audio applications. This color coding assists in component hookup to avoid improper connections.

BA400R	Coaxial Adapter, RCA Bulkhead Female / Female, Red Insulator	3.95	3.71	3.48	CALL
BA400G	Coaxial Adapter, RCA Bulkhead Female / Female, Green Insulator	3.95	3.71	3.48	CALL
BA400B	Coaxial Adapter, RCA Bulkhead Female / Female, Blue Insulator	3.95	3.71	3.48	CALL
BA400Y	Coaxial Adapter, RCA Bulkhead Female / Female, Yellow Insulator	3.95	3.71	3.48	CALL
BA400A	Coaxial Adapter, RCA Bulkhead Female / Female, White Insulator	3.95	3.71	3.48	CALL
BA400A	Coaxial Adapter, RCA Bulkhead Female / Female, 0.5" (1.3cm) Circular Hole	3.95	3.71	3.48	CALL

RCA Interseries Coaxial Adapter / 75 Ohm

BA907	Coaxial Adapter, RCA Male / Type F Female	2.15	2.02	1.89	CALL
-------	---	------	------	------	------

3.5mm Audio Bulkhead Coupler

L-com's 3.5mm audio bulkhead coupler offers a practical and economical way to feed audio cables through panels, wall plates and enclosures. The .50" D-hole design and lock washer ensure a secure fit. This versatile coupler is also available pre-mounted on L-com's USP2-35MM and USP4-35MM two port and four port Universal Sub Panels.

BA35FF	3.5mm Audio Bulkhead Coupler	8.15	7.50	6.85	CALL
--------	------------------------------	------	------	------	------

Right Angle RCA and TS 1/4" Male / Female Adapters

L-com's low profile right angle audio adapters are perfect for tight fit applications. Two options are available, RCA and TS 1/4", allowing cables and connectors to fit in small spaces. These adapters are male to female and can be attached at any angle to allow for any 360 degree option. Durable molded design can take punishment in the field and gold plated contacts provide optimum performance.

RA-RCAMF	RCA Right Angle Adapter, Male / Female	3.85	3.54	3.23	CALL
RA-14M214F	TS 1/4" Right Angle Adapter, Male / Female	5.45	5.01	4.58	CALL

Adapters and Gender Changers

It's often necessary to connect between different interface types or to change the gender of an interface to allow attachment of extension cables. We offer a wide variety of adapters and gender changers covering commonly used interfaces such as HD15, Mini DIN 5 and 6, DB9, DVI and HDMI.

HD15 Slimline Gender Changer / Adapters - Fully Populated

DGBH15F	Slimline Gender Changer, HD15 Female / Female	7.95	7.16	6.36	CALL
DGBH15M	Slimline Gender Changer, HD15 Male / Male	7.95	7.16	6.36	CALL
DGBH15MF	Slimline Socket Saver, HD15 Male / Female	7.95	7.16	6.36	CALL

Slimline Gender Changer / Adapters - with Pin 9 Missing to Interface VGA Monitors

DGBV15F	Slimline Gender Changer, HD15 Female / Female, No Pin 9	8.35	7.51	6.68	CALL
DGBV15M	Slimline Gender Changer, HD15 Male / Male, No Pin 9	8.35	7.51	6.68	CALL
DGBV15MF	Slimline Socket Saver, HD15 Male / Female, No Pin 9	8.35	7.51	6.68	CALL

HD15 Low Profile Right Angle Adapters - Molded and Fully Shielded

Connecting cables in tight spaces can be a problem in many applications. These low profile adapters solve this problem by allowing cables to be connected at a 90 degree angle. Two versions are available to allow cables to exit in opposite directions. Adapters are male to female, fully shielded and are overmolded with Gray PVC. Mating hardware is reversible allowing for use in virtually any application.

DG90H15MF1	Low Profile Right Angle Adapter, HD15 Male / Female, Cable Exit 1	8.91	8.38	7.84	CALL
DG90H15MF2	Low Profile Right Angle Adapter, HD15 Male / Female, Cable Exit 2	8.91	8.38	7.84	CALL

DVI Dust Covers - Male and Female

L-com's DVI dust covers protect unused DVI connectors on cable assemblies and DVI receptacles on DVI equipment including DVI KVM switches, DVI Extenders, DVI splitters, and more. We offer both male and female DVI dust covers in packages of 10.

CVRDVI-M	DVI Dust Cover, Male, Pkg / 10	6.15	5.90	5.66	CALL
CVRDVI-F	DVI Dust Cover, Female, Pkg / 10	6.15	5.90	5.66	CALL

HDMI® Dust Covers - Male and Female

L-com's HDMI dust covers protect unused HDMI connectors on cable assemblies and HDMI receptacles on HDMI equipment including HDMI hubs, HDMI Extenders, HDMI splitters, and more. We offer both male and female HDMI dust covers in packages of 10.

CVRHD-M	HDMI Dust Cover, Male, Pkg / 10	6.15	5.90	5.66	CALL
CVRHD-F	HDMI Dust Cover, Female, Pkg / 10	6.15	5.90	5.66	CALL



What are the major A/V interfaces?

Currently there are four major video interfaces controlled by different standards groups and each with its own strengths and weaknesses. This chart is a comparison of these interfaces.

	HDMI (High Definition Multimedia Interface)	DP (Display Port)	DVI (Digital Video Interface)	SVGA (Super Video Graphics Array)
Standards Group	HDMI Licensing, LLC. (Consortium of consumer electronics manufacturers)	VESA (Video Electronics Standards Association)	DDWG (Digital Display Work Group)	VESA (Video Electronics Standards Association)
Maximum Channels	8	8	6 (Dual Link)	N/A
Maximum Resolution	HDTV 720P and 1080P	1080p	QXGA (2048 x 1536)	800 x 600
Analog / Digital Combination	No	No	DVI-I (24 + 4 Pin) Yes	No
Digital / Audio	Yes	Yes	No	No

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

DVI Digital Video Molded Adapters

These fully molded adapters provide transition from DVI to VGA (HD15) interfaces. Compact in size these adapters are very useful in dealing with difficult interconnection problems.

DMB601MF	DVI Adapter, DVI-A Male / HD15 Female	9.30	8.56	7.81	CALL
DMB602FM	DVI Adapter, DVI-A Female / HD15 Male	9.99	9.19	8.39	CALL
DMB603MF	DVI Adapter, DVI-D Male / DVI-I Female	16.50	15.18	13.86	CALL

DVI Female to Female Feed-thru Bulkhead Adapter

This fully populated DVI female bulkhead adapter is compatible with DVI-I Single/Dual Link, DVI-D Single/Dual Link and DVI-A male connectors and is bulkhead mountable to allow coupling of two DVI cables through a bulkhead.

DMB605FF	DVI Bulkhead Adapter, Female / Female	15.20	13.68	12.16	CALL
----------	---------------------------------------	-------	-------	-------	------

DVI (Digital Video Interface) to HDMI® (High Definition Multimedia Interface) Adapters

This series of adapters utilizes two of the most commonly used digital video interfaces of DVI and HDMI. Offered in various gender combinations to address multiple interface conversion applications. Fully molded and compact in size for durability and usefulness in tight fit situations.

DVIHDMF	Digital Video Adapter, DVI-D Dual Link Male / HDMI Female (Panel Mount)	9.55	8.79	8.02	CALL
DVIHDF	Digital Video Adapter, DVI-D Dual Link Female / HDMI Female	9.55	8.79	8.02	CALL
DVIHDM	Digital Video Adapter, DVI-D Dual Link Male / HDMI Male	9.55	8.79	8.02	CALL
DVIHDFM	Digital Video Adapter, DVI-D Dual Link Female / HDMI Male	9.55	8.79	8.02	CALL

HDMI® Keystone Style Couplers

L-com's HDMI keystone couplers can be easily installed into panels, wall plate openings and enclosures. Two color options, black and white.

HDKEY-BK	HDMI Feed-Thru Adapter, Black	9.95	9.15	8.36	CALL
HDKEY-WT	HDMI Feed-Thru Adapter, White	9.95	9.15	8.36	CALL

HDMI® (High Definition Multimedia Interface) Adapters

This series of HDMI adapters is offered in male-female, female-female and male-male gender configurations covering your HDMI connection applications from gender changing to panel mount feed-thrus. All adapters are fully molded and compact in size for durability and usefulness in tight fit situations.

HDFM	HDMI Adapter, Female / Male	11.95	10.99	10.04	CALL
HDF	HDMI Adapter, Female / Female	11.20	10.30	9.41	CALL
AHDM	HDMI Adapter, Male / Male	8.70	7.83	6.96	CALL

HDMI® Swivel Adapter

L-com offers this male to female HDMI swivel adapter to address applications where space is confined or access is prohibitive. This versatile HDMI swivel adapter can be used with any HDMI compliant cable assembly or HDMI ports on devices including HD TVs and HDMI hubs.

HDFM-SW	HDMI Swivel Adapter, HDMI Female / HDMI Male	10.45	9.82	9.20	CALL
---------	--	-------	------	------	------

DisplayPort Panel Mount Adapter (Female DP to Female DP)

L-com's DP-FF is a versatile panel mount DisplayPort feed-thru adapter that makes connecting DisplayPort cables through a panel or enclosure a snap. This DisplayPort adapter features two removable 4-40 jackscrews for easy panel mounting.

DP-FF	DisplayPort Panel Mount Adapter, Female / Female	14.99	14.69	14.39	CALL
-------	--	-------	-------	-------	------

DisplayPort to HDMI® Adapter

This plug and play DisplayPort to HDMI adapter is perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into an HDMI enabled display/monitor and you are up and running.

DP-HD-ADPT	DisplayPort to HDMI Adapter, HDMI Female / DisplayPort Male	14.99	14.69	14.39	CALL
------------	---	-------	-------	-------	------

DisplayPort to DVI Adapter

This plug and play DisplayPort to DVI adapter is perfect for upgrading to the newer digital DisplayPort A/V technology. Simply plug in the DisplayPort connector to a PC or Laptop and the other end into a DVI enabled display/monitor and you are up and running.

DP-DVI-ADPT	DisplayPort to DVI Adapter, DVI Female / DisplayPort Male	14.99	14.69	14.39	CALL
-------------	---	-------	-------	-------	------



DisplayPort Adapter Cables

DP-HD-CBL	DisplayPort to HDMI Adapter Cable, HDMI Female / DisplayPort Male, 7.25" (18.4cm)	27.80	27.24	26.69	CALL
DP-DVI-CBL	DisplayPort to DVI Adapter Cable, DVI Female / DisplayPort Male, 7.25" (18.4cm)	27.80	27.24	26.69	CALL
DP-SVGA-CBL	DisplayPort to SVGA Adapter Cable, SVGA Female / DisplayPort Male, 8.45" (21.5cm)	30.85	30.23	29.62	CALL



Field Installation Products

Often times the use of finished cable assemblies is simply not possible due to space limitations of an existing installation. In these cases, L-com's offering of field friendly products are the perfect solution. Our terminal block connectors allow termination of data, audio, and video lines without the use of any special tools. These products were designed to address existing infrastructure applications where space is limited and running new cable is not an option.

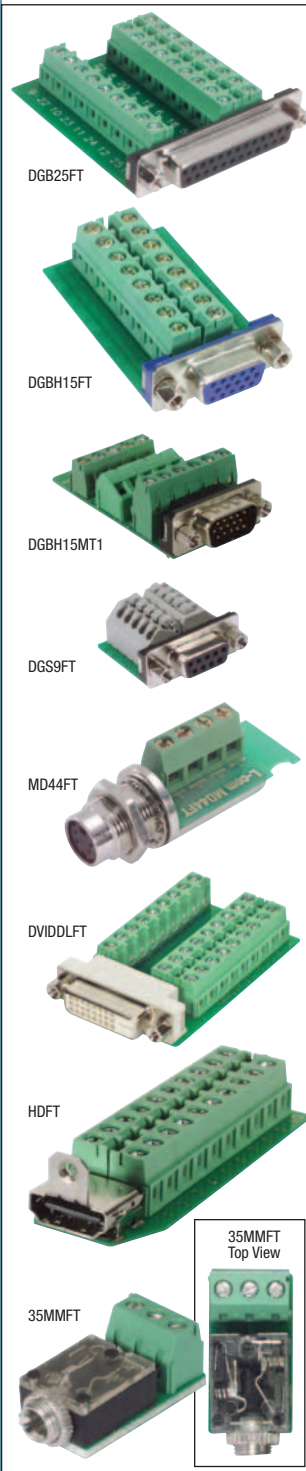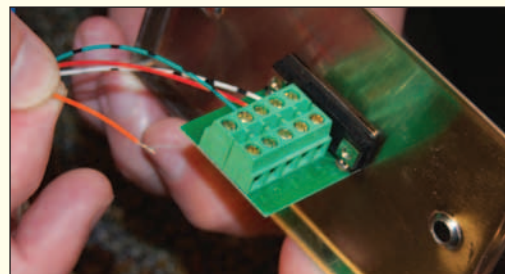

Item #	Description	1-9	10-24	25-99	100+
DB9, DB15, DB25 or HD15 Connectors for Field Termination - Panel Mountable, Male or Female					
These field termination connectors provide an easy and convenient way to perform field termination of any DB9, DB15, DB25 or HD15 cable. Separate connection points are provided for all positions of the connector plus the ground. Terminal block design with set screws provides reliable electrical connections without special tools. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable for thickness up to 0.062" (0.2cm). Please note the orientation of the terminal blocks on the new male connectors.					
DGB9FT	DB9 Female Connector for Field Termination	8.70	8.18	7.66	CALL
DGB15FT	DB15 Female Connector for Field Termination	10.25	9.63	9.02	CALL
DGB25FT	DB25 Female Connector for Field Termination	12.60	11.84	11.09	CALL
DGBH15FT	SVGA HD15 Female Connector for Field Termination	11.03	10.37	9.71	CALL
DGB9MT1	DB9 Male Connector for Field Termination	8.70	8.18	7.66	CALL
DGB15MT1	DB15 Male Connector for Field Termination	10.25	9.63	9.02	CALL
DGB25MT1	DB25 Male Connector for Field Termination	12.60	11.84	11.09	CALL
DGBH15MT1	SVGA HD15 Male Connector for Field Termination	10.50	9.87	9.24	CALL

DB9, DB15, DB25 or HD15 Female Connectors for Field Termination with Screwless Terminal Block


These field termination female connectors provide an easy and convenient way to perform field termination of any cable. Separate connection points are provided for all positions of the connector plus the ground. Screwless terminal block design with spring clamp provides reliable electrical connections utilizing no special tools. Simply depress the spring clamp, insert wire, release and the wire is secure. The terminal block area is clearly marked making proper termination virtually foolproof. Panel mountable for thickness up to 0.062" (0.2cm).

DGS9FT	DB9 Female Connector for Field Termination	9.20	8.65	8.10	CALL
DGS15FT	DB15 Female Connector for Field Termination	10.80	10.15	9.50	CALL
DGS25FT	DB25 Female Connector for Field Termination	13.40	12.60	11.79	CALL
DGSH15FT	HD15 Female Connector for Field Termination	11.05	10.39	9.72	CALL




How to perform a field installation of a DGBH15FT HD15 (SVGA) jack

STEP 1




Prepare bulk cable by exposing coax and conductor lines as shown.

STEP 2



Insert coax center conductor and shield as well as conductors into appropriate terminal slot as indicated in the supplied wiring diagram. Tighten the setscrews.

STEP 3

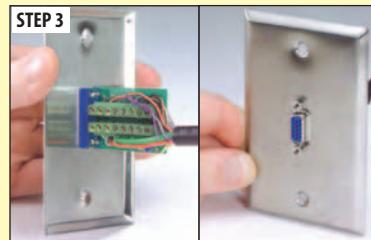

Attach the completed assembly to the mounting surface.

Mini DIN 4-S-Video Jack for Field Termination

The MD44FT field termination Mini DIN 4 female jack offers a quick and easy field termination using common tools. Terminal blocks with set screws ensure reliable electrical connections. The terminal block area is clearly marked making field termination virtually foolproof. This unit is designed to fit common .5" (1.3cm) circular or D-style openings. The undercut PCB area provides a convenient area to secure a cable tie wrap resulting in a neat dressing for the terminated cable. Custom configurations will be considered with modest minimums.

MD44FT	Mini DIN 4 Female Field Termination Jack	7.65	7.04	6.43	CALL
--------	--	------	------	------	------

DVI-D Dual Link Field Termination Connector, Female

The DVDDLFT field termination connector provides an easy and convenient way to perform field termination of any DVI-D Dual Link cable. Separate connection points are provided for all 24 positions of the connector. The terminal block design with set screws provides reliable electrical connections utilizing no special tools. Additionally the terminal block area is clearly marked making proper termination virtually foolproof.

DVDDLFT	DVI-D Dual Link Field Termination Connector, Female	14.65	13.77	12.89	CALL
---------	---	-------	-------	-------	------

Field Termination Connector for HDMI® Applications, Female

The HDTF is the perfect solution for quickly adding an HDMI port for A/V infrastructure additions or repairs. This easy to install connector utilizes handy screw terminals which are clearly numbered for ease of installation. 30µ gold plated contacts provide excellent signal integrity.

HDTF	HDMI Field Termination Connector, Female	10.45	9.82	9.20	CALL
------	--	-------	------	------	------


3.5mm Field Termination Connector, Female

L-com's 35MMFT is the perfect solution for quickly adding a 3.5mm audio port. This easy to install 3.5mm field termination connector utilizes handy screw terminals which are clearly marked for ease of installation.

35MMFT	3.5mm Field Termination Connector, Female	4.20	4.12	4.03	CALL
--------	---	------	------	------	------

Pro Audio 1/4" (0.6cm) to 1/4" (0.6cm) Male TS Cable Assemblies

L-com offers an extensive line of TS (Tip and Sleeve) 1/4" (0.6cm) audio cables for use in professional audio applications including instrument connections and audio patching. Our quality constructed TS cables feature 22 AWG cable and are offered with myriad color code choices to help in identifying attached equipment. Contact us today with your custom length and connector requirements.

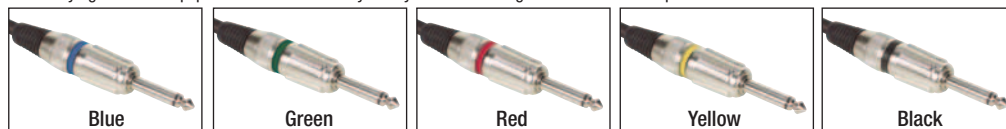

B

G

R

Y

*---

Ordering is easy, add desired color code to part number. Ex: CA14214B-1. *Note: No suffix necessary for Black assemblies.

Item #	Description	1-9	10-24	25+
CA14214 __-1	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 1.0ft (0.3m)	7.79	7.17	6.54
CA14214 __-3	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 3.0ft (0.9m)	9.69	8.91	8.14
CA14214 __-6	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 6.0ft (1.8m)	12.59	11.58	10.58
CA14214 __-10	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 10.0ft (3.0m)	16.49	15.17	13.85
CA14214 __-15	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 15.0ft (4.6m)	22.29	20.51	18.72
CA14214 __-20	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 20.0ft (6.1m)	27.19	25.01	22.84
CA14214 __-25	TS Pro Audio Cable, 1/4" (0.6cm) Male / Male, 25.0ft (7.6m)	32.09	29.52	26.96

Item #	Description	List Price
--------	-------------	------------

Male TS 1/4" (0.6cm) Connector - Colored ID Bands

L-com stocks high quality TS (tip and sleeve) 1/4" (0.6cm) connectors for all your instrument cable repair/termination needs. We offer several color code versions to help in identifying attached equipment. Additionally we offer a right angle version for applications requiring a 90 degree connection. Connectors are packaged individually.

CON-TS14-BLK	TS 1/4" (0.6cm) Connector, Male, Black ID Band	3.30
CON-TS14-RED	TS 1/4" (0.6cm) Connector, Male, Red ID Band	3.30
CON-TS14-YEL	TS 1/4" (0.6cm) Connector, Male, Yellow ID Band	3.30
CON-TS14-BLU	TS 1/4" (0.6cm) Connector, Male, Blue ID Band	3.30
CON-TS14-GRN	TS 1/4" (0.6cm) Connector, Male, Green ID Band	3.30
CON-TS14-RA	TS 1/4" (0.6cm) Connector, Right Angle Male	2.85

XLR 3 Pin Connectors

L-com stocks high quality XLR connectors for all your XLR audio cable repair/termination needs. We offer male, female, and right angle male XLR connectors off the shelf.

CON-XLR-M	3 Pin XLR Connector, Male	2.85
CON-XLR-F	3 Pin XLR Connector, Female	3.10
CON-XLR-MRA	3 Pin XLR Connector, Right Angle Male	5.05

Item #	Description	1-9	10-24	25+
--------	-------------	-----	-------	-----

Pro Audio XLR Cable Assemblies

L-com offers a series of 3 pin XLR audio cables for use in professional audio applications including microphone patching. Our quality constructed XLR cables feature 24 AWG cable to ensure the highest quality audio experience.

XLR 3 Pin Balanced Male to Female Pro Audio Cable Assemblies



CAXLR2XLR-1	XLR 3 Pin Male / Female Pro Audio Cable, 1.0ft (0.3m)	8.79	8.09	7.38
CAXLR2XLR-3	XLR 3 Pin Male / Female Pro Audio Cable, 3.0ft (0.9m)	11.69	10.75	9.82
CAXLR2XLR-6	XLR 3 Pin Male / Female Pro Audio Cable, 6.0ft (1.8m)	16.99	15.63	14.27
CAXLR2XLR-10	XLR 3 Pin Male / Female Pro Audio Cable, 10.0ft (3.0m)	23.59	21.70	19.82
CAXLR2XLR-15	XLR 3 Pin Male / Female Pro Audio Cable, 15.0ft (4.6m)	32.09	29.52	26.96
CAXLR2XLR-20	XLR 3 Pin Male / Female Pro Audio Cable, 20.0ft (6.1m)	39.89	36.70	33.51
CAXLR2XLR-25	XLR 3 Pin Male / Female Pro Audio Cable, 25.0ft (7.6m)	47.69	43.87	40.06

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

XLR 3 Pin Panel Mount Connectors (Solder Type)

L-com stocks both male and female 3 pin XLR connectors to address all your pro audio needs. These solder style connectors are in stock and ready for same day shipping. Each connector features gold plating to ensure a high quality audio experience.

CON-XLR3M	XLR 3 Pin Solder Connector, Male	4.35	4.09	3.83	CALL
CON-XLR3F	XLR 3 Pin Solder Connector, Female	4.35	4.09	3.83	CALL






Balanced Audio vs. Unbalanced Audio

Balanced Audio uses impedance balanced lines to interconnect audio equipment. Balanced connections use three conductor connectors. Most common in professional settings is the XLR connector. It is also sometimes referred to as a "cannon plug" or "cannon connector". Also used for this application are TRS Plugs. They derive their name from the different functions of the sections of the plug, Tip, Ring and Sleeve. (see diagram). They are also often referred to as .25" (6.3mm) 3 channel audio phone plugs. Their appearance is similar to the .25" (6.3mm) stereo plugs used for head phones, even though the two different applications utilize them differently. The durable construction of the XLR makes it ideal for microphones. Most, if not all, high end microphones make use of this interface. In contrast the TRS smaller form factor makes it ideal for mixer inputs / outputs allowing for greater port density.

Balanced Audio Connectors are typically Low Impedance Interfaces. By connecting the balanced lines to identical impedances at both source and load, it allows any differential amplifier to filter out any EMI (Electro-Magnetic-Interference) that the cable may have picked up or generated along the two signal lines.

Unbalanced Audio in contrast uses a two conductor system whereby the shield must carry the return signal. Often used for this application are TS Plugs. Similar in appearance to their TRS siblings, these plugs derive their name similarly, Tip and Sleeve. (see diagram). Noise that is induced onto an Unbalanced line will typically be modulated onto the signal being carried, whereas Balanced lines would not experience this issue. Ground loops are another issue to contend with Unbalanced lines. Unbalanced Audio Connectors are typically high impedance interfaces. Unbalanced Audio is typical for most home audio equipment. Unbalanced Signals can be converted to Balanced signals by the use of a Balun (Balanced / Unbalanced) adapter typically run through a DI (Direct Input) box.





Item #	Description	List Price
L-com HDMI® Splitter 1 x 2 or 1 x 4 - 3D Ready, HDCP Compliant		
Easily split your HDMI signal with L-com's 3D ready HDMI splitters. These plug and play HDMI splitters set up in seconds and are perfect for home or professional use. Features include HDCP compliant hardware, 1080/60p resolutions and 3D support.		
HD-SP-102	L-com HDMI Splitter, 1 x 2, 3D Ready, HDCP Compliant	89.95
HD-SP-104	L-com HDMI Splitter, 1 x 4, 3D Ready, HDCP Compliant	179.95

L-com HDMI® Switches 2 x 1 or 4 x 1 - 3D Ready, HDCP Compliant

Easily switch your HDMI signal with L-com's 3D ready HDMI switches. These plug and play HDMI switches set up in seconds and are perfect for home or professional use. Features include HDCP compliant hardware, 1080/24p resolutions and 3D support.

HD-SW-201	L-com HDMI Switch, 2 x 1, 3D Ready, HDCP Compliant	65.95
HD-SW-401	L-com HDMI Switch, 4 x 1, 3D Ready, HDCP Compliant	92.95

L-com HDMI® Active Extender (TX & RX Units) Extends your Video over Cat5e (or Better) Cabling up to 200 feet (60.9m) HDCP Compliant

L-com's HD-EXT-HSL HDMI extender extends HDMI signal over 24 AWG solid Cat5e (or better) cabling up to 200 feet (60.9m). This active HDMI extender features a TX and RX unit distance up to 200 feet (60.9m) at 1080/60i or 150 feet (45.7m) at Blu-ray 1080/60p. Features include HDCP support, adjustable 8-level EQ control and 7.1-channel surround sound audio.

HD-EXT-HSL	L-com Active HDMI over UTP Extender, 200ft (60.9m)	179.95
------------	--	--------

L-com VGA Video Splitters 1 x 2, 1 x 4 and 1 x 8 (Max Resolution 1920 x 1440)


L-com's LCVS series of VGA video splitters are perfect for distributing VGA video signals from one source to multiple displays. These plug and play video splitters can be installed in seconds and provide crisp, clear images. Perfect for Digital Signage and Pro A/V applications, these robust yet affordable VGA splitters feature rugged metal cases as well as external power supplies (included). Signal bandwidth to 350 MHz (2 and 4 port), 300 MHz (8 port model) (Max Resolution 1920 x 1440).

LCVS-12	L-com 1 x 2 VGA Video Splitter	36.05
LCVS-14	L-com 1 x 4 VGA Video Splitter	51.50
LCVS-18	L-com 1 x 8 VGA Video Splitter	74.20

L-com VGA Splitter/Extender (TX & RX Units) Extends your Video over Cat5e (or Better) Cabling up to 150 Meters (492ft)

L-com's LCVX-VGA VGA Extender is perfect for Digital Signage and PRO A/V applications where the extension of analog computer video is necessary. The LCVX-VGA features both TX (Transmit) and RX (Receiver) units, each with its own power supply. The TX unit has an HD15F VGA in port that would connect to your video source with a standard VGA M/F cable. It also includes two local HD15F outputs to support two local monitors with standard VGA M/M cabling. Using Cat5e (or better) cabling you can also extend your video to the RX unit up to 150 meters (492ft) away, (24 AWG solid cabling recommended for runs over 100ft). The RX unit takes the video received over the Cat5e (or better) cabling and provides two HD15F outputs to support two monitors with standard VGA M/M cabling. The LCVX-VGA is capable of supporting resolutions of up to 1024x768 at 150 meters (492ft).

LCVX-VGA	L-com UTP VGA Extender, TX and RX Unit	99.95
----------	--	-------

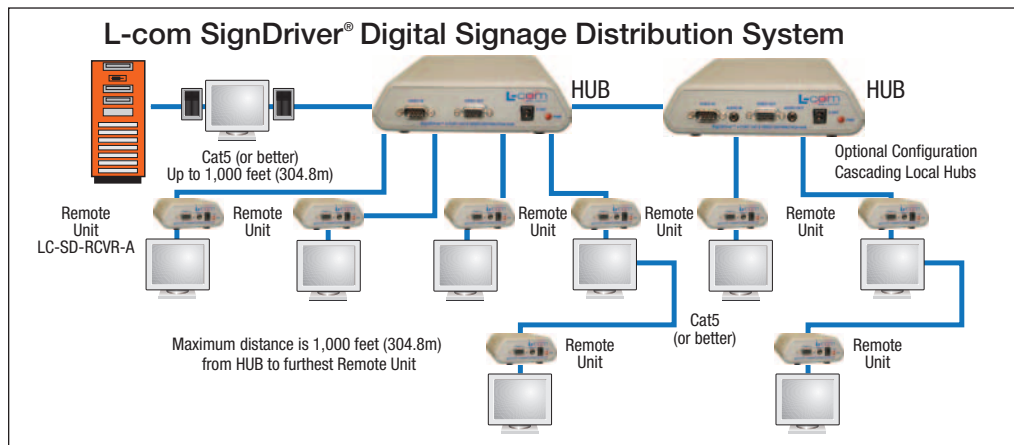

L-com SignDriver® Digital Signage Distribution System - Extend your Video Content over Cat5e (or Better) Cabling up to 1,000 Feet (304.8m)

Use L-com's SignDriver® Digital Signage Distribution System to get your message across to your customers. This rugged, high performance solution delivers crystal clear video content via Cat5e (or better) unshielded twisted pair cabling to video monitors up to 1,000 feet (304.8m) away from the source and supports video resolutions of up to 1600x1280 @ 60Hz.

The core of the system is the Cat-X Video Distribution Hub. This device is equipped with a standard VGA HD15-F connector which is attached to the video content host. Video information is then broadcasted simultaneously to the 4-RJ45 Category-X jacks. Use the VGA-HD15 output port to cascade multiple hubs together to build a much larger system.

LC-SD-KIT	SignDriver Single Port Video Extender Kit	318.00
LC-SD-HUB4	SignDriver 4-Port Video Distribution Hub	228.00
LC-SD-RCVR	SignDriver Video Distribution Remote Receiver	158.00
LC-SD-KIT-A	SignDriver Single Port Video Extender Kit with Audio	348.00
LC-SD-HUB4-A	SignDriver 4-Port Video Distribution Hub with Audio	258.00
LC-SD-RCVR-A	SignDriver Video Distribution Remote Receiver with Audio	188.00

Item #	Description	List Price
--------	-------------	------------

AdderLink AV100 Series Audio/Video Extenders

The AdderLink AV100 Series is a range of audio visual extenders delivering high video resolutions and superb quality audio up to 300m (1,000ft) using standard Cat5e (or better) cables. Designed for use in Digital Signage applications, the innovative design allows for flexible distribution that can grow in line with project developments and ensures direct delivery of crystal clear communication to consumers at the point of decision. The AdderLink AV Series avoids the prohibitive costs of fiber optic cabling, displays with built in CPUs or locating a CPU next to each screen. The AdderLink AV Series consists of 4 interchangeable units. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AV100T-US	Adder AV100 Series Extender Point to Point Transmitter	187.50
AV100R-US	Adder AV100 Series Extender Receiver, No Deskew, Outputs to 2 Displays	235.58
AV100P-US	Adder AV100 Series Extender Pair, Point to Point, No DeSkew, Outputs to 2 Displays	379.83
AV101R-US	Adder AV100 Series Extender Receiver with Deskew, Outputs to 2 Displays	283.68
AV102T-US	Adder AV100 Series Extender Point to Multipoint 2 Way Transmitter with Serial	144.25
AV104T-US	Adder AV100 Series Extender Point to Multipoint 4 Way Transmitter	283.68

AdderLink AV200 Series Audio/Video Extenders

The AdderLink AV200 Series is a range of audio visual extenders delivering high video resolutions, superb quality audio and RS232 up to 300m (1,000ft) using standard Cat5e (or better) cables. The innovative design allows for flexible audio visual distribution, management, control and interaction with the display devices which can be expanded to grow in line with project developments. Consisting of 5 interchangeable units, the AdderLink AV200 Series makes the design of digital signage and narrow casting applications cost effective, flexible and easy to plan. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AV200P-US	Adder AV200 Series Extender Pair, Point to Point with Serial, No Deskew, Outputs to 2 Displays	475.98
AV200R-US	Adder AV200 Series Extender Receiver with Serial, No Deskew, Outputs to 2 Displays	264.43
AV200T-US	Adder AV200 Series Extender Point to Point Transmitter with Serial	216.35
AV201R-US	Adder AV200 Series Extender Receiver with Serial and Deskew, Outputs to 2 Displays	379.83
AV204T-US	Adder AV200 Series Extender Point to Multipoint 4-Way Transmitter with Serial	504.83
AV208T-US	Adder AV200 Series Extender Point to Multipoint 8-Way Transmitter with Serial	600.98

AdderLink LPV150 Series Digital Signage Extenders

The AdderLink LPV has been designed to deliver stunning results at a really attractive price, making it the perfect introduction to professional digital signage. The AdderLink LPV Digital Signage Extender is possibly the easiest to install point to point extender available today. In addition to its simplicity the LPV Extender also delivers fantastic quality video up to 150 meters (500ft) away. The ALPV154T is able to take the same HD input and split it to 4 different screens connected via the ALPV150R receivers. There is a feed through port on the unit to allow a local display or you can cascade another ALAV154T so you can supply 8 screens. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

ALPV150P	Adder LPV150 Series Digital Signage Extender, USB and VGA	235.58
ALPV150R	Adder LPV150 Series Line Powered VGA Extender Receiver to 150 meters	105.78
ALPV154T	Adder LPV150 Series 4-Way Line Powered VGA Extender to 150 meters	350.98

AdderLink X Series X-DVI PRO Extenders

The AdderLink X-DVI PRO allows users to distribute control of any computer which uses DVI video and USB. The X-DVIPRO can deliver perfect 1080p digital video at distances over 50 meters and resolutions up to 165 MPixels per second (e.g. 1920 x 1200 @ 60Hz or 3840 x 2400 @ 17Hz). **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

X-DVIPRO-US	Adder Series DVI and 4-Port USB over a Single Cat5e (or better) Cable to 50 meters	812.50
X-DVIPRO-MS2-US	Adder Series Dual Head DVI, Audio and 4-Port USB over a Single Cat5e (or better) Cable to 50 meters	1437.50

AdderLink X50 and X50-MS2 Series VGA/USB Extenders

The AdderLink X50 was designed for use in applications where computers need to have their USB peripherals including keyboards and mice, high quality video and audio control extended up to 50m (150ft) across Cat5e (or better) UTP cable. The AdderLink X50-MultiScreen adds a second video and transparent, high speed RS232 up to baud rates of 19200. The AdderLink X50 (MS2) series provides sharp, bright and ultra high-resolution video over a VGA interface(s) and ensures total USB compatibility regardless of the computer being controlled or the peripheral being extended. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

X50-US	AdderLink X50-US, USB/Video Extender	552.89
X50-MS2-US	AdderLink X50-MS2-US, USB/Multiscreen Video Extender	812.50

Gefen Extender for HDMI® 1.3 over Cat5e (or Better) Cabling up to 330 Feet (100m)

The Extender for HDMI 1.3 extends a Hi-Def Display with multi-channel digital audio and Ethernet at resolutions of 1080p full HD and 4K (4096 x 2160 @ 24 Hz) up to 330 feet (100 meters) using one Cat5e (or better) cable. DVI-D is supported when used with an HDMI to DVI Adapter, providing greater flexibility and options when integrating several home theater components. 3D content can be displayed when a 3DTV and 3D source are connected. Extension of Ethernet connectivity enables internet or local area network access for HDTVs, home PCs, video game consoles, DVRs and any device that needs fast 10/100Base-T network access, at convenient locations. **As an authorized Gefen reseller, we can bid on RFQs for any Gefen part numbers. Contact us to request a non-obligatory quote.**

GFN-HD-1.3-CAT5ELR	Gefen Extra Long Range Extender for HDMI, 3DTV, Ethernet, and IR with Support for HDBaseT over one Cat5e (or better) Cable	649.00
--------------------	--	--------

Gefen DVI Fiber Optic Extender, Extends your DVI Video over Multimode LC Fiber up to 2,000 Feet (609m)

The DVI-FMP Extender extends your DVI display up to 2000 feet (609m) away from your source, with only two tiny transmitters and receivers required, using a 100% optical fiber solution. It's a great way to extend DVI video easily and unobtrusively. The DVI FM sender unit plugs into your computer. The DVI FM receiver unit plugs into your DVI display - up to 2000 feet (609m) away. Multimode LC fiber optic cable (4 strand) connects the DVI FMP and the DVI FMR units to each other. **As an authorized Gefen reseller, we can bid on RFQs for any Gefen part numbers. Contact us to request a non-obligatory quote.**


GFN-DVI-FMP	Gefen DVI Fiber Optic Extender	488.00
-------------	--------------------------------	--------




AV100T-US



AV200P-US



AV208T-US



ALPV150P



X-DVIPRO-MS2-US



X50-MS2-US

GFN-HD-1.3-CAT5ELR
(Back view)GFN-HD-1.3-CAT5ELR
(Front view)

GFN-DVI-FMP



CS84U (Back view)



CS84U (Front view)

AV4PRO-VGA-US
(Front view)AV4PRO-VGA-US
(Back view)SVMS4-DUAL
(Back view)SVMS4-DUAL
(Front view)

AVX1008-US (Back view)



AVX1008-US (Front view)



X200A-R-US



CCS4USB

Item #	Description	List Price
ATEN USB KVM Switches with Audio and Integrated Octopus Cables, 2 and 4 Port		
Aten offers a broad line of cable KVM switch solutions geared toward the SOHO (Small Office/Home Office) user. These compact, durable cable KVM switches features audio support. The Plug and Play design helps to quickly and easily deploy this cable KVM switch. As an authorized ATEN reseller, we can bid on RFQs for any ATEN part numbers. Contact us to request a non-obligatory quote.		
CS62U	Aten Integrated Cable 2 Port KVM Switch USB with Audio	41.98
CS64US	Aten Integrated Cable 4 Port KVM Switch USB with Audio	72.98

ATEN PS/2-USB Desktop KVM Switches, 2 and 4 Port

The CS82U/CS84U PS/2-USB KVM Switch is a desktop control unit that allows users to access two or four computers from a single KVM console (PS/2 or USB keyboard and mouse, and VGA monitor). In addition, CS82U/CS84U comes with ATEN's new Video DynaSync™ technology, which eliminates boot-up display problems and optimizes resolution. **As an authorized ATEN reseller, we can bid on RFQs for any ATEN part numbers. Contact us to request a non-obligatory quote.**

CS82U	Aten Desktop 2 Port PS/2-USB KVM Switch	81.98
CS84U	Aten Desktop 4 Port PS/2-USB KVM Switch	141.98

AdderView Pro VGA, DVI and DisplayPort 4 and 8 Port KVM Switches

The AdderView Pro series are professional grade KVM switches which deliver ultimate flexibility for users who wish to share a high resolution screen(s) and modern USB peripherals between multiple computers. The AV4PRO-VGA is designed to enable up to four computers to be controlled from a single high resolution KVM console using HD15 VGA cabling. The AV4PRO-DVI-xx group is designed to enable four to eight computers to be controlled from a single high resolution KVM console using dual link DVI cabling. The AV4PRO-DP is designed to enable up to four computers to be controlled from a single high resolution KVM console using the new DisplayPort cabling system. The switches makes use of Adder's True Emulation technology which enables USB HID devices to be continuously emulated to each computer. This unique technology enables instantaneous and reliable hotkey switching while also supporting the extra keys and features of enhanced keyboards and mice. Furthermore, the AdderView includes two independently switchable USB 2.0 channels and an audio channel, giving the user the flexibility to attach selected peripherals to different computers. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AV4PRO-VGA-US	AdderView 4 Pro VGA Switch	408.68
AV4PRO-DVI	AdderView 4 Pro DVI 4 Port KVM Switch (4 PCs)	475.98
AV4PRO-DVI-DUAL	AdderView 4 Pro DVI 4 Port Dual Head KVM Switch (4 PCs)	956.75
AV4PRO-DVI-TRI	AdderView 4 Pro DVI 4 Port Triple Head KVM Switch (4 PCs)	1341.35
AV4PRO-DVI-QUAD	AdderView 4 Pro DVI 4 Port Quad Head KVM Switch (4 PCs)	1725.98
AV8PRO-DVI	AdderView 8 Pro DVI 8 Port KVM Switch (8 PCs)	1437.50
AV4PRO-DP	AdderView Pro 4 Port, DisplayPort with USB True Emulation Technology	649.05

Adder Dual Display KVM Switches

The Adder SmartView Multiscreen expands the horizons of computer control by adding multiple monitor support to an advanced KVM switch. The Multiscreen 2 and 4 port KVM switches maximizes video quality by minimizing any ghosting, smudging or fading effects. Consequently, excellent video clarity is maintained even at higher screen resolutions. DDC (Display Data Channel) signaling is supported on all the SmartView's video ports making them "plug-and-play" compatible and enabling your computers' video cards to be configured for best performance. High quality video with resolutions up to 1920 by 1440 pixels. Computers may be selected using the front panel key, keyboard hotkeys, a three-button mouse or wheel mouse, RS232 data commands or the optional remote controller. 1 year manufacturer's warranty. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

SVMS2-DUAL	Adder 2 Computers, Dual Monitor KVM System	456.95
SVMS4-DUAL	Adder 4 Computers, Dual Monitor KVM System	549.25

AdderView CATx and CATx IP 1000 KVM Switches

The AdderView CATx Series is a range of secure, KVM via CATx switches that provide concurrent local, remote or global users with BIOS level control of up to 24 multi-platform servers. The AdderView CATx IP KVM Switch Series provides local and global access for users who need to control multi-platform operating systems and hardware over IP with BIOS level control. **IP Extender versions available, contact your L-com sales representative for details. As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AVX1008-US	AdderView CATx, Single User, 8 Computer Ports	459.00
AVX1016-US	AdderView CATx, Single User, 16 Computer Ports	595.40
AVX4016	AdderView CATx, 4 User, 16 Port Switch	1564.65
AVX4016IP	AdderView CATx IP, 4 User, 16 Port Switch	2210.80
AVX4024	AdderView CATx, 4 User, 24 Port Switch	1841.55
AVX4024IP	AdderView CATx IP, 4 User, 24 Port Switch	2487.70

Adder User Stations and Computer Access Modules

Adder Computer Access Modules (CAMs) allow the user to connect multiple different machine platforms to an Adder CATx switch or KVM extender. Using the CAMs you can control Windows machines, SUN PCs and MACs over the same switch or connect via an extender. Multiple configurations are available for the Adder CAM including USB, PS/2, Audio, VGA etc. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**


X200R-US	Adder KVM USB User Station, No Audio, No De-skew	323.10
X200A-R-US	Adder KVM USB User Station, with Audio, No De-skew	364.65
X200AS-R-US	Adder KVM USB User Station, with Audio and De-skew	438.50

Adder Command and Control Switch

The Adder Command & Control Switch (CCS4USB) is a professional grade control switch delivering USB True Emulation for use with modern or custom USB peripherals and audio with RS232 control. Includes Free Flow Technology - automated mouse switching designed to work with CCS4USB to automatically switch between target computers simply by moving the mouse pointer from screen to screen and can be configured for almost any combinations of screens. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

CCS4USB	Adder 1x4 USB Keyboard and Mouse Switch with Audio and Free Flow Mouse Switching	456.95
---------	--	--------

Application diagram for CCS4USB

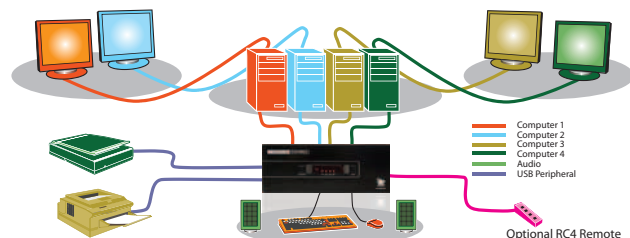

Item #	Description	List Price
--------	-------------	------------

AdderLink X2 KVM Extenders with Local Console, Extends KVM over Cat5e (or Better) Cabling up to 1,000 Feet (300m)

The AdderLink X2 range of KVM Extenders use the latest technology to deliver perfect video pictures at high resolutions over long distances. Using Cat5e (or better) Cable, the X2 enables you to extend KVM signals up to 300m (1,000 feet). X2s are fitted with a range of advanced features that Adder has developed and enhanced over many years of building robust KVM extenders. Flash upgradeable firmware ensures that the latest upgrades and product enhancements can be readily supported via simple downloads. Great attention has also been paid to the quality of the audio signals to avoid the annoying clicks found on some other KVM extension products. The X2-Gold supports high fidelity bi-directional stereo audio and audio signals are transmitted digitally using 16 bit, 44.1kHz sampling to ensure a low noise level. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

X2-DA-SILVER	AdderLink X2 Silver KVM Extender with Local Console (Pair) No Audio	716.35
X2-DA-GOLD	AdderLink X2 Gold KVM Extender with Local Console (Pair)	841.35



X2-DA-GOLD

AdderLink X Series X-200 Extenders, Extend KVM with Audio over Cat5e (or Better) Cabling up to 1,000 Feet (300m)

Fully featured USB keyboard, video and mouse extender with 44.1kHz digital stereo audio support for two computers. AdderLink X200s have been designed for use in applications where up to two computers can have their keyboard, video, audio and mouse control extended up to 300m (1000 feet) across Cat5e (or better) UTP cable. The AdderLink X200 provides absolute real time keyboard and mouse performance along with hi-definition, hi-resolution video over a VGA interface. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

X200-USB-P-US	AdderLink 100m (330 feet) Extender Pair, USB CAM, No Audio, No De-skew	413.48
X200A-USB-P-US	AdderLink 100m (330 feet) Extender Pair, USB CAM, Audio, No De-skew	475.98
X200AS-USB-P-US	AdderLink 300m (1000 feet) Extender Pair, USB CAM, Audio and De-skew	552.90

X200A-USB-P-US
X200AS-USB-P-US

AdderLink X-USB PRO Extenders, Extend USB and Video over Cat5e (or Better) Cabling up to 1,000 Ft (300m)

Adder's next generation USB, video and audio extenders deliver sharp, bright and high resolution video images and high quality audio at distances up to 300m (1000ft) over a single Cat5e (or better) cable. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

X-USBPRO-US	AdderLink VGA, Audio and 4 Port USB Hub (Full Speed) Extender to 300m over a Single Cat5e (or better) Cable	860.58
X-USBPRO-MS2-US	AdderLink Dual Head VGA, Audio and 4 Port USB Hub (Full Speed) Extender to 300m over Two Cat5e (or better) Cables	1437.50



X-USBPRO-US

AdderLink ipeps KVM over IP

For Enterprise KVM solutions the AdderLink ipeps (IP Engine per Server) provides a non-blocking global solution by providing each computer with a dedicated KVM-via-IP engine. This can be enhanced by using the ADDER.NET Enterprise Management Software that provides a centralized and secure user access management interface. Where a KVM switch exists without KVM-over-IP functionality, the AdderLink ipeps is ideal for adding global management capabilities. Increasing numbers of computers are being used in remote, stand alone applications such as ATMs and digital signage play out devices. The incredibly small size of the AdderLink ipeps makes it perfect for remote management and control of dispersed computers, meaning that many tasks that would have required an expensive site visit can now be done from anywhere. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AL-IPEPS	AdderLink ipeps KVM over IP	506.80
AL-IPEPS-DA	AdderLink ipeps KVM over IP (with Local Access)	645.25



AL-IPEPS

AdderLink IP KVM over IP

Manage your computers from anywhere in the world with the high-performance AdderLink IP. The AdderLink IP only requires a KVM (keyboard, video, mouse) connection to your computer or KVM switch and doesn't need any custom software to be loaded on your servers. The AdderLink IP is fully compatible with VNC (Virtual Network Computing) and Java based web browsers and doesn't require the purchase of extra software "seat" licenses. Features video modes up to 1280 x 1024 x 75Hz, video captured at 24 bits per pixel, adaptive color depth to match link speed and security features including AES 128 encryption, RSA 2048 authentication, auto logout after selectable inactive period and IP address restriction. Ships with KVM cable, universal power supply and installation CD. Rack mounting kits sold separately. Covered by a 2 year manufacturer's warranty. **As an authorized Adder reseller, we can bid on RFQs for any Adder part numbers. Contact us to request a non-obligatory quote.**

AL-IP	AdderLink IP Stand Alone KVM	1052.90
AL-IP-GOLD	AdderLink IP Gold KVM via IP with DVI and USB	1437.50
ADR-RMK4S	AdderLink IP KVM Rack Mount Kit	75.98
ADR-RMK4D	AdderLink IP KVM Dual Rack Mount Kit	114.43



Back view


Front view

AL-IPEPS-DA



AL-IP (Front and Back views)

AdderLink IP KVM Over IP Solution

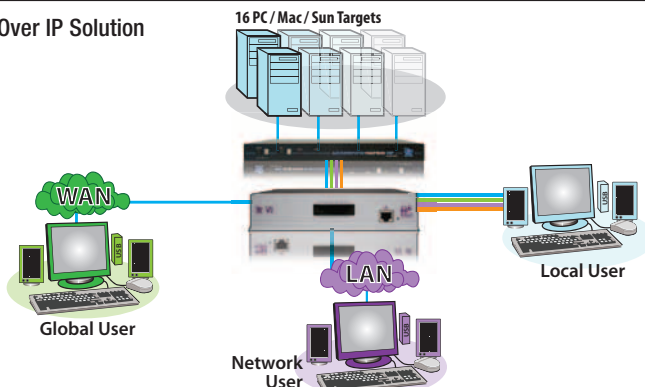

What is Coaxial Cabling?

A coaxial cable is a two conductor electrical cable consisting of a center conductor and an outer conductor with an insulating spacer between the two.

Coaxial Cabling Terms

Attenuation (Insertion Loss): Loss of power. Attenuation is usually measured in dB loss per length of cable (ex. 31.0 dB/100ft.). Attenuation increases as frequency increases.

Bend Radius: The amount of radius a cable can bend without any adverse effects.

Center Conductor: The solid or stranded wire in the middle of the coaxial cable. The conductor diameter is measured by the American Wire Gauge (AWG).

Coaxial Adapter: A device used to change one connector type to another or one gender to another (ex. BNC to SMA Adapter).

Coaxial Cable: A two conductor cylindrical transmission line typically comprised of a center conductor, an insulating dielectric material and an outer conductor (shielding). Coaxial cable can be flexible (typical to the assemblies found in this catalog), semi-rigid or rigid in nature.

Coaxial Connector: The interconnection device found at each end of a coaxial cable assembly. There are many common types of coaxial connectors such as: BNC, SMA, SMB, Type F, etc.

Dielectric: The insulating material that separates the center conductor and shielding.

Electromagnetic Interference (EMI): Electrical or electromagnetic energy that disrupts electrical signals.

How is Coaxial Cabling used?

Primarily, coaxial cables are used for the transmission of Radio Frequency energy. The system offers tight control over electrical impedance. This yields excellent performance at high frequencies and superior EMI control/shielding.

Frequency: Number of times a periodic action occurs in one second. Measured in Hertz.

Impedance: The opposition to the flow of alternating or varying current. Measured in Ohms. Two common impedance values are 50 Ohms used primarily for data and 75 Ohms used to transmit video signals.

Insertion Loss: A measurement of attenuation determined by the system output before and after the connection of a cable and/or device.

Jack: The female connector usually containing a center socket.

Microwave Frequencies: Microwave frequencies range from Ultra-High Frequency (UHF) .3-3 GHz, Super High Frequency (SHF) 3-30 GHz to Extremely High Frequency (EHF) 30-300 GHz.

MIL-C-17: MIL-C-17 is a specification document that has been used since the 1940s to standardize the physical and electrical characteristics of coaxial cables. There is no longer any control of RG specifications so cables may perform differently than the cables that adhere to MIL-C-17.

Plug: The male connector usually containing a center pin.

RF (Radio Frequency): A frequency band from 3 MHz to 300 GHz. Primarily used for transmission of radio and television signals.

RG/U: A designation that originated with a US Government specification. No longer in effect. Currently used as a general reference. (R=Radio

Where is Coaxial Cabling used?

A broad range of applications exist for coaxial cabling. The two primary impedance values of 50 and 75 Ohms determine specific applications with 50 Ohms primarily used in data signal applications and 75 Ohms used in video signal applications.

Frequency, G=Guide, U=Universal Specification). Letters that appear before the /U characters (i.e. A, B or C) means a specification modification or revision. For instance, it is common in the CB industry to see the designation RG-58A/U. The original RG-58/U coaxial cable had a solid center conductor. The "A" modification replaced the solid center conductor with a more flexible stranded center conductor (that is highly recommended for use in mobile installations). Other designators often seen are: A = Modification to the Solid Core Material Specification, B = Modification to the Outer Jacket Specification, C = Modification of the Dielectric Insulator Specification. These designators are not precise and specifications may vary from one vendor to another.

Shielding: Conductive envelope made of wires or metal foil that covers the dielectric and the center conductor.

Twinaxial: An offshoot of coaxial cabling. Two center conductors with one dielectric and braided shielding.

Velocity of Propagation (VP): Usually expressed as a percentage, VP is the transmission speed of electrical energy in a determined length of cable compared to the speed of light.

VSWR (Voltage Standing Wave Ratio): The ratio of the maximum effective voltage to the minimum effective voltage measured along a RF transmission line. This value generally increases with frequency and higher values are not desirable.

Common Applications for Coaxial Cable Assemblies



Entertainment Systems

Coaxial cable assemblies are used extensively to connect a wide variety of home and commercial entertainment products. Entertainment equipment such as monitors, TVs, cameras, recording equipment and broadcast equipment are interconnected using coaxial cables.

Common cable types:
75Ω - RG6 or RG59

Common connectors:
BNC, F and RCA




GPS

Global Positioning Systems utilize coaxial cable for connections between receiving antennas and other related equipment.

Common cable types:
50Ω - RG58, RG174, RG188 or RG316

Common connectors:
TNC, N, MCX, MMCX and SMA




Video Systems

The transmission of a video signal from a video camera to a display monitor is typically through coaxial cable.

Common cable types:
75Ω - RG59, RG59A/U, RG59B/U or RG179

Common connectors:
BNC, F and RCA




Telecom

The infrastructure of most telecommunication systems relies heavily on coaxial cabling. Cell towers, communications equipment and base station facilities are typical examples of coaxial cable interconnection applications.

Common cable types:
50Ω - RG58, RG223 and RG213

Common connectors:
BNC, TNC and Type N



WAN/LAN

Wide Area Networks and Local Area Networks often utilize coaxial cable for equipment interconnections. Also, reverse polarized connectors are found on many wireless antenna connections.

Common cable types:
50Ω - RG174, RG58

Common connectors:
BNC

Typical Coaxial Cabling (Exploded View):

Center Conductor:
The main signal path. Can be solid or stranded wire.

Shielding:
One of the two conductors in coaxial cable. Braid or braid + foil is typical.

Jacket:
Insulates and protects shielding and center conductor. Extruded PVC is typical.

Dielectric:
Insulating material isolates shield from center conductor. This also gives the cable its impedance property.


Typical Coaxial Connector (BNC Exploded View):

Center Pin:
Terminates to center conductor via crimping or soldering.

Crimp Sleeve:
Provides strain relief by securing braid to connector.

Ferrule:
Provides mating surface for coaxial shielding.

Connector (Plug) Body:
Nickel plated brass is typical.

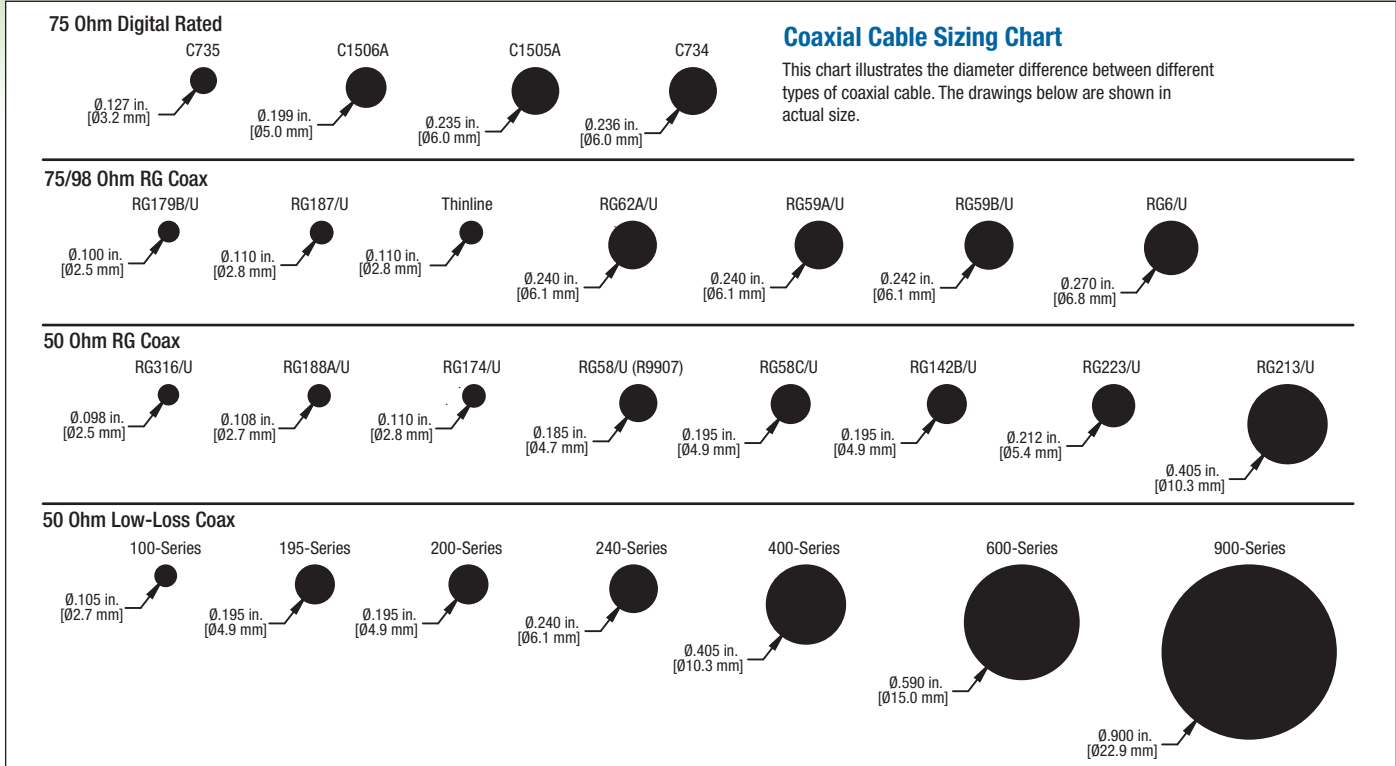

Understanding Coaxial Cable

Coaxial is a term derived from the construction of the cable, as illustrated here. In a coaxial cable an electrical impulse signal is transmitted along the cable length between the center conductor and the outer conductor. The center conductor and the outer conductor share the same center line or axis hence the term coaxial.

Shielding Effectiveness is the relative ability of a shield to screen out undesirable interference. In coaxial cable, the outer conductor provides a shield to keep interfering signals from getting in and to keep signals from leaking out to become undesirable interference for nearby devices. Shielding Effectiveness is measured in dB with higher values indicating better shielding properties. The table below illustrates the relative shielding properties of various shielding types.

Cable Construction Cross Section



Notice as the shielding density increases there is a correlated increase in the shielding effectiveness value. The best shielding effectiveness value can be found in a rigid coaxial cable due to the solid tube construction of the outer jacket. In this type of cable the limiting factor for shielding effectiveness is the quality of the connector attachment.

Shielding Type			
Single Braid Shield (95% coverage)	Single Braid Shield (60%) + Foil Wrap (100%)	(2) Braids (60%) + (2) Foil Wraps (100%)	Conformable Cable
Approximate Shielding Effectiveness Value			
-55dB	-90dB	-110dB	-150dB



When is 50 Ohm coaxial cable used?

The primary use of 50 Ohm coaxial cable is transmission of a data signal in a two-way communication system. Some of the common applications for 50 Ohm coaxial cable are computer Ethernet backbones, wireless antenna feed cables, GPS (Global Positioning Satellite) antenna feed cables and cell phone systems. The cable assemblies offered in this section cover the most common RG style cables and connector interfaces that are used in these applications.

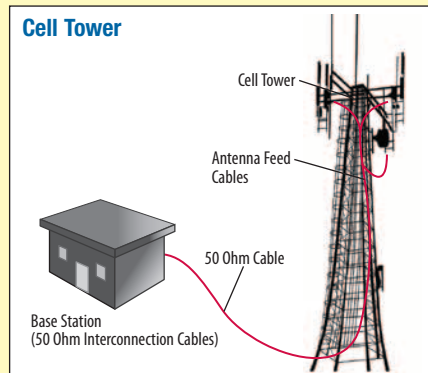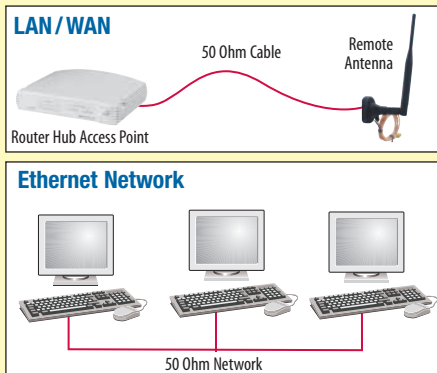

50 Ohm RG Series Coaxial Cables

Inline SMA Plug to Inline SMA Plug							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	0.5ft (0.15m)	CC174S-05	19.45	18.28	17.12	CALL
		1.0ft (0.3m)	CC174S-1	19.65	18.47	17.29	CALL
		1.5ft (0.45m)	CC174S-1.5	19.80	18.61	17.42	CALL
		2.0ft (0.6m)	CC174S-2	19.95	18.75	17.56	CALL
		2.5ft (0.75m)	CC174S-2.5	20.10	18.89	17.69	CALL
		3.0ft (0.9m)	CC174S-3	20.25	19.04	17.82	CALL
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCS188A-1	16.20	15.55	14.90	CALL
		1.5ft (0.45m)	CCS188A-1.5	16.75	16.08	15.41	CALL
		2.0ft (0.6m)	CCS188A-2	17.30	16.61	15.92	CALL
		2.5ft (0.75m)	CCS188A-2.5	17.85	17.14	16.42	CALL
		3.0ft (0.9m)	CCS188A-3	18.40	17.66	16.93	CALL
		4.0ft (1.2m)	CCS188A-4	19.45	18.67	17.89	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	0.67ft (0.2m)	CCS316-08	15.85	15.22	14.58	CALL
		1.0ft (0.3m)	CCS316-1	16.20	15.55	14.90	CALL
		1.5ft (0.45m)	CCS316-1.5	16.75	16.08	15.41	CALL
		2.0ft (0.6m)	CCS316-2	17.30	16.61	15.92	CALL
		2.5ft (0.75m)	CCS316-2.5	17.85	17.14	16.42	CALL
		3.0ft (0.9m)	CCS316-3	18.40	17.66	16.93	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	0.5ft (0.15m)	CCS58A-05	15.75	14.80	13.86	CALL
		1.0ft (0.3m)	CCS58A-1	15.90	14.95	13.99	CALL
		1.5ft (0.45m)	CCS58A-1.5	16.05	15.09	14.12	CALL
		2.0ft (0.6m)	CCS58A-2	16.20	15.23	14.26	CALL
		2.5ft (0.75m)	CCS58A-2.5	16.40	15.42	14.43	CALL
		3.0ft (0.9m)	CCS58A-3	16.55	15.56	14.56	CALL

Inline SMA Plug to Inline SMA Jack							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	1.0ft (0.3m)	CCS58AX-1	17.90	16.83	15.75	CALL
		2.5ft (0.75m)	CCS58AX-2.5	18.40	17.30	16.19	CALL
		5.0ft (1.5m)	CCS58AX-5	19.20	18.05	16.90	CALL

Inline SMA Plug to Right Angle SMA Plug							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	0.5ft (0.15m)	CC174S-05HR	23.25	21.86	20.46	CALL
		1.0ft (0.3m)	CC174S-1HR	23.40	22.00	20.59	CALL
		1.5ft (0.45m)	CC174S-1.5HR	23.55	22.14	20.72	CALL
		2.5ft (0.75m)	CC174S-2.5HR	23.90	22.47	21.03	CALL
		5.0ft (1.5m)	CC174S-5HR	24.70	23.22	21.74	CALL
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCSHR188A-1	18.40	17.66	16.93	CALL
		1.5ft (0.45m)	CCSHR188A-1.5	18.90	18.14	17.39	CALL
		2.5ft (0.75m)	CCSHR188A-2.5	20.00	19.20	18.40	CALL
		4.0ft (1.2m)	CCSHR188A-4	21.60	20.74	19.87	CALL
		5.0ft (1.5m)	CCSHR188A-5	22.70	21.79	20.88	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	7.5ft (2.3m)	CCSHR188A-7.5	25.40	24.38	23.37	CALL
		1.0ft (0.3m)	CCSHR316-1	18.40	17.66	16.93	CALL
		1.5ft (0.45m)	CCSHR316-1.5	18.90	18.14	17.39	CALL
		2.0ft (0.6m)	CCSHR316-2	19.45	18.67	17.89	CALL
		2.5ft (0.75m)	CCSHR316-2.5	20.00	19.20	18.40	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	3.0ft (0.9m)	CCSHR316-3	20.55	19.73	18.91	CALL
		4.0ft (1.2m)	CCSHR316-4	21.60	20.74	19.87	CALL
		0.5ft (0.15m)	CCS58A-05HR	15.80	14.85	13.90	CALL
		1.0ft (0.3m)	CCS58A-1HR	15.95	14.99	14.04	CALL
		1.5ft (0.45m)	CCS58A-1.5HR	16.10	15.13	14.17	CALL
		2.0ft (0.6m)	CCS58A-2HR	16.30	15.32	14.34	CALL
		2.5ft (0.75m)	CCS58A-2.5HR	16.45	15.46	14.48	CALL
		3.0ft (0.9m)	CCS58A-3HR	16.60	15.60	14.61	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

Right Angle SMA Plug to Right Angle SMA Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	0.5ft (0.15m)	CC174S-05HR2	28.10	26.41	24.73	CALL
		1.0ft (0.3m)	CC174S-1HR2	28.25	26.55	24.86	CALL
		1.5ft (0.45m)	CC174S-1.5HR2	28.45	26.74	25.04	CALL
		2.5ft (0.75m)	CC174S-2.5HR2	28.75	27.02	25.30	CALL
		5.0ft (1.5m)	CC174S-5HR2	29.55	27.78	26.00	CALL
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCSR188A-1	21.60	20.74	19.87	CALL
		1.5ft (0.45m)	CCSR188A-1.5	22.15	21.26	20.38	CALL
		2.0ft (0.6m)	CCSR188A-2	22.70	21.79	20.88	CALL
		2.5ft (0.75m)	CCSR188A-2.5	23.25	22.32	21.39	CALL
		3.0ft (0.9m)	CCSR188A-3	23.80	22.85	21.90	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	4.0ft (1.2m)	CCSR188A-4	24.85	23.86	22.86	CALL
		1.0ft (0.3m)	CCSR316-1	21.60	20.74	19.87	CALL
		1.5ft (0.45m)	CCSR316-1.5	22.15	21.26	20.38	CALL
		2.0ft (0.6m)	CCSR316-2	22.70	21.79	20.88	CALL
		2.5ft (0.75m)	CCSR316-2.5	23.25	22.32	21.39	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	3.0ft (0.9m)	CCSR316-3	23.80	22.85	21.90	CALL
		0.5ft (0.15m)	CCS58A-05HR2	19.15	18.00	16.85	CALL
		1.0ft (0.3m)	CCS58A-1HR2	19.30	18.14	16.98	CALL
		1.5ft (0.45m)	CCS58A-1.5HR2	19.45	18.28	17.12	CALL
		2.5ft (0.75m)	CCS58A-2.5HR2	19.65	18.47	17.29	CALL
		5.0ft (1.5m)	CCS58A-5HR2	20.60	19.36	18.13	CALL
		10.0ft (3.0m)	CCS58A-10HR2	22.20	20.87	19.54	CALL

Inline SMA Plug to Inline BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	0.5ft (0.15m)	CC174SB-05	15.15	14.24	13.33	CALL
		1.0ft (0.3m)	CC174SB-1	15.30	14.38	13.46	CALL
		1.5ft (0.45m)	CC174SB-1.5	15.45	14.52	13.60	CALL
		2.5ft (0.75m)	CC174SB-2.5	15.80	14.85	13.90	CALL
		5.0ft (1.5m)	CC174SB-5	16.60	15.60	14.61	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	10.0ft (3.0m)	CC174SB-10	18.20	17.11	16.02	CALL
		1.0ft (0.3m)	CCS58AB-1	13.40	12.60	11.79	CALL
		1.5ft (0.45m)	CCS58AB-1.5	13.60	12.78	11.97	CALL
		2.5ft (0.75m)	CCS58AB-2.5	13.90	13.07	12.23	CALL
		5.0ft (1.5m)	CCS58AB-5	14.70	13.82	12.94	CALL
		7.5ft (2.3m)	CCS58AB-7.5	15.50	14.57	13.64	CALL
		10.0ft (3.0m)	CCS58AB-10	16.35	15.37	14.39	CALL

Inline BNC Plug to Inline BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	1.0ft (0.3m)	CC174-1	7.60	7.14	6.69	CALL
		1.5ft (0.45m)	CC174-1.5	7.75	7.28	6.82	CALL
		2.5ft (0.75m)	CC174-2.5	8.05	7.57	7.08	CALL
		5.0ft (1.5m)	CC174-5	8.90	8.37	7.83	CALL
		7.5ft (2.3m)	CC174-7.5	9.70	9.12	8.54	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	25.0ft (7.6m)	CC174-25	15.35	14.43	13.51	CALL
		1.0ft (0.3m)	CC58C-1	7.90	7.43	6.95	CALL
		2.5ft (0.75m)	CC58C-2.5	8.40	7.90	7.39	CALL
		2.0ft (0.6m)	CC58C-5	9.20	8.65	8.10	CALL
		2.5ft (0.75m)	CC58C-10	10.80	10.15	9.50	CALL
RG58/U ThinNet Plenum Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Beige PVC Operating Temperature: -40°C - +75°C	.185in. (4.7mm)	3.0ft (0.9m)	CC58C-15	12.45	11.70	10.96	CALL
		4.0ft (1.2m)	CC58C-50	23.80	22.37	20.94	CALL
		1.0ft (0.3m)	CCTN58P-1B	17.30	16.61	15.92	CALL
		2.5ft (0.75m)	CCTN58P-2.5B	19.45	18.67	17.89	CALL
		5.0ft (1.5m)	CCTN58P-5B	24.85	23.86	22.86	CALL
RG223/U Center Conductor: 19 AWG solid silver coated copper Min. Bend Radius: 0.98" (25mm) Jacket: Black PVC Operating Temperature: -40°C - +60°C	.212in. (5.4mm)	7.5ft (2.3m)	CCTN58P-7.5B	29.20	28.03	26.86	CALL
		10.0ft (3.0m)	CCTN58P-10B	33.50	32.16	30.82	CALL
		50.0ft (15.2m)	CCTN58P-50B	94.00	90.24	86.48	CALL
		1.0ft (0.3m)	CC223B-1	21.10	20.26	19.41	CALL
		1.5ft (0.45m)	CC223B-1.5	21.90	21.02	20.15	CALL
RG142B/U Center Conductor: 18 AWG solid silver coated copper Min. Bend Radius: 0.98" (25mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.195in. (5.0mm)	2.5ft (0.75m)	CC223B-2.5	23.50	22.56	21.62	CALL
		5.0ft (1.5m)	CC223B-5	27.55	26.45	25.35	CALL
		10.0ft (3.0m)	CC223B-10	35.65	34.22	32.80	CALL
		15.0ft (4.6m)	CC223B-15	43.75	42.00	40.25	CALL
		1.0ft (0.3m)	CC142B-1	16.05	15.41	14.77	CALL
RG213/U Center Conductor: 13 AWG bare copper Min. Bend Radius: 1.57" (40mm) Jacket: Black PVC Operating Temperature: -40°C - +80°C	.405in. (10.3mm)	2.5ft (0.75m)	CC142B-2.5	18.65	17.90	17.16	CALL
		5.0ft (1.5m)	CC142B-5	22.95	22.03	21.11	CALL
		7.5ft (2.3m)	CC142B-7.5	27.30	26.21	25.12	CALL
		10.0ft (3.0m)	CC142B-10	31.60	30.34	29.07	CALL
		50.0ft (15.2m)	CC142B-50	100.75	96.72	92.69	CALL
		5.0ft (1.5m)	CC213B-5	18.90	18.14	17.39	CALL
		10.0ft (3.0m)	CC213B-10	22.95	22.03	21.11	CALL
		15.0ft (4.6m)	CC213B-15	27.00	25.92	24.84	CALL
		25.0ft (7.6m)	CC213B-25	35.10	33.70	32.29	CALL
		50.0ft (15.2m)	CC213B-50	55.35	53.14	50.92	CALL
		100.0ft (30.5m)	CC213B-100	95.85	92.02	88.18	CALL





CC174-MF



CC58C-HR



CC174-HR2



CCTN58-B



CCSB188A

50 Ohm Coaxial Cables

Inline BNC Plug to Inline BNC Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	1.0ft (0.3m)	CC174-MF-1	15.15	14.24	13.33	CALL
		3.0ft (0.9m)	CC174-MF-3	15.80	14.85	13.90	CALL
		10.0ft (3.0m)	CC174-MF-10	18.05	16.97	15.88	CALL
		15.0ft (4.6m)	CC174-MF-15	19.70	18.52	17.34	CALL
		25.0ft (7.6m)	CC174-MF-25	22.90	21.53	20.15	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	1.0ft (0.3m)	CC58C-MF-1	15.05	14.15	13.24	CALL
		3.0ft (0.9m)	CC58C-MF-3	15.70	14.76	13.82	CALL
		6.0ft (1.8m)	CC58C-MF-6	16.65	15.65	14.65	CALL
		10.0ft (3.0m)	CC58C-MF-10	17.95	16.87	15.80	CALL
		25.0ft (7.6m)	CC58C-MF-25	22.80	21.43	20.06	CALL
		50.0ft (15.2m)	CC58C-MF-50	30.90	29.05	27.19	CALL

Inline BNC Plug to Right Angle BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	1.0ft (0.3m)	CC174-1HR	11.00	10.34	9.68	CALL
		1.5ft (0.45m)	CC174-1.5HR	11.15	10.48	9.81	CALL
		2.5ft (0.75m)	CC174-2.5HR	11.45	10.76	10.08	CALL
		5.0ft (1.5m)	CC174-5HR	12.30	11.56	10.82	CALL
		7.5ft (2.3m)	CC174-7.5HR	13.10	12.31	11.53	CALL
		10.0ft (3.0m)	CC174-10HR	13.90	13.07	12.23	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	1.0ft (0.3m)	CC58C-1HR	11.30	10.62	9.94	CALL
		1.5ft (0.45m)	CC58C-1.5HR	11.45	10.76	10.08	CALL
		2.0ft (0.6m)	CC58C-2HR	11.65	10.95	10.25	CALL
		2.5ft (0.75m)	CC58C-2.5HR	11.80	11.09	10.38	CALL
		5.0ft (1.5m)	CC58C-5HR	12.60	11.84	11.09	CALL
		10.0ft (3.0m)	CC58C-10HR	14.25	13.39	12.54	CALL

Right Angle BNC Plug to Right Angle BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	1.0ft (0.3m)	CC174-1HR2	14.25	13.39	12.54	CALL
		1.5ft (0.45m)	CC174-1.5HR2	14.40	13.54	12.67	CALL
		2.5ft (0.75m)	CC174-2.5HR2	14.70	13.82	12.94	CALL
		5.0ft (1.5m)	CC174-5HR2	15.50	14.57	13.64	CALL
		7.5ft (2.3m)	CC174-7.5HR2	16.35	15.37	14.39	CALL
		10.0ft (3.0m)	CC174-10HR2	17.15	16.12	15.09	CALL
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	1.0ft (0.3m)	CC58C-1HR2	13.50	12.69	11.88	CALL
		1.5ft (0.45m)	CC58C-1.5HR2	13.70	12.88	12.06	CALL
		2.0ft (0.6m)	CC58C-2HR2	13.85	13.02	12.19	CALL
		2.5ft (0.75m)	CC58C-2.5HR2	14.00	13.16	12.32	CALL
		5.0ft (1.5m)	CC58C-5HR2	14.80	13.91	13.02	CALL
		10.0ft (3.0m)	CC58C-10HR2	16.45	15.46	14.48	CALL

Inline Insulated BNC Plug to Inline Insulated BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG58/U (R9907) Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Beige PVC Operating Temperature: -40°C - +75°C	.185in. (4.7mm)	1.0ft (0.3m)	CCTN58-1B	9.20	8.46	7.73	CALL
		3.0ft (0.9m)	CCTN58-3B	10.30	9.48	8.65	CALL
		6.0ft (1.8m)	CCTN58-6B	11.90	10.95	10.00	CALL
		10.0ft (3.0m)	CCTN58-10B	14.05	12.93	11.80	CALL
		25.0ft (7.6m)	CCTN58-25B	20.40	18.77	17.14	CALL
		50.0ft (15.2m)	CCTN58-50B	33.90	31.19	28.48	CALL

Insulated Right Angle BNC Plug to Insulated Right Angle BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG58/U (R9907) Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Beige PVC Operating Temperature: -40°C - +75°C	.185in. (4.7mm)	5.0ft (1.5m)	CCTN58-5HR2B	25.65	21.55	21.55	CALL
		10.0ft (3.0m)	CCTN58-10HR2B	28.35	23.81	23.81	CALL
		15.0ft (4.6m)	CCTN58-15HR2B	31.05	26.08	26.08	CALL
		25.0ft (7.6m)	CCTN58-25HR2B	36.45	30.62	30.62	CALL

Inline SMB Plug to Inline SMB Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCSB188A-1	28.65	27.50	26.36	CALL
		1.5ft (0.45m)	CCSB188A-1.5	29.20	28.03	26.86	CALL
		2.5ft (0.75m)	CCSB188A-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSB188A-5	32.95	31.63	30.31	CALL
		7.5ft (2.3m)	CCSB188A-7.5	35.65	34.22	32.80	CALL
		10.0ft (3.0m)	CCSB188A-10	38.35	36.82	35.28	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	1.0ft (0.3m)	CCSB316-1	28.65	27.50	26.36	CALL
		1.5ft (0.45m)	CCSB316-1.5	29.20	28.03	26.86	CALL
		2.0ft (0.6m)	CCSB316-2	29.70	28.51	27.32	CALL
		2.5ft (0.75m)	CCSB316-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSB316-5	32.95	31.63	30.31	CALL
		10.0ft (3.0m)	CCSB316-10	38.35	36.82	35.28	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

Inline SMC Plug to Inline SMC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCSC188A-1	28.65	27.50	26.36	CALL
		1.5ft (0.45m)	CCSC188A-1.5	29.20	28.03	26.86	CALL
		2.5ft (0.75m)	CCSC188A-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSC188A-5	32.95	31.63	30.31	CALL
		7.5ft (2.3m)	CCSC188A-7.5	35.65	34.22	32.80	CALL
		10.0ft (3.0m)	CCSC188A-10	38.35	36.82	35.28	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	1.0ft (0.3m)	CCSC316-1	28.65	27.50	26.36	CALL
		1.5ft (0.45m)	CCSC316-1.5	29.20	28.03	26.86	CALL
		2.0ft (0.6m)	CCSC316-2	29.70	28.51	27.32	CALL
		2.5ft (0.75m)	CCSC316-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSC316-5	32.95	31.63	30.31	CALL
		10.0ft (3.0m)	CCSC316-10	38.35	36.82	35.28	CALL

Right Angle MCX Plug to Right Angle MCX Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG188A/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.50" (12.7mm) Jacket: White TFE taped Operating Temperature: -70°C - +200°C	.108in. (2.7mm)	1.0ft (0.3m)	CCSM188A-1	28.65	27.50	26.36	CALL
		2.5ft (0.75m)	CCSM188A-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSM188A-5	32.95	31.63	30.31	CALL
		7.5ft (2.3m)	CCSM188A-7.5	35.65	34.22	32.80	CALL
		10.0ft (3.0m)	CCSM188A-10	38.35	36.82	35.28	CALL
RG316/U Center Conductor: 26 AWG silver coated copper covered steel Min. Bend Radius: 0.51" (13mm) Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.098in. (2.5mm)	1.0ft (0.3m)	CCSM316-1	28.65	27.50	26.36	CALL
		1.5ft (0.45m)	CCSM316-1.5	29.20	28.03	26.86	CALL
		2.0ft (0.6m)	CCSM316-2	29.70	28.51	27.32	CALL
		2.5ft (0.75m)	CCSM316-2.5	30.25	29.04	27.83	CALL
		5.0ft (1.5m)	CCSM316-5	32.95	31.63	30.31	CALL
		10.0ft (3.0m)	CCSM316-10	38.35	36.82	35.28	CALL

Inline TNC Plug to Inline TNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.0mm)	1.0ft (0.3m)	CC58T-1	10.40	9.78	9.15	CALL
		3.0ft (0.9m)	CC58T-3	11.05	10.39	9.72	CALL
		10.0ft (3.0m)	CC58T-10	13.30	12.50	11.70	CALL
		15.0ft (4.6m)	CC58T-15	14.95	14.05	13.16	CALL
		25.0ft (7.6m)	CC58T-25	18.15	17.06	15.97	CALL
		50.0ft (15.2m)	CC58T-50	26.25	24.67	23.10	CALL
RG223/U Center Conductor: 19 AWG solid silver coated copper Min. Bend Radius: 0.98" (25mm) Jacket: Black PVC Operating Temperature: -40°C - +60°C	.212in. (5.4mm)	1.0ft (0.3m)	CC223T-1	21.10	20.26	19.41	CALL
		1.5ft (0.45m)	CC223T-1.5	21.90	21.02	20.15	CALL
		2.0ft (0.6m)	CC223T-2	22.70	21.79	20.88	CALL
		2.5ft (0.75m)	CC223T-2.5	23.50	22.56	21.62	CALL
		5.0ft (1.5m)	CC223T-5	27.55	26.45	25.35	CALL
		10.0ft (3.0m)	CC223T-10	35.65	34.22	32.80	CALL
RG213/U Center Conductor: 13 AWG bare copper Min. Bend Radius: 1.57" (40mm) Jacket: Black PVC Operating Temperature: -40°C - +60°C	.405in. (10.3mm)	5.0ft (1.5m)	CC213T-5	19.75	18.96	18.17	CALL
		10.0ft (3.0m)	CC213T-10	23.80	22.85	21.90	CALL
		15.0ft (4.6m)	CC213T-15	27.85	26.74	25.62	CALL
		25.0ft (7.6m)	CC213T-25	35.95	34.51	33.07	CALL
		50.0ft (15.2m)	CC213T-50	56.20	53.95	51.70	CALL
		75.0ft (22.9m)	CC213T-75	76.45	73.39	70.33	CALL

Inline Type N Plug to Inline Type N Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG223/U Center Conductor: 19 AWG solid silver coated copper Min. Bend Radius: 0.98" (25mm) Jacket: Black PVC Operating Temperature: -40°C - +60°C	.212in. (5.4mm)	1.0ft (0.3m)	CC223N-1	32.40	31.10	29.81	CALL
		1.5ft (0.45m)	CC223N-1.5	33.25	31.92	30.59	CALL
		2.5ft (0.75m)	CC223N-2.5	34.85	33.46	32.06	CALL
		5.0ft (1.5m)	CC223N-5	38.90	37.34	35.79	CALL
		7.5ft (2.3m)	CC223N-7.5	42.95	41.23	39.51	CALL
		10.0ft (3.0m)	CC223N-10	47.00	45.12	43.24	CALL
RG213/U Center Conductor: 13 AWG bare copper Min. Bend Radius: 1.57" (40mm) Jacket: Black PVC Operating Temperature: -40°C - +80°C	.405in. (10.3mm)	5.0ft (1.5m)	CC213-5	19.75	18.96	18.17	CALL
		10.0ft (3.0m)	CC213-10	23.80	22.85	21.90	CALL
		15.0ft (4.6m)	CC213-15	27.85	26.74	25.62	CALL
		25.0ft (7.6m)	CC213-25	35.95	34.51	33.07	CALL
		50.0ft (15.2m)	CC213-50	56.20	53.95	51.70	CALL
		75.0ft (22.9m)	CC213-75	76.45	73.39	70.33	CALL

Reverse Polarized TNC Plug to Reverse Polarized TNC Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG58C/U Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.00" (50.8mm) Jacket: Black PVC Operating Temperature: -40°C - +85°C	.195in. (5.08mm)	5.0ft (1.5m)	CC58RP-5	23.80	22.37	20.94	CALL
		10.0ft (3.0m)	CC58RP-10	26.50	24.91	23.32	CALL
		20.0ft (6.1m)	CC58RP-20	31.90	29.99	28.07	CALL
		25.0ft (7.6m)	CC58RP-25	34.60	32.52	30.45	CALL

Reverse Polarized SMA Plug to Reverse Polarized SMA Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG174/U Center Conductor: 26 AWG bare copper covered steel Min. Bend Radius: 0.47" (12mm) Jacket: Black PVC Operating Temperature: -40°C - +75°C	.110in. (2.8mm)	5.0ft (1.5m)	CC174RP-5	21.35	20.07	18.79	CALL
		10.0ft (3.0m)	CC174RP-10	22.70	21.34	19.98	CALL
		15.0ft (4.6m)	CC174RP-15	24.05	22.61	21.16	CALL
		20.0ft (6.1m)	CC174RP-20	25.40	23.88	22.35	CALL
		25.0ft (7.6m)	CC174RP-25	26.75	25.14	23.54	CALL





What is Low Loss cable?

The term low loss refers to the cables relative low attenuation (loss) over distance. The main difference between standard RG cable and low loss coaxial cable is the shielding. Low loss cable has far better shielding than typical RG style cable thus achieving better low loss characteristics.

Additionally, low loss coaxial cables use solid center conductors which offer lower attenuation than stranded conductors that are sometimes found on RG style cables. Low loss coaxial cables are typically used in WLAN, Cellular, PCS, ISM and many other wireless applications.

Low Loss Attenuation Comparison			
Cable	MHz	db / 100ft	
RG213/U	2500	14.9	
400 Series	2500	6.8	

50 Ohm Low Loss Series Coax Pigtails

1.13mm Series Low Loss Coaxial Pigtails

Connectors	Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
U.FL/Type N Female Bulkhead	1.13mm Mini Pigtails - Black Center Conductor: Silver plated copper Min. Bend Radius: 0.50" (12mm) Jacket: FEP Operating Temp.: -55°C - +200°C	.105in. (2.7mm)	7.9" (20cm)	CA-UFLNBQC20	17.95	16.51	15.08	CALL
U.FL/Type N Male			7.9" (20cm)	CA-UFLNMQC20	17.95	16.51	15.08	CALL
U.FL/Rev. Polarity SMA Jack Bulkhead			7.9" (20cm)	CA-UFLRSBQC20	17.95	16.51	15.08	CALL
U.FL/SMA Female Bulkhead			7.9" (20cm)	CA-UFLSBQC20	17.95	16.51	15.08	CALL
U.FL/Underterminated			10.0ft (3.0m)	CA-UFLQ010	18.95	17.43	15.92	CALL
			7.9" (20cm)	CA-UFLQC20	13.95	12.83	11.72	CALL

100 Series Low Loss Coaxial Pigtails

Connectors	Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
AIProx/Type N Female Bulkhead	100 Series - Black Center Conductor: Solid bare copper covered steel Min. Bend Radius: 0.25" (6.4mm) Jacket: PVC Operating Temp.: -20°C - +60°C	.105in. (2.7mm)	19" (48.3cm)	CA-AMNFCBNC19	10.25	9.22	8.20	CALL
AIProx/Type N Female			19" (48.3cm)	CA-AMNFCN19	10.00	9.00	8.00	CALL
			1.5m	CA-AMNMC1M5	17.80	16.02	14.24	CALL
			2.5m	CA-AMNMC2M5	19.25	17.32	15.40	CALL
			19" (48.3cm)	CA-AMNMCN19	16.20	14.58	12.96	CALL
FME Plug/Reverse Polarity SMA Plug	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-RSPFMEPCN19	16.20	15.23	14.26	CALL
FME Plug/Reverse Polarity TNC Plug			19" (48.3cm)	CA-RTPFMEPCN19	16.20	15.23	14.26	CALL
FME Plug/FME Jack			19" (48.3cm)	CA-FMEPFMEJCN19	19.75	17.78	15.80	CALL
MC Card/Type N Female			19" (48.3cm)	CA-MCNFCN19	10.80	9.72	8.64	CALL
MC Card/Type N Male			1.5m	CA-MCNMC1M5	10.80	9.72	8.64	CALL
MC Card/Reverse Polarity TNC Plug	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-MCNMCN19	8.65	7.79	6.92	CALL
MC Card/Type N Male			19" (48.3cm)	CA-MCRTCPCN19	10.80	9.72	8.64	CALL
MMCX/Type N Female Bulkhead			19" (48.3cm)	CA-MMNFCBNC19	21.60	19.44	17.28	CALL
MMCX/Type N Female			19" (48.3cm)	CA-MMNFCN19	16.20	14.58	12.96	CALL
MMCX/Type N Male			19" (48.3cm)	CA-MMNMN19	11.35	10.21	9.08	CALL
MMCX Straight/Type N Male	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-MMSNMCN19	21.60	19.44	17.28	CALL
MCX/Type N Female			19" (48.3cm)	CA-MPNFCN19	16.20	14.58	12.96	CALL
MCX/Type N Male			19" (48.3cm)	CA-MPNMCN19	16.20	14.58	12.96	CALL
MCX Plug Right Angle/Type N Male			19" (48.3cm)	CA-MPRNMCN19	16.20	14.58	12.96	CALL
Reverse Polarity MMCX Plug/ Type N Female Bulkhead			19" (48.3cm)	CA-RMMNFCBNC19	20.50	18.45	16.40	CALL
Reverse Polarity MMCX/Type N Female	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-RMMNFCN19	16.20	14.58	12.96	CALL
Reverse Polarity MMCX/Type N Male			19" (48.3cm)	CA-RMMNMN19	10.80	9.72	8.64	CALL
QMA Plug/QMA Jack Bulkhead			19" (48.3cm)	CA-QPQJBCN19	24.85	23.36	21.87	CALL
QMA Plug/QMA Plug			19" (48.3cm)	CA-QPQPCN19	24.85	23.36	21.87	CALL
Reverse Polarity TNC Plug/Reverse Polarity TNC Jack Bulkhead			19" (48.3cm)	CA-RTPTTJBCN19	17.30	16.26	15.22	CALL
Reverse Polarity TNC Plug/Reverse Polarity SMA Plug Right Angle	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-RTPRSPRCN19	16.20	15.23	14.26	CALL
Reverse Polarity TNC Plug/Type N Female Bulkhead			19" (48.3cm)	CA-RTPNFBCN19	18.35	17.25	16.15	CALL
Reverse Polarity TNC Plug/ Type N Male			19" (48.3cm)	CA-RTPNMCN19	16.20	15.23	14.26	CALL
Reverse Polarity SMA Plug/ Reverse Polarity TNC Plug			19" (48.3cm)	CA-RSPRTPCN19	16.20	15.23	14.26	CALL
Reverse Polarity SMA Plug/ Reverse Polarity TNC Jack Bulkhead			19" (48.3cm)	CA-RSPRTJBCN19	17.30	16.26	15.22	CALL
Reverse Polarity SMA Plug/ Reverse Polarity SMA Jack Bulkhead	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-RSPRSJBCN19	16.20	15.23	14.26	CALL
Reverse Polarity SMA Plug/ Reverse Polarity SMA Plug			19" (48.3cm)	CA-RSPRSPCN19	16.20	15.23	14.26	CALL
Reverse Polarity SMA Plug/ Reverse Polarity SMA Plug Right Angle			19" (48.3cm)	CA-RSPRSPRCN19	17.30	16.26	15.22	CALL
Reverse Polarity SMA Plug/ Type N Male			19" (48.3cm)	CA-RSPNMCN19	16.20	15.23	14.26	CALL
Reverse Polarity SMA Plug/ Type N Female Bulkhead			19" (48.3cm)	CA-RSPNFBCN19	18.35	17.25	16.15	CALL
SMB Plug Right Angle/SMB Jack	100 Series - Black (see above for specs)	.105in. (2.7mm)	12" (30.5cm)	CA-SBPRSBJCN12	15.70	14.76	13.82	CALL
			24" (61cm)	CA-SBPRSBJCN24	16.75	15.74	14.74	CALL
			30" (76.2cm)	CA-SBPRSBJCN30	17.30	16.26	15.22	CALL
			36" (91.4cm)	CA-SBPRSBJCN36	17.85	16.78	15.71	CALL
			48" (121.9cm)	CA-SBPRSBJCN48	18.90	17.77	16.63	CALL
SMB Plug/SMB Jack	100 Series - Black (see above for specs)	.105in. (2.7mm)	12" (30.5cm)	CA-SBPSBJCN12	15.70	14.76	13.82	CALL
			24" (61cm)	CA-SBPSBJCN24	16.75	15.74	14.74	CALL
			30" (76.2cm)	CA-SBPSBJCN30	17.30	16.26	15.22	CALL
			36" (91.4cm)	CA-SBPSBJCN36	17.85	16.78	15.71	CALL
			48" (121.9cm)	CA-SBPSBJCN48	18.90	17.77	16.63	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

100 Series Low Loss Coaxial Pigtails

Connectors	Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
SMB Plug Rt. Angle / SMB Plug Rt. Angle	100 Series - Black Center Conductor: Solid bare copper covered steel Min. Bend Radius: 0.25" (6.4mm) Jacket: PVC Operating Temp.: -20°C - +60°C	.105in. (2.7mm)	12" (30.5cm)	CA-SBPRSBPRCN12	15.70	14.76	13.82	CALL
			18" (45.7cm)	CA-SBPRSBPRCN18	16.20	15.23	14.26	CALL
			24" (61cm)	CA-SBPRSBPRCN24	16.75	15.74	14.74	CALL
			30" (76.2cm)	CA-SBPRSBPRCN30	17.30	16.26	15.22	CALL
			36" (91.4cm)	CA-SBPRSBPRCN36	17.85	16.78	15.71	CALL
SMB Plug / SMB Plug Right Angle	100 Series - Black (see above for specs)	.105in. (2.7mm)	48" (121.9cm)	CA-SBPRSBPRCN48	18.90	17.77	16.63	CALL
			12" (30.5cm)	CA-SBPSBPRCN12	15.70	14.76	13.82	CALL
			18" (45.7cm)	CA-SBPSBPRCN18	16.20	15.23	14.26	CALL
			24" (61cm)	CA-SBPSBPRCN24	16.75	15.74	14.74	CALL
			30" (76.2cm)	CA-SBPSBPRCN30	17.30	16.26	15.22	CALL
S/E Type 237 Plug / Type N Male	100 Series - Black (see above for specs)	.105in. (2.7mm)	36" (91.4cm)	CA-SBPSBPRCN36	17.85	16.78	15.71	CALL
S/E Type 237 Plug / RP SMA Jack			48" (121.9cm)	CA-SBPSBPRCN48	18.90	17.77	16.63	CALL
S/E Type 237 Plug / SMA Female			19" (48.3cm)	CA-SEPNCN19	16.20	15.23	14.26	CALL
SMA Nano Plug / TNC Female Bulkhead			19" (48.3cm)	CA-SEPNCN19	16.20	15.23	14.26	CALL
SMA Nano Plug / TNC Female			19" (48.3cm)	CA-SNPTFCN19	16.20	15.23	14.26	CALL
SMA Nano RA Plug / Type N Female	100 Series - Black (see above for specs)	.105in. (2.7mm)	19" (48.3cm)	CA-SNPTFCN19	16.20	15.23	14.26	CALL
			19" (48.3cm)	CA-SNPNCN19	16.20	15.23	14.26	CALL

BNC Male Right Angle / BNC Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-BMRBMA002	26.00	23.40	20.80	CALL
		4.0ft (1.2m)	CA-BMRBMA004	27.00	24.30	21.60	CALL
		10.0ft (3.0m)	CA-BMRBMA010	30.00	27.00	24.00	CALL
		20.0ft (6.1m)	CA-BMRBMA020	35.00	31.50	28.00	CALL

BNC Male Right Angle / BNC Male Right Angle

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-BMRBMA002	26.00	23.40	20.80	CALL
		4.0ft (1.2m)	CA-BMRBMA004	27.00	24.30	21.60	CALL
		10.0ft (3.0m)	CA-BMRBMA010	30.00	27.00	24.00	CALL
		20.0ft (6.1m)	CA-BMRBMA020	35.00	31.50	28.00	CALL

Type N Male / Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMNMMA002	15.00	13.50	12.00	CALL
		4.0ft (1.2m)	CA-NMNMMA004	16.00	14.40	12.80	CALL
		10.0ft (3.0m)	CA-NMNMMA010	19.00	17.10	15.20	CALL
		20.0ft (6.1m)	CA-NMNMMA020	24.00	21.60	19.20	CALL
200-Series Center Conductor: Solid copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMNMME002	19.10	17.19	15.28	CALL
		4.0ft (1.2m)	CA-NMNMME004	20.20	18.18	16.16	CALL
		10.0ft (3.0m)	CA-NMNMME010	23.50	21.15	18.80	CALL
		20.0ft (6.1m)	CA-NMNMME020	29.00	26.10	23.20	CALL
		50.0ft (15.2m)	CA-NMNMME050	45.50	40.95	36.40	CALL
240-Series Center Conductor: Solid copper Min. Bend Radius: 0.75" (19.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.240 in. (6.1mm)	2.0ft (0.6m)	CA-NMNMTO02	19.25	17.32	15.40	CALL
		4.0ft (1.2m)	CA-NMNMTO04	20.55	18.50	16.44	CALL
		10.0ft (3.0m)	CA-NMNMTO10	24.45	22.00	19.56	CALL
		20.0ft (6.1m)	CA-NMNMTO20	30.95	27.86	24.76	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA3N002	21.75	19.57	17.40	CALL
		10.0ft (3.0m)	CA3N010	27.75	24.98	22.20	CALL
		20.0ft (6.1m)	CA3N020	35.25	31.73	28.20	CALL
		25.0ft (7.6m)	CA3N025	39.00	35.10	31.20	CALL
		30.0ft (9.0m)	CA3N030	42.75	38.48	34.20	CALL
		40.0ft (12.0m)	CA3N040	50.25	45.23	40.20	CALL
		50.0ft (15.2m)	CA3N050	57.75	51.98	46.20	CALL
		75.0ft (22.9m)	CA3N075	82.75	74.48	66.20	CALL
		100.0ft (30.5m)	CA3N100	107.75	96.98	86.20	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	5.0ft (1.5m)	CA-NMNMH005	22.10	20.77	19.45	CALL
		10.0ft (3.0m)	CA-NMNMH010	28.10	26.41	24.73	CALL
		15.0ft (4.6m)	CA-NMNMH015	34.10	32.05	30.01	CALL
		25.0ft (7.6m)	CA-NMNMH025	46.10	43.33	40.57	CALL
		50.0ft (15.2m)	CA-NMNMH050	76.10	71.53	66.97	CALL
		75.0ft (22.9m)	CA-NMNMH075	106.10	99.73	93.37	CALL
		10.0ft (3.0m)	CA-6NMNM010	40.50	37.26	34.02	CALL
		25.0ft (7.6m)	CA-6NMNM025	66.75	61.41	56.07	CALL
		50.0ft (15.2m)	CA-6NMNM050	110.50	101.66	92.82	CALL
		75.0ft (22.9m)	CA-6NMNM075	154.25	141.91	129.57	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	100.0ft (30.5m)	CA-6NMNM100	208.00	191.36	174.72	CALL
		125.0ft (38.1m)	CA-6NMNM125	251.75	231.61	211.47	CALL
		150.0ft (45.7m)	CA-6NMNM150	298.50	274.62	250.74	CALL
		200.0ft (60.1m)	CA-6NMNM200	383.00	352.36	321.72	CALL
		250.0ft (75.3m)	CA-6NMNM250	470.50	432.86	395.22	CALL
		25.0ft (7.6m)	CA-9NMNM025	667.50	614.10	560.70	CALL
		50.0ft (15.2m)	CA-9NMNM050	785.00	722.20	659.40	CALL
		75.0ft (22.9m)	CA-9NMNM075	902.50	830.30	758.10	CALL
		100.0ft (30.5m)	CA-9NMNM100	1020.00	938.40	856.80	CALL
900-Series Center Conductor: BC Tube Min. Bend Radius: 3.0" (76.2mm) Jacket: Polyethylene Operating Temperature: -40°C - +85°C	.870 in. (22.1mm)	25.0ft (7.6m)	CA-9NMNM025	667.50	614.10	560.70	CALL
		50.0ft (15.2m)	CA-9NMNM050	785.00	722.20	659.40	CALL
		75.0ft (22.9m)	CA-9NMNM075	902.50	830.30	758.10	CALL
		100.0ft (30.5m)	CA-9NMNM100	1020.00	938.40	856.80	CALL





CA-NMRNMF




CA-NMNF



CA-6NMNF



CA-NMRRSPA



CA-NMRRSJA

Type N Male Right Angle / Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMRNMA002	32.50	29.25	26.00	CALL
		4.0ft (1.2m)	CA-NMRNMA004	33.50	30.15	26.80	CALL
		10.0ft (3.0m)	CA-NMRNMA010	36.50	32.85	29.20	CALL
		20.0ft (6.1m)	CA-NMRNMA020	41.50	37.35	33.20	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA-NMRNMF002	20.75	18.68	16.60	CALL
		10.0ft (3.0m)	CA-NMRNMF010	26.75	24.07	21.40	CALL
		25.0ft (7.6m)	CA-NMRNMF025	38.00	34.20	30.40	CALL
		50.0ft (15.2m)	CA-NMRNMF050	56.75	51.08	45.40	CALL

Type N Male / Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMNF002	15.50	13.95	12.40	CALL
		4.0ft (1.2m)	CA-NMNF004	16.50	14.85	13.20	CALL
		10.0ft (3.0m)	CA-NMNF010	19.50	17.55	15.60	CALL
		20.0ft (6.1m)	CA-NMNF020	24.50	22.05	19.60	CALL
200-Series Center Conductor: Solid copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMNF002	19.10	17.19	15.28	CALL
		4.0ft (1.2m)	CA-NMNF004	20.20	18.18	16.16	CALL
		10.0ft (3.0m)	CA-NMNF010	23.50	21.15	18.80	CALL
		20.0ft (6.1m)	CA-NMNF020	29.00	26.10	23.20	CALL
240-Series Center Conductor: Solid copper Min. Bend Radius: 0.75" (19.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.240 in. (6.1mm)	2.0ft (0.6m)	CA-NMNF002	19.25	17.32	15.40	CALL
		4.0ft (1.2m)	CA-NMNF004	20.55	18.50	16.44	CALL
		10.0ft (3.0m)	CA-NMNF010	24.45	22.00	19.56	CALL
		20.0ft (6.1m)	CA-NMNF020	30.95	27.86	24.76	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4N002	22.00	19.80	17.60	CALL
		10.0ft (3.0m)	CA4N010	28.00	25.20	22.40	CALL
		20.0ft (6.1m)	CA4N020	35.50	31.95	28.40	CALL
		25.0ft (7.6m)	CA4N025	39.25	35.33	31.40	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	50.0ft (15.2m)	CA4N050	58.00	52.20	46.40	CALL
		100.0ft (30.5m)	CA4N100	108.00	97.20	86.40	CALL
		5.0ft (1.5m)	CA-NMNFH005	21.60	20.30	19.01	CALL
		10.0ft (3.0m)	CA-NMNFH010	27.60	25.94	24.29	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	15.0ft (4.6m)	CA-NMNFH015	33.60	31.58	29.57	CALL
		25.0ft (7.6m)	CA-NMNFH025	45.60	42.86	40.13	CALL
		50.0ft (15.2m)	CA-NMNFH050	75.60	71.06	66.53	CALL
		75.0ft (22.9m)	CA-NMNFH075	105.60	99.26	92.93	CALL
900-Series Center Conductor: BC Tube Min. Bend Radius: 3.0" (76.2mm) Jacket: Polyethylene Operating Temperature: -40°C - +85°C	.870 in. (22.1mm)	100.0ft (30.5m)	CA-NMNFH100	135.60	127.46	119.33	CALL
		25.0ft (7.6m)	CA-6NMNF025	66.75	61.41	56.07	CALL
		50.0ft (15.2m)	CA-6NMNF050	110.50	101.66	92.82	CALL
		75.0ft (22.9m)	CA-6NMNF075	154.25	141.91	129.57	CALL
		100.0ft (30.5m)	CA-6NMNF100	208.00	191.36	174.72	CALL
		150.0ft (45.7m)	CA-6NMNF150	295.50	271.86	248.22	CALL
		200.0ft (60.1m)	CA-6NMNF200	383.00	352.36	321.72	CALL
		25.0ft (7.6m)	CA-9NMNF025	667.50	614.10	560.70	CALL
		50.0ft (15.2m)	CA-9NMNF050	785.00	722.20	659.40	CALL
		75.0ft (22.9m)	CA-9NMNF075	902.50	830.30	758.10	CALL
		100.0ft (30.5m)	CA-9NMNF100	1020.00	938.40	856.80	CALL

Type N Male Right Angle / Reverse Polarity SMA Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMRRSPA002	30.00	27.00	24.00	CALL
		4.0ft (1.2m)	CA-NMRRSPA004	31.00	27.90	24.80	CALL
		10.0ft (3.0m)	CA-NMRRSPA010	34.00	30.60	27.20	CALL
		20.0ft (6.1m)	CA-NMRRSPA020	39.00	35.10	31.20	CALL

Type N Male Right Angle / Reverse Polarity SMA Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMRRSJA002	27.25	24.53	21.80	CALL
		4.0ft (1.2m)	CA-NMRRSJA004	28.25	25.43	22.60	CALL
		10.0ft (3.0m)	CA-NMRRSJA010	31.25	28.13	25.00	CALL
		20.0ft (6.1m)	CA-NMRRSJA020	36.25	32.63	29.00	CALL


Solid vs stranded center conductors



Online Video

L-com.com/Videos/A19

In coaxial cable there is a trade off in center conductor construction. A solid center conductor will give the best attenuation performance but will be somewhat stiff, while a stranded center conductor will be more flexible but have slightly higher attenuation.



Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

Type N Male Right Angle / SMA Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMRSMA002	14.00	12.60	11.20	CALL
		4.0ft (1.2m)	CA-NMRSMA004	15.00	13.50	12.00	CALL
		10.0ft (3.0m)	CA-NMRSMA010	18.00	16.20	14.40	CALL
		20.0ft (6.1m)	CA-NMRSMA020	23.00	20.70	18.40	CALL

Type N Male Right Angle / TNC Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-NMRTMA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-NMRTMA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-NMRTMA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-NMRTMA020	27.00	24.30	21.60	CALL

Reverse Polarity BNC Plug / Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RBPNMA002	19.50	17.55	15.60	CALL
		4.0ft (1.2m)	CA-RBPNMA004	20.50	18.45	16.40	CALL
		10.0ft (3.0m)	CA-RBPNMA010	23.50	21.15	18.80	CALL
		20.0ft (6.1m)	CA-RBPNMA020	28.50	25.65	22.80	CALL

Reverse Polarity SMA Plug / Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSPNMA002	16.00	14.40	12.80	CALL
		4.0ft (1.2m)	CA-RSPNMA004	17.00	15.30	13.60	CALL
		10.0ft (3.0m)	CA-RSPNMA010	20.00	18.00	16.00	CALL
		20.0ft (6.1m)	CA-RSPNMA020	25.00	22.50	20.00	CALL
200-Series Center Conductor: Solid copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSPNME002	18.10	16.29	14.48	CALL
		4.0ft (1.2m)	CA-RSPNME004	19.20	17.28	15.36	CALL
		10.0ft (3.0m)	CA-RSPNME010	22.50	20.25	18.00	CALL
		20.0ft (6.1m)	CA-RSPNME020	28.00	25.20	22.40	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4NMRSF002	24.00	21.60	19.20	CALL
		10.0ft (3.0m)	CA4NMRSF010	30.00	27.00	24.00	CALL
		20.0ft (6.1m)	CA4NMRSF020	37.50	33.75	30.00	CALL
		25.0ft (7.6m)	CA4NMRSF025	41.25	37.13	33.00	CALL
		30.0ft (9.0m)	CA4NMRSF030	45.00	40.50	36.00	CALL
		50.0ft (15.2m)	CA4NMRSF050	60.00	54.00	48.00	CALL
400UF-Series Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	5.0ft (1.5m)	CA-NMRSPH005	19.35	18.19	17.03	CALL
		10.0ft (3.0m)	CA-NMRSPH010	25.35	23.83	22.31	CALL
		15.0ft (4.6m)	CA-NMRSPH015	31.35	29.47	27.59	CALL
		25.0ft (7.6m)	CA-NMRSPH025	43.35	40.75	38.15	CALL
		50.0ft (15.2m)	CA-NMRSPH050	73.35	68.95	64.55	CALL
		75.0ft (22.9m)	CA-NMRSPH075	103.35	97.15	90.95	CALL
		100.0ft (30.5m)	CA-NMRSPH100	133.35	125.35	117.35	CALL

Reverse Polarity SMA Plug / Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSPNFA002	14.50	13.05	11.60	CALL
		4.0ft (1.2m)	CA-RSPNFA004	15.50	13.95	12.40	CALL
		10.0ft (3.0m)	CA-RSPNFA010	18.50	16.65	14.80	CALL
		20.0ft (6.1m)	CA-RSPNFA020	23.50	21.15	18.80	CALL

Reverse Polarity SMA Plug / Type N Female Bulkhead

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSPNFA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-RSPNFA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-RSPNFA010	22.25	20.03	17.80	CALL
		20.0ft (6.1m)	CA-RSPNFA020	27.25	24.53	21.80	CALL

Reverse Polarity SMA Plug / Reverse Polarity SMA Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSPRSJA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-RSPRSJA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-RSPRSJA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-RSPRSJA020	27.00	24.30	21.60	CALL

Reverse Polarity SMA Jack / Reverse Polarity TNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RSJRTPA002	17.00	15.30	13.60	CALL
		4.0ft (1.2m)	CA-RSJRTPA004	18.00	16.20	14.40	CALL
		10.0ft (3.0m)	CA-RSJRTPA010	21.00	18.90	16.80	CALL
		20.0ft (6.1m)	CA-RSJRTPA020	26.00	23.40	20.80	CALL



CA-NMRSMA



CA-NMRTMA



CA-RBPNMA



CA4NMRSF



CA-RSPNFA



CA-RSPNFA



CA-RSPRSJA



CA-RSJRTPA



CA-RTPNME



CA-6RTPNM



CA-RTPNFT



CA-RTPNFBA




CA-RTMRTF



Identifying a reverse polarized connector

A reverse polarized coaxial connector alters a standard polarized connector interface by utilizing a male center pin in a jack body or a female center pin in a plug body. Reverse polarity connectors are sometimes used in an attempt to "key" connections so that incorrect connections are not possible. This also prevents mating with a standard non-polarized connector. Common reverse polarized interfaces are RP-SMA and RP-TNC.

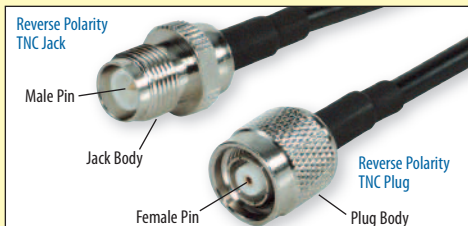

Reverse Polarity TNC Plug/Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPNMA002	11.00	9.90	8.80	CALL
		4.0ft (1.2m)	CA-RTPNMA004	12.00	10.80	9.60	CALL
		10.0ft (3.0m)	CA-RTPNMA010	15.00	13.50	12.00	CALL
		20.0ft (6.1m)	CA-RTPNMA020	20.00	18.00	16.00	CALL
200-Series Center Conductor: Solid copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPNME002	18.10	16.29	14.48	CALL
		4.0ft (1.2m)	CA-RTPNME004	19.20	17.28	15.36	CALL
		10.0ft (3.0m)	CA-RTPNME010	22.50	20.25	18.00	CALL
		20.0ft (6.1m)	CA-RTPNME020	28.00	25.20	22.40	CALL
240-Series Center Conductor: Solid copper Min. Bend Radius: 0.75" (19.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.240 in. (6.1mm)	2.0ft (0.6m)	CA-RTPNMT002	18.25	16.43	14.60	CALL
		4.0ft (1.2m)	CA-RTPNMT004	19.55	17.60	15.64	CALL
		10.0ft (3.0m)	CA-RTPNMT010	23.45	21.11	18.76	CALL
		20.0ft (6.1m)	CA-RTPNMT020	29.95	26.95	23.96	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4NMRTF002	24.00	21.60	19.20	CALL
		10.0ft (3.0m)	CA4NMRTF010	30.00	27.00	24.00	CALL
		20.0ft (6.1m)	CA4NMRTF020	37.50	33.75	30.00	CALL
		25.0ft (7.6m)	CA4NMRTF025	41.25	37.13	33.00	CALL
		50.0ft (15.2m)	CA4NMRTF050	60.00	54.00	48.00	CALL
		100.0ft (30.5m)	CA4NMRTF100	110.00	99.00	88.00	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	5.0ft (1.5m)	CA-NMRTPH005	24.20	22.75	21.30	CALL
		10.0ft (3.0m)	CA-NMRTPH010	30.20	28.39	26.58	CALL
		15.0ft (4.6m)	CA-NMRTPH015	36.20	34.03	31.86	CALL
		25.0ft (7.6m)	CA-NMRTPH025	48.20	45.31	42.42	CALL
		50.0ft (15.2m)	CA-NMRTPH050	78.20	73.51	68.82	CALL
		75.0ft (22.9m)	CA-NMRTPH075	108.20	101.71	95.22	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	10.0ft (3.0m)	CA-6RTPNM010	40.50	37.26	34.02	CALL
		25.0ft (7.6m)	CA-6RTPNM025	66.75	61.41	56.07	CALL
		50.0ft (15.2m)	CA-6RTPNM050	110.50	101.66	92.82	CALL
		75.0ft (22.9m)	CA-6RTPNM075	154.25	141.91	129.57	CALL
		100.0ft (30.5m)	CA-6RTPNM100	208.00	191.36	174.72	CALL

Reverse Polarity TNC Plug/Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPNFA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-RTPNFA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-RTPNFA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-RTPNFA020	27.00	24.30	21.60	CALL
240-Series Center Conductor: Solid copper Min. Bend Radius: 0.75" (19.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.240 in. (6.1mm)	2.0ft (0.6m)	CA-RTPNFT002	18.25	16.43	14.60	CALL
		4.0ft (1.2m)	CA-RTPNFT004	19.55	17.60	15.64	CALL
		10.0ft (3.0m)	CA-RTPNFT010	23.45	21.11	18.76	CALL
		20.0ft (6.1m)	CA-RTPNFT020	29.95	26.95	23.96	CALL

Reverse Polarity TNC Plug/Type N Female Bulkhead

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPNFBA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-RTPNFBA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-RTPNFBA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-RTPNFBA020	27.00	24.30	21.60	CALL

Reverse Polarity TNC Plug/Reverse Polarity TNC Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPRTJA002	17.00	15.30	13.60	CALL
		4.0ft (1.2m)	CA-RTPRTJA004	18.00	16.20	14.40	CALL
		10.0ft (3.0m)	CA-RTPRTJA010	21.00	18.90	16.80	CALL
		20.0ft (6.1m)	CA-RTPRTJA020	26.00	23.40	20.80	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4RTMRTF002	24.00	21.60	19.20	CALL
		10.0ft (3.0m)	CA4RTMRTF010	30.00	27.00	24.00	CALL
		20.0ft (6.1m)	CA4RTMRTF020	37.50	33.75	30.00	CALL
		25.0ft (7.6m)	CA4RTMRTF025	41.25	37.13	33.00	CALL
		50.0ft (15.2m)	CA4RTMRTF050	60.00	54.00	48.00	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

Reverse Polarity TNC Plug Right Angle /Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPRNMA002	14.00	12.60	11.20	CALL
		4.0ft (1.2m)	CA-RTPRNMA004	15.00	13.50	12.00	CALL
		10.0ft (3.0m)	CA-RTPRNMA010	18.00	16.20	14.40	CALL
		20.0ft (6.1m)	CA-RTPRNMA020	23.00	20.70	18.40	CALL

Reverse Polarity TNC Plug / Reverse Polarity TNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-RTPRTPA002	17.00	15.30	13.60	CALL
		4.0ft (1.2m)	CA-RTPRTPA004	18.00	16.20	14.40	CALL
		10.0ft (3.0m)	CA-RTPRTPA010	21.00	18.90	16.80	CALL
		20.0ft (6.1m)	CA-RTPRTPA020	26.00	23.40	20.80	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4RTPRTP002	24.00	21.60	19.20	CALL
		10.0ft (3.0m)	CA4RTPRTP010	30.00	27.00	24.00	CALL
		50.0ft (15.2m)	CA4RTPRTP050	60.00	54.00	48.00	CALL

SMA Male /Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMNMA002	14.00	12.60	11.20	CALL
		4.0ft (1.2m)	CA-SMNMA004	15.00	13.50	12.00	CALL
		10.0ft (3.0m)	CA-SMNMA010	18.00	16.20	14.40	CALL
		20.0ft (6.1m)	CA-SMNMA020	23.00	20.70	18.40	CALL
240-Series Center Conductor: Solid copper Min. Bend Radius: 0.75" (19.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.240 in. (6.1mm)	2.0ft (0.6m)	CA-SMNMTO02	18.25	16.43	14.60	CALL
		4.0ft (1.2m)	CA-SMNMTO04	19.55	17.60	15.64	CALL
		10.0ft (3.0m)	CA-SMNMTO10	23.45	21.11	18.76	CALL
		20.0ft (6.1m)	CA-SMNMTO20	29.95	26.95	23.96	CALL
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	2.0ft (0.6m)	CA4NMSM002	27.00	24.30	21.60	CALL
		10.0ft (3.0m)	CA4NMSM010	33.00	29.70	26.40	CALL
		25.0ft (7.6m)	CA4NMSM025	44.25	39.83	35.40	CALL

SMA Male /Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMNFMA002	14.00	12.60	11.20	CALL
		4.0ft (1.2m)	CA-SMNFMA004	15.00	13.50	12.00	CALL
		10.0ft (3.0m)	CA-SMNFMA010	18.00	16.20	14.40	CALL
		20.0ft (6.1m)	CA-SMNFMA020	23.00	20.70	18.40	CALL

SMA Male /Type N Female Bulkhead

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMNFBA002	24.00	21.60	19.20	CALL
		4.0ft (1.2m)	CA-SMNFBA004	25.00	22.50	20.00	CALL
		10.0ft (3.0m)	CA-SMNFBA010	28.00	25.20	22.40	CALL
		20.0ft (6.1m)	CA-SMNFBA020	33.00	29.70	26.40	CALL

SMA Male Right Angle /Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMRNMA002	14.00	12.60	11.20	CALL
		4.0ft (1.2m)	CA-SMRNMA004	15.00	13.50	12.00	CALL
		10.0ft (3.0m)	CA-SMRNMA010	18.00	16.20	14.40	CALL
		20.0ft (6.1m)	CA-SMRNMA020	23.00	20.70	18.40	CALL

SMA Male Right Angle /Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMRNFA002	19.50	17.55	15.60	CALL
		4.0ft (1.2m)	CA-SMRNFA004	20.50	18.45	16.40	CALL
		10.0ft (3.0m)	CA-SMRNFA010	23.50	21.15	18.80	CALL
		20.0ft (6.1m)	CA-SMRNFA020	28.50	25.65	22.80	CALL

SMA Male Right Angle /Type N Female Bulkhead

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-SMRNFA002	23.50	21.15	18.80	CALL
		4.0ft (1.2m)	CA-SMRNFA004	24.50	22.05	19.60	CALL
		10.0ft (3.0m)	CA-SMRNFA010	27.50	24.75	22.00	CALL
		20.0ft (6.1m)	CA-SMRNFA020	32.50	29.25	26.00	CALL





TNC Male/Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-TMNMA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-TMNMA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-TMNMA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-TMNMA020	27.00	24.30	21.60	CALL

TNC Male/Type N Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-TMNFA002	18.00	16.20	14.40	CALL
		4.0ft (1.2m)	CA-TMNFA004	19.00	17.10	15.20	CALL
		10.0ft (3.0m)	CA-TMNFA010	22.00	19.80	17.60	CALL
		20.0ft (6.1m)	CA-TMNFA020	27.00	24.30	21.60	CALL

Type F Male/Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-FMNMA002	18.50	16.65	14.80	CALL
		4.0ft (1.2m)	CA-FMNMA004	19.50	17.55	15.60	CALL
		10.0ft (3.0m)	CA-FMNMA010	22.50	20.25	18.00	CALL
		20.0ft (6.1m)	CA-FMNMA020	27.50	24.75	22.00	CALL

QMA Plug Right Angle/Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
195-Series Center Conductor: Solid bare copper Min. Bend Radius: 0.50" (12.7mm) Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated) Operating Temperature: -20°C - +60°C	.195 in. (5.0mm)	2.0ft (0.6m)	CA-QPNMA002	27.50	24.75	22.00	CALL
		4.0ft (1.2m)	CA-QPNMA004	28.50	25.65	22.80	CALL
		10.0ft (3.0m)	CA-QPNMA010	31.50	28.35	25.20	CALL
		20.0ft (6.1m)	CA-QPNMA020	36.50	32.85	29.20	CALL


Semi-Rigid and Formable 50 Ohm Coaxial Assemblies

L-com offers quality crafted Semi-Rigid and Formable coax cable assemblies for use in a wide array of applications. These cable assemblies are designed, manufactured and tested using state of the art equipment to ensure the highest quality to our customers.

Have custom cable requirements? We can custom build your Semi-Rigid and Formable cable assemblies using the very best in forming and stripping equipment. In addition to our standard cable types, we can build cable assemblies using Semi-Rigid Low Loss Aluminum or Copper cable from sizes of .047 (1.2mm) to .250 (6.4mm) with a wide array of available connector types. Contact us today with your custom cable requirements.

**What is the difference between Semi-Rigid and Formable cable?**

Semi-rigid cable is a coaxial form using a solid copper outer sheath. This type of coax offers superior screening compared to cables with a braided outer conductor, especially at higher frequencies. The major disadvantage is that the cable, as its name implies, is not very flexible, and is not intended to be flexed after initial forming. This type of cable is also called "hard line" cable.



Formable cable is a flexible reformable alternative to semi-rigid coaxial cable used where flexibility is required. Formable cable can be stripped and formed by hand without the need for special tools, similar to standard coaxial cable. Also this cable type is ideal for laying out and designing pre-bent semi-rigid assemblies.



Type N Male/Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
.085 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.085 in. (2.2mm)	6.0in (152.4mm)	CA-085SCNMM006	47.50	44.65	41.80	CALL
		12.0in (304.8mm)	CA-085SCNMM012	51.00	47.94	44.88	CALL
		18.0in (457.2mm)	CA-085SCNMM018	54.50	51.23	47.96	CALL
		24.0in (609.6mm)	CA-085SCNMM024	58.00	54.52	51.04	CALL
		36.0in (914.4mm)	CA-085SCNMM036	65.00	61.10	57.20	CALL
.141 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.141 in. (3.6mm)	6.0in (152.4mm)	CA-141SCNMM006	51.00	47.94	44.88	CALL
		12.0in (304.8mm)	CA-141SCNMM012	55.00	51.70	48.40	CALL
		18.0in (457.2mm)	CA-141SCNMM018	59.00	55.46	51.92	CALL
		24.0in (609.6mm)	CA-141SCNMM024	63.00	59.22	55.44	CALL
		36.0in (914.4mm)	CA-141SCNMM036	71.00	66.74	62.48	CALL
.085 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.085 in. (2.2mm)	6.0in (152.4mm)	CA-085FNMNM006	47.50	44.65	41.80	CALL
		12.0in (304.8mm)	CA-085FNMNM012	51.00	47.94	44.88	CALL
		18.0in (457.2mm)	CA-085FNMNM018	54.50	51.23	47.96	CALL
		24.0in (609.6mm)	CA-085FNMNM024	58.00	54.52	51.04	CALL
		36.0in (914.4mm)	CA-085FNMNM036	65.00	61.10	57.20	CALL
.141 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.141 in. (3.6mm)	6.0in (152.4mm)	CA-141FNMNM006	51.00	47.94	44.88	CALL
		12.0in (304.8mm)	CA-141FNMNM012	55.00	51.70	48.40	CALL
		18.0in (457.2mm)	CA-141FNMNM018	59.00	55.46	51.92	CALL
		24.0in (609.6mm)	CA-141FNMNM024	63.00	59.22	55.44	CALL
		36.0in (914.4mm)	CA-141FNMNM036	71.00	66.74	62.48	CALL


Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

Type N Male / Type N Female							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
.085 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.085 in. (.2mm)	6.0in (152.4mm)	CA-085SCNMNF006	47.25	44.41	41.58	CALL
		12.0in (304.8mm)	CA-085SCNMNF012	50.75	47.70	44.66	CALL
		18.0in (457.2mm)	CA-085SCNMNF018	54.25	50.99	47.74	CALL
		24.0in (609.6mm)	CA-085SCNMNF024	57.75	54.28	50.82	CALL
		36.0in (914.4mm)	CA-085SCNMNF036	64.75	60.86	56.98	CALL
.141 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.141 in. (.36mm)	6.0in (152.4mm)	CA-141SCNMNF006	50.75	47.70	44.66	CALL
		12.0in (304.8mm)	CA-141SCNMNF012	54.75	51.46	48.18	CALL
		18.0in (457.2mm)	CA-141SCNMNF018	58.75	55.22	51.70	CALL
		24.0in (609.6mm)	CA-141SCNMNF024	62.75	58.98	55.22	CALL
		36.0in (914.4mm)	CA-141SCNMNF036	70.75	66.50	62.26	CALL
.085 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.085 in. (.2mm)	6.0in (152.4mm)	CA-085FNMNF006	47.25	44.41	41.58	CALL
		12.0in (304.8mm)	CA-085FNMNF012	50.75	47.70	44.66	CALL
		18.0in (457.2mm)	CA-085FNMNF018	54.25	50.99	47.74	CALL
		24.0in (609.6mm)	CA-085FNMNF024	57.75	54.28	50.82	CALL
		36.0in (914.4mm)	CA-085FNMNF036	64.75	60.86	56.98	CALL
.141 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.141 in. (.36mm)	6.0in (152.4mm)	CA-141FNMNF006	50.75	47.70	44.66	CALL
		12.0in (304.8mm)	CA-141FNMNF012	54.75	51.46	48.18	CALL
		18.0in (457.2mm)	CA-141FNMNF018	58.75	55.22	51.70	CALL
		24.0in (609.6mm)	CA-141FNMNF024	62.75	58.98	55.22	CALL
		36.0in (914.4mm)	CA-141FNMNF036	70.75	66.50	62.26	CALL

Type N Male/SMA Male							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
.085 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.085 in. (.2mm)	6.0in (152.4mm)	CA-085SCNMSM006	46.25	43.47	40.70	CALL
		12.0in (304.8mm)	CA-085SCNMSM012	49.75	46.77	43.78	CALL
		18.0in (457.2mm)	CA-085SCNMSM018	53.25	50.05	46.86	CALL
		24.0in (609.6mm)	CA-085SCNMSM024	56.75	53.34	49.94	CALL
		36.0in (914.4mm)	CA-085SCNMSM036	63.75	59.92	56.10	CALL
.141 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.141 in. (.36mm)	6.0in (152.4mm)	CA-141SCNMSM006	49.75	46.77	43.78	CALL
		12.0in (304.8mm)	CA-141SCNMSM012	53.75	50.52	47.30	CALL
		18.0in (457.2mm)	CA-141SCNMSM018	57.75	54.28	50.82	CALL
		24.0in (609.6mm)	CA-141SCNMSM024	61.75	58.04	54.34	CALL
		36.0in (914.4mm)	CA-141SCNMSM036	69.75	65.56	61.38	CALL
.085 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.085 in. (.2mm)	6.0in (152.4mm)	CA-085FNMSM006	46.25	43.47	40.70	CALL
		12.0in (304.8mm)	CA-085FNMSM012	49.75	46.77	43.78	CALL
		18.0in (457.2mm)	CA-085FNMSM018	53.25	50.05	46.86	CALL
		24.0in (609.6mm)	CA-085FNMSM024	56.75	53.34	49.94	CALL
		36.0in (914.4mm)	CA-085FNMSM036	63.75	59.92	56.10	CALL
.141 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.141 in. (.36mm)	6.0in (152.4mm)	CA-141FNMSM006	49.75	46.77	43.78	CALL
		12.0in (304.8mm)	CA-141FNMSM012	53.75	50.52	47.30	CALL
		18.0in (457.2mm)	CA-141FNMSM018	57.75	54.28	50.82	CALL
		24.0in (609.6mm)	CA-141FNMSM024	61.75	58.04	54.34	CALL
		36.0in (914.4mm)	CA-141FNMSM036	69.75	65.56	61.38	CALL

SMA Male / SMA Male							
Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
.085 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.085 in. (.2mm)	6.0in (152.4mm)	CA-085SCSMSM006	45.25	42.53	39.82	CALL
		12.0in (304.8mm)	CA-085SCSMSM012	48.75	45.82	42.90	CALL
		18.0in (457.2mm)	CA-085SCSMSM018	52.25	49.11	45.98	CALL
		24.0in (609.6mm)	CA-085SCSMSM024	55.75	52.40	49.06	CALL
		36.0in (914.4mm)	CA-085SCSMSM036	62.75	58.98	55.22	CALL
.141 Semi-Rigid Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin plated copper	.141 in. (.36mm)	6.0in (152.4mm)	CA-141SCSMSM006	48.75	45.82	42.90	CALL
		12.0in (304.8mm)	CA-141SCSMSM012	52.75	49.58	46.42	CALL
		18.0in (457.2mm)	CA-141SCSMSM018	56.75	53.34	49.94	CALL
		24.0in (609.6mm)	CA-141SCSMSM024	60.75	57.10	53.46	CALL
		36.0in (914.4mm)	CA-141SCSMSM036	68.75	64.63	60.50	CALL
.085 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.085 in. (.2mm)	6.0in (152.4mm)	CA-085FSMSM006	45.25	42.53	39.82	CALL
		12.0in (304.8mm)	CA-085FSMSM012	48.75	45.82	42.90	CALL
		18.0in (457.2mm)	CA-085FSMSM018	52.25	49.11	45.98	CALL
		24.0in (609.6mm)	CA-085FSMSM024	55.75	52.40	49.06	CALL
		36.0in (914.4mm)	CA-085FSMSM036	62.75	58.98	55.22	CALL
.141 Formable Inner Conductor: Silver plated copper covered steel Outer Conductor: Tin overcoat-tinned annealed copper wire braiding	.141 in. (.36mm)	6.0in (152.4mm)	CA-141FSMSM006	48.75	45.82	42.90	CALL
		12.0in (304.8mm)	CA-141FSMSM012	52.75	49.58	46.42	CALL
		18.0in (457.2mm)	CA-141FSMSM018	56.75	53.34	49.94	CALL
		24.0in (609.6mm)	CA-141FSMSM024	60.75	57.10	53.46	CALL
		36.0in (914.4mm)	CA-141FSMSM036	68.75	64.63	60.50	CALL

Custom engineered and manufactured Semi-Rigid cables

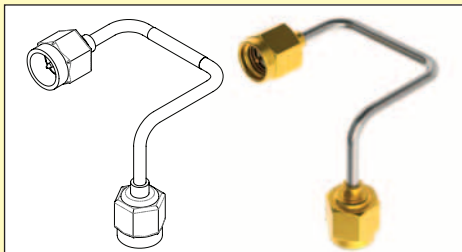

From concept to design to manufacture, L-com can provide custom Semi-Rigid cable assemblies in large or small quantities.

Using state of the art forming and stripping equipment, L-com can provide these cable assemblies at competitive pricing while maintaining the high quality our customers expect.





7/16 DIN Male to 7/16 DIN Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	10.0ft (3.0m)	CA-DMDMF010	92.50	85.10	77.70	CALL
		15.0ft (4.6m)	CA-DMDMF015	96.25	88.55	80.85	CALL
		25.0ft (7.6m)	CA-DMDMF025	103.75	95.45	87.15	CALL
		50.0ft (15.2m)	CA-DMDMF050	122.50	112.70	102.90	CALL
		75.0ft (22.9m)	CA-DMDMF075	141.25	129.95	118.65	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	100.0ft (30.5m)	CA-DMDMF100	170.00	156.40	142.80	CALL
		10.0ft (3.0m)	CA-DMDMH010	97.00	89.24	81.48	CALL
		15.0ft (4.6m)	CA-DMDMH015	103.00	94.76	86.52	CALL
		25.0ft (7.6m)	CA-DMDMH025	115.00	105.80	96.60	CALL
		50.0ft (15.2m)	CA-DMDMH050	145.00	133.40	121.80	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	75.0ft (22.9m)	CA-DMDMH075	175.00	161.00	147.00	CALL
		100.0ft (30.5m)	CA-DMDMH100	215.00	197.80	180.60	CALL
		10.0ft (3.0m)	CA-6DMDM010	112.50	103.50	94.50	CALL
		25.0ft (7.6m)	CA-6DMDM025	138.75	127.65	116.55	CALL
		50.0ft (15.2m)	CA-6DMDM050	182.50	167.90	153.30	CALL
		75.0ft (22.9m)	CA-6DMDM075	226.25	208.15	190.05	CALL
		100.0ft (30.5m)	CA-6DMDM100	280.00	257.60	235.20	CALL
		125.0ft (38.1m)	CA-6DMDM125	323.75	297.85	271.95	CALL

7/16 DIN Male / 7/16 DIN Female

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	10.0ft (3.0m)	CA-DMDF010	97.50	89.70	81.90	CALL
		15.0ft (4.6m)	CA-DMDF015	101.25	93.15	85.05	CALL
		25.0ft (7.6m)	CA-DMDF025	108.75	100.05	91.35	CALL
		50.0ft (15.2m)	CA-DMDF050	127.50	117.30	107.10	CALL
		75.0ft (22.9m)	CA-DMDF075	146.25	134.55	122.85	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	100.0ft (30.5m)	CA-DMDF100	175.00	161.00	147.00	CALL
		10.0ft (3.0m)	CA-DMDFH010	102.00	93.84	85.68	CALL
		15.0ft (4.6m)	CA-DMDFH015	108.00	99.36	90.72	CALL
		25.0ft (7.6m)	CA-DMDFH025	120.00	110.40	100.80	CALL
		50.0ft (15.2m)	CA-DMDFH050	150.00	138.00	126.00	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	75.0ft (22.9m)	CA-DMDFH075	180.00	165.60	151.20	CALL
		100.0ft (30.5m)	CA-DMDFH100	220.00	202.40	184.80	CALL
		10.0ft (3.0m)	CA-6DMDF010	117.50	108.10	98.70	CALL
		25.0ft (7.6m)	CA-6DMDF025	143.75	132.25	120.75	CALL
		50.0ft (15.2m)	CA-6DMDF050	187.50	172.50	157.50	CALL
		75.0ft (22.9m)	CA-6DMDF075	231.25	212.75	194.25	CALL
		100.0ft (30.5m)	CA-6DMDF100	285.00	262.20	239.40	CALL
		125.0ft (38.1m)	CA-6DMDF125	328.75	302.45	276.15	CALL

7/16 DIN Male / Type N Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	10.0ft (3.0m)	CA-DMNMF010	77.50	71.30	65.10	CALL
		15.0ft (4.6m)	CA-DMNMF015	81.25	74.75	68.25	CALL
		25.0ft (7.6m)	CA-DMNMF025	88.75	81.65	74.55	CALL
		50.0ft (15.2m)	CA-DMNMF050	107.50	98.90	90.30	CALL
		75.0ft (22.9m)	CA-DMNMF075	126.25	116.15	106.05	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	100.0ft (30.5m)	CA-DMNMF100	155.00	142.60	130.20	CALL
		10.0ft (3.0m)	CA-DMNMH010	82.00	75.44	68.88	CALL
		15.0ft (4.6m)	CA-DMNMH015	88.00	80.96	73.92	CALL
		25.0ft (7.6m)	CA-DMNMH025	100.00	92.00	84.00	CALL
		50.0ft (15.2m)	CA-DMNMH050	130.00	119.60	109.20	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	75.0ft (22.9m)	CA-DMNMH075	160.00	147.20	134.40	CALL
		100.0ft (30.5m)	CA-DMNMH100	200.00	184.00	168.00	CALL
		10.0ft (3.0m)	CA-6DMNM010	92.50	85.10	77.70	CALL
		25.0ft (7.6m)	CA-6DMNM025	118.75	109.25	99.75	CALL
		50.0ft (15.2m)	CA-6DMNM050	162.50	149.50	136.50	CALL
		75.0ft (22.9m)	CA-6DMNM075	206.25	189.75	173.25	CALL
		100.0ft (30.5m)	CA-6DMNM100	260.00	239.20	218.40	CALL
		125.0ft (38.1m)	CA-6DMNM125	303.75	279.45	255.15	CALL

7/16 DIN Male / Type N Female


Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
400-Series Center Conductor: Copper clad aluminum Min. Bend Radius: 1.0" (25.4mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.405 in. (10.3mm)	10.0ft (3.0m)	CA-DMNFF010	77.50	71.30	65.10	CALL
		15.0ft (4.6m)	CA-DMNFF015	81.25	74.75	68.25	CALL
		25.0ft (7.6m)	CA-DMNFF025	88.75	81.65	74.55	CALL
		50.0ft (15.2m)	CA-DMNFF050	107.50	98.90	90.30	CALL
		75.0ft (22.9m)	CA-DMNFF075	126.25	116.15	106.05	CALL
400UF-Series Ultra Flex Center Conductor: Stranded bare copper Min. Bend Radius: 1.0" (25.4mm) Jacket: Black Thermoplastic Elastomer Operating Temperature: -40°C - +85°C	.405 in. (10.3mm)	100.0ft (30.5m)	CA-DMNFF100	155.00	142.60	130.20	CALL
		10.0ft (3.0m)	CA-DMNFFH010	82.00	75.44	68.88	CALL
		15.0ft (4.6m)	CA-DMNFFH015	88.00	80.96	73.92	CALL
		25.0ft (7.6m)	CA-DMNFFH025	100.00	92.00	84.00	CALL
		50.0ft (15.2m)	CA-DMNFFH050	130.00	119.60	109.20	CALL
600-Series Center Conductor: Solid copper Min. Bend Radius: 1.50" (38.1mm) Jacket: Polyethylene Operating Temperature: -40°C - +80°C	.590 in. (15.0mm)	75.0ft (22.9m)	CA-DMNFFH075	160.00	147.20	134.40	CALL
		100.0ft (30.5m)	CA-DMNFFH100	200.00	184.00	168.00	CALL
		10.0ft (3.0m)	CA-6DMNF010	92.50	85.10	77.70	CALL
		25.0ft (7.6m)	CA-6DMNF025	118.75	109.25	99.75	CALL
		50.0ft (15.2m)	CA-6DMNF050	162.50	149.50	136.50	CALL
		75.0ft (22.9m)	CA-6DMNF075	206.25	189.75	173.25	CALL
		100.0ft (30.5m)	CA-6DMNF100	260.00	239.20	218.40	CALL
		125.0ft (38.1m)	CA-6DMNF125	303.75	279.45	255.15	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.



When is a 75 Ohm coaxial cable used?

The primary use of a 75 Ohm cable is to transmit a video signal. One of the typical applications is television signals over cable, sometimes called signal feed cables. The most common connector used in this application is a Type F. Another application is video signals between components such as DVD players, VCRs or Receivers commonly known as audio / video (A / V) cables. In this case BNC and RCA connectors are most often found. In both of these applications RG59 with both solid center conductor (RG59B / U) and stranded center conductor (RG59A / U) as well as RG6 are often found. The cable assemblies offered in the following section cover the most common connection situations found in both applications.

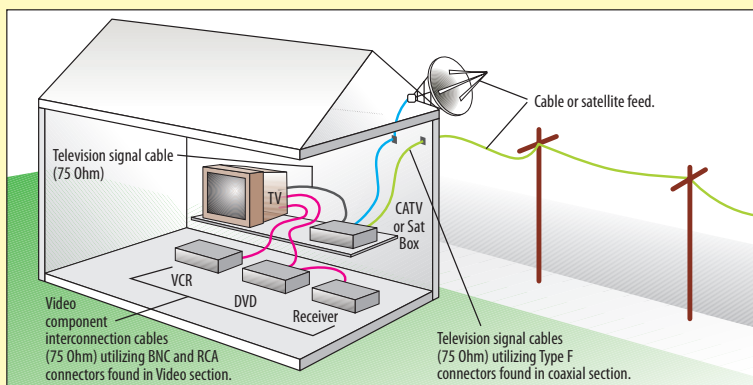

75 Ohm Coaxial Cables

L-com offers a wide variety of 75 ohm coaxial video cable assemblies. Cable types include RG59, RG6, RG179, RG187, and our small OD Thinline cable. Connector types include BNC male & female, RCA, F, and SMB. Please see our website for our complete offering.

Inline BNC Plug to Inline BNC Plug


Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	0.5ft (0.15m)	CC59A-05	9.05	8.89	8.33	CALL
		3.0ft (0.9m)	CC59A-3	10.30	9.89	9.48	CALL
		5.0ft (1.5m)	CC59A-5	11.35	10.90	10.44	CALL
		10.0ft (3.0m)	CC59A-10	13.95	13.39	12.83	CALL
		15.0ft (4.6m)	CC59A-15	16.50	15.84	15.18	CALL
		50.0ft (15.2m)	CC59A-50	34.55	33.17	31.79	CALL
		100.0ft (30.5m)	CC59A-100	60.30	57.89	55.48	CALL
RG59B/U Center Conductor: 22 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.242in. (6.1mm)	0.5ft (0.15m)	CC59B-05	9.05	8.69	8.33	CALL
		3.0ft (0.9m)	CC59B-3	10.30	9.89	9.48	CALL
		5.0ft (1.5m)	CC59B-5	11.35	10.90	10.44	CALL
		10.0ft (3.0m)	CC59B-10	13.95	13.39	12.83	CALL
		15.0ft (4.6m)	CC59B-15	16.50	15.84	15.18	CALL
		25.5ft (7.6m)	CC59B-25	21.65	20.78	19.92	CALL
		50.0ft (15.2m)	CC59B-50	34.55	33.17	31.79	CALL
Thinline Center Conductor: 28 AWG stranded tinned copper wire Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CTL1B-1	7.25	6.96	6.67	CALL
		2.5ft (0.75m)	CTL1B-2.5	8.00	7.68	7.36	CALL
		5.0ft (1.5m)	CTL1B-5	9.30	8.93	8.56	CALL
		7.5ft (2.3m)	CTL1B-7.5	10.60	10.18	9.75	CALL
		10.0ft (3.0m)	CTL1B-10	11.85	11.38	10.90	CALL
		15.0ft (4.6m)	CTL1B-15	14.45	13.87	13.29	CALL
		1.0ft (0.3m)	CC179B-1	22.30	21.41	20.52	CALL
RG179B/U Center Conductor: 30 AWG stranded silver plated copper covered steel Jacket: Brown FEP Operating Temperature: -70°C - +200°C	.100in. (2.5mm)	2.5ft (0.75m)	CC179B-2.5	24.67	23.68	22.70	CALL
		5.0ft (1.5m)	CC179B-5	28.69	27.54	26.39	CALL
		7.5ft (2.3m)	CC179B-7.5	32.65	31.34	30.04	CALL
		10.0ft (3.0m)	CC179B-10	36.62	35.16	33.69	CALL
		15.0ft (4.6m)	CC179B-15	44.60	42.82	41.03	CALL
		1.0ft (0.3m)	CC6PB-1	33.53	32.19	30.85	CALL
		1.5ft (0.45m)	CC6PB-1.5	34.61	33.23	31.84	CALL
RG6/U Center Conductor: 18 AWG solid bare copper covered steel Jacket: White Plenum Operating Temperature: -20°C - +75°C	.222in. (5.6mm)	2.5ft (0.75m)	CC6PB-2.5	37.85	36.34	34.82	CALL
		5.0ft (1.5m)	CC6PB-5	43.26	41.53	39.80	CALL
		10.0ft (3.0m)	CC6PB-10	54.08	51.92	49.75	CALL
		15.0ft (4.6m)	CC6PB-15	64.89	62.29	59.70	CALL
		1.0ft (0.3m)	CC187B-1	29.04	26.72	24.39	CALL
		2.5ft (0.75m)	CC187B-2.5	32.95	30.31	27.68	CALL
		5.0ft (1.5m)	CC187B-5	39.44	36.28	33.13	CALL
RG187/U Center Conductor: 30 AWG stranded silver plated copper covered steel Jacket: TFE Teflon tape wrap Operating Temperature: -70°C - +200°C	.110in. (2.8mm)	7.5ft (2.3m)	CC187B-7.5	45.93	42.26	38.58	CALL
		10.0ft (3.0m)	CC187B-10	52.42	48.23	44.03	CALL
		15.0ft (4.6m)	CC187B-15	65.39	60.16	54.93	CALL

Best Seller



Distinguishing between 50 and 75 Ohm BNC connectors

BNC connectors are one of the few coaxial connectors that are available in two impedance values of 50 and 75 Ohms. You can distinguish the two types by the absence of dielectric material at the interface of the 75 Ohm version as shown.

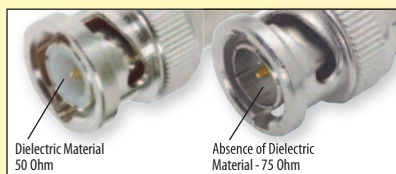

What is the difference between a plug and a jack?

People often have difficulty choosing the correct gender termination on cable assemblies. Plugs are considered male gendered connectors which utilize a center pin. Jacks are considered female gendered connectors utilizing a center socket.

A PLUG utilizes a center pin = MALE GENDER



A JACK utilizes a center socket = FEMALE GENDER





CC59A-HR



CC59A-HR2



CC59A-MF



CC59A-RB



CTL1RB

75 Ohm Coaxial Cables

Inline BNC Plug to Right Angle BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-1HR	11.95	11.47	10.99	CALL
		2.0ft (0.6m)	CC59A-2HR	12.46	11.96	11.46	CALL
		3.0ft (0.9m)	CC59A-3HR	13.03	12.51	11.99	CALL
		4.0ft (1.2m)	CC59A-4HR	13.54	13.00	12.46	CALL
		5.0ft (1.5m)	CC59A-5HR	14.06	13.50	12.94	CALL
		10.0ft (3.0m)	CC59A-10HR	16.74	16.07	15.40	CALL
RG59B/U Center Conductor: 22 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.242in. (6.1mm)	1.0ft (0.3m)	CC59B-1HR	12.77	12.26	11.75	CALL
		2.0ft (0.6m)	CC59B-2HR	13.34	12.81	12.27	CALL
		3.0ft (0.9m)	CC59B-3HR	13.91	13.35	12.80	CALL
		4.0ft (1.2m)	CC59B-4HR	14.47	13.89	13.31	CALL
		5.0ft (1.5m)	CC59B-5HR	15.04	14.44	13.84	CALL
		10.0ft (3.0m)	CC59B-10HR	17.87	17.16	16.44	CALL

Right Angle BNC Plug to Right Angle BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59B/U Center Conductor: 22 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.242in. (6.1mm)	1.0ft (0.3m)	CC59B-1HR2	17.00	16.32	15.64	CALL
		2.0ft (0.6m)	CC59B-2HR2	17.56	16.86	16.16	CALL
		2.5ft (0.8m)	CC59B-2.5HR2	17.87	17.16	16.44	CALL
		3.0ft (0.9m)	CC59B-3HR2	18.13	17.40	16.68	CALL
		7.5ft (2.3m)	CC59B-7.5HR2	20.70	19.87	19.04	CALL
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-1HR2	15.91	15.27	14.64	CALL
		1.5ft (0.45m)	CC59A-1.5HR2	16.22	15.57	14.92	CALL
		2.0ft (0.6m)	CC59A-2HR2	16.48	15.82	15.16	CALL
		3.0ft (0.9m)	CC59A-3HR2	17.00	16.32	15.64	CALL
		4.0ft (1.2m)	CC59A-4HR2	17.51	16.81	16.11	CALL
		10.0ft (3.0m)	CC59A-10HR2	20.70	19.87	19.04	CALL

Inline BNC Plug to Inline BNC Jack

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-MF-1	15.40	14.48	13.55	CALL
		3.0ft (0.9m)	CC59A-MF-3	16.48	15.49	14.50	CALL
		10.0ft (3.0m)	CC59A-MF-10	20.19	18.98	17.77	CALL
		15.0ft (4.6m)	CC59A-MF-15	22.81	21.44	20.07	CALL
		25.0ft (7.6m)	CC59A-MF-25	28.12	26.43	24.75	CALL
		50.0ft (15.2m)	CC59A-MF-50	41.41	38.93	36.44	CALL
RG59B/U Center Conductor: 22 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.242in. (6.1mm)	1.0ft (0.3m)	CC59B-MF-1	12.77	12.00	11.24	CALL
		3.0ft (0.9m)	CC59B-MF-3	13.80	12.97	12.14	CALL
		6.0ft (1.8m)	CC59B-MF-6	15.40	14.48	13.55	CALL
		10.0ft (3.0m)	CC59B-MF-10	17.51	16.46	15.41	CALL
		25.0ft (7.6m)	CC59B-MF-25	25.49	23.96	22.43	CALL
		50.0ft (15.2m)	CC59B-MF-50	38.73	36.41	34.08	CALL

**What is the advantage of using a cable assembly with a male to female bulkhead gender combination?**

Typical coaxial cable assemblies commonly found in the marketplace have male gender connectors on both ends. In applications where a cable must pass through an obstruction such as a bulkhead panel, a configuration as shown in Figure 1 is typically used.

By utilizing L-com's male to female bulkhead cable assembly you can simplify the configuration, reducing the number of separate parts needed and reduce overall signal loss by eliminating an interface connection and the signal loss of the feedthru bulkhead. Figure 2 shows this set up.

Figure 1





Figure 2



Inline RCA Plug to Inline BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-RB-1	4.89	4.69	4.50	CALL
		3.0ft (0.9m)	CC59A-RB-3	5.97	5.73	5.49	CALL
		6.0ft (1.8m)	CC59A-RB-6	7.57	7.27	6.96	CALL
		9.0ft (2.7m)	CC59A-RB-9	9.22	8.85	8.48	CALL
		12.0ft (3.7m)	CC59A-RB-12	10.82	10.39	9.95	CALL
Thinline Center Conductor: 28 AWG stranded tinned copper wire Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CTL1RB-1	5.97	5.73	5.49	CALL
		5.0ft (1.5m)	CTL1RB-5	8.14	7.81	7.49	CALL
		10.0ft (3.0m)	CTL1RB-10	10.82	10.39	9.95	CALL
		15.0ft (4.6m)	CTL1RB-15	13.54	13.00	12.46	CALL
		25.0ft (7.6m)	CTL1RB-25	18.95	18.19	17.43	CALL

Don't see what you are looking for? Be sure to visit **L-com.com** for a complete listing of all available cable assemblies, as well as our online Custom Cable Configurator and Product Wizards.

75 Ohm Coaxial Cables

Inline RCA Plug to Inline RCA Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-RR-1	5.10	4.90	4.69	CALL
		3.0ft (0.9m)	CC59A-RR-3	6.23	5.98	5.73	CALL
		6.0ft (1.8m)	CC59A-RR-6	7.93	7.61	7.30	CALL
		9.0ft (2.7m)	CC59A-RR-9	9.63	9.24	8.86	CALL
		12.0ft (3.7m)	CC59A-RR-12	11.33	10.88	10.42	CALL
Thinline Center Conductor: 28 AWG stranded tinned copper wire Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CTL1R-1	5.87	5.64	5.40	CALL
		5.0ft (1.5m)	CTL1R-5	7.98	7.66	7.34	CALL
		10.0ft (3.0m)	CTL1R-10	10.61	10.19	9.76	CALL
		15.0ft (4.6m)	CTL1R-15	13.29	12.76	12.23	CALL
		25.0ft (7.6m)	CTL1R-25	18.59	17.85	17.10	CALL

Inline Type F Plug to Inline Type F Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG6/U Quad Shielded Center Conductor: 18 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.298in. (7.6mm)	0.5ft (0.2m)	CC60F-05	20.60	19.36	18.13	CALL
		1.0ft (0.3m)	CC60F-1	20.90	19.65	18.39	CALL
		3.0ft (0.9m)	CC60F-3	21.90	20.59	19.27	CALL
		6.0ft (1.8m)	CC60F-6	23.45	22.04	20.64	CALL
		12.0ft (3.7m)	CC60F-12	26.55	24.96	23.36	CALL
		25.0ft (7.6m)	CC60F-25	33.25	31.25	29.26	CALL
RG6/U Center Conductor: 18 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.270in. (6.9mm)	1.0ft (0.3m)	CCF6-1	5.95	5.36	4.76	CALL
		3.0ft (0.9m)	CCF6-3	6.95	6.25	5.56	CALL
		6.0ft (1.8m)	CCF6-6	8.50	7.65	6.80	CALL
		12.0ft (3.7m)	CCF6-12	11.60	10.44	9.28	CALL
		25.0ft (7.6m)	CCF6-25	18.30	16.47	14.64	CALL
		50.0ft (15.2m)	CCF6-50	31.20	28.08	24.96	CALL
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CCF59-1	4.50	4.32	4.14	CALL
		3.0ft (0.9m)	CCF59-3	5.50	5.28	5.06	CALL
		6.0ft (1.8m)	CCF59-6	7.00	6.72	6.44	CALL
		9.0ft (2.7m)	CCF59-9	8.50	8.16	7.82	CALL
		12.0ft (3.7m)	CCF59-12	10.00	9.60	9.20	CALL
RG59B/U Center Conductor: 22 AWG solid bare copper covered steel Jacket: Black PVC Operating Temperature: -40°C - +80°C	.242in. (6.1mm)	1.0ft (0.3m)	CCF59B-1	4.65	4.46	4.28	CALL
		3.0ft (0.9m)	CCF59B-3	5.70	5.47	5.24	CALL
		6.0ft (1.8m)	CCF59B-6	7.25	6.96	6.67	CALL
		9.0ft (2.7m)	CCF59B-9	8.80	8.45	8.10	CALL
		12.0ft (3.7m)	CCF59B-12	10.30	9.89	9.48	CALL
Thinline Center Conductor: 28 AWG stranded tinned copper wire Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CTL1F-1	5.87	5.64	5.40	CALL
		5.0ft (1.5m)	CTL1F-5	7.98	7.66	7.34	CALL
		10.0ft (3.0m)	CTL1F-10	10.61	10.19	9.76	CALL
		15.0ft (4.6m)	CTL1F-15	13.29	12.76	12.23	CALL
		25.0ft (7.6m)	CTL1F-25	18.59	17.85	17.10	CALL
RG187/U Center Conductor: 30 AWG stranded silver plated copper covered steel Jacket: TFE Teflon tape wrap Operating Temperature: -70°C - +200°C	.110in. (2.8mm)	1.0ft (0.3m)	CC187F-1	24.71	23.72	22.73	CALL
		1.5ft (0.5m)	CC187F-1.5	25.95	24.91	23.87	CALL
		2.0ft (0.6m)	CC187F-2	27.28	26.19	25.10	CALL
		2.5ft (0.8m)	CC187F-2.5	28.62	27.48	26.33	CALL
		7.5ft (2.3m)	CC187F-7.5	41.60	39.94	38.27	CALL
		15.0ft (4.6m)	CC187F-15	61.07	58.63	56.18	CALL

Inline Type F Plug to Inline BNC Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
RG59A/U Center Conductor: 22 AWG bare compacted copper Jacket: Black PVC Operating Temperature: -40°C - +80°C	.240in. (6.1mm)	1.0ft (0.3m)	CC59A-BF-1	6.80	6.53	6.26	CALL
		3.0ft (0.9m)	CC59A-BF-3	7.93	7.61	7.30	CALL
		6.0ft (1.8m)	CC59A-BF-6	9.63	9.24	8.86	CALL
		9.0ft (2.7m)	CC59A-BF-9	11.33	10.88	10.42	CALL
		12.0ft (3.7m)	CC59A-BF-12	13.03	12.51	11.99	CALL
Thinline Center Conductor: 28 AWG stranded tinned copper wire Jacket: Black PVC Operating Temperature: -40°C - +80°C	.110in. (2.8mm)	1.0ft (0.3m)	CTL1FB-1	7.06	6.78	6.50	CALL
		5.0ft (1.5m)	CTL1FB-5	9.22	8.85	8.48	CALL
		10.0ft (3.0m)	CTL1FB-10	11.90	11.42	10.95	CALL
		15.0ft (4.6m)	CTL1FB-15	14.63	14.04	13.46	CALL
		25.0ft (7.6m)	CTL1FB-25	20.03	19.23	18.43	CALL

**Why is a molded strain relief superior to a heat shrink strain relief?**

As shown in Figure 1, a heat shrink strain relief does offer some strain relief at the egress point where the cable exits the strain relief, reducing stress at this critical junction.



Figure 1

As seen in Figure 2, however, a molded strain relief provides far superior stress reduction through a more robust design. The improved adhesion between the strain relief and the cable/connector interface is achieved during the molding process. In addition, the molded strain relief design provides a more finished appearance than the heat shrink version.



Figure 2



CTL1R



CC60F



CCF6



CC187F



CC59A-BF



CTL1FB



CA-TRBP-P



CA-TRBP-PR



CA-TRBPR-PR




ATRBP-1553B

ATRBP-1553B



CTC Series

CTC Construction Detail



See all listings or use our
Cable Configurator
and Wizards at L-com.com.



What are twinaxial cables?

Twinaxial cabling, or "Twinax", is a type of cable similar to coaxial cable, but with two inner conductors instead of one. The connectors used on this type of cable also feature two separate conductors. To ensure correct orientation, these connectors are often keyed to prevent incorrect connections.

Coaxial
CableTwinaxial
Cable

MIL-STD-1553B 78 Ohm Twinax Cable Assemblies

L-com's MIL-STD-1553B cable assemblies feature high-temperature M17/176-00002 twinax cable and TRB connectors designed for these types of bus applications. Standard lengths from 1' to 50' (0.3m to 15.2m). Custom lengths also available.

Inline TRB Plug to Inline TRB Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
M17/176-00002 Center Conductor: .024" (0.1cm) Dia. Min. Bend Radius: 1.50" (3.8cm) Jacket: Blue Teflon Operating Temperature: -55°C - +200°C	.129 in. (0.3cm)	1.0ft (0.3m)	CA-TRBP-P001	105.00	98.70	92.40	CALL
		2.0ft (0.6m)	CA-TRBP-P002	108.99	102.45	95.91	CALL
		3.0ft (0.9m)	CA-TRBP-P003	112.98	106.20	99.42	CALL
		4.0ft (1.2m)	CA-TRBP-P004	116.97	109.95	102.93	CALL
		5.0ft (1.5m)	CA-TRBP-P005	120.96	113.70	106.44	CALL
		6.0ft (1.8m)	CA-TRBP-P006	124.95	117.45	109.96	CALL
		7.0ft (2.1m)	CA-TRBP-P007	128.94	121.20	113.47	CALL
		10.0ft (3.0m)	CA-TRBP-P010	140.91	132.46	124.00	CALL
		12.0ft (3.7m)	CA-TRBP-P012	148.89	139.96	131.02	CALL
		15.0ft (4.6m)	CA-TRBP-P015	160.86	151.21	141.56	CALL
		20.0ft (6.1m)	CA-TRBP-P020	180.81	169.96	159.11	CALL
		25.0ft (7.6m)	CA-TRBP-P025	200.76	188.71	176.67	CALL
		50.0ft (15.2m)	CA-TRBP-P050	300.51	282.48	264.45	CALL

Inline TRB Plug to Right Angle TRB Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
M17/176-00002 Center Conductor: .024" (0.1cm) Dia. Min. Bend Radius: 1.50" (3.8cm) Jacket: Blue Teflon Operating Temperature: -55°C - +200°C	.129 in. (0.3cm)	1.0ft (0.3m)	CA-TRBP-PR001	295.00	277.30	259.60	CALL
		2.0ft (0.6m)	CA-TRBP-PR002	298.99	281.05	263.11	CALL
		3.0ft (0.9m)	CA-TRBP-PR003	302.98	284.80	266.62	CALL
		4.0ft (1.2m)	CA-TRBP-PR004	306.97	288.55	270.13	CALL
		5.0ft (1.5m)	CA-TRBP-PR005	310.96	292.30	273.64	CALL
		6.0ft (1.8m)	CA-TRBP-PR006	314.95	296.05	277.16	CALL
		7.0ft (2.1m)	CA-TRBP-PR007	318.94	299.80	280.67	CALL
		10.0ft (3.0m)	CA-TRBP-PR010	330.91	311.06	291.20	CALL
		12.0ft (3.7m)	CA-TRBP-PR012	338.89	318.56	298.22	CALL
		15.0ft (4.6m)	CA-TRBP-PR015	350.86	329.81	308.76	CALL
		20.0ft (6.1m)	CA-TRBP-PR020	370.81	348.56	326.31	CALL
		25.0ft (7.6m)	CA-TRBP-PR025	390.76	367.31	343.87	CALL
		50.0ft (15.2m)	CA-TRBP-PR050	490.51	461.08	431.65	CALL

Right Angle TRB Plug to Right Angle TRB Plug

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
M17/176-00002 Center Conductor: .024" (0.1cm) Dia. Min. Bend Radius: 1.50" (3.8cm) Jacket: Blue Teflon Operating Temperature: -55°C - +200°C	.129 in. (0.3cm)	1.0ft (0.3m)	CA-TRBPR-PR001	440.00	413.60	387.20	CALL
		2.0ft (0.6m)	CA-TRBPR-PR002	443.99	417.35	390.71	CALL
		3.0ft (0.9m)	CA-TRBPR-PR003	447.98	421.10	394.22	CALL
		4.0ft (1.2m)	CA-TRBPR-PR004	451.97	424.85	397.73	CALL
		5.0ft (1.5m)	CA-TRBPR-PR005	455.96	428.60	401.24	CALL
		6.0ft (1.8m)	CA-TRBPR-PR006	459.95	432.35	404.76	CALL
		7.0ft (2.1m)	CA-TRBPR-PR007	463.94	436.10	408.27	CALL
		10.0ft (3.0m)	CA-TRBPR-PR010	475.91	447.36	418.80	CALL
		12.0ft (3.7m)	CA-TRBPR-PR012	483.89	454.86	425.82	CALL
		15.0ft (4.6m)	CA-TRBPR-PR015	495.86	466.11	436.36	CALL
		20.0ft (6.1m)	CA-TRBPR-PR020	515.81	484.86	453.91	CALL
		25.0ft (7.6m)	CA-TRBPR-PR025	535.76	503.61	471.47	CALL
		50.0ft (15.2m)	CA-TRBPR-PR050	635.51	597.38	559.25	CALL

Item #	Description	Cable	Attachment	1-9	10-24	25-99	100+
--------	-------------	-------	------------	-----	-------	-------	------

Concentric Twinax TRB Type Connectors

TRB type connectors from Trompeter feature a center contact and an intermediate cylindrical contact. The three bayonet design can withstand severe shocks and vibrations. Typically used for MIL-STD-1533B bus applications, these full crimp connectors are available in Straight and Right Angle Plug versions.

ATRBP-1553B	TRB Plug, Trompeter # PL75C-201	M17/176-00002	Crimp	28.09	25.84	23.60	CALL
ATRBP-1553B	TRB Plug, Trompeter # PLR75C-201	M17/176-00002	Crimp	149.94	137.94	125.95	CALL

78 Ohm Twinaxial BNC Cables - Feature Polarized/Stepped Keyway and Crimp Design

This Twin BNC cable series accommodates the need for low level signal patching and balanced line applications. Fittings have polarized, stepped keyways that look like, but do not match traditional BNC coaxial connectors. Twin BNC connectors are constructed of machined brass with a non-tarnish nickel finish and gold plated contacts.

Twin BNC Male to Twin BNC Male

Type	Cable Dia.	Length	Item #	1-9	10-24	25-99	100+
Twinaxial Center Conductor: 20 AWG tinned copper Min. Bend Radius: 2.50" (63.5mm) Jacket: Blue PVC Operating Temperature: -20°C - +80°C	.243in. (0.6cm)	1.0ft (0.3m)	CTC-1	49.30	47.33	45.36	CALL
		2.0ft (0.6m)	CTC-2	50.40	48.38	46.37	CALL
		3.0ft (0.9m)	CTC-3	52.65	50.54	48.44	CALL
		5.0ft (1.5m)	CTC-5	57.15	54.86	52.58	CALL
		7.5ft (2.3m)	CTC-7.5	61.60	59.14	56.67	CALL
		10.0ft (3.0m)	CTC-10	66.10	63.46	60.81	CALL



How do you select the right coaxial cable interface for your application?

There are numerous coaxial interfaces in use today. These interfaces cover a broad range of applications including both 50 Ohm data signal transmission and 75 Ohm audio / video signal transmission. The following chart is a general guide to help you select the best interface for your specific application.

Interface Type	Impedance	Application	Coupling Mechanism	Typical Cable Types	Typical Frequency Range
BNC 	Available in both 50 and 75 Ohm	50 Ohm version is utilized in data signal transmission for such applications as WAN / LAN, Ethernet or Test & Measurement. 75 Ohm version is utilized in audio / video signal transmission for such applications as security and CATV	Two stud bayonet twist and lock	Wide variety of RG style coaxial cables including 50 Ohm RG174, RG58, RG142 etc. And 75 Ohm RG179, RG59, RG6	0-4 GHz
TNC (Threaded version of a BNC) 	50 Ohm	Data signal transmission for such applications as GPS, wireless base stations antennas and instrumentation	Threaded coupling	Wide variety of RG style coaxial cables including RG174, RG58, RG142, etc	0-11 GHz
SMA 	50 Ohm	Data signal transmission for such applications as GPS and instrumentation	Threaded coupling	Generally used on small diameter cable such as RG174, RG188 and RG316	0-18 GHz
Type N 	50 Ohm	Data signal transmission for such applications as GPS antennas and instrumentation	Threaded coupling	Generally used on larger diameter cable such as RG58, RG213 and RG223	0-11 GHz
Type F 	75 Ohm	Video signal transmission in applications such as CATV and entertainment video	Threaded coupling	Primarily RG59 and RG6	0-1 GHz
MCX 	50 Ohm	Data signal transmission for such applications as GPS antennas and instrumentation	Snap on coupling	Generally used on small diameter cable such as RG174, RG188 and RG316	0-6 GHz
MMCX 	50 Ohm	Data signal transmission for such applications as GPS antennas and PCMCIA cards	Snap on coupling	Generally used on small diameter cable such as RG174, RG188 and RG316	0-6 GHz
SMB 	Available in both 50 and 75 Ohm	Data signal transmission for such applications as digital cellular, GPS and wireless LAN	Snap on coupling	Generally used on small diameter cable such as 50 Ohm RG174, RG188 and RG316 and 75 Ohm RG179 and RG187	0-4 GHz
SMC 	Available in both 50 and 75 Ohm	Signal transmission for such applications as automotive GPS and telecom with high vibration requirements	Threaded coupling	Generally used on small diameter cable such as 50 Ohm RG174, RG188 and RG316 and 75 Ohm RG179 and RG187	0-10 GHz
Reverse Polarity TNC and SMA 	50 Ohm	Signal transmission in wireless spread spectrum devices that must comply with FCC non standard interface rule	Threaded coupling and RG58	Primarily used with RG174	TNC 0-11 GHz SMA 0-18 GHz

Note: Images on this page are for reference only and may not be to scale

Coaxial Interseries Adapter Selection Matrix

Use this handy chart to locate the desired interseries adapter. Simply locate the connector type and gender in the top row and repeat in the left hand column. Intersect the row and column to determine availability. Adapters shown in this matrix are listed on this and the opposite page. If a specific adapter type is not listed, please visit our website at **L-com.com** for the latest information or call our technical support group at **800-343-1455** for assistance. Adapters listed are generally intended for use in the RF band.

Reversed Polarity Types

INTERFACE SERIES	RP-BNC	RP-TNC PLUG	RP-TNC JACK	RP-SMA PLUG	RP-SMA JACK
N FEMALE	AXA-NFRBP	AXA-NFRTP, AXA-NFRTP2		AXA-NFRSP	AXA-NFRSJ
N MALE		AXA-NMRT	AXA-NMRTJ	AXA-NMRSP	AXA-NMRSJ
RP-TNC				AXA-RTJRSJ	AXA-RTPRSJ

INTERFACE SERIES	BNC FEMALE	BNC MALE	F FEMALE	F MALE	TNC MALE	TNC FEMALE	MINI UHF F	MINI UHF M	N MALE	N FEMALE	SMA F	SMA M	SMB J	SMB P	UHF F	UHF M	MCX P	MMCX F	NMO
BNC FEMALE			BA220	BA120, BA037	BA3001	BA70 BA71, BA3002	BA882	BA883	AXA-NMBF	AXA-NF8F	BA588	BA29			BA230	BA50			
BNC MALE			BA125, BA017						BN107	AXA-NFBM	BA38	BA28			BA60	BA270			
F FEMALE	BA220	BA125, BA017				BA127			AXA-NMFF						BA301	BA160			
F MALE	BA120, BA037				BA121										BA130				
FME MALE	BA8016	BA8005, BA8006(RA)																	
MINI UHF FEMALE		BA882			BA881							BA582							
MINI UHF MALE	BA883					BA886				AXA-NFMUM	BA591								
MCX											AXA-MPSF								
N FEMALE	AXA-NF8F	AXA-NFBM			AXA-NFTM			AXA-NFMUM			AXA-NFSF	BA25							AXA-AMNFB
N MALE	AXA-BFNM90 AXA-NMBF	BN107	AXA-NMFF			AXA-NMTF					AXA-NMSF	AXA-NMSM							
RCA FEMALE	BA94	BA95, BA018	BA887													BA40			
RCA MALE	BA90		BA907												BA140				
SMA FEMALE	BA588	BA38			BA589	BA590		BA591	AXA-NMSF	AXA-NFSF			AXA-SMBJSF	AXA-SMBPSF			AXA-MPSF	BA3000	
SMA MALE	BA29	BA28			BA579	BA580	BA582		AXA-NMSM	BA25					BA27	BA36 BA26			
SMB JACK											AXA-SMBJSF								
SMB PLUG											AXA-SMBPSF								
TNC FEMALE	BA70	BA71, BA3002	BA127					BA886	AXA-NMTF			BA580							
TNC MALE	BA3001			BA121			BA881			AXA-NFTM	BA589	BA579							
UHF FEMALE	BA230	BA60	BA301	BA130															
UHF MALE	BA50	BA270	BA160																
7/16 DIN MALE										AXA-NFDM									
7/16 DIN FEMALE									AXA-NMDF										
1.6/5.6 MALE	BA9201	BA9200																	



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

BNC Interseries Coaxial Adapters - 50 Ohm

BA28	Coaxial Adapter, BNC Male / SMA Male	6.88	6.47	6.05	CALL
BA38	Coaxial Adapter, BNC Male / SMA Female	6.88	6.47	6.05	CALL
BA60	Coaxial Adapter, BNC Male / UHF Female	4.73	4.45	4.16	CALL
BA71	Coaxial Adapter, BNC Male / TNC Female	5.36	5.04	4.72	CALL
BA3002	Coaxial Adapter, BNC Male / TNC Female, Right Angle	7.82	7.35	6.88	CALL
BA29	Coaxial Adapter, BNC Female / SMA Male	6.88	6.47	6.05	CALL
BA50	Coaxial Adapter, BNC Female / UHF Male	4.73	4.45	4.16	CALL
BA70	Coaxial Adapter, BNC Female / TNC Female	5.36	5.04	4.72	CALL
BA3001	Coaxial Adapter, BNC Female / TNC Male	4.83	4.54	4.25	CALL
AXA-BFNM90	Coaxial Adapter, BNC Female / Type N Male, Right Angle	6.88	6.33	5.78	CALL

BNC Interseries Coaxial Adapters - 75 Ohm

BA017	Coaxial Adapter, BNC Male / Type F Female	4.35	4.09	3.83	CALL
BA018	Coaxial Adapter, BNC Male / RCA Female	3.25	3.05	2.86	CALL
BA037	Coaxial Adapter, BNC Female / Type F Male	4.35	4.09	3.83	CALL

SMA Interseries Coaxial Adapters - 50 Ohm

AXA-NMSM	Coaxial Adapter, SMA Male / Type N Male	4.83	4.44	4.06	CALL
BA25	Coaxial Adapter, SMA Male / Type N Female	6.88	6.47	6.05	CALL
BA26	Coaxial Adapter, SMA Male / UHF Male	6.88	6.47	6.05	CALL
BA27	Coaxial Adapter, SMA Male / UHF Female	6.88	6.47	6.05	CALL
BA579	Coaxial Adapter, SMA Male / TNC Male	6.88	6.47	6.05	CALL
BA580	Coaxial Adapter, SMA Male / TNC Female	6.88	6.47	6.05	CALL
BA582	Coaxial Adapter, SMA Male / Mini UHF Female	6.88	6.47	6.05	CALL
AXA-NMSF	Coaxial Adapter, SMA Female / Type N Male	4.83	4.44	4.06	CALL
AXA-NFSF	Coaxial Adapter, SMA Female / Type N Female	6.41	5.90	5.38	CALL
BA36	Coaxial Adapter, SMA Female / UHF Male	6.88	6.47	6.05	CALL
BA588	Coaxial Adapter, SMA Female / BNC Female	6.88	6.47	6.05	CALL
BA589	Coaxial Adapter, SMA Female / TNC Male	6.88	6.47	6.05	CALL
BA590	Coaxial Adapter, SMA Female / TNC Female	6.88	6.47	6.05	CALL
BA591	Coaxial Adapter, SMA Female / Mini UHF Male	6.88	6.47	6.05	CALL
AXA-MPSF	Coaxial Adapter, SMA Female / MCX Plug	6.88	6.33	5.78	CALL
BA3000	Coaxial Adapter, SMA Female / MMCX Female	7.14	6.71	6.28	CALL

SMB Interseries Coaxial Adapters - 50 Ohm

AXA-SMBJSF	Coaxial Adapter, SMB Jack / SMA Female	5.67	5.22	4.76	CALL
AXA-SMBPSF	Coaxial Adapter, SMB Plug / SMA Female	6.88	6.33	5.78	CALL



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

FME to BNC Interseries Coaxial Adapters - 50 and 75 Ohm - Useful in Cellular Applications

Many cellular communication devices utilize the FME connector on coaxial antenna lines. L-com offers a selection of highest quality components utilizing machined brass with nickel plated surfaces and gold plated pins.

BA8016	Coaxial Adapter, FME Male/BNC Female, 50 Ohm	5.93	5.57	5.22	CALL
BA8005	Coaxial Adapter, FME Male/BNC Male, 75 Ohm	4.35	4.09	3.83	CALL
BA8006	Coaxial Adapter, FME Male/90° BNC Male, 75 Ohm	5.35	5.03	4.71	CALL

1.6/5.6 to BNC Interseries Coaxial Adapters - 50 Ohm - For Conversion to the European Standard

These machined adapters are great for converting standard BNC terminations to 1.6/5.6 terminations which are common in other areas of the world.

BA9200	Coaxial Adapter, BNC Male/1.6/5.6 Female Adapter	9.45	8.88	8.32	CALL
BA9201	Coaxial Adapter, BNC Female/1.6/5.6 Male Adapter	9.45	8.88	8.32	CALL

Type F Interseries Coaxial Adapters - 50 Ohm

BA120	Coaxial Adapter, Type F Male/BNC Female	2.42	2.27	2.13	CALL
BA121	Coaxial Adapter, Type F Male/TNC Male	2.42	2.27	2.13	CALL
BA125	Coaxial Adapter, Type F Female/BNC Male	2.42	2.27	2.13	CALL
BA127	Coaxial Adapter, Type F Female/TNC Female	2.42	2.27	2.13	CALL
BA220	Coaxial Adapter, Type F Female/BNC Female	2.42	2.27	2.13	CALL

RCA Interseries Coaxial Adapters - 50 and 75 Ohm

BA90	Coaxial Adapter, RCA Male/BNC Female, 50 Ohm	3.62	3.40	3.19	CALL
BA94	Coaxial Adapter, RCA Female/BNC Female, 50 Ohm	3.62	3.40	3.19	CALL
BA95	Coaxial Adapter, RCA Female/BNC Male, 50 Ohm	3.62	3.40	3.19	CALL
BA887	Coaxial Adapter, RCA Female/Type F Female, 50 Ohm	2.42	2.27	2.13	CALL
BA907	Coaxial Adapter, RCA Male/Type F Female, 75 Ohm	2.15	2.02	1.89	CALL

Type N Interseries Coaxial Adapters - 50 Ohm

BN107	Coaxial Adapter, Type N Male/BNC Male	6.88	6.47	6.05	CALL
AXA-NMBF	Coaxial Adapter, Type N Male/BNC Female	4.20	3.86	3.53	CALL
AXA-NMSM	Coaxial Adapter, Type N Male/SMA Male	4.83	4.44	4.06	CALL
AXA-NMTF	Coaxial Adapter, Type N Male/TNC Female	4.83	4.44	4.06	CALL
AXA-NMFF	Coaxial Adapter, Type N Male/Type F Female	4.20	3.86	3.53	CALL
AXA-NMRSJ	Coaxial Adapter, Type N Male/RP-SMA Jack	5.99	5.51	5.03	CALL
AXA-NMRSP	Coaxial Adapter, Type N Male/RP-SMA Plug	5.99	5.51	5.03	CALL
AXA-NMRTJ	Coaxial Adapter, Type N Male/RP-TNC Jack	5.99	5.51	5.03	CALL
AXA-NMRTJ	Coaxial Adapter, Type N Male/RP-TNC Plug	5.99	5.51	5.03	CALL
AXA-NFBF	Coaxial Adapter, Type N Female/BNC Female	3.62	3.33	3.04	CALL
AXA-NFBM	Coaxial Adapter, Type N Female/BNC Male	4.20	3.86	3.53	CALL
AXA-AMNFB	Coaxial Adapter, Type N Female Bulkhead/NMO	15.38	14.15	12.92	CALL
AXA-NFMUM	Coaxial Adapter, Type N Female/Mini-UHF Male	4.20	3.86	3.53	CALL
AXA-NFTM	Coaxial Adapter, Type N Female/TNC Male	4.20	3.86	3.53	CALL
AXA-NFRBP	Coaxial Adapter, Type N Female/RP BNC Plug	4.20	3.86	3.53	CALL
AXA-NFRSJ	Coaxial Adapter, Type N Female/RP-SMA Jack	5.99	5.51	5.03	CALL
AXA-RSJNFB	Coaxial Adapter, Type N Female Bulkhead/RP-SMA Jack	6.88	6.33	5.78	CALL
AXA-NFRSP	Coaxial Adapter, Type N Female/RP-SMA Plug	4.83	4.44	4.06	CALL
AXA-NFRTP	Coaxial Adapter, Type N Female/RP-TNC Plug	5.99	5.51	5.03	CALL
AXA-NFRTP2	Coaxial Adapter, Type N Female/RP-TNC Plug 1 Piece Design	5.99	5.51	5.03	CALL

Mini-UHF Interseries Coaxial Adapters - 50 Ohm

BA881	Coaxial Adapter, Mini-UHF Female/TNC Male	6.88	6.47	6.05	CALL
BA882	Coaxial Adapter, Mini-UHF Female/BNC Male	6.88	6.47	6.05	CALL
BA883	Coaxial Adapter, Mini-UHF Male/BNC Female	6.88	6.47	6.05	CALL
BA886	Coaxial Adapter, Mini-UHF Male/TNC Female	6.88	6.47	6.05	CALL

UHF Interseries Coaxial Adapters - 50 Ohm


BA40	Coaxial Adapter, UHF Male/RCA Female	3.62	3.40	3.19	CALL
BA130	Coaxial Adapter, UHF Female/Type F Male	3.62	3.40	3.19	CALL
BA140	Coaxial Adapter, UHF Female/RCA Male	3.62	3.40	3.19	CALL
BA160	Coaxial Adapter, UHF Male/Type F Female	3.62	3.40	3.19	CALL
BA230	Coaxial Adapter, UHF Female/BNC Female	4.73	4.45	4.16	CALL
BA270	Coaxial Adapter, UHF Male/BNC Male	3.62	3.40	3.19	CALL
BA301	Coaxial Adapter, UHF Female/Type F Female	3.62	3.40	3.19	CALL

TNC Interseries Coaxial Adapters - 50 Ohm

AXA-RTJRSP	Coaxial Adapter, RP-TNC Jack/RP-SMA Plug	4.83	4.44	4.06	CALL
AXA-RTPRSJ	Coaxial Adapter, RP-TNC Plug/RP-SMA Jack	4.83	4.44	4.06	CALL

7/16 DIN Interseries Coaxial Adapters - 50 Ohm

AXA-NFDM	Coaxial Adapter, 7/16 DIN Male/Type N Female	65.10	59.89	54.68	CALL
AXA-NMDF	Coaxial Adapter, 7/16 DIN Female/Type N Male	72.45	66.65	60.86	CALL

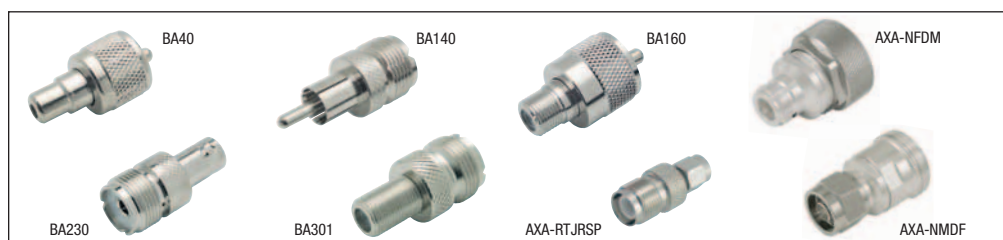

Coaxial Within Series Adapter Selection Matrix

Use this handy chart to locate the desired within series or T type adapter. Simply locate the connector type and configuration in the top row. Then find the connector type and gender in the left hand column. Intersect the row and column to determine availability. If a specific

adapter type is not listed, please visit our website at **L-com.com** for the latest information or call our technical support group at **800-343-1455** for assistance. Adapters listed are generally intended for use in the RF band.

INTERFACE SERIES	SAME GENDER IN SERIES				GENDER CHANGE IN SERIES			
	STRAIGHT	BULKHEAD	3 PORT TEE (F, F, F)	RIGHT ANGLE	STRAIGHT	RIGHT ANGLE	3 PORT TEE (F, M, F)	3 PORT F or Y
BNC FEMALE	BA80, BA80E, BIF-CB	BA1087, BA1089, BA1087E	BA832, BA832E			BA240	BA250, BA250E, BIF-TB1, BIF-TB2	BA840 (F), BA845 (Y)
BNC FEMALE (75 Ohms)	BA016	BA036, BA039	BA019			BA038	BA035	
BNC MALE	BA100							
F FEMALE		BA330A	BA132		BA124	BA126, BA123	BA133	
F MALE	BA122							
FME PLUG	AXA-FMEJFMEP							
FME JACK	AXA-FMEJFMEJ							
MINI UHF FEMALE	BA476					BA470		
MINI UHF MALE	BA478							
N FEMALE	AXA-NFNF	AXA-NFNF8, AXA-NFNF2	BN133			BN121	BN126	
N MALE	AXA-NMNM			AXA-NMNM90		AXA-NMNF90		
RCA FEMALE		BA400(R, G, B, Y), BA400A						
SMA FEMALE	BA23	BA21, AXA-SFSFB	BA18			BA20	BA19	
SMA MALE	BA22, AXA-SMSM							
RP-SMA PLUG	AXA-RSPRSP							
RP-SMA JACK		AXA-RSJRSJB						
TNC FEMALE		BA2301, BA1090			BA4000			
RP-TNC PLUG	AXA-RTPTPT							
RP-TNC JACK	AXA-RTJRTJ							
UHF FEMALE	BA170	BA406Z	BA303			BA404Z		
UHF MALE	BA280							
7/16 DIN FEMALE	AXA-DFDF							
7/16 DIN MALE	AXA-DMDM							



Item #	Description	1-9	10-24	25-99	100+
BNC Within Series Adapters - 50 Ohm					
BA80	Coaxial Adapter, BNC Female / Female	2.42	2.27	2.13	CALL
BA100	Coaxial Adapter, BNC Male / Male	3.62	3.40	3.19	CALL
BA240	Coaxial Adapter, BNC Female / 90° Male	4.73	4.45	4.16	CALL
BA250	Coaxial T Adapter, BNC Female / Male / Female	4.73	4.45	4.16	CALL
BA832	Coaxial T Adapter, BNC Female / Female / Female	4.88	4.59	4.29	CALL
BA840	Coaxial Adapter, BNC Male / Female / Female	9.45	8.88	8.32	CALL
BA845	Coaxial Adapter, BNC Female / Male / Female	9.45	8.88	8.32	CALL
BA1087	Coaxial Adapter, BNC Bulkhead, Female / Female, Grounded	4.73	4.45	4.16	CALL
BA1089	Coaxial Adapter, BNC Bulkhead, Female / Female, Insulated Ground	5.93	5.57	5.22	CALL
True 75 Ohm BNC Within Series Adapters - To Precisely Match All 75 Ohm Coaxial Cables					
BA016	Coaxial Adapter, BNC Female / Female (Splice)	3.20	3.01	2.82	CALL
BA019	Coaxial T Adapter, BNC Female / Female / Female	5.35	5.03	4.71	CALL
BA035	Coaxial T Adapter, BNC Female / Male / Female	5.35	5.03	4.71	CALL
BA036	Coaxial Adapter, BNC Female / Female Bulkhead	5.35	5.03	4.71	CALL
BA038	Coaxial Adapter, BNC Male / 90° Female	5.35	5.03	4.71	CALL
BA039	Coaxial Adapter, BNC Female / Female Bulkhead, Insulated	6.10	5.73	5.37	CALL
Economy BNC Adapters - 50 Ohm - Cast Metal Components Save on Production Costs					
BA80E	Economy Coaxial Adapter, BNC Female / Female	1.58	1.49	1.39	CALL
BA250E	Economy Coaxial T Adapter, BNC Female / Male / Female	2.42	2.27	2.13	CALL
BA832E	Economy Coaxial T Adapter, BNC Female / Female / Female	3.62	3.40	3.19	CALL
BA1087E	Economy Coaxial Adapter, BNC Bulkhead Adapter, Grounded	3.62	3.40	3.19	CALL
FME Within Series Adapters - 50 Ohm					
AXA-FMEJFMEJ	Coaxial Adapter, FME Jack / FME Jack	3.62	3.33	3.04	CALL
AXA-FMEJFMEP	Coaxial Adapter, FME Plug / FME Plug	3.62	3.33	3.04	CALL
SMA Within Series Adapters - 50 Ohm					
L-com offers the interseries coaxial adapters to help you match any SMA terminated cable to any other. Adapters are machined nickel plated brass, contacts are gold plated.					
BA18	Coaxial Adapter, SMA Female / Female / Female	6.88	6.47	6.05	CALL
BA19	Coaxial Adapter, SMA Female / Male / Female	6.88	6.47	6.05	CALL
BA20	Coaxial Adapter, SMA Female / Male, 90°	6.88	6.47	6.05	CALL
BA21	Coaxial Adapter, SMA Female / Female (Bulkhead)	6.88	6.47	6.05	CALL
BA22	Coaxial Adapter, SMA Male / Male	6.88	6.47	6.05	CALL
BA23	Coaxial Adapter, SMA Female / Female	6.88	6.47	6.05	CALL
AXA-SMSM	Coaxial Adapter, SMA Male / SMA Male Barrel Adapter	4.20	3.86	3.53	CALL
AXA-SFSFB	Coaxial Adapter, SMA Female / SMA Female Bulkhead Bullet Adapter	4.83	4.44	4.06	CALL
AXA-RSJRSJB	Coaxial Adapter, RP-SMA Jack / RP-SMA Jack Bulkhead Adapter	4.83	4.44	4.06	CALL
AXA-RSPRSP	Coaxial Adapter, RP-SMA Plug / RP-SMA Plug	4.83	4.44	4.06	CALL
Type F Within Series Adapters - 75 Ohm					
BA122	Coaxial Adapter, Type F Male / Male	2.15	2.02	1.89	CALL
BA123	Coaxial Adapter, Type F Female / Male, Right Angle	2.15	2.02	1.89	CALL
BA124	Coaxial Adapter, Type F Male Push-on / Female	1.35	1.27	1.19	CALL
BA126	Coaxial Adapter, Type F Female / Male Push On, 90°	2.15	2.02	1.89	CALL
BA132	Coaxial T Adapter, Type F Female / Female / Female	3.20	3.01	2.82	CALL
BA133	Coaxial T Adapter, Type F Male Push-on / Female / Female	3.20	3.01	2.82	CALL
BA330A	Coaxial Bulkhead Adapter, Type F Female / Female, (.5 / 1.3cm D-Hole), Insulated	2.15	2.02	1.89	CALL
Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.					

Item #	Description	Color	1-9	10-24	25-99	100+
RCA Female Feed-Thru Adapter - 75 Ohm - with Red, Green, Blue, Yellow or White Insulators						
These RCA feed-thru adapters feature color coded insulators for video and audio applications. This color coding helps avoid improper connections.						
BA400R	Coaxial Adapter, RCA Bulkhead Female / Female, Red Insulator		3.95	3.71	3.48	CALL
BA400G	Coaxial Adapter, RCA Bulkhead Female / Female, Green Insulator		3.95	3.71	3.48	CALL
BA400B	Coaxial Adapter, RCA Bulkhead Female / Female, Blue Insulator		3.95	3.71	3.48	CALL
BA400Y	Coaxial Adapter, RCA Bulkhead Female / Female, Yellow Insulator		3.95	3.71	3.48	CALL
BA400	Coaxial Adapter, RCA Bulkhead Female / Female, White Insulator		3.95	3.71	3.48	CALL
BA400A	Coaxial Adapter, RCA Bulkhead Female / Female, 0.5" (1.3cm) Circular Hole		3.95	3.71	3.48	CALL

Type N Within Series Adapters - 50 Ohm

AXA-NMNM	Coaxial Adapter, Type N Male / Male Barrel Adapter		4.83	4.44	4.06	CALL
AXA-NFNF	Coaxial Adapter, Type N Female / Female Bullet Adapter		4.83	4.44	4.06	CALL
AXA-NMNM90	Coaxial Adapter, Type N Male / Male Right Angle Adapter		7.14	6.57	6.00	CALL
AXA-NMNF90	Coaxial Adapter, Type N Male / Female Right Angle Adapter		7.14	6.57	6.00	CALL
AXA-NFNF2	Coaxial Adapter, Type N Female / Female 1/4" (0.6cm) (Bulkhead)		4.20	3.86	3.53	CALL
AXA-NFNF2	Coaxial Adapter, Type N Female / Female 1/8" (0.3cm) (Bulkhead)		4.20	3.86	3.53	CALL
BN121	Coaxial Adapter, Type N Male / Female Right Angle Adapter		6.88	6.47	6.05	CALL
BN126	Coaxial T Adapter, Type N Female / Female / Male		6.88	6.47	6.05	CALL
BN133	Coaxial T Adapter, Type N Female / Female / Female		6.88	6.47	6.05	CALL

Mini-UHF Within Series Adapters - 50 Ohm

BA470	Coaxial Adapter, Mini-UHF Female / 90° Male		10.71	10.07	9.42	CALL
BA476	Coaxial Adapter, Mini-UHF Female / Female		4.73	4.45	4.16	CALL
BA478	Coaxial Adapter, Mini-UHF Male / Male		4.73	4.45	4.16	CALL

UHF Within Series Adapters - 50 Ohm

BA170	Coaxial Adapter, UHF Female / Female		3.62	3.40	3.19	CALL
BA280	Coaxial Adapter, UHF Male / Male		4.73	4.45	4.16	CALL
BA303	Coaxial T Adapter, UHF Female / Female / Female		7.14	6.71	6.28	CALL
BA404Z	Coaxial Adapter, UHF Male / 90° Female		7.14	6.71	6.28	CALL
BA406Z	Coaxial Adapter, UHF Feed-Thru Female / Female		7.14	6.71	6.28	CALL



TNC Within Series Adapters - 50 Ohm

BA2301	Coaxial Adapter, TNC Bulkhead, Female / Female, Grounded		5.93	5.57	5.22	CALL
BA1090	Coaxial Adapter, TNC Bulkhead, Female / Female, Insulated Ground		7.14	6.71	6.28	CALL
BA4000	Coaxial Adapter, TNC Male / Female		4.52	4.25	3.98	CALL
AXA-RTJRTJ	Coaxial Adapter, RP-TNC Jack to RP-TNC Jack Bullet Adapter		4.83	4.44	4.06	CALL
AXA-RTPTPT	Coaxial Adapter, RP-TNC Plug to RP-TNC Plug Barrel Adapter		4.20	3.86	3.53	CALL
AXA-RTPTJ90	Coaxial Adapter, RP-TNC Plug to RP-TNC Jack, Right Angle		6.88	6.33	5.78	CALL

7/16 DIN Within Series Adapters - 50 Ohm

AXA-DMDM	Coaxial Adapter, 7/16 DIN Male / Male		49.35	45.40	41.45	CALL
AXA-DFDF	Coaxial Adapter, 7/16 DIN Female / Female		48.30	44.44	40.57	CALL

Insulated Coaxial Connections - 50 Ohm - Needed to Prevent Ground Loops and Noise

Data signals are particularly susceptible to both ground loop and common mode interference. Reducing the number of ground points of a coaxial wiring system reduces the number of potential ground loops and multiple noise currents.

BIF-CB	Coaxial Coupler, BNC Female / Female		3.62	3.33	3.04	CALL
BIF-TB1	Coaxial T Adapter, BNC Female / Male / Female		6.77	6.36	5.96	CALL
BIF-TB2	Coaxial T Adapter, BNC Female / Male / Female		7.09	6.66	6.24	CALL

BNC Connector Identifiers/Insulators - Take on New Look with Color-Coded Insulated Covers

The conventional BNC crimp connector may now be modified to be fully insulated, helping eliminate ground loop problems. Our colorful slip-on insulated covers are quick to assemble and provide color coding. The hood cover is installed over the BNC movable collar; the plastic bend strain protector is slipped on over ferrule after the crimping operation. An important feature is the added support offered by the bend-protector; it helps prevent cable breakage.

BIF-H0	Coaxial Connector Cover for BNC, Pkg / 10	Black	2.31	2.13	1.94	CALL
BIF-H2	Coaxial Connector Cover for BNC, Pkg / 10	Red	2.31	2.13	1.94	CALL
BIF-H5	Coaxial Connector Cover for BNC, Pkg / 10	Green	2.31	2.13	1.94	CALL
BIF-H6	Coaxial Connector Cover for BNC, Pkg / 10	Blue	2.31	2.13	1.94	CALL
BIF-H9	Coaxial Connector Cover for BNC, Pkg / 10	White	2.31	2.13	1.94	CALL
BIF-P0-58	Coaxial Plastic Bend Protector for RG58, Pkg / 10	Black	2.94	2.70	2.47	CALL
BIF-P2-58	Coaxial Plastic Bend Protector for RG58, Pkg / 10	Red	2.94	2.70	2.47	CALL
BIF-P5-58	Coaxial Plastic Bend Protector for RG58, Pkg / 10	Green	2.94	2.70	2.47	CALL
BIF-P6-58	Coaxial Plastic Bend Protector for RG58, Pkg / 10	Blue	2.94	2.70	2.47	CALL
BIF-P0-59/62	Coaxial Plastic Bend Protector for RG59 / RG62, Pkg / 10	Black	2.05	1.89	1.72	CALL
BIF-P2-59/62	Coaxial Plastic Bend Protector for RG59 / RG62, Pkg / 10	Red	2.05	1.89	1.72	CALL
BIF-P5-59/62	Coaxial Plastic Bend Protector for RG59 / RG62, Pkg / 10	Green	2.05	1.89	1.72	CALL
BIF-P6-59/62	Coaxial Plastic Bend Protector for RG59 / RG62, Pkg / 10	Blue	2.05	1.89	1.72	CALL
BIF-P9-59/62	Coaxial Plastic Bend Protector for RG59 / RG62, Pkg / 10	White	2.05	1.89	1.72	CALL



Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.



BAK300



BAK400



BA1200K



BA1700K



BA1800K

Item #	Description	1-9	10-24	25-99	100+
Deluxe Coaxial Adapter Kit - Immediate Assembly of 108 Adapters					
Thirty component parts interchangeably screw together to form up to 108 different types of coaxial adapters, all in a matter of seconds. Disassemble them when you're through, for use next time. Truly a problem solver for those unique situations and it replaces a drawer full of adapters. Premium quality, having gold center pins and Teflon insulators for good conductivity and low loss. All components are gold plated to prevent long term oxidation. The deluxe coaxial adapter kit contains male and female: Type N, BNC, TNC, SMA, UHF and Mini-UHF types of interconnections. Mix and match to suit your immediate needs. Supplied in a handy leatherette, zippered storage case ideal for portable use.					
BAK300	Deluxe Coaxial Adapter Kit	144.99	139.19	133.39	CALL

Premium Coaxial Adapter Kit - Assemble up to 192 Different Adapters

Forty component parts interchangeably screw together to form up to 192 different types of coaxial adapters. The secret is the special in-between fittings that allow you to assemble virtually any coaxial adapter in a matter of seconds. Mix and match to suit your needs. Disassemble them when you're through for use next time. A problem solver for those unique situations and it replaces a drawer full of adapters. Premium quality, featuring gold plated pins and Teflon insulators and gold plated overall. Kit assembles the same types as the BAK300, plus RCA-Phono and Type F. Supplied in portable black leatherette zippered storage case. No technician or third party maintenance person should be without this.

BAK400	Premium Coaxial Adapter Kit	173.99	167.03	160.07	CALL
--------	-----------------------------	--------	--------	--------	------

SMA Interseries Adapter Kit - 10 of the Most Commonly Used Adapters

The BA1200K includes 10 of the most commonly used SMA interseries adapters. This kit is a super value versus buying the parts separately and includes a free 7 compartment plastic case. Adapters included are: BA20, BA23 (2), BA28 (2), BA29 (2), BA34, BA38, BA588.

BA1200K	SMA Interseries Adapter Kit	58.99	55.45	51.91	CALL
---------	-----------------------------	-------	-------	-------	------

BNC Within Series Adapter Kit

This useful adapter kit offers a super value to buying parts separately. Kit includes various BNC adapters as well as 3 port tees and right angle configurations all stored in a multi compartment storage case. Adapters are machined and plated for corrosion resistance and long life.

BA1700K	BNC Adapter Kit	46.99	44.17	41.35	CALL
---------	-----------------	-------	-------	-------	------

BNC Interseries Assortment - Adapters to Mate SMA, UHF, RCA and Type F


A handy adapter assortment to have in the lab or workshop. How many times did you come up with a mismatch in coaxial cables and nowhere to turn to make the connection? We have the answer with our InterSeries Assortment that contains eleven adapters, one each of the following: BA28, BA38, BA50, BA60, BA90, BA94, BA95, BA120, BA125, BA220 and BA230. Seven compartment carry case included.

BA1800K	BNC Interseries Adapter Assortment	46.99	44.17	41.35	CALL
---------	------------------------------------	-------	-------	-------	------




What is the difference between a WITHIN SERIES coaxial adapter and an INTERSERIES coaxial adapter?

A **WITHIN SERIES** coaxial adapter connects between two interfaces of the same series (i.e. SMA to SMA) in female to female, male to female or male to male configurations.

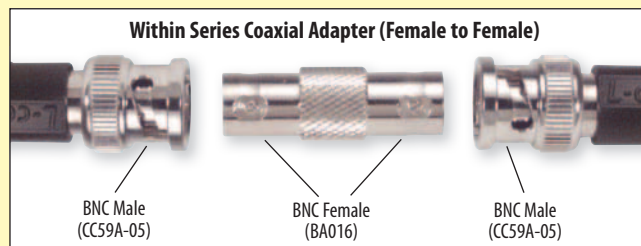

An **INTERSERIES** coaxial adapter connects between two interfaces of different series (i.e. SMA to BNC) in female to female, male to female or male to male configurations.

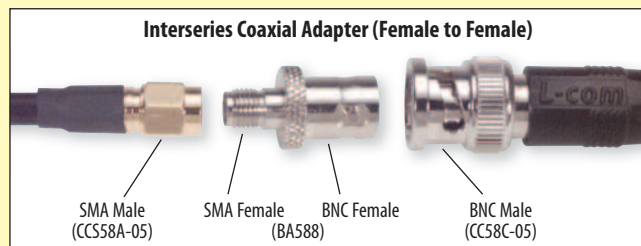

Coaxial Connector Selection Matrix

Use this handy chart to locate the desired coaxial connector. Simply locate the connector type and gender in the top row. Then find the coaxial cable type in the left hand column. Intersect the row and column to determine availability. Connectors shown in this matrix are listed on [pages 186 thru 189](#). If a specific

connector type is not listed, please visit our website at L-com.com for the latest information or call our technical support group at **800-343-1455** for assistance. Connectors listed are generally intended for use in the RF band. Assembly tools can be found on [pages 194 and 195](#).

PLUG TYPES													
CABLE TYPE	BNC	TNC	RP-TNC	SMA	RP-SMA	SMB	QMA	TYPE N	RP-TYPE N	MCX	MMCX	TYPE F	RCA
RG6 (75 Ohm)	BAC026, BAC029 BAC032											BAC-CF56U BAC529 BAC-EX6	BAC700-6
RG6Q (75 Ohm)	BAC042												
RG58 (50 Ohm)	BAC836A-58, BAC10A BIF-83, BAC838-58	BAC898-58 BAC500 BAC525		BAC03, BAC03-G BAC02, BAC02-G				BAC519					
RG58 (50 Ohm) Plenum	BAC836A-58P												
RG59 (75 Ohm) Plenum	BAC028, BAC031, BAC541												
RG59/6 (75 Ohm)	BAC027, BAC027A BAC030, BAC836A-59 BAC033, BAC024 BAC706, BAC985 BAC543	BAC933-59 BAC893-59 BAC709										BAC-CF559U BAC530 BAC-EX59	BAC700-59
RG142								ANM-1J00					
RG174/188/316 (50 Ohm)	BAC836B-74 BAC546	BAC531 BAC537	BAC541	BAC03A, BAC03A-G BAC02A, BAC02A-G BAC502				BAC523 ANM-1114	ARTP-1100	BAC507 BAC508	BAC509 BAC510 ARMMP-1100		
RG179/187/CTL (75 Ohm)	BAC836B-87 BAC551												
RG213 (50 Ohm)		BAC504						BAN111, BAC506					
RG223 (50 Ohm)	BAC547	BAC534, BAC545						ANM-1J00, BAC536					
734 (75 Ohm)	BAC-UPL220-025												
735 (75 Ohm)	BAC-UPL220-026												
1505A (75 Ohm)	BAC-UPL2000-D2B												
1506A (75 Ohm)	BAC-UPL2000-D8B												
BELDEN 9913	HPC992	HPC993						HPC994					
BELDEN 7807	HPC782	HPC783		HPC781									
PANEL MOUNT	BAC1501												
Low Loss 100 Series				ASM-1102	ARSP-1100	ASMBP-1100, ASMBP-1102		ANM-1114		AMM-1102	AMMM-1100 AMMM-1104 AMMM-1106		
Low Loss 195 Series	ABM-1700, ABM-1702	ATM-1700	ARTP-1708 ARTP-1714	ASM-1714 ASM-1710 ASM-1708	ARSP-1700 ARSP-1702 ARSP-1726 ARSP-1728		AQP-1700, AQP-1702	ANM-1700 ANM-1716	ARNP-1700			AFM-1700	
Low Loss 200 Series		ATM-1204	ARTP-1200	HPC201, HPC202	ARSP-1202			ANM-1202	ARNP-1202				
Low Loss 240 Series		ATM-1506	ARTP-1502	ASM-1504	ARSP-1504			ANM-1508, ANM-1516					
Low Loss 300 Series			ARTP-1312					ANM-1304					
Low Loss 400 Series		ATM-1402 ATM-1416 ATML-1400	ARTP-1404	HPC401, HPC402, ASM-1406	ARSP-1404			HPC404, ANM-2400, ANM-1406, ANM-1416 ANM-1420, ANM-2402	ARNP-1404				
Low Loss 600 Series		ATM-1608	ARTP-1606					ANM-2602, ANM-1610, ANM-1616					
Low Loss 900 Series								ANM-2904					

JACK TYPES												
CABLE TYPE	BNC	TNC	RP-TNC	SMA	RP-SMA	SMB	TYPE N	RP-TYPE N	QMA	FME	TYPE F	
RG6 (75 Ohm)	BAC516											
RG58 (50 Ohm)	BAC515, BAC522	BAC513, BAC501 BAC518		BAC05, BAC04			BAC524					
RG58 (50 Ohm) Plenum							BAC527					
RG59/6 (75 Ohm)	BAC908-59 BAC014, BAC552	BAC934-59									BAC520	
RG142	BAC548	BAC553, BAC554					BAC544					
RG174/188/316 (50 Ohm)	BAC517, BAC540	BAC514, BAC528		BAC05A, BAC06A BAC503, BAC512								
RG179/187/CTL (75 Ohm)	BAC550										BAC535	
RG223 (50 Ohm)							BAC544, BAC542					
Panel Mount	BAC260, BAC1503 BAC70A			BAC16			ANF-4000					
Low Loss 100 Series			ARTJ-1100			ASMBJ-1100						
Low Loss 195 Series		ATF-3700, ATF-1700	ARTJ-1708, ARTJ-3702	ASF-3700, ASF-1708	ARSJ-3700, ARSJ-1700		ANF-3700, ANF-1700 ANF-5700	ARNJ-1700	AQJ-3700	AFMEJ-1700		
Low Loss 200 Series							ANF-1202					
Low Loss 240 Series		ATF-1506					ANF-1508					
Low Loss 300 Series							ANF-1304					
Low Loss 400 Series		ATF-1402	ARTJ-3400, ARTJ-1404		ARSJ-1404		ANF-2400, ANF-1406	ARNJ-1404				
Low Loss 600 Series			ARTJ-1606				ANF-2602, ANF-1610					
Low Loss 900 Series							ANF-2904					



Item #	Description	Cable Type	Attachment	1-9	10-24	25-99	100+
Coaxial Connectors							
In addition to the most popular styles, L-com also provides harder to find connectors for all your application needs. Configurations include crimp style, clamp style, bulkhead style and panel mount connectors. Each connector is precision manufactured using only the highest quality materials.							
Solderless Coaxial Connectors, 50 Ohm							
L-com's Solderless Coaxial Connectors make it quick and easy to terminate coax cable assemblies in the field and on the fly. All that is needed is a cable stripper and crimp tool. No soldering is needed for the center conductor.							
ANM-1420	Type N Male	Low Loss 400-Series	Solderless / Crimp	4.20	3.86	3.53	CALL
ARSP-1726	Reverse Polarity SMA Plug, Right Angle	Low Loss 195-Series, RG58	Solderless / Crimp	4.94	4.54	4.15	CALL
ARSP-1728	Reverse Polarity SMA Plug	Low Loss 195-Series, RG58	Solderless / Crimp	5.04	4.64	4.23	CALL
ARTP-1710	Reverse Polarity TNC Plug	Low Loss 195-Series, RG58	Solderless / Crimp	2.73	2.62	2.51	CALL
ARTP-1406	Reverse Polarity TNC Plug	Low Loss 400-Series	Solderless / Crimp	4.36	4.19	4.01	CALL
ARTJ-3704	Reverse Polarity TNC Jack, Bulkhead	Low Loss 195-Series, RG58	Solderless / Crimp	4.20	4.03	3.86	CALL
ABM-1704	BNC Male	Low Loss 195-Series, RG58	Solderless / Crimp	2.73	2.62	2.51	CALL
TNC Coaxial Connectors, 50 Ohm							
BAC893-58	TNC Male	RG58	Crimp	2.94	2.76	2.59	CALL
BAC525	TNC Male, Right Angle	RG58	Crimp	5.57	5.24	4.90	CALL
BAC537	TNC Male, Right Angle	RG174 / RG188 / RG316	Crimp	7.67	7.21	6.75	CALL
BAC545	TNC Male	RG223	Crimp	5.88	5.53	5.17	CALL
BAC531	TNC Male	RG174 / RG188 / RG316	Crimp	6.46	6.07	5.68	CALL
BAC504	TNC Male	RG213	Crimp	2.94	2.76	2.59	CALL
ATM-1204	TNC Male	Low Loss 200-Series	Crimp	3.73	3.43	3.13	CALL
ATM-1506	TNC Male	Low Loss 240-Series	Crimp	4.36	4.01	3.66	CALL
ATM-1402	TNC Male	Low Loss 400-Series	Crimp	4.36	4.01	3.66	CALL
ATM-1416	TNC Male, Right Angle	Low Loss 400-Series	Crimp	5.57	5.12	4.68	CALL
ATML-1400	TNC Male, Reverse Thread	Low Loss 400-Series	Crimp	4.10	3.77	3.44	CALL
BAC513	TNC Female	RG58	Crimp	2.94	2.76	2.59	CALL
BAC514	TNC Female	RG174 / RG188 / RG316	Crimp	2.94	2.76	2.59	CALL
BAC528	TNC Female, Bulkhead	RG174 / RG188 / RG316	Crimp	7.04	6.62	6.20	CALL
BAC553	TNC Female	RG142 / RG223 / RG400	Crimp	6.46	6.07	5.68	CALL
BAC554	TNC Female, Bulkhead	RG142 / RG223 / RG400	Crimp	7.35	6.91	6.47	CALL
ATF-1700	TNC Female	Low Loss 195-Series, RG58	Crimp	2.00	1.84	1.68	CALL
ATF-1506	TNC Female	Low Loss 240-Series	Crimp	4.10	3.77	3.44	CALL
ATF-1402	TNC Female	Low Loss 400-Series	Crimp	4.73	4.35	3.97	CALL
ATF-3700	TNC Female, Bulkhead	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
BAC500	Reverse Polarity TNC Plug	RG58	Crimp	5.83	5.48	5.13	CALL
ARTP-1A10	Reverse Polarity TNC Plug	RG6	Crimp	3.73	3.43	3.13	CALL
ARTP-1100	Reverse Polarity TNC Plug	RG316 / RG174 / RG188	Crimp	5.83	5.36	4.90	CALL
ARTP-1708	Reverse Polarity TNC Plug	Low Loss 195-Series, RG58	Crimp	3.73	3.43	3.13	CALL
ARTP-1710	Reverse Polarity TNC Plug	Low Loss 195-Series, RG58	Solderless / Crimp	2.73	2.62	2.51	CALL
ARTP-1200	Reverse Polarity TNC Plug	Low Loss 200-Series	Crimp	3.73	3.43	3.13	CALL
ARTP-1502	Reverse Polarity TNC Plug	Low Loss 240-Series	Crimp	4.94	4.54	4.15	CALL
ARTP-1312	Reverse Polarity TNC Plug	Low Loss 300-Series	Crimp	4.94	4.54	4.15	CALL
ARTP-1404	Reverse Polarity TNC Plug	Low Loss 400-Series	Crimp	4.94	4.54	4.15	CALL
ARTP-1406	Reverse Polarity TNC Plug	Low Loss 400-Series	Solderless / Crimp	4.36	4.19	4.01	CALL
ARTP-1606	Reverse Polarity TNC Plug	Low Loss 600-Series	Crimp	6.20	5.70	5.21	CALL
BAC501	Reverse Polarity TNC Jack	RG58	Crimp	5.83	5.48	5.13	CALL
ARTJ-3100	Reverse Polarity TNC Jack, Bulkhead	Low Loss 100-Series	Crimp	3.89	3.58	3.27	CALL
ARTJ-3702	Reverse Polarity TNC Jack, Bulkhead	Low Loss 195-Series, RG58	Crimp	3.73	3.43	3.13	CALL
ARTJ-3704	Reverse Polarity TNC Jack, Bulkhead	Low Loss 195-Series, RG58	Solderless / Crimp	4.20	4.03	3.86	CALL
ARTJ-1708	Reverse Polarity TNC Jack	Low Loss 195-Series, RG58	Crimp	3.73	3.43	3.13	CALL
ARTJ-3400	Reverse Polarity TNC Jack, Bulkhead	Low Loss 400-Series	Crimp	3.83	3.52	3.22	CALL
ARTJ-1404	Reverse Polarity TNC Jack	Low Loss 400-Series	Crimp	4.10	3.77	3.44	CALL
ARTJ-1606	Reverse Polarity TNC Jack	Low Loss 600-Series	Crimp	4.20	3.86	3.53	CALL
TNC Coaxial Connectors, 75 Ohm							
BAC893-59	TNC Male	RG59	Crimp	2.75	2.59	2.42	CALL
BAC933-59	TNC Male	RG59	Twist On	3.60	3.38	3.17	CALL
BAC709	TNC Male, Right Angle	RG59	Crimp	5.25	4.93	4.62	CALL
BAC934-59	TNC Female	RG59	Crimp	5.25	4.93	4.62	CALL
SMA Coaxial Connectors, 50 Ohm							
BAC03-G	SMA Male, Gold	RG58	Crimp	4.99	4.69	4.39	CALL
BAC02-G	SMA Male, Right Angle Gold	RG58	Crimp	4.99	4.69	4.39	CALL
ASM-1710	SMA Male, Right Angle	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
ASM-1708	SMA Male	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
BAC02A	SMA Male, Right Angle Nickel	RG174 / RG188 / RG316	Crimp	4.99	4.69	4.39	CALL
BAC03A	SMA Male, Nickel	RG174 / RG188 / RG316	Crimp	4.99	4.69	4.39	CALL
BAC03A-G	SMA Male, Gold	RG174 / RG188 / RG316	Crimp	4.99	4.69	4.39	CALL
BAC02A-G	SMA Male, Right Angle Gold	RG174 / RG188 / RG316	Crimp	4.62	4.34	4.07	CALL
ASM-1102	SMA Male	Low Loss 100-Series	Crimp	4.10	3.77	3.44	CALL
ASM-1504	SMA Male	Low Loss 240-Series	Crimp	3.73	3.43	3.13	CALL
ASM-1406	SMA Male	Low Loss 400-Series	Crimp	4.10	3.77	3.44	CALL
HPC401	SMA Male	Low Loss 400-Series	Crimp	11.18	10.73	10.29	CALL
BAC06A	SMA Female, Bulkhead Gold	RG174 / RG188 / RG316	Crimp	6.20	5.83	5.46	CALL
BAC05A	SMA Female, Nickel	RG174 / RG188 / RG316	Crimp	6.20	5.83	5.46	CALL
ASF-3700	SMA Female, Bulkhead	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
ASF-1708	SMA Female	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
BAC503	Reverse Polarity SMA Jack, Bulkhead	RG174 / RG188 / RG316	Crimp	5.83	5.48	5.13	CALL
BAC512	Reverse Polarity SMA Jack	RG174 / RG188 / RG316	Crimp	6.46	6.07	5.68	CALL
ARSJ-3100	Reverse Polarity SMA Jack, Bulkhead	Low Loss 100-Series	Crimp	2.89	2.66	2.43	CALL
ARSJ-3700	Reverse Polarity SMA Jack, Bulkhead	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ARSJ-1700	Reverse Polarity SMA Jack	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ARSJ-1404	Reverse Polarity SMA Jack	Low Loss 400-Series	Crimp	4.94	4.54	4.15	CALL
BAC502	Reverse Polarity SMA Plug	RG174 / RG188 / RG316	Crimp	5.83	5.48	5.13	CALL
ARSP-1100	Reverse Polarity SMA Plug	Low Loss 100-Series	Crimp	4.10	3.77	3.44	CALL
ARSP-1700	Reverse Polarity SMA Plug	Low Loss 195-Series, RG58	Crimp	5.04	4.64	4.23	CALL
ARSP-1702	Reverse Polarity SMA Plug, Right Angle	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ARSP-1726	Reverse Polarity SMA Plug, Right Angle	Low Loss 195-Series, RG58	Solderless / Crimp	4.94	4.54	4.15	CALL
ARSP-1728	Reverse Polarity SMA Plug	Low Loss 195-Series, RG58	Solderless / Crimp	5.04	4.64	4.23	CALL
ARSP-1202	Reverse Polarity SMA Plug	Low Loss 200-Series	Crimp	4.10	3.77	3.44	CALL
HPC202	Reverse Polarity SMA Plug	Low Loss 200-Series	Crimp	7.35	7.06	6.76	CALL
ARSP-1504	Reverse Polarity SMA Plug	Low Loss 240-Series	Crimp	4.94	4.54	4.15	CALL
ARSP-1404	Reverse Polarity SMA Plug	Low Loss 400-Series	Crimp	6.20	5.70	5.21	CALL

Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.

Type N Coaxial Connectors, 50 Ohm

Item #	Description	Cable Type	Attachment	1-9	10-24	25-99	100+
ANM-1A18	Type N Male	RG6	Crimp	4.10	3.77	3.44	CALL
BAC536	Type N Male	RG142/RG223/RG400	Crimp	6.46	6.07	5.68	CALL
BAC523	Type N Male	RG174	Crimp	7.93	7.45	6.98	CALL
BAN111	Type N Male	RG213	Clamp	7.35	6.91	6.47	CALL
BAC506	Type N Male	RG213	Crimp	7.04	6.62	6.20	CALL
ANM-1J00	Type N Male, Right Angle	RG142/RG223/RG400	Crimp	7.93	7.45	6.98	CALL
ANM-1114	Type N Male	RG316/RG174/RG188	Crimp	4.10	3.77	3.44	CALL
ANM-1700	Type N Male	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
ANM-1716	Type N Male, Right Angle	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ANM-1202	Type N Male	Low Loss 200-Series	Crimp	4.20	3.86	3.53	CALL
ANM-1508	Type N Male	Low Loss 240-Series	Crimp	4.10	3.77	3.44	CALL
ANM-1516	Type N Male, Right Angle	Low Loss 240-Series	Crimp	7.35	6.76	6.17	CALL
ANM-1304	Type N Male	Low Loss 300-Series	Crimp	4.10	3.77	3.44	CALL
ANM-1416	Type N Male, Right Angle	Low Loss 400-Series	Crimp	4.94	4.54	4.15	CALL
ANM-1406	Type N Male	Low Loss 400-Series	Crimp	4.10	3.77	3.44	CALL
ANM-1420	Type N Male	Low Loss 400-Series	Solderless/Crimp	4.20	3.86	3.53	CALL
ANM-2400	Type N Male	Low Loss 400-Series	Clamp	4.36	4.01	3.66	CALL
ANM-2402	Type N Male, Right Angle	Low Loss 400-Series	Clamp	9.35	8.60	7.85	CALL
ANM-2602	Type N Male	Low Loss 600-Series	Clamp	6.20	5.70	5.21	CALL
ANM-1610	Type N Male	Low Loss 600-Series	Crimp	7.46	6.86	6.27	CALL
ANM-1616	Type N Male, Right Angle	Low Loss 600-Series	Crimp	7.35	6.76	6.17	CALL
ANM-2904	Type N Male	Low Loss 900-Series	Clamp	35.28	32.46	29.64	CALL
ANF-1A18	Type N Female	RG6	Crimp	4.20	3.86	3.53	CALL
BAC527	Type N Female	RG174/RG188/RG316	Crimp	8.51	8.00	7.49	CALL
BAC542	Type N Female, Bulkhead	RG55/RG141/RG142/RG223	Crimp	5.83	5.48	5.13	CALL
BAC544	Type N Female	RG55/RG141/RG142/RG223	Crimp	7.04	6.62	6.20	CALL
ANF-3700	Type N Female, Bulkhead	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ANF-1700	Type N Female	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
ANF-5700	Type N Female, Panel Mount	Low Loss 195-Series, RG58	Crimp	4.36	4.01	3.66	CALL
ANF-1202	Type N Female	Low Loss 200-Series	Crimp	4.10	3.77	3.44	CALL
ANF-1508	Type N Female	Low Loss 240-Series	Crimp	4.10	3.77	3.44	CALL
ANF-1304	Type N Female	Low Loss 300-Series	Crimp	4.20	3.86	3.53	CALL
ANF-1406	Type N Female	Low Loss 400-Series	Crimp	4.10	3.77	3.44	CALL
ANF-2400	Type N Female	Low Loss 400-Series	Clamp	4.36	4.01	3.66	CALL
ANF-2602	Type N Female	Low Loss 600-Series	Clamp	5.88	5.41	4.94	CALL
ANF-1610	Type N Female	Low Loss 600-Series	Crimp	7.40	6.81	6.22	CALL
ANF-2906	Type N Female	Low Loss 900-Series	Clamp	35.28	32.46	29.64	CALL
ANF-2904	Type N Female, Times Microwave® #EZ-900-NFC-2	Low Loss 900-Series	Clamp	88.20	81.14	74.09	CALL
ARNJ-1700	Reverse Polarity Type N Jack	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ARNJ-1404	Reverse Polarity Type N Jack	Low Loss 400-Series	Crimp	4.94	4.54	4.15	CALL
ARNP-1700	Reverse Polarity Type N Plug	Low Loss 195-Series, RG58	Crimp	4.94	4.54	4.15	CALL
ARNP-1404	Reverse Polarity Type N Plug	Low Loss 400-Series	Crimp	4.94	4.54	4.15	CALL

BNC Coaxial Connectors, 50 Ohm

BAC836A-58	BNC Male	RG58	Crimp	3.26	3.06	2.87	CALL
BAC836A-58P	BNC Male	RG58 Plenum	Crimp	4.10	3.85	3.61	CALL
BAC838-58	BNC Male	RG58	Twist On	4.99	4.69	4.39	CALL
BIF-83	BNC Male, Insulated	RG58	Crimp	5.04	4.74	4.44	CALL
BAC10A	BNC Male	RG58	Clamp	4.99	4.69	4.39	CALL
BAC547	BNC Male	RG142/RG223/RG400	Crimp	2.94	2.76	2.59	CALL
BAC836B-74	BNC Male	RG174/RG188/RG316	Crimp	5.57	5.24	4.90	CALL
BAC546	BNC Male, Right Angle	RG174/RG188/RG316	Crimp	5.57	5.24	4.90	CALL
ABM-1702	BNC Male, Right Angle	Low Loss 195-Series, RG58	Crimp	4.99	4.59	4.19	CALL
ABM-1704	BNC Male	Low Loss 195-Series, RG58	Solderless/Crimp	2.73	2.62	2.51	CALL
BAC515	BNC Female	RG58	Crimp	4.99	4.69	4.39	CALL
BAC522	BNC Female, Bulkhead	RG58	Crimp	6.20	5.83	5.46	CALL
BAC548	BNC Female	RG142	Crimp	5.46	5.13	4.80	CALL
BAC517	BNC Female	RG174/RG188/RG316	Crimp	4.99	4.69	4.39	CALL
BAC540	BNC Female	RG174/RG188/RG316	Crimp	5.88	5.53	5.17	CALL
ARBJ-1700	Reverse Polarity BNC Jack	Low Loss 195-Series, RG58	Crimp	3.68	3.39	3.09	CALL
ARBP-1700	Reverse Polarity BNC Plug	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
ARBP-1402	Reverse Polarity BNC Plug	Low Loss 400-Series	Crimp	4.73	4.35	3.97	CALL

BNC Coaxial Connectors, 75 Ohm

BAC026	BNC Male	RG6	Twist On	3.60	3.38	3.17	CALL
BAC032	BNC Male	RG6	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC029	BNC Male	RG6	Crimp (3 Pc)	3.55	3.34	3.12	CALL
BAC042	BNC Male	RG6-Q	Crimp	2.45	2.30	2.16	CALL
BAC024	BNC Male	RG59	Twist On	3.60	3.38	3.17	CALL
BAC027	BNC Male	RG59 (23 AWG C.C.)	Crimp	3.55	3.34	3.12	CALL
BAC027A	BNC Male	RG59 (20 AWG C.C.)	Crimp	3.55	3.34	3.12	CALL
BAC028	BNC Male	RG59 Plenum	Crimp (3 Pc)	3.55	3.34	3.12	CALL
BAC030	BNC Male	RG59	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC031	BNC Male	RG59 Plenum	Crimp (2 Pc)	3.55	3.34	3.12	CALL
BAC033	BNC Male	RG59	Solder	4.70	4.42	4.14	CALL
BAC543	BNC Male, Right Angle	RG59	Crimp	5.15	4.84	4.53	CALL
BAC706	BNC Male, Right Angle	RG59/6	Crimp	6.25	5.88	5.50	CALL
BAC985	BNC Male, Right Angle	RG59/6	Twist On	6.35	5.97	5.59	CALL
BAC836A-59	BNC Male	RG59/6	Crimp	3.00	2.82	2.64	CALL
BAC551	BNC Male, Right Angle	RG179/RG187	Crimp	5.70	5.36	5.02	CALL
BAC836B-87	BNC Male	RG187/CTL	Crimp	3.00	2.82	2.64	CALL
BAC516	BNC Female	RG6	Crimp	4.35	4.09	3.83	CALL
BAC014	BNC Female	RG59	Twist On	4.35	4.09	3.83	CALL
BAC908-59	BNC Female	RG59/6	Crimp	4.35	4.09	3.83	CALL
BAC552	BNC Female, Bulkhead	RG59	Crimp	5.80	5.45	5.10	CALL
BAC550	BNC Female, Bulkhead	RG179	Crimp	4.40	4.14	3.87	CALL


Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.





Distinguishing between 50 and 75 Ohm BNC connectors

BNC connectors are one of the few coaxial connectors that are available in two impedance values of 50 and 75 Ohms. You can distinguish the two types by the absence of dielectric material at the interface of the 75 Ohm version as shown.

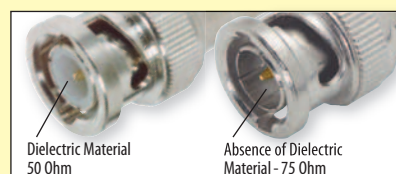

Item #	Description	Cable Type	Attachment	1-9	10-24	25-99	100+
--------	-------------	------------	------------	-----	-------	-------	------

Digital Grade BNC Connectors for 1505A and 1506A Cable, 75 Ohm

BAC-UPL2000-D2B	BNC Male	1505A Coax	Crimp	9.20	8.83	8.46	CALL
BAC-UPL2000-D8B	BNC Male	1506A Plenum Coax	Crimp	9.20	8.83	8.46	CALL

Telecommunications Grade BNC Connectors for 734 and 735 Cable, 75 Ohm

BAC-UPL220-025	BNC Male	734 Coax	Crimp	11.35	10.90	10.44	CALL
BAC-UPL220-026	BNC Male	735 Coax	Crimp	11.35	10.90	10.44	CALL

Twin BNC Connector - Bayonet Style Coupling Polarized Contacts

BAC928	Twin BNC	Twinaxial	Clamp	8.61	8.09	7.58	CALL
--------	----------	-----------	-------	------	------	------	------

BNC, TNC and Type N - Belden 9913 Cable

Belden 9913 style cable is an RG8/U type cable with low loss performance characteristics. This cable utilizes a semi-solid polyethylene as an insulator along with a solid 10 AWG center conductor to achieve this performance enhancement.

HPC992	BNC Plug	9913	Crimp	12.92	12.40	11.89	CALL
HPC993	TNC Plug	9913	Crimp	12.92	12.40	11.89	CALL
HPC994	Type N Plug	9913	Crimp	12.92	12.40	11.89	CALL

SMA, BNC and TNC - Belden 7807 Cable

Belden 7807 cable is an RG58 type cable with low loss performance characteristics. This cable utilizes a gas injected foam HDPE as an insulator along with a solid 17 AWG center conductor to achieve this performance enhancement.

HPC781	SMA Plug	7807	Crimp	12.44	11.94	11.44	CALL
HPC782	BNC Plug	7807	Crimp	10.61	10.19	9.76	CALL
HPC783	TNC Plug	7807	Crimp	10.61	10.19	9.76	CALL

Panel Mount Receptacle Connectors

These series of connectors are intended for panel mounting with discrete receptacle terminations. Offered in BNC, RCA, SMA and Type N interfaces with various mounting configurations.

BAC1501	BNC Male Bulkhead	N/A		3.52	3.31	3.10	CALL
BAC1503	BNC Female Bulkhead	N/A		3.52	3.31	3.10	CALL
BAC70A	BNC Female Bulkhead	N/A		3.52	3.31	3.10	CALL
BAC260	BNC Female, 4 Hole Flange	N/A		3.52	3.31	3.10	CALL
BAC930	Twin BNC Female Bulkhead	N/A		6.98	6.56	6.14	CALL
BAC440	RCA Female Insulated Bulkhead	N/A		4.62	4.34	4.07	CALL
ANF-4000	Type N Female, 4 Hole Flange	N/A		4.36	4.01	3.66	CALL
BAC16	SMA Female Bulkhead	N/A		5.83	5.48	5.13	CALL
ARSJ-4000	Reverse Polarity SMA Jack	1" (2.5cm) Flange for PCB		4.20	3.86	3.53	CALL

Type F Coaxial Connectors, 75 Ohm

BAC-CFS6U	Type F Male, Indoor	RG6	Crimp	1.10	1.03	0.97	CALL
BAC529	Type F Male, Indoor/Outdoor	RG6	Crimp	1.40	1.32	1.23	CALL
BAC-EX6	Type F Male	RG6	Compression	1.65	1.55	1.45	CALL
BAC-CFS59U	Type F Male, Indoor	RG59	Crimp	1.10	1.03	0.97	CALL
BAC530	Type F Male, Indoor/Outdoor	RG59	Crimp	1.40	1.32	1.23	CALL
BAC-EX59	Type F Male	RG59	Compression	1.65	1.55	1.45	CALL
AFM-1700	Type F Male	Low Loss 195-Series, RG58	Crimp	3.73	3.43	3.13	CALL
BAC520	Type F Female	RG59	Crimp	3.10	2.91	2.73	CALL
BAC535	Type F Female Bulkhead	RG179/RG187	Crimp	2.94	2.76	2.59	CALL

RCA Coaxial Connector - Push-On Coupling for 75 Ohm Coaxial Cable

The RCA connector is the most commonly used connector type found on consumer electronics for both composite and component video as well as audio in some cases.

BAC700-6	RCA Male	Push-On RG6	Crimp	1.10	1.03	0.97	CALL
BAC700-59	RCA Male	Push-On RG59	Crimp	1.10	1.03	0.97	CALL

TS-9 Coaxial Connector, 50 Ohm

TS-9 connectors are generally used with cellular type products such as certain models manufactured by Novatel, Sierra Wireless and ZTE.

ATS9P-1100	TS-9 Plug	Low Loss 100-Series RG174/RG188/RG316	Crimp	7.35	6.76	6.17	CALL
------------	-----------	--	-------	------	------	------	------

MCX Coaxial Connectors, 50 Ohm

This subminiature coaxial connector is widely used in GPS and wireless infrastructure applications. Offered in both straight and right angle configurations with crimp style attachment.

BAC507	MCX Plug	RG174/RG188/RG316	Crimp	5.57	5.24	4.90	CALL
BAC508	MCX Plug, Right Angle	RG174/RG188/RG316	Crimp	5.88	5.53	5.17	CALL
AMM-1102	MCX Plug	Low Loss 100-Series	Crimp	3.73	3.43	3.13	CALL
BAC526	MCX Jack	RG174/RG188/RG316	Crimp	6.77	6.36	5.96	CALL

UHF Connectors, 50 Ohm

AUM-1700	UHF Male	Low Loss 195-Series, RG58	Crimp	3.52	3.24	2.96	CALL
AUM-1402	UHF Male	Low Loss 400-Series	Crimp	3.52	3.24	2.96	CALL

Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.

Item #	Description	Cable Type	Attachment	1-9	10-24	25-99	100+
MMCX Coaxial Connectors, 50 Ohm							
This microminiaturized connector is widely used in PCB surface mount coaxial interconnect systems in applications such as wireless LAN equipment and GPS.							
BAC509	MMCX Plug	RG174/RG188/RG316	Crimp	6.20	5.83	5.46	CALL
BAC510	MMCX Plug, Right Angle	RG174/RG188/RG316	Crimp	6.46	6.07	5.68	CALL
AMMM-1104	MMCX Plug, Right Angle	Low Loss 100-Series	Crimp	3.73	3.43	3.13	CALL
AMMM-1106	MMCX Plug, Straight	Low Loss 100-Series	Crimp	3.73	3.43	3.13	CALL
ARMMP-1100	MMCX Plug, Rt. Angle, Rev. Pol	Low Loss 100-Series	Crimp	4.20	3.86	3.53	CALL
MC Card Connector, 50 Ohm							
AMCM-1102	MC Card Male	Low Loss 100-Series	Crimp	3.73	3.43	3.13	CALL
NMO Connector, 50 Ohm							
AAM1-1700	NMO 3/4" (1.9cm) Hole	Low Loss 195-Series, RG58	Crimp	4.20	3.86	3.53	CALL
QMA Connector, 50 Ohm							
AQJ-3700	QMA Jack Bulkhead	Low Loss 195-Series, RG58	Crimp	9.14	8.41	7.68	CALL
AQP-1700	QMA Plug Right Angle	Low Loss 195-Series, RG58	Crimp	7.46	6.86	6.27	CALL
AQP-1702	QMA Plug	Low Loss 195-Series, RG58	Crimp	7.19	6.61	6.04	CALL
SMB Connectors, 50 Ohm							
ASMBP-1100	SMB Plug	Low Loss 100-Series	Crimp	4.62	4.25	3.88	CALL
ASMBP-1102	SMB Plug, Right Angle	Low Loss 100-Series	Crimp	5.57	5.12	4.68	CALL
ASMBJ-1100	SMB Jack	Low Loss 100-Series	Crimp	4.10	3.77	3.44	CALL
FME Connectors, 50 Ohm							
BAC8015	FME Plug	Low Loss 195-Series, RG58	Crimp	3.52	3.31	3.10	CALL
AFMEJ-1700	FME Jack	Low Loss 195-Series, RG58	Crimp	3.52	3.24	2.96	CALL
ORINOCO Compatible Connector, 50 Ohm*							
AAPM-1100	AIProx Male Right Angle	Low Loss 100-Series	Crimp	4.83	4.44	4.06	CALL
Waverider Compatible Connector, 50 Ohm*							
AWM-1700	Waverider Compatible Male	Low Loss 195-Series, RG58	Crimp	5.04	4.64	4.23	CALL
Shrouded SMA Connector, 50 Ohm							
ASM-1714	Shrouded SMA Male Rt Angle	Low Loss 195-Series, RG58	Crimp	4.10	3.77	3.44	CALL
Sierra Wireless Aircard Compatible Connector, 50 Ohm*							
ASNP-1100	SMA Nano-Plug	Low Loss 100-Series	Crimp	4.94	4.54	4.15	CALL

*Note: See website for additional compatibility information.

Some Connectors are sold in 10-Packs. See website for details. Adapters are sold individually.



The anatomy of a coaxial connector

The two main components of a connector that determine the mating type (sex) are the **BODY** and the **PIN**.

Here are two examples of **PLUG** bodies (aka Male).



This is a **PLUG** body of a typical threaded type connector. Note that the threads are on the inside of the body.



This is a **PLUG** body of a typical bayonet type connector such as a BNC. Note the coupling mechanism on the body.

And these are two examples of **JACK** bodies (aka Female).



This is a **JACK** body of a typical threaded type connector. Note that the threads are on the outside of the body.



This is a **JACK** body of a typical bayonet type connector such as a BNC. Note the bayonets on the body.




This is a **MALE** pin.



This is a **FEMALE** pin.


So what makes up the different types of connectors?

Here is a Standard Polarity Plug connector:



It is made up of a **PLUG BODY** and a **MALE PIN**. Standard polarity plug connectors can also be known as Male Connectors.

Here is a Standard Polarity Jack connector:




It is made up of a **JACK BODY** and a **FEMALE PIN**. Standard polarity jack connectors can also be known as Female Connectors.

Here is a Reverse Polarity Plug connector:



It is made up of a **PLUG BODY** and a **FEMALE PIN**. The polarity of the pin is reversed, thus making it a Reverse Polarity Plug Connector.

Here is a Reverse Polarity Jack connector:























It is made up of a **JACK BODY** and a **MALE PIN**. Again the polarity of the pin is reversed, thus making it a Reverse Polarity Jack Connector.



How do you select the right coaxial cable for your application?






There are a number of coaxial cable styles available today. "RG" style cables were originally designed for military applications but now are extensively used in commercial applications. Low Loss coaxial cables are designed to meet the demands of the wireless communications market. High performance with low signal loss makes them ideal for a wide array of wireless applications. The following coaxial cable selection guide is intended as a general guide to assist you in selecting the right cable for your application.

Cable Type	Impedance	Typical Application	Cable Type	Impedance	Typical Application
RG174/U 	50 Ohm	Transmission of data signals in applications such as LAN/WAN or GPS.	RG179B/U 	75 Ohm	Transmission of a video signal in applications such as security systems where high temperature performance is needed.
RG188A/U 	50 Ohm	Transmission of data signals in applications such as LAN/WAN or GPS in situations where high temperature performance is needed.	RG187/U 	75 Ohm	Transmission of a video signal in applications such as security systems where high temperature performance is needed.
RG316/U 	50 Ohm	Transmission of data signals in applications such as LAN/WAN or GPS in situations where high temperature performance is needed.	100 Series Low Loss 	50 Ohm	Drop-in Low Loss equivalent for RG316/174. Very short radio pigtails/jumper cables.
RG58C/U 	50 Ohm	Transmission of data signals in applications such as antenna feed cables or Ethernet backbones.	195 Series Low Loss 	50 Ohm	Drop-in Low Loss equivalent for RG58/142. Short antenna and jumper cables.
RG142B/U 	50 Ohm	Transmission of data signals in applications such as antenna feed cables or Ethernet backbones in situations where high temperature performance is needed.	200 Series Low Loss 	50 Ohm	Short antenna cable feeds. Applications requiring easily routed low loss cable.
RG59A/U 	75 Ohm	Transmission of a video or audio signal in applications such as security systems or CATV.	240 Series Low Loss 	50 Ohm	Medium length antenna/jumper cables.
RG59B/U 	75 Ohm	Transmission of a video or audio signal in applications such as security systems or CATV.	400 Series Low Loss 	50 Ohm	Drop-in Low Loss equivalent for RG8/9913. Medium distance antenna feed cables.
RG6/U 	75 Ohm	Transmission of a video or audio signal in applications such as security systems or CATV.	400 Ultra Flex Series Low Loss 	50 Ohm	Applications requiring maximum flexibility and repeated bending/flexing. Drop-in Low Loss equivalent for RG-8/9913.
RG223/U 	50 Ohm	Transmission of data signals in applications such as LAN/WAN or GPS in situations where low signal loss and high shielding performance is needed.	600 Series Low Loss 	50 Ohm	Medium distance base station and cell tower applications.
RG213/U 	50 Ohm	Transmission of data signals in applications such as antenna feed cables in situations where low signal loss and high operating voltage performance is needed.	900DB Series Low Loss 	50 Ohm	Outdoor/direct burial applications, jumper cable assemblies for 1-5/8" & 2-1/4" feeders, medium antenna cable feeds with no jumpers required and long distance base station and cell tower applications.

Note: Images on this page are for reference only and may not be to scale

Anatomy of a Coaxial Connector

There are a wide variety of coaxial connectors available today. These connectors are offered in numerous interface types and attachment methods. Illustrated below are some common elements and functions shared by most of these coaxial connectors.

Crimp Ring	Coupling Body	Outer Conductor	Dielectric Support	Center Conductor
				
Attachment sleeve to cable outer conductor.	Attachment mechanism to mating connector.	Outer conducting element for signal transmission.	Non-conductive spacer between center and outer conductor.	Center conducting element for signal transmission.

Building Your Own Coaxial Cable Assembly

In order to successfully build your own coaxial cable assembly, you must make the following decisions:

1. Select a cable type

Many parameters come into play in making this decision from electrical performance properties such as impedance, shielding and attenuation to mechanical properties such as diameter, center conductor construction (solid vs stranded) and jacket material. A selection of the most commonly used cable is listed on [pages 192 and 193](#).

2. Select a connector type

Numerous connector interfaces exist such as BNC, TNC, SMA, F or RCA to name just a few. Each has a different application and come in both male and female versions. A selection of the most popular types is listed on [pages 185-189](#).

3. Select an attachment method







In general, there are three basic methods to attach a coaxial connector to a coaxial cable. They are crimp, clamp and twist-on. Each of these methods is illustrated below.

4. Select a tool

If a crimp attachment method was selected then a crimp tool will be needed. The crimp cross reference chart on [page 194](#) will assist you in selecting the correct tool.


Crimp Method:

This is the most common connector attachment method. In this case the cable shield is crimped to the connector using the crimp ring. The connector center conductor is attached to the cable center conductor by crimp or solder.

STEP 1  Cut cable to length and slide crimp ring onto free end.	STEP 2  Strip free end with Coaxial Cable Stripper.	STEP 3  Slide pin onto center conductor making sure base of pin meets dielectric. Crimp in place.	STEP 4  Fan braid and slide plug over pin.	STEP 5  Pull crimp sleeve over braid and ring.	STEP 6  Crimp in place.
--	--	--	---	--	--

Clamp Method:

The clamp method is often used for weather exposure applications or when crimp tools are not available. In this case the cable shield is clamped between the connector body and back nut. The connector center conductor is usually soldered to the cable center conductor.

STEP 1  Cut cable and slide nut into position. Strip and flair braid.	STEP 2  Position braid clamp and crimp or solder pin.	STEP 3  Attach main body to back nut.
---	---	---

Twist-On Method:

This method is most often used in field applications because of its simplicity and not needing special tools.

STEP 1  Prepare cable with strip tool.	STEP 2  Position connector body.	STEP 3  Twist connector body onto cable.
--	---	--

Crimp Tool:

When using a crimp connector, the HT330K tool kit can be a valuable item ([page 194](#)). This kit contains dies for all the commonly used crimp sizes. In addition, this kit comes complete with a cable cutter and a rotary cable stripper - helpful tools for building a cable assembly.



Plug or Jack:



A **PLUG** utilizes a center pin = **MALE GENDER**



A **JACK** utilizes a center socket = **FEMALE GENDER**

Solid or Stranded:














Online Video

L-com.com/Videos/A19

SOLID center conductor: best attenuation but somewhat stiff.

STRANDED center conductor: more flexible but slightly higher attenuation.



100 Series**195 Series****200 Series****240 Series****Best Seller****400 Series****400P Series****400UF Series****600 Series****900DB Series****RG174/U****RG188A/U****Low Loss Bulk Coaxial Cable**

100 Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	22.8	74.8			
	1800	33.2	108.8			
	2500	39.8	130.6			

• Center Conductor: Solid bare copper covered steel
 • Shielding: Inner foil 90% coverage + tinned copper braid
 • Insulation: Solid polyethylene
 • Jacket: PVC
 • Operating Temperature: -20°C - +60°C

195R Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	11.1	36.5			
	1800	16.0	52.5			
	2500	19.0	62.4			

• Center Conductor: Solid bare copper
 • Shielding: Foil + tinned copper braid (90% coverage)
 • Insulation: Physical foam polyethylene (PTFE for Plenum Rated)
 • Jacket: Polyvinyl Chloride (CMP Grade for Plenum Rated)
 • Operating Temperature: -20°C - +60°C

200 Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	9.9	32.6			
	1800	14.2	46.6			
	2500	16.9	55.4			

• Center Conductor: Solid copper
 • Shielding: Foil + tinned copper braid (90% coverage)
 • Insulation: Physical foam polyethylene
 • Jacket: Polyethylene
 • Operating Temperature: -40°C - +80°C

240 Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	7.6	24.8			
	1800	10.9	35.6			
	2500	12.9	45.4			

• Center Conductor: Solid copper
 • Shielding: Foil + tinned copper braid
 • Insulation: Physical foam polyethylene
 • Jacket: Polyethylene
 • Operating Temperature: -40°C - +80°C

400 and 400P Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	3.9	12.8			
	1800	5.7	18.6			
	2500	6.8	22.2			

• Center Conductor: Copper clad aluminum
 • Shielding: Foil + tinned copper braid
 • Insulation: Physical foam polyethylene
 • Jacket: Polyethylene (Black)
 Kynar for Plenum Rated (White)
 • Operating Temperature: -40°C - +80°C

400 Series Ultra Flex Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	4.7	15.4			
	1800	6.8	22.3			
	2500	8.1	26.6			

• Center Conductor: Stranded bare copper
 • Shielding: Foil + tinned copper braid
 • Insulation: Physical foam polyethylene
 • Jacket: Black Thermoplastic Elastomer
 • Operating Temperature: -40°C - +85°C

600 Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	2.5	8.2			
	1800	3.7	12.1			
	2500	4.4	14.5			

• Center Conductor: Solid copper
 • Shielding: Foil + tinned copper braid
 • Insulation: Physical foam polyethylene
 • Jacket: Polyethylene
 • Operating Temperature: -40°C - +80°C

900DB Series Low Loss Bulk Cable	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	900	1.7	5.6			
	1800	2.5	8.2			
	2500	2.9	9.8			

• Center Conductor: BC Tube
 • Shielding: Aluminum tape + tinned copper braid
 • Insulation: Foam polyethylene
 • Jacket: Polyethylene
 • Operating Temperature: -40°C - +85°C

Bulk Coaxial Cable

RG174/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	100	8.4	27.6			
	200	12.5	41.0			
	400	19.0	62.3			

• Center Conductor: 26 (7 x 34) AWG bare copper covered steel
 • Shielding: Tinned copper braid (90% coverage)
 • Insulation: Polyethylene
 • Jacket: Black PVC
 • Operating Temperature: -40°C - +75°C

RG188A/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
	100	8.3	27.2			
	200	12.0	39.4			
	400	17.5	57.4			

• Center Conductor: 26 (7 x 34) AWG silver coated copper covered steel
 • Shielding: Silver coated copper braid (96% shield coverage)
 • Insulation: TFE Teflon
 • Jacket: White TFE taped
 • Operating Temperature: -70°C - +200°C VW-1 vertical flame test compliant

RG174-100 RG174/U, 100 ft coil (30.5m) 34.32
 RG174-500 RG174/U, 500 ft spool (152.4m) 161.20
 RG174-1K RG174/U, 1,000 ft spool (304.8m) 291.20

RG188A-100 RG188A/U, 100 ft coil (30.5m) 109.20
 RG188A-500 RG188A/U, 500 ft spool (152.4m) 535.60
 RG188A-1K RG188A/U, 1,000 ft spool (304.8m) 1050.40

Note: Spools may contain more than one piece.

Bulk Coaxial Cable

RG316/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 26 (7 x 34) AWG silver coated copper covered steel Shielding: Silver coated copper braid (95% shield coverage) Insulation: TFE Teflon Jacket: Brown FEP Operating Temperature: -70°C - +200°C VW-1 vertical flame test compliant 	100	8.3	27.2	RG316-100	RG316/U, 100ft (30.5m) coil	78.00
	200	12.0	39.4	RG316-500	RG316/U, 500ft (152.4m) spool	364.00
	400	17.5	57.4	RG316-1K	RG316/U, 1,000ft (304.8m) spool	676.00
	1000	29.0	95.1	Note: Spools may contain more than one piece.		

RG58C/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 20 (19 x 32) AWG tinned copper Shielding: Tinned copper braid (95% coverage) Insulation: Polyethylene Jacket: Black PVC Operating Temperature: -40°C - +85°C 	100	4.9	16.1	RG58C-100	RG58C/U, 100ft (30.5m) coil	40.56
	200	7.3	23.9	RG58C-500	RG58C/U, 500ft (152.4m) spool	192.40
	400	11.0	36.1	RG58C-1K	RG58C/U, 1,000ft (304.8m) spool	374.40
	1000	20.0	65.6			

RG142B/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 18 AWG solid silver coated copper Shielding: 2 silver coated copper braids (96% coverage) Insulation: TFE Teflon Jacket: Brown FEP Operating Temperature: -70°C - +200°C VW-1 vertical flame test compliant 	100	3.9	12.8	RG142B-100	RG142B/U, 100ft (30.5m) coil	187.20
	200	5.6	18.4	RG142B-500	RG142B/U, 500ft (152.4m) spool	962.00
	400	8.2	26.9	RG142B-1K	RG142B/U, 1,000ft (304.8m) spool	1768.00
	1000	13.5	44.3	Note: Spools may contain more than one piece.		

RG59A/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 22 (7 x 30) AWG bare copper Shielding: Bare copper braid (95% coverage) Insulation: Foam polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	3.0	9.8	RG59A-100	RG59A/U, 100ft (30.5m) coil	26.20
	200	4.5	14.8	RG59A-500	RG59A/U, 500ft (152.4m) spool	104.95
	400	6.6	21.7	RG59A-1K	RG59A/U, 1,000ft (304.8m) spool	209.95
	1000	10.9	35.8			










RG59B/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 22 AWG solid bare copper covered steel Shielding: Bare copper braid (95% coverage) Insulation: Polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	3.4	11.1	RG59B-100	RG59B/U, 100ft (30.5m) coil	24.95
	200	4.9	16.1	RG59B-500	RG59B/U, 500ft (152.4m) spool	99.95
	400	7.0	23.0	RG59B-1K	RG59B/U, 1,000ft (304.8m) spool	199.95
	1000	12.0	39.3			

RG6/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 18 AWG solid bare copper covered steel Shielding: Inner foil (100% coverage); Outer, copper braid (60% coverage) Insulation: Foam Polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	2.1	6.9	RG6-100	RG6/U, 100ft (30.5m) coil	15.70
	200	3.1	10.2	RG6-500	RG6/U, 500ft (152.4m) spool	78.70
	400	4.5	14.8	RG6-1K	RG6/U, 1,000ft (304.8m) spool	178.50
	1000	7.3	23.9			

RG62A/U	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 22 AWG solid bare copper covered steel Shielding: Bare copper braid (95% coverage) Insulation: Semi-solid polyethylene Jacket: Black PVC Operating Temperature: -40°C - +80°C 	100	2.7	8.9	RG62A-100	RG62A/U, 100ft (30.5m) coil	28.08
	200	3.8	12.5	RG62A-500	RG62A/U, 500ft (152.4m) spool	130.00
	400	5.3	17.4	RG62A-1K	RG62A/U, 1,000ft (304.8m) spool	239.20
	1000	8.7	28.5			

734 Type DS3-4	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 20 AWG silver plated solid copper Shielding: Inner AL foil 100% + outer braid Insulation: Foamed polyethylene Jacketing: Polyvinyl chloride (PVC) Operating Temperature: -40°C - +75°C 	5	.55	1.8	C734-100	C734, 100ft (30.5m) coil	57.25
	10	.77	2.5	C734-500	C734, 500ft (152.4m) spool	259.20
	50	1.74	5.7	C734-1K	C734, 1,000ft (304.8m) spool	464.40
	100	2.49	8.2			

735 Type DS3-4	NOMINAL ATTENUATION			Item #	Description	List
	MHz	db/100ft	db/100m			
<ul style="list-style-type: none"> Center Conductor: 26 AWG silver plated solid copper Shielding: Inner AL foil 100% + outer braid Insulation: Foamed polyethylene Jacketing: Polyvinyl chloride (PVC) Operating Temperature: -40°C - +75°C 	5	1.10	3.6	C735-100	C735, 100ft (30.5m) coil	47.55
	10	1.53	5.0	C735-500	C735, 500ft (152.4m) spool	210.60
	50	3.47	11.4	C735-1K	C735, 1,000ft (304.8m) spool	388.80
	100	4.95	16.2			



Lengths may vary ±10% from lengths shown.

Crimp Tool Cross Reference Chart

Use this chart to find the correct ferrule and center conductor crimp size as well as the recommended economy, deluxe and deluxe kit crimp tool for each of the connector model numbers listed.

If a specific type is not listed, please visit our website at **L-com.com** for the latest information or call our technical support group at **800-343-1455** for assistance.

CONNECTOR P/N	CRIMP SIZE		CRIMP TOOL		
	FERRULE	CENTER COND.	ECONOMY	DELUXE	DELUXE KIT
ATF-3700	0.213	0.068	HT106D	HT301A	HT330K
BAC519	0.213	0.068	HT106D	HT301A	HT330K
BAC522	0.213	0.068	HT106D	HT301A	HT330K
ANF-1700	0.213	0.068	HT106D	HT301A	HT330K
BAC836A-58	0.213	0.068	HT106D	HT301A	HT330K
BAC836A-58P	0.213	0.068	HT106D	HT301A	HT330K
BIF-83	0.231	0.068	HT106D	HT301A	HT330K
BAC523	0.178	0.068	N/A	HT301J	HT330K
BAC526	0.178	0.068	N/A	HT301J	HT330K
BAC527	0.178	0.068	N/A	HT301J	HT330K
BAC528	0.178	0.068	N/A	HT301J	HT330K
BAC836B-74	0.178	0.068	N/A	HT301J	HT330K
BAC893-58	0.213	0.068	HT106D	HT301A	HT330K
BAC893-59	0.255	0.068	HT106D	HT301A	HT330K
BAC908-59	0.255	0.068	HT106D	HT301A	HT330K
BAC934-59	0.255	0.068	HT106D	HT301A	HT330K
BAC706	0.255	0.068	HT106D	HT301A	HT330K
BAC709	0.255	N/A	HT106D	HT301A	HT330K
BAC012	0.324	N/A	HT106H	HT301D	HT330K
BAC027	0.255	0.068	HT106D	HT301A	HT330K
BAC027A	0.255	0.068	HT106D	HT301A	HT330K
BAC028	0.255	0.068	HT106D	HT301A	HT330K
BAC029	0.324	0.068	N/A	HT301D	HT330K
BAC030	0.324	0.255	N/A	HT301D	HT330K
BAC031	0.324	0.255	N/A	HT301D	HT330K
BAC032	0.319	N/A	HT106H	HT301C	HT330K
BAC520	0.255	0.068	HT106D	HT301A	HT330K
BAC836A-59	0.255	0.068	HT106D	HT301A	HT330K

CONNECTOR P/N	FERRULE	CRIMP TOOL	CENTER COND.	CRIMP TOOL
BAC-UPL2000-D2B	0.255	HTS-CT4L & HTS-CD3-21	0.042	HT010-0055
BAC-UPL2000-D8B	0.255	HTS-CT4L & HTS-CD3-21	0.042	HT010-0055

CONNECTOR P/N	CRIMP SIZE		CRIMP TOOL		
	FERRULE	CENTER COND.	ECONOMY	DELUXE	DELUXE KIT
BAC836B-87	0.213	0.068	HT106D	HT301A	HT330K
BAC042	0.319	N/A	HT106H	HT301C	HT330K
BAC02	0.213	N/A	HT106D	HT301A	HT330K
BAC02A	0.128	N/A	N/A	HT301J	HT330K
BAC03	0.213	0.042	N/A	HT301G	HT330K
BAC03A	0.128	0.042	N/A	HT301J	HT330K
BAC04	0.213	0.042	N/A	HT301G	HT330K
BAC05	0.213	0.042	N/A	HT301G	HT330K
BAC05A	0.128	0.042	N/A	HT301J	HT330K
BAC02-G	0.213	N/A	HT106D	HT301A	HT330K
BAC02A-G	0.128	N/A	N/A	HT301J	HT330K
BAC03-G	0.213	0.042	N/A	HT301G	HT330K
BAC03A-G	0.128	0.042	N/A	HT301J	HT330K
BAC06A	0.128	0.042	N/A	HT301J	HT330K
BAC8015	0.213	N/A	HT106D	HT301A	HT330K
BAC525	0.213	N/A	HT106D	HT301A	HT330K
BAC500	0.213	N/A	HT106D	HT301A	HT330K
BAC501	0.213	N/A	HT106D	HT301A	HT330K
BAC502	0.128	0.042	N/A	HT301J	HT330K
BAC503	0.137	N/A	N/A	HT301G	HT330K
BAC-CF56U	0.324	N/A	HT106H	HTS3162CT	N/A
BAC-CF559U	0.324	N/A	HT106H	HTS3162CT	N/A
BAC529	0.360	N/A	HT106H	HTS3162CT	N/A
BAC530	0.360	N/A	HT106H	HTS3162CT	N/A
BAC-EX6	Compression	N/A	N/A	HTS-EX	N/A
BAC-EX59	Compression	N/A	N/A	HTS-EX	N/A
BAC700-6	.319	N/A	HT106H	HT301C	HT330K
BAC700-59	.262	N/A	HT106D	HT301A	HT330K

CONNECTOR P/N	FERRULE	CRIMP TOOL	CENTER COND.	CRIMP TOOL
BAC-UPL220-025	0.255	HTS-CT4L & HTS-CD3-11	0.042	HT010-0055
BAC-UPL220-026	0.178	HTS-CT4L & HTS-CD3-11	0.042	HT010-0055



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Economy Crimping Tools - Common Crimp Sizes for Connectors and Center Pins

These heavy-duty crimping tools are economically priced and easy to use. Leverage action produces an enormous force to properly crimp a perfect hex every time. An adjustable cam is added to keep the tool in full conformance with the required tolerance. Tools accept the most popular crimp connector types. HT106D hex sizes are .068", .213" and .255". HT106H hex sizes are .322" and .359".

HT106D	9" Lever Type Coaxial Crimp Tool (.068", .213", .255")	33.95	32.59	31.23	CALL
HT106H	9" Lever Type Coaxial Crimp Tool (.322", .359")	33.95	32.59	31.23	CALL

Deluxe Full Cycle Ratchet with Hex Crimping Tools

Your choice of seven similar crimp tools equipped with specific die sets to perform a wide variety of crimping functions to fit your needs.

HT301A	Deluxe Crimp Tool with .256", .213" and .068" Hex Die	35.95	34.51	33.07	CALL
HT301C	Deluxe Crimp Tool with .319", .256", .213" and .068" Hex Die	44.95	43.15	41.35	CALL
HT301D	Deluxe Crimp Tool with .324", .256", .213" and .068" Hex Die	44.95	43.15	41.35	CALL
HT301G	Deluxe Crimp Tool with .255", .213", .137", .100", .069", .043" Hex Die	41.95	40.27	38.59	CALL
HT301J	Deluxe Crimp Tool with .178", .151", .128", .078", .068", .042" Hex Die	41.95	40.27	38.59	CALL
HT230A	Deluxe Crimp Tool with .255", .213", .187" and .068" Hex Die	39.95	38.35	36.75	CALL
HT-CRIMP02	Deluxe Crimp Tool with .028", .039", .047", .100", .128" and .151" Hex Die	27.95	26.83	25.71	CALL
HT-CRIMP03	Deluxe Crimp Tool with .100", .128" and .429" Hex Die	39.95	38.35	36.75	CALL
HT-CRIMP04	Deluxe Crimp Tool with .068", .213", .256" and .324" Hex Die	27.95	26.83	25.71	CALL
HT-CRIMP600	Deluxe Crimp Tool with .610" Hex Die	33.95	32.59	31.23	CALL

Deluxe Full Cycle Ratchet Crimp Tool Kit

Housed in rugged, high impact cases these handy deluxe ratchet crimp and strip tool kits can satisfy most coaxial crimping needs. These kits include ratchet tool, interchangeable dies, cable cutter and rotary cable stripper. See **L-com.com** for complete kit contents.

HT330K	Deluxe Crimp Tool Kit, for use with RG Type Cable	159.95	153.55	147.15	CALL
HT-KIT-01	Deluxe Crimp Tool Kit, for use with Low Loss and RG Type Cable	101.99	97.91	93.83	CALL

Item #	Description	1-9	10-24	25-99	100+
Professional Grade Crimp and Compression Tools - for Professional Grade Type F Plugs					
Two new ratchet action crimp tools are now offered. Sturdily constructed from high carbon steel ensures long life expectancy. Fully machined crimp cavities ensure accurate crimps every time.					
HTS3162CT	Hex Crimp Tool .360" and .470" Sizes	74.95	71.95	68.95	CALL
HTS-EX	Compression Connector Crimp Tool	89.95	86.35	82.75	CALL

Easy Strip RG59/6 Coaxial Cable Stripper

A must for anyone working with coaxial cabling. This tool provides a precise industry standard 1/4" (0.6cm) cable prep for RG59 and 6 in seconds. Simply compress the jaw, place the cable into the strip insert, release then spin the tool 360° and you're ready to crimp.

HTS8700ES	CATV Stripper Tool for RG59/RG6	19.95	19.15	18.35	CALL
HTS8700RB	10 Replacement Cartridges for RG59/RG6	61.95	59.47	56.99	CALL

Type F Installation Kit - Toner, Crimper, Stripper and 40 Plugs for RG59 or RG6 Coaxial Cabling

We've assembled a kit for installers and technicians who want to terminate popular Type F coaxial cabling. Each kit includes 40 professional grade Type F plugs, a cable stripping tool, a connector crimping tool and a pocket toner. There are two kits to choose from, one for RG59 and one for RG6.

TCK59F	Type F Connector Installation Kit for RG59	110.99	106.55	102.11	CALL
TCK60F	Type F Connector Installation Kit for RG6	110.99	106.55	102.11	CALL

Rotary Coaxial Cable Strippers - Adjusted to Accurately Prepare Popular Coaxials

Time saving tools to quickly and accurately cut and trim the coaxial jacket, shield and inner insulation in one easy step. Compartment holds hex key to align sensitive socket and adjust blade cut for optimum results. Available in two or three blade configurations.

AT-STRIP-01	Coax Cable Stripper, 2-Blade for 100/174/200/240/316 Series	16.95	15.59	14.24	CALL
AT-STRIP-02	Coax Cable Stripper, 2-Blade for 100 Series, RG8/RG11/RG213/RG214	16.95	15.59	14.24	CALL
HT302B	Coax Cable Stripper, 2-Blade for RG58/RG59/RG62	16.95	16.27	15.59	CALL
HT3021	Set of 4 Replacement Blades for HT302	5.95	5.71	5.47	CALL
HT312A	Coax Cable Stripper, 3-Blade for RG59/RG62/RG6	22.95	22.03	21.11	CALL
HT312B	Coax Cable Stripper, 3-Blade for RG58/RG59/RG62	22.95	22.03	21.11	CALL
HT312S	Coax Cable Stripper, 3-Blade for RG213/RG11/RG8	22.95	22.03	21.11	CALL
HT312X	Coax Cable Stripper, 3-Blade for 3.5 to 5mm dia.	22.95	22.03	21.11	CALL
HT3121	Set of 4 Replacement Blades for HT312	5.95	5.71	5.47	CALL

Rotary Coaxial Cable Strippers for 400/600 Series

Quickly and accurately cut and trim the coaxial jacket, shield and inner insulation in two easy steps. Just insert the un-stripped end of the coax cable into the tool, spin clockwise 4 or 5 times, then insert into other end of tool, spin clockwise 4 or 5 times again and pull off the unwanted portion.

HT-STRIP400-1	Coax Cable Stripper for 400-Series Cable	61.95	59.47	56.99	CALL
HT-STRIP600-1	Coax Cable Stripper for 600-Series Cable	67.95	65.23	62.51	CALL
HT-STRIP-B1	Replacement Blades for HT-STRIP400-1/HT-STRIP600-1	8.95	8.59	8.23	CALL

USA Made Crimping Tool Accepts Dies for Coaxial or Modular Type Terminations

The HTS2100 crimp tool accepts a variety of dies that allow it to crimp modular or coaxial terminations. This top of the line tool is more compact than competitors' models allowing easier crimping ability for people with smaller hands. Molded grips and carbon steel frame is conservatively rated at 50,000+ crimps. This tool also accepts modular die sets listed on [page 62](#).

HTS2100	Crimp Tool Body, accepts any HTS2100 Die Set	67.95	65.23	62.51	CALL
HTS2100-51	RG58/RG59 Die Set, use for BNCs and TNCs, .068, .213 and .255 hex	39.95	38.35	36.75	CALL
HTS2100-53	RG58/RG59 Die Set, use for SMA's, .042 square, .213 and .255 hex	39.95	38.35	36.75	CALL
HTS2100-54	RG58/RG59 Plenum Die Set, use for Plenum BNCs, .042 square, .068, .190 & .213 hex	39.95	38.35	36.75	CALL
HTS2100-60	RG174 Die Set, use for BNCs and SMA's, .068 and .178 hex	39.95	38.35	36.75	CALL

Weatherproofing Tape

HT-TAPE01	3M® Self-Healing Weatherproofing Tape, 2" x 10' roll	24.95	23.95	22.95	CALL
HT-TAPE104	COAX-SEAL #104 Hand Moldable Plastic Weatherproofing Tape, 1/2" x 5' roll	3.95	3.79	3.63	CALL
HT-TAPE105	COAX-SEAL #105 Hand Moldable Plastic Weatherproofing Tape, (4) 1/2" x 12' rolls/box	36.95	35.47	33.99	CALL
HT-TAPE106	COAX-SEAL #106 Hand Moldable Plastic Weatherproofing Tape, (4) 1" x 12' rolls/box	48.95	46.99	45.03	CALL

Item #	Description	List Price
--------	-------------	------------

Fluke Pocket Toner® NX1

Test for continuity and short circuits on coax cables in one easy step. Basic professional coaxial testing does not get any more compact and simple as PTNX1. The PTNX1 features lightweight aluminum construction, a standard AAA battery, and new dual buzzers that audibly indicate continuity at both ends of the test cable. Like all Pocket Toner® NX test tools, the PTNX1 is 100% low voltage protected so connecting it to live low voltage systems will not damage the tool. **As an authorized Fluke reseller, we can bid on RFQs for any Fluke part numbers. Contact us to request a non-obligatory quote.**

PTNX1	Fluke Pocket Toner NX1	33.00
-------	------------------------	-------

Fluke Pocket Toner® NX2

The individual PTNX2 is for the technician that works primarily with coaxial cable that wants a powerful but super-compact tool to fit in his or her pocket. In addition to testing for continuity and short circuits PTNX2 is packed with advanced features like indication of AC or DC voltage, 50-75 Ohm terminators and auto shut-off to conserve battery life. PTNX2 instantly displays all test results on an easy to read 8-segment LED display as well as giving audible feedback at both ends of the test cable. Like all Pocket Toner® NX test tools, the NX2 is 100% low voltage protected so connecting it to live low voltage systems will not damage the tool. **As an authorized Fluke reseller, we can bid on RFQs for any Fluke part numbers. Contact us to request a non-obligatory quote.**

PTNX2	Fluke Pocket Toner NX2	43.00
-------	------------------------	-------

Professional Grade 8 Point Center Pin Crimp Tool


This professional grade tool makes pin crimping a breeze. Featuring a multipoint design which has proven to be one of the most reliable attachment methods. Designed for use with the BAC-UPL Series plugs.

HT010-0055	8 Point Center Pin Crimp Tool	199.95
------------	-------------------------------	--------

HTS-CT4L Professional Crimp Tool Accepts Dies for Coaxial Hex Dies

An ergonomic design makes this a tool of choice for professionals. A comfortable, high leverage handle minimizes fatigue. A precision ratchet mechanism assures full cycle crimping. Dies can be easily interchanged with a phillips or flat blade screwdriver.

HTS-CT4L	Professional Crimp Tool Frame	149.95
HTS-CD3-11	734/735 Hex Crimp Die (.255", .178")	104.95
HTS-CD3-21	1505/1506 Hex Crimp Die (.255", .290")	149.95







Auto-Terminating Adapters 50 and 75 Ohm



Why use an auto terminating adapter?

In today's complex audio, video, data world coaxial cables are used to interconnect various devices. Many times a coaxial cable will not be connected to anything causing an open port which allows signals to escape. This can possibly interfere with an adjacent device and allow signals to enter the network as interference. The use of an auto terminating adapter eliminates this problem by automatically terminating the open port any time a connecting device is disconnected. This eliminates the need to attach a separate terminator which is often lost or forgotten.

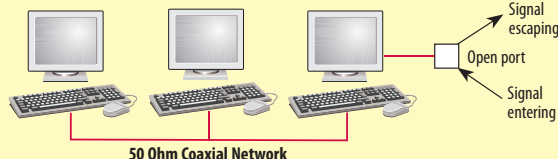

Item #	Description	Color	1-9	10-24	25-99	100+
BTS5F	SMA Terminator, Female, 50 Ohm	Green	8.19	7.86	7.53	CALL
BTS5M	SMA Terminator, Male, 50 Ohm	Green	8.19	7.86	7.53	CALL
ARSP-TERM	SMA Reverse Polarity Terminator, Male, 0-6 GHz (50 Ohm)		6.30	5.80	5.29	CALL

BNC Line Terminators - Fully Insulated, Select Impedance to Match Coaxial Cables

Terminators are generally used at the far end of the line. Resistance should match characteristic impedance of the coaxial line, so no reflections or standing waves are present when the signal enters. All terminators listed are rated at 0.5 watt. Fully insulated male versions include Black hood cover as shown. Color coded body to match resistance.

BIF5M	BNC Terminator, Male, use with RG58 (50 Ohm)	Green	5.83	5.36	4.90	CALL
BIF7M	BNC Terminator, Male, use with RG59 (75 Ohm)	Violet	5.35	4.92	4.49	CALL
BIF9M	BNC Terminator, Male, use with RG62 (93 Ohm)	White	5.83	5.36	4.90	CALL
BIF5F	BNC Terminator, Female, use with RG58 (50 Ohm)	Green	4.62	4.25	3.88	CALL
BIF7F	BNC Terminator, Female, use with RG59 (75 Ohm)	Violet	4.35	4.00	3.65	CALL
BIF9F	BNC Terminator, Female, use with RG62 (93 Ohm)	White	4.62	4.25	3.88	CALL

Deluxe BNC and Type N Terminators - Machined Metal Construction with Full Shielding

These deluxe terminators offer a machined body versus a plastic one. One model also available with grounding cable.

BTB5MD	BNC Terminator, Male, use with RG58 (50 Ohm)	5.83	5.60	5.36	CALL
BTB5FD	BNC Terminator, Female, use with RG58 (50 Ohm)	5.83	5.60	5.36	CALL
BTB7MD	BNC Terminator, Male, use with RG59 (75 Ohm)	5.45	5.01	4.58	CALL
BTB7FD	BNC Terminator, Female, use with RG59 (75 Ohm)	5.45	5.01	4.58	CALL
BTB9MD	BNC Terminator, Male, use with RG62 (93 Ohm)	5.83	5.60	5.36	CALL
BM50G-1W	BNC Terminator, Male with Ground Cable (50 Ohm)	6.98	6.42	5.86	CALL
ANF-TERM	Type N Terminator, Female, 0-6 GHz (50 Ohm)	9.61	8.84	8.07	CALL
ANM-TERM1	Type N Terminator, Male, 0-6 GHz (50 Ohm)	9.61	8.84	8.07	CALL

Type F 75 Ohm Terminators - Simple Design Minimizes RF Reflections

Also known as dummy loads, terminators are an essential component in the proper termination of unused outputs of line splitters and amplifiers. Sold in packages of 10.

BTF75M	Type F 75 Ohm Terminator, Pkg/10	5.20	4.78	4.37	CALL
--------	----------------------------------	------	------	------	------


Deluxe Chained Protective Caps

ADM-CAP01	Protective Cap for 7/16 DIN Female, with Chain	10.45	9.61	8.78	CALL
ANM-CAP01	Protective Cap for Type N/UHF Female, with Chain	5.99	5.51	5.03	CALL
ANF-CAP01	Protective Cap for Type N/UHF Male, with Chain	6.09	5.60	5.12	CALL
ASF-CAP01	Protective Cap for SMA Male, with Chain	5.99	5.51	5.03	CALL
BA09	Protective Cap for SMA Female, with Chain	6.09	5.60	5.12	CALL
USP-PCB	Protective Cap for BNC Female, with Chain	3.57	3.43	3.28	CALL
USP-PCT	Protective Cap for TNC Female, with Chain	3.57	3.43	3.28	CALL

Auto-Terminating Bulkhead or T Adapter - Does Not Need Terminator on Open End

Any rack panel with half inch diameter D-holes will accept either the BA307 or BA307-75 BNC auto-terminating bulkhead adapters. They save the cost and nuisance of using separate terminators. Panels with 16 or 32 D-holes are listed on [page 235](#). Also available are the BA45 and BA45-75 (F-M-F) T adapters, equipped with internal 50 or 75 Ohm auto-terminators.

BA307	BNC Auto-Terminating (F-F) Bulkhead Adapter, 50 Ohm	8.30	7.80	7.30	CALL
BA307-75	BNC Auto-Terminating (F-F) Bulkhead Adapter, 75 Ohm	7.65	7.04	6.43	CALL
BA45	BNC Auto-Terminating (F-M-F) T Adapter, 50 Ohm	10.19	9.58	8.97	CALL
BA45-75	BNC Auto-Terminating (F-M-F) T Adapter, 75 Ohm	9.45	8.69	7.94	CALL

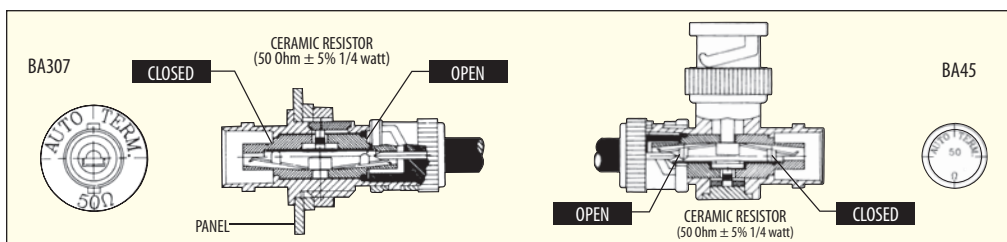

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

BNC Test Leads and Adapters - Your Most Useful Laboratory Accessory Items

Here's an opportunity to purchase quality test lead and adapter accessories for your lab. For use primarily with BNC connectors and dual banana plugs which are the most popular in the lab.

BC25	Test Cable, BNC Male/6" (15.2cm) Leads with Tinned Ends	3.60	3.31	3.02	CALL
BC30	Test Cable, BNC Male/6" (15.2cm) Leads with Banana Plugs	5.67	5.22	4.76	CALL
BC40	Test Cable, BNC Male/6" (15.2cm) Leads with Test Clips	5.93	5.46	4.98	CALL
BC50	Test Cable, BNC Male/6" (15.2cm) Leads with Alligator Clips	5.25	4.83	4.41	CALL
BC55	Test Cable, BNC Female/6" (15.2cm) Leads with Tinned Ends	3.89	3.58	3.27	CALL
BC60	Test Cable, BNC Female/6" (15.2cm) Leads with Banana Plugs	5.72	5.26	4.80	CALL
BC70	Test Cable, BNC Female/6" (15.2cm) Leads with Test Clips	5.93	5.46	4.98	CALL
BC80	Test Cable, BNC Female/6" (15.2cm) Leads with Alligator Clips	5.93	5.46	4.98	CALL
BC2720	Test Adapter, BNC Male/Dual Binding Posts	6.72	6.18	5.64	CALL
BC2730	Test Adapter, BNC Female/Dual Binding Posts	6.72	6.18	5.64	CALL
BC2710	Test Adapter, BNC Female/Dual Banana Plugs	6.09	5.60	5.12	CALL

Solder Cup Banana Plugs - Red or Black, Accepts up to 16 AWG Wires

BC030R	Solder Type Banana Plug, Red	1.58	1.45	1.33	CALL
BC030B	Solder Type Banana Plug, Black	1.58	1.45	1.33	CALL

Coaxial Test Cables - With BNC and Dual Banana Plugs, Choice of Lengths

These test cables use the most popular 50 Ohm RG58C coaxial cable. Choice of two series as shown.

BCC58C-1	Test Cable, BNC Male/Dual Banana, 1.0ft (0.3m)	16.25	15.60	14.95	CALL
BCC58C-2	Test Cable, BNC Male/Dual Banana, 2.0ft (0.6m)	17.10	16.42	15.73	CALL
BCC58C-3	Test Cable, BNC Male/Dual Banana, 3.0ft (0.9m)	17.95	17.23	16.51	CALL
BCC58C-4	Test Cable, BNC Male/Dual Banana, 4.0ft (1.2m)	18.80	18.05	17.30	CALL
BCC58C-5	Test Cable, BNC Male/Dual Banana, 5.0ft (1.5m)	19.60	18.82	18.03	CALL
BCB58C-1	Test Cable, Dual Banana/Dual Banana, 1.0ft (0.3m)	16.25	15.60	14.95	CALL
BCB58C-2	Test Cable, Dual Banana/Dual Banana, 2.0ft (0.6m)	17.10	16.42	15.73	CALL
BCB58C-3	Test Cable, Dual Banana/Dual Banana, 3.0ft (0.9m)	17.95	17.23	16.51	CALL
BCB58C-4	Test Cable, Dual Banana/Dual Banana, 4.0ft (1.2m)	18.80	18.05	17.30	CALL
BCB58C-5	Test Cable, Dual Banana/Dual Banana, 5.0ft (1.5m)	19.60	18.82	18.03	CALL

Dual Banana Plug - Easy Connection to Coaxial Cable or Discrete Wires


This dual banana plug allows easy connection to coaxial cable with an outer diameter of .220 in. (0.6cm) or less. Screw terminals allow termination without soldering. Gold plated.

BP125209	Dual Banana Plug for Coax or Wires	3.52	3.31	3.10	CALL
----------	------------------------------------	------	------	------	------

BNC/Banana/Binding Post Adapter Kit - What You Need to Mate Any Test Cable

This kit contains 1 each BNC female and BNC male to dual binding posts, BNC female to dual banana plugs and a pair of BNC gender changers M-M and F-F. Provided in a 7 compartment plastic box (2 spares). Assortment price represents a cost savings over the purchase of individual units. Save even more when purchased in multiple lots.

BC2700K	5 Piece BNC/Dual Banana Adapter Kit	23.99	22.07	20.15	CALL
---------	-------------------------------------	-------	-------	-------	------

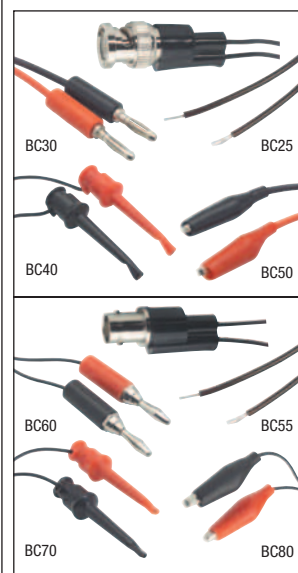

What are the differences between various laboratory test leads?

The common feature of test leads used in a laboratory environment is ease of connection and disconnection since most attachments are temporary in nature and are often being changed. Below is a list of some of the most common test leads found in a lab.



Banana Plugs

Banana Plugs

A high-quality plug and socket for speaker cable. The banana plug is pushed into the socket, the spring-like protrusions on the prong make a snug fit.



Alligator Clips

Alligator Clips

A spring-loaded clip with serrated jaws, often used to make temporary electrical connections.



Test Clips

Test Clips


Used in many probing applications, test clips can be quickly attached to bare wires or other conducting features.



Binding Posts

Binding Posts

Typically used in an audio application, it features a threaded collar for gripping bare wires.



BNC Connector

BNC Connector

A commonly used coaxial interface for audio, video and networking applications that provides a secure connection. Coupling is achieved utilizing mating post on the jack and a spring loaded coupling nut on the plug. A simple quarter turn of the coupling nut completes the mating process.



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Lightning Protected 400-Series 50 Ohm Coax Cable Assemblies

L-com's lightning protected 400-series cable assemblies feature an in-line gas discharge tube lightning protector attached directly to the cable. This not only reduces the cost since a connector is eliminated, but helps reduce return loss and insertion loss. These cable assemblies feature L-com's CA-400 high performance low loss coaxial cable. Attached directly to the cable is L-com's AL6-NF-14-9 or AL6-NM-14-9 5.8 GHz gas discharge coaxial lightning protector. Along with the standard lengths and connectors, custom lengths and connectors are also available. Contact L-com sales for more information.

400-Series 50 Ohm Type N Male to Type N Female Bulkhead Lightning Protector Cable Assemblies

CA4NMLPNF002	400-Series Cable, Type N Male/Type N Female Bulkhead Lightning Protector, 2.0ft (0.6m)	47.83	43.05	38.26	CALL
CA4NMLPNF004	400-Series Cable, Type N Male/Type N Female Bulkhead Lightning Protector, 4.0ft (1.2m)	48.88	43.99	39.10	CALL
CA4NMLPNF010	400-Series Cable, Type N Male/Type N Female Bulkhead Lightning Protector, 10.0ft (3.0m)	53.56	48.20	42.85	CALL
CA4NMLPNF020	400-Series Cable, Type N Male/Type N Female Bulkhead Lightning Protector, 20.0ft (6.1m)	61.36	55.22	49.09	CALL

400-Series 50 Ohm Type N Male to Type N Male Lightning Protector Cable Assemblies

CA4NMLPNM002	400-Series Cable, Type N Male/Type N Male Lightning Protector, 2.0ft (0.6m)	47.32	42.59	37.86	CALL
CA4NMLPNM004	400-Series Cable, Type N Male/Type N Male Lightning Protector, 4.0ft (1.2m)	48.88	43.99	39.10	CALL
CA4NMLPNM010	400-Series Cable, Type N Male/Type N Male Lightning Protector, 10.0ft (3.0m)	53.56	48.20	42.85	CALL
CA4NMLPNM020	400-Series Cable, Type N Male/Type N Male Lightning Protector, 20.0ft (6.1m)	61.36	55.22	49.09	CALL

400-Series 50 Ohm Type N Female to Type N Female Bulkhead Lightning Protector Cable Assemblies

CA4NMLPNF002	400-Series Cable, Type N Female/Type N Female Bulkhead Lightning Protector, 2.0ft (0.6m)	47.32	42.59	37.86	CALL
CA4NMLPNF004	400-Series Cable, Type N Female/Type N Female Bulkhead Lightning Protector, 4.0ft (1.2m)	48.88	43.99	39.10	CALL
CA4NMLPNF010	400-Series Cable, Type N Female/Type N Female Bulkhead Lightning Protector, 10.0ft (3.0m)	53.56	48.20	42.85	CALL
CA4NMLPNF020	400-Series Cable, Type N Female/Type N Female Bulkhead Lightning Protector, 20.0ft (6.1m)	61.36	55.22	49.09	CALL

400-Series 50 Ohm Type N Female to Type N Male Lightning Protector Cable Assemblies

CA4NMLPNM002	400-Series Cable, Type N Female/Type N Male Lightning Protector, 2.0ft (0.6m)	47.32	42.59	37.86	CALL
CA4NMLPNM004	400-Series Cable, Type N Female/Type N Male Lightning Protector, 4.0ft (1.2m)	48.88	43.99	39.10	CALL
CA4NMLPNM010	400-Series Cable, Type N Female/Type N Male Lightning Protector, 10.0ft (3.0m)	53.56	48.20	42.85	CALL
CA4NMLPNM020	400-Series Cable, Type N Female/Type N Male Lightning Protector, 20.0ft (6.1m)	61.36	55.22	49.09	CALL

0-6 GHz In-line Crimp Type Coaxial Protectors

L-com's crimp type coaxial protectors are designed to be attached directly onto a 400-series Low Loss coax cable via the solderless crimp end of the protector. This helps improve insertion loss since a cable connector is eliminated. They feature a replaceable gas tube element, multi-strike capability and fast response time.


AL6-NF-14-9	Type N Female Bulkhead to Crimp End, 90V	35.31	32.49	29.66	CALL
AL6-NM-14-9	Type N Male to Crimp End, 90V	35.31	32.49	29.66	CALL

How to Install L-com's Crimp Type Coax Lightning Protector


- Strip unterminated end of 400-Series cable (see drawing on web site for dimensions)




- Slide supplied heat shrink tube followed by the Ferrule onto the cable





- Insert the stripped cable fully into the Lightning Protector



- Slide Ferrule into place and crimp (see drawing on web site for dimensions), then slide heat shrink into place and apply heat



- Attach ground wire to Crimp Ring Terminal on protector

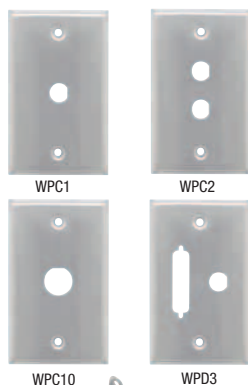

Stainless Steel Wall Plates - Unbreakable and Offer An Enhanced Appearance

Wall plates that accept a variety of termination devices are found to be useful by many installers. Wall plates also provide a more organized accommodation to your day-to-day cabling needs. Furthermore, stainless steel gives a commercial appearance that is sometimes more acceptable in today's business office environment. The variety we offer fills most installation needs.

WPC1	Stainless Wall Plate, One 0.5" (1.3cm) dia. D-hole	2.15	2.02	1.89	CALL
WPC2	Stainless Wall Plate, Two 0.5" (1.3cm) dia. D-holes	2.50	2.35	2.20	CALL
WPC10	Stainless Wall Plate, One 0.75" (1.9cm) dia. D-hole	2.95	2.71	2.48	CALL
WPD3	Stainless Wall Plate, One DB25 Opening and One 0.5" (1.3cm) dia. D-hole	3.39	3.19	2.98	CALL

Panel Mount Receptacle Connectors

These series of connectors are intended for panel mounting with discrete receptacle terminations. Offered in BNC, RCA, SMA and Type N interfaces with various mounting configurations.

BAC1501	BNC Male Bulkhead	3.52	3.31	3.10	CALL
BAC1503	BNC Female Bulkhead	3.52	3.31	3.10	CALL
BAC930	BNC Female Bulkhead	6.98	6.56	6.14	CALL
BAC440	RCA Female Insulated Bulkhead	4.62	4.34	4.07	CALL
BAC260	BNC Female, 4 Hole Flange	3.52	3.31	3.10	CALL
ANF-4000	Type N Female, 4 Hole Flange	4.36	4.01	3.66	CALL
BAC70A	BNC Female Bulkhead	3.52	3.31	3.10	CALL
BAC16	SMA Female Bulkhead	5.83	5.48	5.13	CALL

T1 Communication Systems - A Brief Primer

The T1 line is the most widely used switched digital communication circuit used in America today. T1s are used for connecting phone and computer networks to public switched network infrastructures. Each T1 is equivalent to 24 64Kbps communication channels. Each channel utilizes two 100 Ohm shielded twisted pairs; one for transmit (TX) and one for receive (RX). Some T1 equipment uses two 75 Ohm coaxial connections for the TX and RX channels. Baluns are used to bridge the gap between 75 Ohm coaxial and 100 Ohm twisted pair.

Note: An E1 circuit is the European equivalent of the American T1. The infrastructure uses 120 Ohm shielded twisted pairs so 75/120 baluns would be used in European applications.

T1 - E1 Differences

	NAME	#64Kbps CHANNELS	TWISTED PAIR TYPE	COAXIAL TYPE
USA Standard	T1	24	2 100 Ohms Shielded Twisted Pair (RJ45s Typical)	75 Ohms (BNC Typical)
European Standard	E1	32	2 120 Ohms Shielded Twisted Pair (RJ45s Typical)	75 Ohms (BNC, 1.6/5.6 Typical)

Item #	Description	List Price
--------	-------------	------------

75 to 100 or 120 Ohm Transmission Baluns for Telecommunication Applications

75/100 and 75/120 Ohm impedance matching baluns allow users to use inexpensive shielded twisted pair cabling in place of expensive coaxial cabling. They are especially useful in telecommunication applications for patching at the distribution frame. Units meet CCITT Recommendation G703 and are great for American or European applications. Choose from multiple coaxial connector types as well as Krone IDC or compression IDC termination styles.

ACK2010	75 to 120 Ohm Balun, 1.6/5.6 Plug (Screw Type)/Krone IDC	21.53
ACK3010	75 to 120 Ohm Balun, 1.6/5.6 Jack/Krone IDC	32.03
ACK8010	75 to 120 Ohm Balun, BNC Plug/Krone IDC	30.71
ACK9010	75 to 120 Ohm Balun, BNC Bulkhead Jack/Krone IDC	30.71
ACC2060	75 to 120 Ohm Balun, 1.6/5.6 Plug (Screw Type)/Compression IDC	37.25
ACC3060	75 to 120 Ohm Balun, 1.6/5.6 Jack/Compression IDC	36.30
ACC8060	75 to 120 Ohm Balun, BNC Plug/Compression IDC	36.30

75 to 120 Ohm E1 Dual Balun - Two BNC Jacks to RJ45

This unit allows bi-directional connectivity between coaxial and twisted pair E1 cabling. Dual 75 Ohm coaxial connections connect to shielded 120 Ohm RJ45 jack for easy connecting to terminated UTP/STP cabling.

ACD201	Dual BNC Jack/RJ45 Balun, 75 to 120 Ohm	67.15
--------	---	-------

Mini Transmission Balun Electrical Specifications

- Impedance Match: 75 to 100 or 120 Ohms \pm 10 measured at 70 MHz.
- Insertion Loss: <0.9 dB, range measured 0.2 MHz to 70 MHz.
- Return Loss: <15 dB, range measured 1 MHz to 70 MHz.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Active Video Baluns

These active video baluns are perfect for long distance CCTV applications. Features include built in surge protection, screw terminals for quick installation, and 1,000 meter run support. These active video baluns require a power source (not included).

AVB-BNC-F	Active Video Balun, Female	54.95	53.85	52.75	CALL
AVB-BNC-M	Active Video Balun, Male	54.95	53.85	52.75	CALL

Tool-less CCTV Video Balun

The TL-VB-BNC is perfect for on the spot field installations or repairs. The tool-less design makes termination easy and fast. Supports full color video up to 2,200 feet over Cat5 cabling.

TL-VB-BNC	Tool-less CCTV Video Balun, BNC Male	14.25	13.96	13.68	CALL
-----------	--------------------------------------	-------	-------	-------	------



What is a balun?

The term balun (pronounced "bal-un") is derived from the function of the passive device that converts between a BALanced and UNbalanced electrical signal. Common types of baluns convert 100 Ohm twisted pair (balanced) to 75 Ohm coaxial (unbalanced).

ACK SERIES KRONE IDC TYPE



Terminate wires with punch down tool



ACK2010



ACK3010



ACK8010



ACK9010

ACC SERIES COMPRESSION IDC TYPE



Terminate wires with wrench or pliers



ACC2060



ACC3060



ACC8060



ACD201
E1 Dual BNC
Jack to RJ45



AVB-BNC-F



AVB-BNC-M



TL-VB-BNC



TL-VB-BNC
Rear View

Fiber Optic Tutorial

What are Fiber Optic Cables?

Fiber optic cables consist of a glass core and cladding, buffer coating, Kevlar strength members and a protective outer jacket. Fiber optic cables use light pulses as opposed to electrical signals to send information.

How are Fiber Optic Cables used?

Fiber optic cables can be plugged into communications equipment and patch panels to provide a physical connection to a network or device.

Where are Fiber Optic Cables used?

Fiber optic cables are used by commercial business, governments, the military and many other industries for myriad applications involving the transmission of voice, video and data.


A Quick Lesson In Optical Transmission

Where copper cabling uses electricity to transmit signals from one end to another, fiber optics use light pulses to accomplish the same purpose. The fiber cable is made of a transparent glass core surrounded by a mirror like covering called cladding. Light passes through the cable, bouncing off the cladding until it reaches the other end of the fiber channel.

In today's high speed networks, Graded Index Multimode fiber or Step Index Single mode fiber is used to improve light transmission over long distances. Multimode fiber has a larger core and is typically used in short runs within buildings. Single mode fiber has a smaller core and is used in long distance runs typically outside between buildings.

Fiber Core Sizes

Fiber specifications list the core and cladding diameters as a ratio to determine the fiber type. Multimode fiber is commonly 62.5/125 or 50/125 micron and Single mode fiber is commonly 9/125 micron.

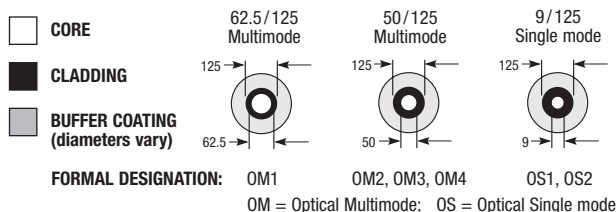


Polish Types / Typical Back Reflection

In Single mode applications the amount of back reflection on assemblies can be critical. L-com offers both PC and APC Single mode assemblies off the shelf. UPC finishes are available by custom order.



Fiber Glass Types

Stepped Index Fiber relies on the reflection of light whereas in Graded Index Fiber, the properties of the glass are changed in layers to "bend" the light as it travels down the cable. This reduces modal dispersion within the cable allowing for higher transmission rates.

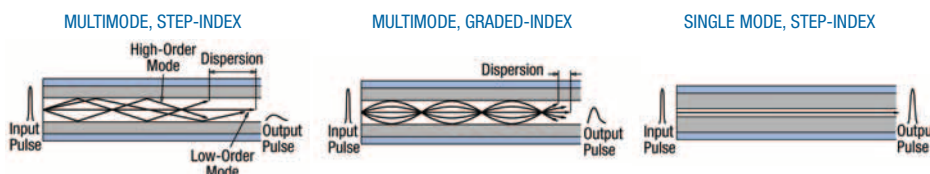

	Connector Type	Coupling Type	Fiber Type	Polish	Number Fibers	Typical Applications	Comment
	LC	Snap On RJ45 Style	Single mode/Multimode	PC, UPC, APC	1	Gigabit Ethernet, Video Multimedia	Small Form Factor (SFF)
	MPO (MTP)	Push/Pull	Single mode/Multimode	N/A	6 or 12	Active Device Transceiver, Interconnections for O/E Modules, QSFP Transceivers	One Mating Connector must have Alignment Pins
	SC	Snap On	Single mode/Multimode	PC, UPC, APC	1	CATV, Test Equipment	Keyed
	ST	Twist On	Single mode/Multimode	PC, UPC	1	LANS, Military	Keyed
	FC	Screw On	Single mode/Multimode	PC, UPC, APC	1	Datacom, Telecommunications	Keyed
	MT-RJ	Snap On RJ45 Style	Single mode/Multimode	N/A	2	Gigabit Ethernet, Asynchronous Transmission mode (ATM)	One Mating Connector must have Alignment Pins

Learn all about
fiber connectors




Online Video

L-com.com/Videos/A21

Military Grade Fiber Optic Solutions

L-com's Military Grade fiber optic patch cables are built with specialized Military Tactical cable that features impact and crush resistance characteristics which comply with Military requirements. These robust assemblies are rated for operating temps of -55° to +85° C. They are available in both single mode and multimode options with ST, LC or SC connector options. ST assemblies feature rust resistant stainless steel bodies and extra high force springs to ensure tight mating even when exposed to shock and vibration as often encountered in the field under combat conditions. These cables are perfect for rough field conditions or other outdoor use. Custom lengths can be created with L-com's Custom Cable Configurator at **L-com.com**.

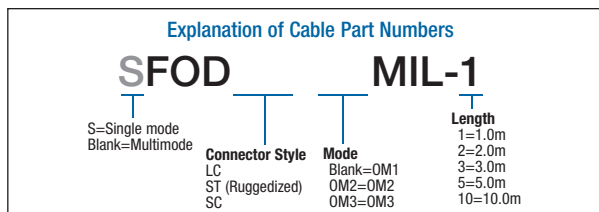

Item #	Description	1-9
Duplex Military Grade Multimode Cables, OM1 62.5/125, Polyurethane Jacket		
Pricing for the OM1 LC, ST and SC connector series is shown below. Pricing for OM2, OM3 or Single mode may be found at L-com.com .		

FODLCMIL-01	OM1 Military Grade Fiber Cable, Clipped LC / Clipped LC, TPUR Jacket, 1.0m	47.30
FODLCMIL-02	OM1 Military Grade Fiber Cable, Clipped LC / Clipped LC, TPUR Jacket, 2.0m	52.80
FODLCMIL-03	OM1 Military Grade Fiber Cable, Clipped LC / Clipped LC, TPUR Jacket, 3.0m	58.30
FODLCMIL-05	OM1 Military Grade Fiber Cable, Clipped LC / Clipped LC, TPUR Jacket, 5.0m	69.30
FODLCMIL-10	OM1 Military Grade Fiber Cable, Clipped LC / Clipped LC, TPUR Jacket, 10.0m	96.80
FODSCMIL-01	OM1 Military Grade Fiber Cable, Clipped SC / Clipped SC, TPUR Jacket, 1.0m	39.80
FODSCMIL-02	OM1 Military Grade Fiber Cable, Clipped SC / Clipped SC, TPUR Jacket, 2.0m	45.65
FODSCMIL-03	OM1 Military Grade Fiber Cable, Clipped SC / Clipped SC, TPUR Jacket, 3.0m	50.35
FODSCMIL-05	OM1 Military Grade Fiber Cable, Clipped SC / Clipped SC, TPUR Jacket, 5.0m	62.05
FODSCMIL-10	OM1 Military Grade Fiber Cable, Clipped SC / Clipped SC, TPUR Jacket, 10.0m	91.30
FODSTMIL-01	OM1 Military Grade Fiber Cable, Dual ST / Dual ST, TPUR Jacket, 1.0m	81.90
FODSTMIL-02	OM1 Military Grade Fiber Cable, Dual ST / Dual ST, TPUR Jacket, 2.0m	87.75
FODSTMIL-03	OM1 Military Grade Fiber Cable, Dual ST / Dual ST, TPUR Jacket, 3.0m	93.60
FODSTMIL-05	OM1 Military Grade Fiber Cable, Dual ST / Dual ST, TPUR Jacket, 5.0m	105.30
FODSTMIL-10	OM1 Military Grade Fiber Cable, Dual ST / Dual ST, TPUR Jacket, 10.0m	134.55

MIL-C-83522 ST Connectors and Dust Caps

L-com's Mil ST line of connectors meet or exceed 100% of the requirements of military specification MIL-C-83522 including extreme temperature change, shock, vibration and corrosion making them ideal for military, aircraft, spacecraft, shipboard and land based applications. These connectors are designed to be used with 2mm cable. For use with 2.5 or 3mm cable, please purchase crimp ferrule CF83522 separately. Locking versions prevent accidental disconnects from high shock or vibration environments.

FOC-M83522-ANXB	MIL M83522 ST Connector, Multimode, Locking, Nickel Plated Brass for 2mm Fiber	29.40
FOC-M83522-ANYB	MIL M83522 ST Connector, Single mode, Locking, Nickel Plated Brass for 2mm Fiber	31.05
FOC-M83522-DNXX	MIL M83522 ST Connector, Multimode, Non-Locking, Nickel Plated Brass for 2mm Fiber	14.10
FOC-M83522-DNYB	MIL M83522 ST Connector, Single mode, Non-Locking, Nickel Plated Brass for 2mm Fiber	14.15
FOC-M83522-DNXXS	MIL M83522 ST Connector, Multimode, Non-Locking, Stainless Steel for 2mm Fiber	21.50
FOC-M83522-DNYS	MIL M83522 ST Connector, Single mode, Non-Locking, Stainless Steel for 2mm Fiber	21.55
CF83522	MIL M83522 ST Crimp Ferrule Required for use with 2.5 and 3mm Fiber Cable	2.40
DSTCP-RSTN	ST Dust Cap for MIL and Ruggedized COTS Connectors, Nickel Plated Brass with Lanyard	22.60
DSTCP-RSTS	ST Dust Cap for MIL and Ruggedized COTS Connectors, Stainless Steel with Lanyard	25.25

MIL-C-83522 ST Couplers and Dust Caps



These ST couplers are fully qualified to MIL-C-83522 standards ensuring the highest performance for an ST connector. These are designed to work with L-com's FOC-M83522 line of connectors but will also work with standard or COTS ST connectors. Couplers are compatible with both multimode and single mode applications.


FOA-M83522-YB	MIL M83522 ST Coupler, Multimode and Single mode, Nickel Plated Brass	15.95
FOA-M83522-YS	MIL M83522 ST Coupler, Multimode and Single mode, Stainless Steel	34.45
DSTCP-RSTADPTN	ST Dust Cap for MIL and Ruggedized COTS Couplers, Nickel Plated Brass with Lanyard	19.05
DSTCP-RSTADPTS	ST Dust Cap for MIL and Ruggedized COTS Couplers, Stainless Steel with Lanyard	21.60

IP67 Harsh Environment Fiber

L-com's IP67 rated Duplex LC cable assemblies are perfect for industrial networks and harsh environments where protection from moisture, dust, chemicals, corrosive gases and other liquids is essential. These rugged assemblies feature robust outdoor rated cable, which stands up to hostile environments, plus IP67 rated LC connectors. Accessories include bulkhead style adapters where one side is designed for standard LC fiber cable connections and the other will accept the industrial LC connector. Additional caps for both the connector and bulkhead adapter are also available. OM3 rated cables are available online or use L-com's Custom Cable Configurator at **L-com.com**.

Item #	Description	1-9
FODLC-IND-01	OM1 IP67 Fiber Cable, Dual LC / Dual LC, 1.0m	172.19
FODLC-IND-03	OM1 IP67 Fiber Cable, Dual LC / Dual LC, 3.0m	180.59
FODLC-IND-05	OM1 IP67 Fiber Cable, Dual LC / Dual LC, 5.0m	188.99
FODLC-IND-10	OM1 IP67 Fiber Cable, Dual LC / Dual LC, 10.0m	209.99
FODLCOM2-IND-01	OM2 IP67 Fiber Cable, Dual LC / Dual LC, 1.0m	188.99
FODLCOM2-IND-03	OM2 IP67 Fiber Cable, Dual LC / Dual LC, 3.0m	195.99
FODLCOM2-IND-05	OM2 IP67 Fiber Cable, Dual LC / Dual LC, 5.0m	201.99
FODLCOM2-IND-10	OM2 IP67 Fiber Cable, Dual LC / Dual LC, 10.0m	217.99
SFODLC-IND-01	Single mode IP67 Fiber Cable, Dual LC / Dual LC, 1.0m	182.69
SFODLC-IND-03	Single mode IP67 Fiber Cable, Dual LC / Dual LC, 3.0m	190.29
SFODLC-IND-05	Single mode IP67 Fiber Cable, Dual LC / Dual LC, 5.0m	198.09
SFODLC-IND-10	Single mode IP67 Fiber Cable, Dual LC / Dual LC, 10.0m	215.99
FOC-XPLC2-MM	Duplex Multimode LC IP67 Connector	65.80
FOC-XPLC2-SM	Duplex Single mode LC IP67 Connector	83.05
XLC-MM	Multimode IP67 Duplex LC Bulkhead Adapter	44.85
XLC-SM	Single mode IP67 Duplex LC Bulkhead Adapter	54.95
X-CAP	IP67 Duplex LC Cap with Chain for Bulkhead Receptacle	9.95
XPM-CAP2	IP67 Duplex LC Cap with Chain for Industrial Plugs	14.90

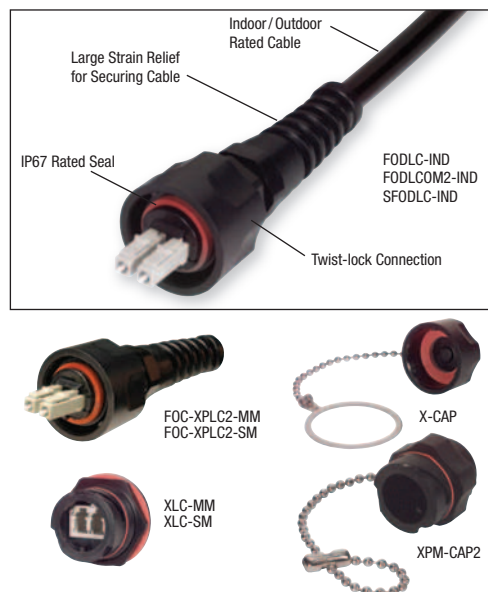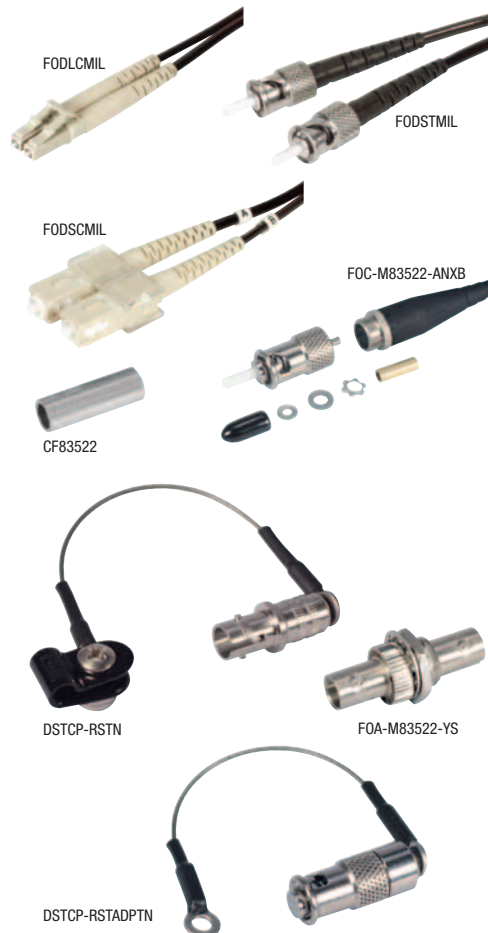

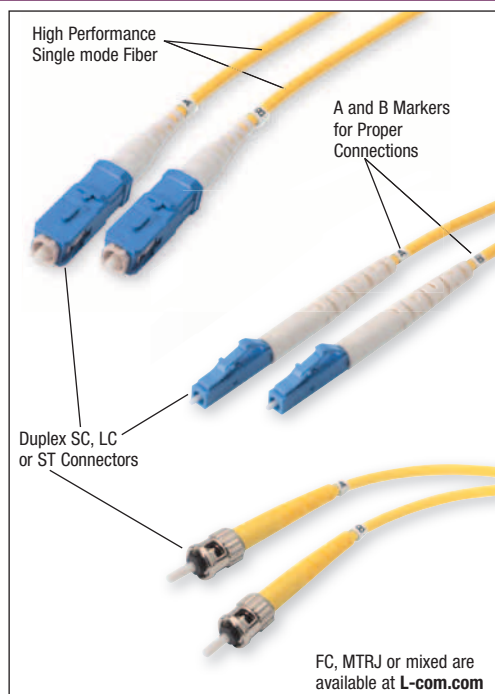

9/125 Single mode Duplex Patch Cords

L-com's 9/125 fiber optic cables are 100% optically tested and utilize a PC polish. Check L-com.com for additional length, color and connector options. All cable measurements are in meters. 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
--------	-------------	-----

9/125 Single mode Duplex Fiber Patch Cords

PVC RISER (OFNR) RATED OPTIONS


SFODLC-01	Single mode Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 1.0m	30.90
SFODLC-02	Single mode Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 2.0m	31.95
SFODLC-03	Single mode Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 3.0m	33.00
SFODSC-01	Single mode Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 1.0m	19.45
SFODSC-02	Single mode Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 2.0m	20.50
SFODSC-03	Single mode Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 3.0m	21.55
SFODST-01	Single mode Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Yellow, 1.0m	19.45
SFODST-02	Single mode Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Yellow, 2.0m	20.50
SFODST-03	Single mode Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Yellow, 3.0m	21.55
SFODSC-LC-01	Single mode Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Yellow, 1.0m	31.05
SFODSC-LC-02	Single mode Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Yellow, 2.0m	32.10
SFODSC-LC-03	Single mode Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Yellow, 3.0m	33.20
SFODST-LC-01	Single mode Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Yellow, 1.0m	29.90
SFODST-LC-02	Single mode Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Yellow, 2.0m	30.90
SFODST-LC-03	Single mode Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Yellow, 3.0m	31.95

PLENUM (OFNP) RATED OPTIONS

SFODPLC-01	Single mode Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Yellow, 1.0m	42.80
SFODPLC-02	Single mode Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Yellow, 2.0m	41.00
SFODPLC-03	Single mode Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Yellow, 3.0m	42.00
SFODPSC-01	Single mode Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Yellow, 1.0m	21.00
SFODPSC-02	Single mode Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Yellow, 2.0m	22.05
SFODPSC-03	Single mode Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Yellow, 3.0m	23.10

LOW SMOKE ZERO HALOGEN (LSZH) OPTIONS

SFODZLC-01	Single mode Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Yellow, 1.0m	42.00
SFODZLC-02	Single mode Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Yellow, 2.0m	43.35
SFODZLC-03	Single mode Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Yellow, 3.0m	44.70
SFODZSC-01	Single mode Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Yellow, 1.0m	18.75
SFODZSC-02	Single mode Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Yellow, 2.0m	20.10
SFODZSC-03	Single mode Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Yellow, 3.0m	21.40

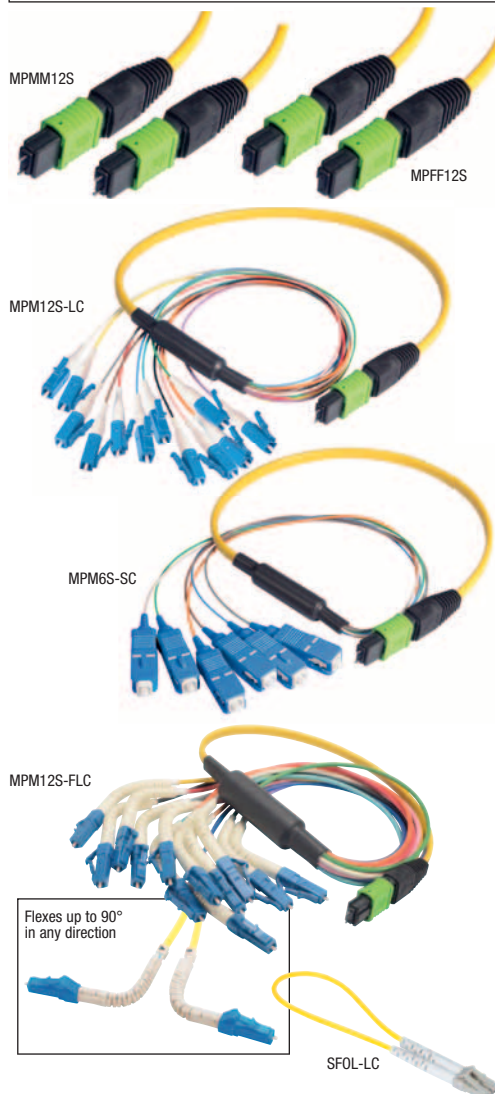

9/125 Single mode MPO Fiber Ribbon and Fanout Cables

These multi-fiber MPO assemblies provide significant advantages in size by offering 12 times the density when compared to using separate SC connectors. Fan-out assemblies are ideal for making connections within rack or wall mounted fiber enclosures that utilize single fiber connectors and new Flex boot LC connectors are available for applications requiring a 90° bend or other situation with tight space constraints.

6 or 12 FIBER RIBBON CABLES - MPO to MPO

MPMM6S-25	Single mode 6 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 25.0m	200.50
MPMM6S-50	Single mode 6 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 50.0m	275.60
MPMM6S-100	Single mode 6 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 100.0m	426.25
MPMM12S-25	Single mode 12 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 25.0m	214.15
MPMM12S-50	Single mode 12 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 50.0m	303.40
MPMM12S-100	Single mode 12 Fiber Ribbon, MPO Male/MPO Male, OFNR Jacket, Yellow, 100.0m	480.85
MPFF6S-25	Single mode 6 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 25.0m	195.80
MPFF6S-50	Single mode 6 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 50.0m	270.85
MPFF6S-100	Single mode 6 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 100.0m	421.55
MPFF12S-25	Single mode 12 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 25.0m	209.45
MPFF12S-50	Single mode 12 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 50.0m	298.15
MPFF12S-100	Single mode 12 Fiber Ribbon, MPO Female/MPO Female, OFNR Jacket, Yellow, 100.0m	476.15

6 or 12 FIBER FANOUT CABLES - MPO to LC or SC FANOUT

MPM6S-LC-1	Single mode 6 Fiber Ribbon, MPO Male/6x LC Fanout, OFNR Jacket, Yellow, 1.0m	107.05
MPM6S-LC-5	Single mode 6 Fiber Ribbon, MPO Male/6x LC Fanout, OFNR Jacket, Yellow, 5.0m	120.20
MPM6S-LC-10	Single mode 6 Fiber Ribbon, MPO Male/6x LC Fanout, OFNR Jacket, Yellow, 10.0m	136.45
MPM12S-LC-1	Single mode 12 Fiber Ribbon, MPO Male/12x LC Fanout, OFNR Jacket, Yellow, 1.0m	143.30
MPM12S-LC-5	Single mode 12 Fiber Ribbon, MPO Male/12x LC Fanout, OFNR Jacket, Yellow, 5.0m	158.50
MPM12S-LC-10	Single mode 12 Fiber Ribbon, MPO Male/12x LC Fanout, OFNR Jacket, Yellow, 10.0m	177.95
MPM6S-SC-1	Single mode 6 Fiber Ribbon, MPO Male/6x SC Fanout, OFNR Jacket, Yellow, 1.0m	98.65
MPM6S-SC-5	Single mode 6 Fiber Ribbon, MPO Male/6x SC Fanout, OFNR Jacket, Yellow, 5.0m	111.25
MPM6S-SC-10	Single mode 6 Fiber Ribbon, MPO Male/6x SC Fanout, OFNR Jacket, Yellow, 10.0m	128.05
MPM12S-SC-1	Single mode 12 Fiber Ribbon, MPO Male/12x SC Fanout, OFNR Jacket, Yellow, 1.0m	125.95
MPM12S-SC-5	Single mode 12 Fiber Ribbon, MPO Male/12x SC Fanout, OFNR Jacket, Yellow, 5.0m	141.70
MPM12S-SC-10	Single mode 12 Fiber Ribbon, MPO Male/12x SC Fanout, OFNR Jacket, Yellow, 10.0m	160.60

6 or 12 FIBER FANOUT CABLES - MPO to LC FLEX BOOT FANOUT

MPM6S-FLC-1	Single mode 6 Fiber Ribbon, MPO Male/6x Flex LC Fanout, OFNR Jacket, Yellow, 1.0m	119.90
MPM6S-FLC-5	Single mode 6 Fiber Ribbon, MPO Male/6x Flex LC Fanout, OFNR Jacket, Yellow, 5.0m	134.65
MPM6S-FLC-10	Single mode 6 Fiber Ribbon, MPO Male/6x Flex LC Fanout, OFNR Jacket, Yellow, 10.0m	153.85
MPM12S-FLC-1	Single mode 12 Fiber Ribbon, MPO Male/12x Flex LC Fanout, OFNR Jacket, Yellow, 1.0m	160.50
MPM12S-FLC-5	Single mode 12 Fiber Ribbon, MPO Male/12x Flex LC Fanout, OFNR Jacket, Yellow, 5.0m	177.55
MPM12S-FLC-10	Single mode 12 Fiber Ribbon, MPO Male/12x Flex LC Fanout, OFNR Jacket, Yellow, 10.0m	199.30


9/125 Single mode LC Loopback

L-com's Single mode LC loopback cable is handy for a number of test applications. A generous yet manageable fiber loop virtually eliminates bend loss.

SFOL-LC	Single mode Fiber Loopback, Clipped LC	20.50
---------	--	-------

Bulk Fiber Optic Cabling - Sold by the Meter (1m = 3.28ft)

L-com offers the most popular types of Simplex, Duplex, Breakout and Distribution style cables. All are available from stock in 1 meter intervals with a 25 meter minimum unless otherwise noted. Other cabling types are available by request. Jacket color of bulk cable may vary. Contact L-com today for custom termination of bulk cable. **NOTE:** Bulk cable custom lengths are non-returnable.

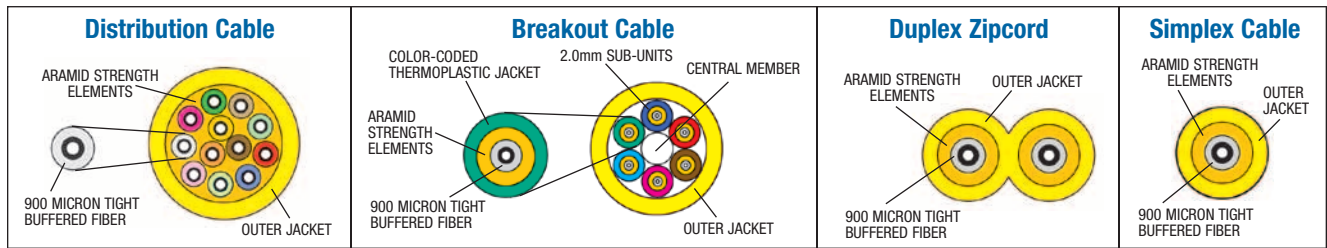How do fiber optics work?**Online Video**L-com.com/videos/A15

Item #	Description	Color	1-9
--------	-------------	-------	-----

9/125 Single mode Bulk Fiber Cable**DISTRIBUTION STYLE WITH 900µm SUB UNITS**

FOBSNGD6-M	Single mode 6 Count Indoor / Outdoor OFNP Bulk Fiber Distribution Cable	Yellow	2.60
FOBSNGD12-M	Single mode 12 Count Indoor / Outdoor OFNP Bulk Fiber Distribution Cable	Yellow	7.20
FOBSNGD24-M	Single mode 24 Count Indoor / Outdoor OFNP Bulk Fiber Distribution Cable	Yellow	11.60

BREAKOUT STYLE WITH 2mm SUB UNITS

FOBOS1B2-M	Single mode 2 Count Indoor / Outdoor OFNP Bulk Fiber Breakout Cable	Yellow	5.10
FOBOS1B4-M	Single mode 4 Count Indoor / Outdoor OFNP Bulk Fiber Breakout Cable	Yellow	5.75
FOBOS1B6-M	Single mode 6 Count Indoor / Outdoor OFNP Bulk Fiber Breakout Cable	Yellow	7.90
FOBOS1B12-M	Single mode 12 Count Indoor / Outdoor OFNP Bulk Fiber Breakout Cable	Yellow	12.70

PATCH STYLE SIMPLEX OR DUPLEX (ZIPCORD) WITH 2mm CABLE OD

FOBOS1S-M	Single mode Simplex Indoor OFNR Bulk Fiber Cable	Yellow	1.15
FOBOS1Z-M	Single mode Duplex (Zipcord) Indoor OFNR Bulk Fiber Cable	Yellow	1.80

Item #	Description	Body	Sleeve	1-9
--------	-------------	------	--------	-----

Fiber Optic Single mode Couplers/Adapters - Multimode Options on pages 205, 212 and 213

Need to join two single mode cables with the same connector types? Use these fiber optic couplers which utilize precise ceramic sleeves best suited to single mode applications.

LC, SC and ST STYLES (see L-com.com for additional styles and options)

FOA-500A	Simplex LC / LC Coupler Low Profile	Plastic	Ceramic	10.25
FOA-550A	Duplex LC / LC Coupler Low Profile	Plastic	Ceramic	14.20
FOA-801	Duplex LC / LC Coupler with Mounting Flange	Plastic	Ceramic	13.35
FOA-570	Quad LC / LC Coupler with Mounting Flange	Plastic	Ceramic	20.55
FOA-002A	Simplex SC / SC Coupler with Mounting Flange	Plastic	Ceramic	5.70
FOA-002MA	Simplex SC / SC Coupler with Mounting Flange	Metal	Ceramic	8.05
FOA-005A	Duplex SC / SC Coupler with Mounting Flange	Plastic	Ceramic	8.25
FOA-005MA	Duplex SC / SC Coupler with Mounting Flange	Metal	Ceramic	10.50
FOA-001A	Simplex ST / ST Coupler with D Hole Mount	Metal	Ceramic	5.15
FOA-011A	Simplex ST / ST Coupler with Mounting Flange	Metal	Ceramic	5.15
FOA-401A	Duplex ST / ST Coupler with Mounting Flange	Metal	Ceramic	10.30

Need to change from one type of single mode connector to another? Use these fiber optic adapters.

LC, SC and ST STYLES (see L-com.com for additional styles and options)

FOA-014	Simplex LC / SC Adapter Low Profile	Plastic	Ceramic	46.20
FOA-020C	Simplex LC / SC Adapter with Mounting Flange	Plastic	Ceramic	32.00
FOA-006	Duplex SC / ST Adapter with Mounting Flange	Plastic	Ceramic	10.85
FOA-006MA	Duplex ST / SC Adapter with Mounting Flange	Metal	Ceramic	14.95
FOA-211A	Simplex SC / ST Adapter with Rectangular Mount	Metal	Ceramic	10.00

Item #	Description	1-9
--------	-------------	-----

9/125 Single mode Fiber Optic Pigtails - 900µm, 2mm or 3mm OFNR Jackets

L-com's fiber optic pigtails provide a fast way to make factory terminations in the field. They can easily be fusion or mechanically spliced to an existing fiber line. All connectors utilize PC polish and all jackets are Riser (OFNR) rated. See L-com.com for complete listings including additional connectors, modes and 900µm 12 packs which contain one cable of every standard fiber color (such as FPT9SNG-LC-12PK) so you don't have to purchase the different colors individually.

PIGTAIL CABLES - 900µm





FPT9SNG-LC-__-1	Single mode Fiber Optic Pigtail, OFNR Jacket, 900µm, 1.0m	4.45
FPT9SNG-LC-__-2	Single mode Fiber Optic Pigtail, OFNR Jacket, 900µm, 2.0m	4.80
FPT9SNG-LC-__-3	Single mode Fiber Optic Pigtail, OFNR Jacket, 900µm, 3.0m	5.15

PIGTAIL CABLES - 2mm (Only available in: BLU, BRN, GRN, ORG, RED, WHT or YLW)




FPT2SNG-LC-__-1	Single mode Fiber Optic Pigtail, OFNR Jacket, 2mm, 1.0m	4.45
FPT2SNG-LC-__-2	Single mode Fiber Optic Pigtail, OFNR Jacket, 2mm, 2.0m	4.80
FPT2SNG-LC-__-3	Single mode Fiber Optic Pigtail, OFNR Jacket, 2mm, 3.0m	5.15

PIGTAIL CABLES - 3mm (Only available in: BLU, GRN, ORG, RED or YLW)

FPT3SNG-LC-__-1	Single mode Fiber Optic Pigtail, OFNR Jacket, 3mm, 1.0m	4.45
FPT3SNG-LC-__-2	Single mode Fiber Optic Pigtail, OFNR Jacket, 3mm, 2.0m	4.80
FPT3SNG-LC-__-3	Single mode Fiber Optic Pigtail, OFNR Jacket, 3mm, 3.0m	5.15

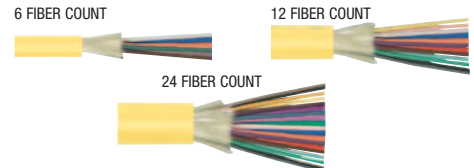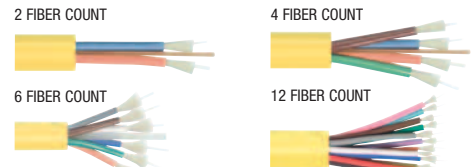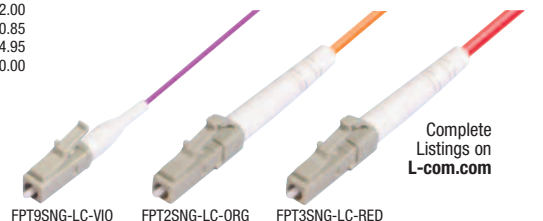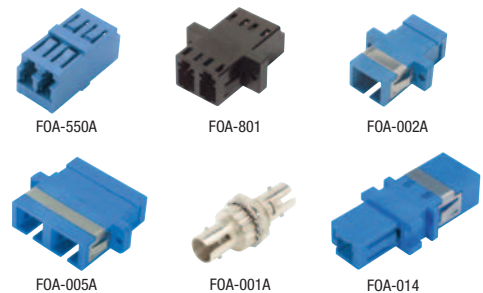Distribution Cable**Breakout Cable****Simplex Cable****Duplex Zipcord****Explanation of FPT Series Part Numbers**

FPT9SNG- - -1			
Series	Cable Size	Mode	Length
LC	9=900µm 2=2mm 3=3mm	SNG=9/125 OM1=62.5/125 OM2=50/125 OM3=50/125 10G	1=1.0m 2=2.0m 3=3.0m
Cable Color			
BLK GRY YLW ORG BLU GRN RED VIO BRN AQU ROS WHT			
Connector Style			
LC	ST	FC	SC
Complete Listings on L-com.com	Listings on L-com.com	Listings on L-com.com	Listings on L-com.com

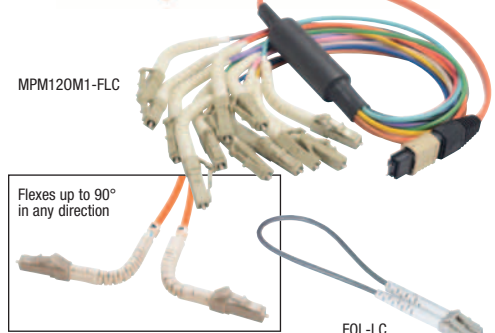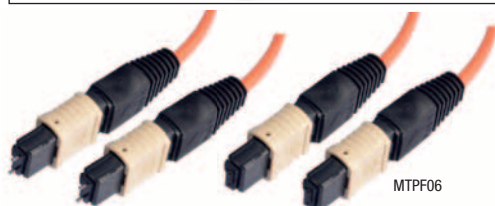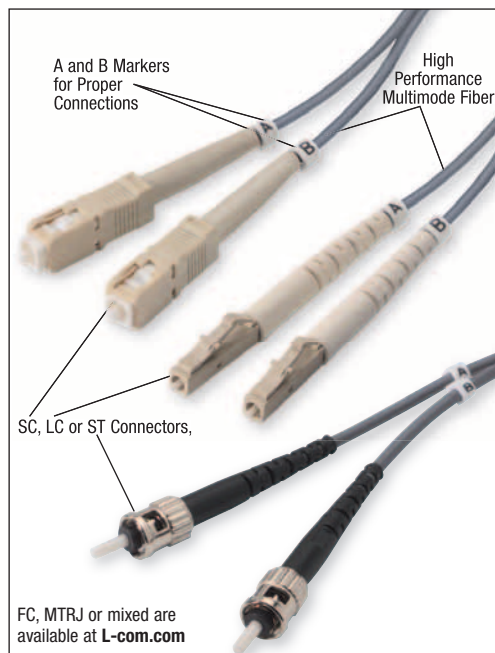

FOL-LC

OM1 62.5/125 Multimode Duplex Patch Cords

L-com's OM1 62.5/125 fiber optic cables are 100% optically tested and utilize a PC polish. Check L-com.com for additional lengths, colors and connector options. All cable measurements are in meters. 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
--------	-------------	-----

OM1 62.5/125 Multimode Fiber Patch Cords

PVC RISER (OFNR) RATED OPTIONS

FODLC-01	OM1 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Gray, 1.0m	17.70
FODLC-02	OM1 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Gray, 2.0m	19.89
FODLC-03	OM1 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Gray, 3.0m	21.89
FODSC-01	OM1 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Gray, 1.0m	16.65
FODSC-02	OM1 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Gray, 2.0m	18.50
FODSC-03	OM1 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Gray, 3.0m	19.25
FODSTC-01	OM1 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Gray, 1.0m	16.65
FODSTC-02	OM1 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Gray, 2.0m	17.95
FODSTC-03	OM1 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Gray, 3.0m	19.25
FODSC-LC-01	OM1 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Gray, 1.0m	23.15
FODSC-LC-02	OM1 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Gray, 2.0m	24.45
FODSC-LC-03	OM1 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Gray, 3.0m	25.75
FODST-LC-01	OM1 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Gray, 1.0m	25.25
FODST-LC-02	OM1 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Gray, 2.0m	26.55
FODST-LC-03	OM1 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Gray, 3.0m	27.85

PLENUM (OFNP) RATED OPTIONS

FODPLC-01	OM1 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Gray, 1.0m	29.90
FODPLC-02	OM1 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Gray, 2.0m	30.90
FODPLC-03	OM1 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Gray, 3.0m	31.95
FODPSC-01	OM1 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Gray, 1.0m	18.90
FODPSC-02	OM1 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Gray, 2.0m	19.95
FODPSC-03	OM1 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Gray, 3.0m	21.00

LOW SMOKE ZERO HALOGEN (LSZH) OPTIONS

FODZLC-01	OM1 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Gray, 1.0m	37.60
FODZLC-02	OM1 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Gray, 2.0m	39.15
FODZLC-03	OM1 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Gray, 3.0m	40.70
FODZSC-01	OM1 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Gray, 1.0m	15.50
FODZSC-02	OM1 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Gray, 2.0m	17.10
FODZSC-03	OM1 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Gray, 3.0m	18.65

OM1 62.5/125 Multimode MPO Fiber Ribbon and Fanout Cables

These multi-fiber MPO assemblies provide significant advantages in size by offering 12 times the density when compared to using separate SC connectors. Fan-out assemblies are ideal for making connections within rack or wall mounted fiber enclosures that utilize single fiber connectors and new Flex boot LC connectors are available for applications requiring a 90° bend or other situations with tight space constraints.

6 or 12 FIBER RIBBON CABLES - MPO to MPO

MPMM60M1-25	OM1 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 25.0m	172.00
MPMM60M1-50	OM1 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 50.0m	276.00
MPMM60M1-100	OM1 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 100.0m	484.05
MPMM120M1-25	OM1 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 25.0m	196.85
MPMM120M1-50	OM1 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 50.0m	312.85
MPMM120M1-100	OM1 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 100.0m	545.45
MTPF06-25	OM1 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 25.0m	169.90
MTPF06-50	OM1 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 50.0m	272.40
MTPF06-100	OM1 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 100.0m	485.10
MTPF12-25	OM1 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 25.0m	189.50
MTPF12-50	OM1 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 50.0m	306.40
MTPF12-100	OM1 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 100.0m	536.60

6 or 12 FIBER FANOUT CABLES - MPO to LC or SC FANOUT

MTPM06-LC-01	OM1 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 1.0m	75.65
MTPM06-LC-05	OM1 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 5.0m	92.65
MTPM06-LC-10	OM1 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 10.0m	116.35
MTPM12-LC-01	OM1 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 1.0m	114.30
MTPM12-LC-05	OM1 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 5.0m	133.85
MTPM12-LC-10	OM1 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 10.0m	160.65
MTPM06-SC-01	OM1 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 1.0m	66.40
MTPM06-SC-05	OM1 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 5.0m	85.45
MTPM06-SC-10	OM1 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 10.0m	116.35
MTPM12-SC-01	OM1 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 1.0m	97.30
MTPM12-SC-05	OM1 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 5.0m	118.40
MTPM12-SC-10	OM1 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 10.0m	145.20

6 or 12 FIBER FANOUT CABLES - MPO to LC FLEX BOOT FANOUT

MPM60M1-FLC-1	OM1 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 1.0m	84.75
MPM60M1-FLC-5	OM1 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 5.0m	103.80
MPM60M1-FLC-10	OM1 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 10.0m	130.35
MPM120M1-FLC-1	OM1 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 1.0m	128.05
MPM120M1-FLC-5	OM1 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 5.0m	149.95
MPM120M1-FLC-10	OM1 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 10.0m	179.95


OM1 62.5/125 Multimode LC Loopback

L-com's OM1 LC loopback cable is handy for a number of test applications. A generous yet manageable fiber loop virtually eliminates bend loss.

FOL-LC	OM1 Fiber Loopback, Clipped LC	15.70
--------	--------------------------------	-------

Bulk Fiber Optic Cabling - Sold by the Meter (1m = 3.28ft)

L-com offers the most popular types of Simplex, Duplex, Breakout and Distribution style cables. All are available from stock in 1 meter intervals with a 25 meter minimum unless otherwise noted. Other cabling types are available by request. Jacket color of bulk cable may vary. Contact L-com today for custom termination of bulk cable. **NOTE:** Bulk cable custom lengths are non-returnable.

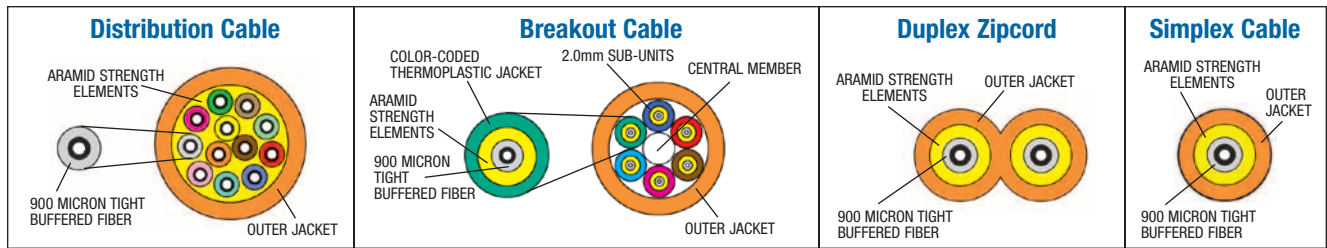What do the numbers mean?**Online Video**L-com.com/videos/A15

Item #	Description	Color	1-9
--------	-------------	-------	-----

OM1 62.5/125 Multimode Bulk Fiber Cable**DISTRIBUTION STYLE WITH 900µm SUB UNITS**

FOB625D6-M	OM1 6 Count Indoor/Outdoor OFNR Bulk Fiber Distribution Cable	Orange	4.10
FOB625D12-M	OM1 12 Count Indoor/Outdoor OFNR Bulk Fiber Distribution Cable	Orange	6.20
FOB625D24-M	OM1 24 Count Indoor/Outdoor OFNR Bulk Fiber Distribution Cable	Orange	17.40

BREAKOUT STYLE WITH 2mm SUB UNITS

FOBOM1B2-M	OM1 2 Count Indoor/Outdoor OFNR Bulk Fiber Breakout Cable	Orange	5.50
FOBOM1B4-M	OM1 4 Count Indoor/Outdoor OFNR Bulk Fiber Breakout Cable	Orange	6.50
FOBOM1B6-M	OM1 6 Count Indoor/Outdoor OFNR Bulk Fiber Breakout Cable	Orange	9.10
FOBOM1B12-M	OM1 12 Count Indoor/Outdoor OFNR Bulk Fiber Breakout Cable	Orange	16.00

PATCH STYLE SIMPLEX OR DUPLEX (ZIPCORD) WITH 2mm CABLE OD

FOBOM1S-M	OM1 Simplex Indoor OFNR Bulk Fiber Cable	Orange	1.35
FOBOM1Z-M	OM1 Duplex (Zipcord) Indoor OFNR Bulk Fiber Cable	Orange	1.95

Item #	Description	Body	Sleeve	1-9
--------	-------------	------	--------	-----

Fiber Optic Multimode Couplers/Adapters - Single mode Options Located on pages 203, 212, 213

Need to join two multimode cables with the same connector types? Use these fiber optic couplers which utilize durable bronze sleeves best suited for multimode applications.

LC, MPO, SC and ST STYLES (see L-com.com for additional styles and options)

FOA-802	Duplex LC Coupler with Mounting Flange	Plastic	Bronze	6.15
FOA-803	Duplex LC Coupler, Low Profile	Plastic	Bronze	4.10
FOA-560	Quad LC Coupler with Mounting Flange	Plastic	Bronze	16.45
FOA-MPO	MPO Coupler	Plastic	N/A	19.90
FOA-MPOF	MPO Coupler with Mounting Flange	Plastic	N/A	19.90
FOA-002	Simplex SC Coupler with Mounting Flange	Plastic	Bronze	4.15
FOA-002M	Simplex SC Coupler with Mounting Flange	Metal	Bronze	5.35
FOA-005	Duplex SC Coupler with Mounting Flange	Plastic	Bronze	5.70
FOA-005M	Duplex SC Coupler with Mounting Flange	Metal	Bronze	8.40
FOA-001	Simplex ST Coupler with D-Hole Mount	Metal	Bronze	3.10
FOA-011	Simplex ST Coupler with Rectangular Mount	Metal	Bronze	3.10
FOA-401	Duplex ST Coupler with Mounting Flange	Metal	Bronze	5.15

Need to change from one type of multimode connector to another? Use these fiber optic adapters.

LC, SC and ST STYLES (see L-com.com for additional styles and options)

FOA-020C	Simplex LC/SC Adapter with Mounting Flange	Plastic	Bronze	32.00
FOA-211	Simplex ST/SC Adapter with Rectangular Mount	Metal	Bronze	5.25
FOA-201	Simplex ST/SC Adapter with Square Mount	Metal	Bronze	8.40
FOA-006M	Duplex ST/SC Adapter with Mounting Flange	Metal	Bronze	10.85

Item #	Description	1-9
--------	-------------	-----

OM1 62.5/125 Multimode Pigtails - 900µm, 2mm or 3mm OFNR Jackets

L-com's fiber optic pigtails provide a fast way to make factory terminations in the field. They can easily be fusion or mechanically spliced to an existing fiber line. All connectors utilize PC polish and all jackets are Riser (OFNR) rated. See L-com.com for complete listings including additional connectors, modes and 900µm 12 packs which contain one cable of every standard fiber color (such as FPT90M1-LC-12PK) so you don't have to purchase the different colors individually.

PIGTAIL CABLES - 900µm




FPT90M1-LC-__-1	OM1 Fiber Optic Pigtail, OFNR Jacket, 900µm, 1.0m	4.25
FPT90M1-LC-__-2	OM1 Fiber Optic Pigtail, OFNR Jacket, 900µm, 2.0m	4.70
FPT90M1-LC-__-3	OM1 Fiber Optic Pigtail, OFNR Jacket, 900µm, 3.0m	5.10

PIGTAIL CABLES - 2mm (Only available in ORG)


FPT20M1-LC-ORG-1	OM1 Fiber Optic Pigtail, OFNR Jacket, 2mm, 1.0m	4.30
FPT20M1-LC-ORG-2	OM1 Fiber Optic Pigtail, OFNR Jacket, 2mm, 2.0m	4.80
FPT20M1-LC-ORG-3	OM1 Fiber Optic Pigtail, OFNR Jacket, 2mm, 3.0m	5.30

PIGTAIL CABLES - 3mm (Only available in: BLU, GRN, ORG, RED or YLW)

FPT30M1-LC-__-1	OM1 Fiber Optic Pigtail, OFNR Jacket, 3mm, 1.0m	4.30
FPT30M1-LC-__-2	OM1 Fiber Optic Pigtail, OFNR Jacket, 3mm, 2.0m	4.80
FPT30M1-LC-__-3	OM1 Fiber Optic Pigtail, OFNR Jacket, 3mm, 3.0m	5.30

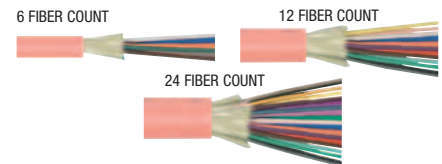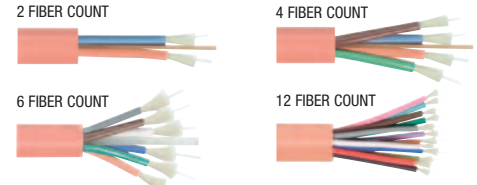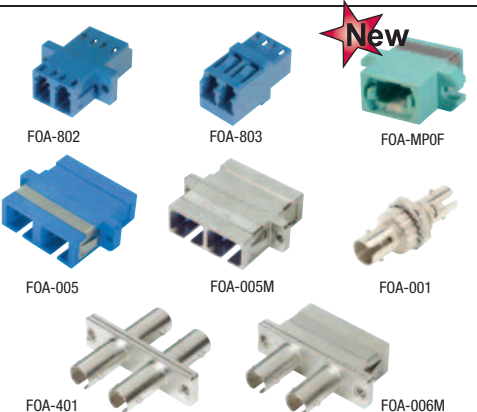Distribution Cable**Breakout Cable****Simplex Cable****Duplex Zipcord****Explanation of FPT Series Part Numbers****FPT90M1- - -1**

Series	Cable Size	Mode	Length	Cable Color	Connector Style
	9=900µm 2=2mm 3=3mm	SNG=9/125 OM1=62.5/125 OM2=50/125 OM3=50/125 10G	1=1.0m 2=2.0m 3=3.0m	BLK GRY YLW ORG BLU GRN RED VIO BRN AQU ROS WHT	

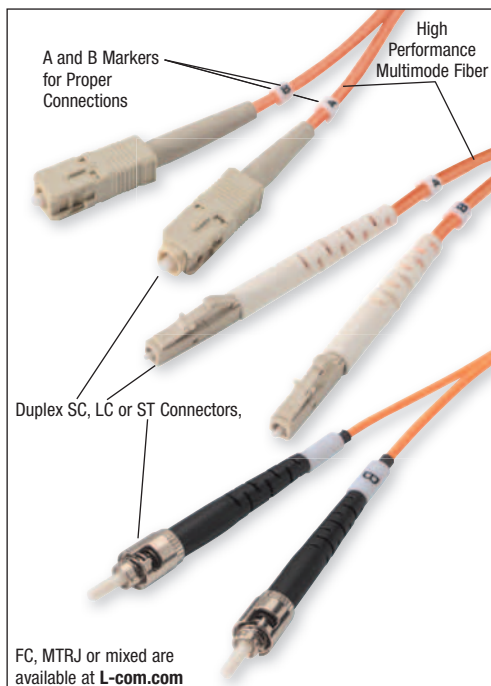

OM2 50/125 Multimode Duplex Patch Cords

L-com's OM2 50/125 fiber optic cables are 100% optically tested and utilize a PC polish. Check L-com.com for additional length, color and connector options. All cable measurements are in meters. 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
--------	-------------	-----

OM2 50/125 Multimode Duplex Fiber Patch Cords

PVC RISER (OFNR) RATED OPTIONS

FODL50-01	OM2 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Orange, 1.0m	17.79
FODL50-02	OM2 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Orange, 2.0m	19.89
FODL50-03	OM2 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Orange, 3.0m	21.89
FODSC50-01	OM2 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Orange, 1.0m	16.65
FODSC50-02	OM2 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Orange, 2.0m	17.95
FODSC50-03	OM2 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Orange, 3.0m	19.25
FODST50-01	OM2 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Orange, 1.0m	16.65
FODST50-02	OM2 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Orange, 2.0m	17.95
FODST50-03	OM2 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Orange, 3.0m	19.25
FODSC50-LC-01	OM2 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Orange, 1.0m	25.25
FODSC50-LC-02	OM2 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Orange, 2.0m	26.55
FODSC50-LC-03	OM2 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Orange, 3.0m	27.85
FODST50-LC-01	OM2 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Orange, 1.0m	27.30
FODST50-LC-02	OM2 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Orange, 2.0m	28.60
FODST50-LC-03	OM2 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Orange, 3.0m	29.90

PLENUM (OFNP) RATED OPTIONS

FODPL50-01	OM2 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Orange, 1.0m	30.45
FODPL50-02	OM2 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Orange, 2.0m	31.50
FODPL50-03	OM2 Fiber Cable, Dual LC/Dual LC, OFNP Jacket, Orange, 3.0m	31.00
FODPSC50-01	OM2 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Orange, 1.0m	18.90
FODPSC50-02	OM2 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Orange, 2.0m	19.95
FODPSC50-03	OM2 Fiber Cable, Dual SC/Dual SC, OFNP Jacket, Orange, 3.0m	21.00

LOW SMOKE ZERO HALOGEN (LSZH) OPTIONS

FODZL50-01	OM2 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Orange, 1.0m	38.35
FODZL50-02	OM2 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Orange, 2.0m	39.90
FODZL50-03	OM2 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Orange, 3.0m	41.50
FODZSC50-01	OM2 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Orange, 1.0m	15.50
FODZSC50-02	OM2 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Orange, 2.0m	17.10
FODZSC50-03	OM2 Fiber Cable, Dual SC/Dual SC, LSZH Jacket, Orange, 3.0m	18.65

OM2 50/125 Multimode MPO Fiber Ribbon and Fanout Cables

These multi-fiber MPO assemblies provide significant advantages in size by offering 12 times the density when compared to using separate SC connectors. Fan-out assemblies are ideal for making connections within rack or wall mounted fiber enclosures that utilize single fiber connectors and new Flex boot LC connectors are available for applications requiring a 90° bend or other situation with tight space constraints.

6 or 12 FIBER RIBBON CABLES - MPO to MPO

MPMM60M2-25	OM2 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 25.0m	172.00
MPMM60M2-50	OM2 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 50.0m	276.00
MPMM60M2-100	OM2 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 100.0m	484.05
MPMM120M2-25	OM2 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 25.0m	196.85
MPMM120M2-50	OM2 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 50.0m	312.85
MPMM120M2-100	OM2 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Orange, 100.0m	545.45
MPFF60M2-25	OM2 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 25.0m	168.35
MPFF60M2-50	OM2 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 50.0m	272.40
MPFF60M2-100	OM2 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 100.0m	480.45
MPFF120M2-25	OM2 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 25.0m	188.95
MPFF120M2-50	OM2 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 50.0m	303.30
MPFF120M2-100	OM2 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Orange, 100.0m	531.45

6 or 12 FIBER FANOUT CABLES - MPO to LC or SC FANOUT

MPM60M2-LC-1	OM2 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 1.0m	75.15
MPM60M2-LC-5	OM2 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 5.0m	92.65
MPM60M2-LC-10	OM2 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Orange, 10.0m	115.35
MPM120M2-LC-1	OM2 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 1.0m	114.30
MPM120M2-LC-5	OM2 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 5.0m	133.85
MPM120M2-LC-10	OM2 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Orange, 10.0m	158.60
MPM60M2-SC-1	OM2 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 1.0m	66.40
MPM60M2-SC-5	OM2 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 5.0m	84.45
MPM60M2-SC-10	OM2 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Orange, 10.0m	107.10
MPM120M2-SC-1	OM2 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 1.0m	97.80
MPM120M2-SC-5	OM2 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 5.0m	117.40
MPM120M2-SC-10	OM2 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Orange, 10.0m	142.10


6 or 12 FIBER FANOUT CABLES - MPO to LC FLEX BOOT FANOUT

MPM60M2-FLC-1	OM2 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 1.0m	84.20
MPM60M2-FLC-5	OM2 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 5.0m	103.80
MPM60M2-FLC-10	OM2 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Orange, 10.0m	129.20
MPM120M2-FLC-1	OM2 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 1.0m	128.05
MPM120M2-FLC-5	OM2 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 5.0m	149.95
MPM120M2-FLC-10	OM2 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Orange, 10.0m	177.65

OM2 50/125 Multimode LC Loopback

L-com's OM2 LC loopback cable is handy for a number of test applications. A generous yet manageable fiber loop virtually eliminates bend loss.

FOL50-LC	OM2 Fiber Loopback, Clipped LC	15.70
----------	--------------------------------	-------

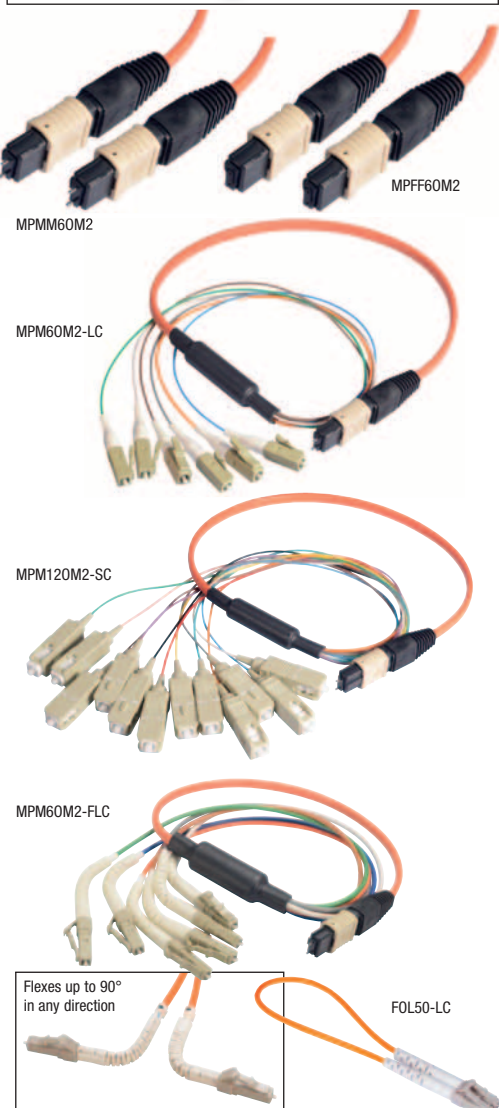

Bulk Fiber Optic Cabling - Sold by the Meter (1m = 3.28ft)


L-com offers the most popular types of Simplex, Duplex, Breakout and Distribution style cables. All are available from stock in 1 meter intervals with a 25 meter minimum unless otherwise noted. Other cabling types are available by request. Jacket color of bulk cable may vary. Contact L-com today for custom termination of bulk cable. **NOTE:** Bulk cable custom lengths are non-returnable.

Learn about fiber connectors



Online Video

L-com.com/videos/A21

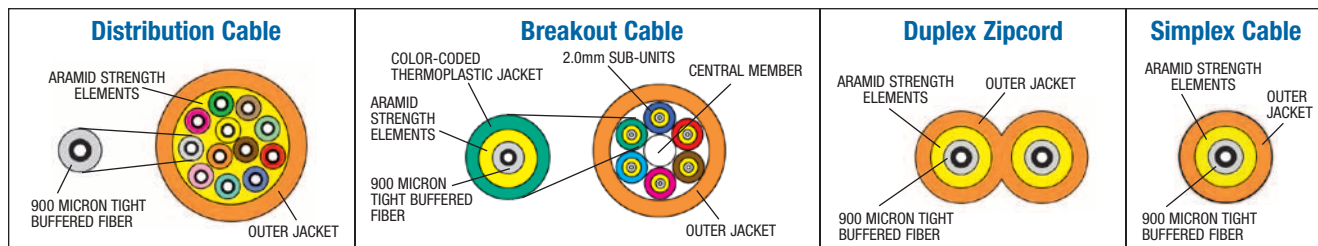

Item #	Description	Color	1-9
--------	-------------	-------	-----

OM2 50/125 Multimode Bulk Fiber Cable**DISTRIBUTION STYLE WITH 900µm SUB UNITS**

FOB500D6-M	OM2 6 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Orange	4.10
FOB500D12-M	OM2 12 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Orange	6.20
FOB500D24-M	OM2 24 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Orange	18.20

BREAKOUT STYLE WITH 2mm SUB UNITS

FOB2M2B2-M	OM2 2 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Orange	5.40
FOB2M2B4-M	OM2 4 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Orange	7.85
FOB2M2B6-M	OM2 6 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Orange	10.50
FOB2M2B12-M	OM2 12 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Orange	17.30

PATCH STYLE SIMPLEX OR DUPLEX (ZIPCORD) WITH 2mm CABLE OD

FOB2M2S-M	OM2 Simplex Indoor OFNR Bulk Fiber Cable	Orange	1.30
FOB2M2Z-M	OM2 Duplex (Zipcord) Indoor OFNR Bulk Fiber Cable	Orange	1.95

Item #	Description	1-9
--------	-------------	-----

OM2 50/125 Multimode Pigtailed - 900µm, 2mm or 3mm OFNR Jackets

L-com's fiber optic pigtailed provide a fast way to make factory terminations in the field. They can easily be fusion or mechanically spliced to an existing fiber line. All connectors utilize PC polish and all jackets are Riser (OFNR) rated. See L-com.com for complete listings including additional connectors, modes and 900µm 12 packs which contain one cable of every color (such as FPT90M2-LC-12PK) so you don't have to purchase the different colors individually.

PIGTAILED CABLES - 900µm



FPT90M2-LC-__-1	OM2 Fiber Optic Pigtail, OFNR Jacket, 900µm, 1.0m	4.25
FPT90M2-LC-__-2	OM2 Fiber Optic Pigtail, OFNR Jacket, 900µm, 2.0m	4.70
FPT90M2-LC-__-3	OM2 Fiber Optic Pigtail, OFNR Jacket, 900µm, 3.0m	5.10

PIGTAILED CABLES - 2mm (Only available in ORG)

FPT20M2-LC-ORG-1	OM2 Fiber Optic Pigtail, OFNR Jacket, 2mm, 1.0m	4.30
FPT20M2-LC-ORG-2	OM2 Fiber Optic Pigtail, OFNR Jacket, 2mm, 2.0m	4.80
FPT20M2-LC-ORG-3	OM2 Fiber Optic Pigtail, OFNR Jacket, 2mm, 3.0m	5.30

PIGTAILED CABLES - 3mm (Only available in: BLU or ORG)

FPT30M2-LC-__-1	OM2 Fiber Optic Pigtail, OFNR Jacket, 3mm, 1.0m	4.30
FPT30M2-LC-__-2	OM2 Fiber Optic Pigtail, OFNR Jacket, 3mm, 2.0m	4.80
FPT30M2-LC-__-3	OM2 Fiber Optic Pigtail, OFNR Jacket, 3mm, 3.0m	5.30

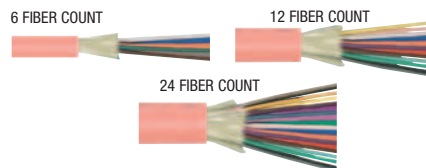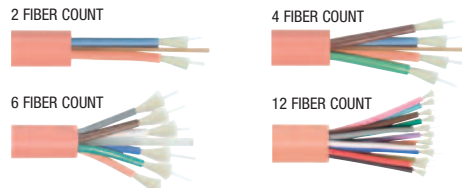**Distribution Cable****Breakout Cable****Simplex Cable****Duplex Zipcord****Explanation of FPT Series Part Numbers****FPT90M2- - -1**


Series	Cable Size	Mode	Length	Cable Color	Connector Style
	9=900µm 2=2mm 3=3mm	SNG=9/125 OM1=62.5/125 OM2=50/125 OM3=50/125 10G	1=1.0m 2=2.0m 3=3.0m	BLK GRY YLW ORG BLU GRN RED VIO BRN AQU ROS WHT	
LC	ST	FC	SC		
Complete Listings on L-com.com	Listings on L-com.com	Listings on L-com.com	Listings on L-com.com		

**OM1, OM3, 10 Gig, Multimode, Single mode, Laser Optimized ... What does it all mean?**

In today's world of fiber optics many choices are available when choosing fiber optic cable types. Depending on the type of fiber cable and transceiver specification, different distances and speeds are supported per technology (i.e. 100Base FX, 1 Gigabit, 10 Gigabit etc). The size of the fiber core, bandwidth requirements and transceiver wavelengths (i.e. 62.5/125, 850nm) are some of the considerations when designing a network with fiber. The transceiver is the driving force behind a fiber network and its specifications will generally determine what type of fiber cable is required. Always check the manufacturer's transceiver specifications for the equipment you are buying fiber cables for to get the best recommendation about the type of fiber you require.

The chart below outlines some of the common specifications and typical distance/speed limitations for the most popular fiber types.

	Typical Wavelength	1 Gig Typical Distance Limitation	10 Gig Typical Distance Limitation	100 Gig Typical Distance Limitation
OM1, 62.5/125 Multimode	850/1310nm	280m (918ft)	33m (108ft)	n/a
OM2, 50/125 Multimode	850/1310nm	550m (1,804ft)	82m (269ft)	n/a
OM3, 10Gig Rated 50/125 Multimode	850/1310nm	800m (2,624ft)	300m (984ft)	100m (328ft)
OM4, 100Gig Rated 50/125 Multimode	850/1310nm	1040m (3,411ft)	550m (1804ft)	150m (492ft)
OS1/OS2, 9/125 Single mode	1310/1550nm	100km (62miles)	70km (43.5miles)	40km (25miles)

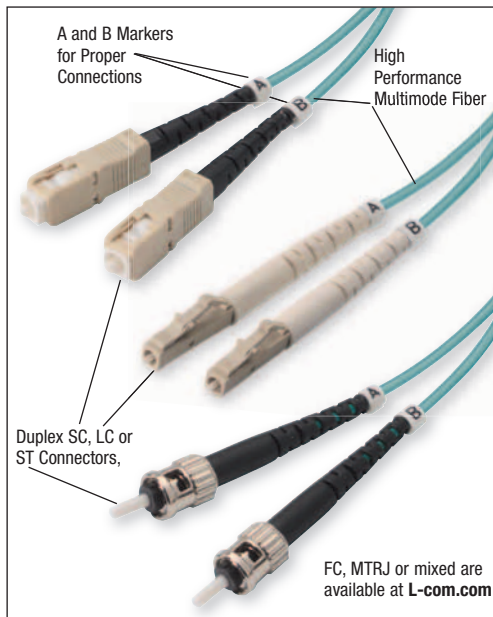

OM3 10 Gig Rated, Laser Optimized 50/125 Multimode Duplex Patch Cords

L-com's OM3 10 Gig rated 50/125 fiber optic cables are 100% optically tested and utilize a PC polish. Check **L-com.com** for additional length, color and connector options. All cable measurements are in meters. 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
--------	-------------	-----

OM3 10 Gig Rated, Laser Optimized 50/125 Multimode Duplex Fiber Patch Cords

PVC RISER (OFNR) RATED OPTIONS

FODLC-10G-01	OM3 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 1.0m	26.79
FODLC-10G-02	OM3 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 2.0m	27.89
FODLC-10G-03	OM3 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 3.0m	28.99
FODSC-10G-01	OM3 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Aqua, 1.0m	20.80
FODSC-10G-02	OM3 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Aqua, 2.0m	21.85
FODSC-10G-03	OM3 Fiber Cable, Dual SC/Dual SC, OFNR Jacket, Aqua, 3.0m	22.90
FODST-10G-01	OM3 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Aqua, 1.0m	20.80
FODST-10G-02	OM3 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Aqua, 2.0m	21.85
FODST-10G-03	OM3 Fiber Cable, Dual ST/Dual ST, OFNR Jacket, Aqua, 3.0m	22.90
FODSC-LC10G-01	OM3 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Aqua, 1.0m	23.40
FODSC-LC10G-02	OM3 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Aqua, 2.0m	24.45
FODSC-LC10G-03	OM3 Fiber Cable, Dual SC/Dual LC, OFNR Jacket, Aqua, 3.0m	25.50
FODST-LC10G-01	OM3 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Aqua, 1.0m	23.40
FODST-LC10G-02	OM3 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Aqua, 2.0m	24.45
FODST-LC10G-03	OM3 Fiber Cable, Dual ST/Dual LC, OFNR Jacket, Aqua, 3.0m	25.50

LOW SMOKE ZERO HALOGEN (LSZH) OPTIONS

FODZLC-OM3-1	OM3 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 1.0m	28.75
FODZLC-OM3-2	OM3 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 2.0m	29.85
FODZLC-OM3-3	OM3 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 3.0m	30.90

OM3 10 Gig Rated, Laser Optimized 50/125 Multimode MPO Fiber Ribbon & Fanout Cables

These multi-fiber MPO assemblies provide significant advantages in size by offering 12 times the density when compared to using separate SC connectors. Fanout assemblies are ideal for making connections within rack or wall mounted fiber enclosures that utilize single fiber connectors and new Flex boot LC connectors are available for applications requiring a 90° bend or other situation with tight space constraints.

6 or 12 FIBER RIBBON CABLES - MPO to MPO


MPMM60M3-25	OM3 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 25.0m	266.75
MPMM60M3-50	OM3 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 50.0m	465.55
MPMM60M3-100	OM3 6 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 100.0m	862.60
MPMM120M3-25	OM3 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 25.0m	312.85
MPMM120M3-50	OM3 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 50.0m	545.45
MPMM120M3-100	OM3 12 Fiber Ribbon Cable, MPO Male/MPO Male, OFNR Jacket, Aqua, 100.0m	1010.60
MPFF60M3-25	OM3 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 25.0m	263.15
MPFF60M3-50	OM3 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 50.0m	461.40
MPFF60M3-100	OM3 6 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 100.0m	858.45
MPFF120M3-25	OM3 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 25.0m	303.30
MPFF120M3-50	OM3 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 50.0m	531.45
MPFF120M3-100	OM3 12 Fiber Ribbon Cable, MPO Female/MPO Female, OFNR Jacket, Aqua, 100.0m	987.75

6 or 12 FIBER FANOUT CABLES - MPO to LC or SC FANOUT


MPM60M3-LC-1	OM3 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Aqua, 1.0m	79.30
MPM60M3-LC-5	OM3 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Aqua, 5.0m	113.25
MPM60M3-LC-10	OM3 6 Fiber Ribbon Cable, MPO Male/6x LC Fanout, OFNR Jacket, Aqua, 10.0m	156.55
MPM120M3-LC-1	OM3 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Aqua, 1.0m	119.45
MPM120M3-LC-5	OM3 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Aqua, 5.0m	158.60
MPM120M3-LC-10	OM3 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, OFNR Jacket, Aqua, 10.0m	208.55
MPM60M3-SC-1	OM3 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Aqua, 1.0m	70.50
MPM60M3-SC-5	OM3 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Aqua, 5.0m	105.05
MPM60M3-SC-10	OM3 6 Fiber Ribbon Cable, MPO Male/6x SC Fanout, OFNR Jacket, Aqua, 10.0m	148.30
MPM120M3-SC-1	OM3 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Aqua, 1.0m	102.45
MPM120M3-SC-5	OM3 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Aqua, 5.0m	142.10
MPM120M3-SC-10	OM3 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, OFNR Jacket, Aqua, 10.0m	191.55

6 or 12 FIBER FANOUT CABLES - MPO to LC FLEX BOOT FANOUT


MPM60M3-FLC-1	OM3 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Aqua, 1.0m	88.85
MPM60M3-FLC-5	OM3 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Aqua, 5.0m	126.85
MPM60M3-FLC-10	OM3 6 Fiber Ribbon Cable, MPO Male/6x Flex LC Fanout, OFNR Jacket, Aqua, 10.0m	175.35
MPM120M3-FLC-1	OM3 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Aqua, 1.0m	133.80
MPM120M3-FLC-5	OM3 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Aqua, 5.0m	177.65
MPM120M3-FLC-10	OM3 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, OFNR Jacket, Aqua, 10.0m	233.60

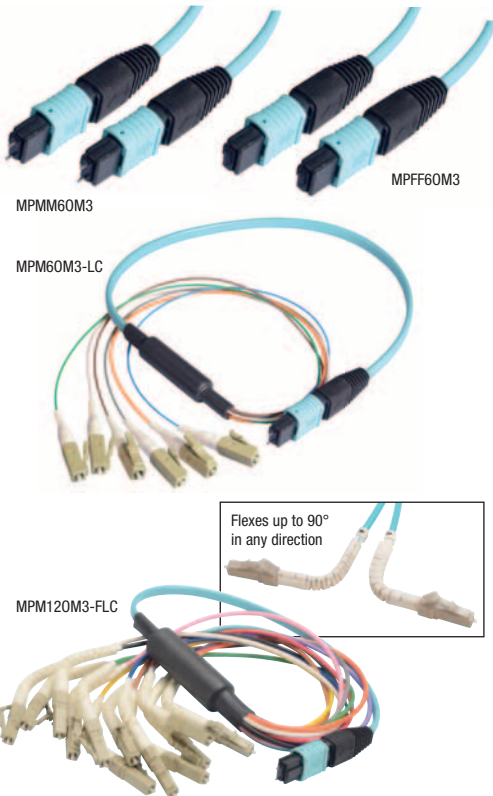

Explaining regular and 10 Gig Multimode fiber

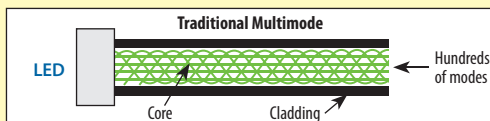

OM1 62.5/125 and OM2 50/125 multimode fiber is typically attached to communications equipment that use LED (light-emitting diode) transceivers that output hundreds of modes into the cable.

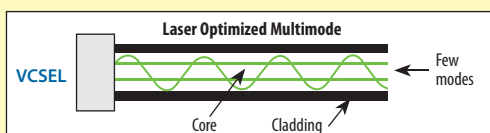

OM3 and OM4 50/125 10 Gig or higher rated multimode fiber uses VCSEL (vertical cavity surface emitting laser) transceivers that use only a specific set of modes instead of the hundreds of modes of traditional multimode fiber.


When transmitting light through a fiber cable a phenomenon known as Modal Dispersion occurs, causing different modes of light to arrive at the receiving end of the cable at different times. The degree to which this happens is determined by the fiber's Refractive Index which is defined during the fiber manufacturing process.

A multimode fiber cable's bandwidth is dictated by the combined performance of all its modes. For a traditional LED driven OM1 or OM2 cable, if several modes fall behind or get ahead, it has little influence or effect on the cable's total bandwidth since it is few modes out of many.

As the need for increased speeds and bandwidth grew, 10 Gig VCSELs were developed. These low cost lasers use only a specific set of modes. Since there are fewer modes, Modal Dispersion can have a great effect on a cable; since there are less modes, it takes fewer getting ahead or falling behind to degrade a fiber cable's performance and bandwidth capacity. 10 Gig and 100 Gig, Laser optimized OM3 and OM4 fibers were developed with enhanced Refractive Indexes specifically to achieve higher speeds over longer distances than traditional multimode cables.

Bulk Fiber Optic Cabling - Sold by the Meter (1m = 3.28ft)

L-com offers the most popular types of Simplex, Duplex, Breakout and Distribution style cables. All are available from stock in 1 meter intervals with a 25 meter minimum unless otherwise noted. Other cabling types are available by request. Jacket color of bulk cable may vary. Contact L-com today for custom termination of bulk cable. **NOTE:** Bulk cable custom lengths are non-returnable.

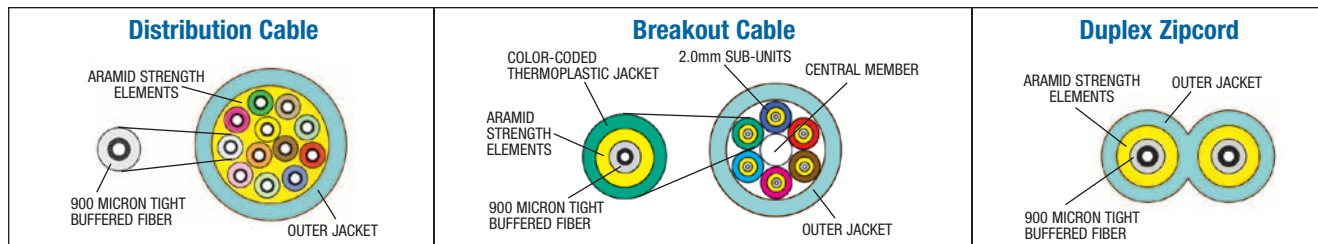How to clean fiber cable**Online Video**
L-com.com/videos/AQ5


Item #	Description	Color	1-9
OM3 10 Gig Rated, Laser Optimized 50/125 Multimode Bulk Fiber Cable			
DISTRIBUTION STYLE WITH 900µm SUB UNITS (50 meter minimum)			
FOB501D6-M	OM3 6 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	9.75
FOB501D12-M	OM3 12 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	15.75
FOB501D24-M	OM3 24 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	26.75
BREAKOUT STYLE WITH 2mm SUB UNITS (50 meter minimum)			
FOBOM3IB2-M	OM3 2 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Aqua	7.00
FOBOM3IB4-M	OM3 4 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Aqua	8.65
FOBOM3IB6-M	OM3 6 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Aqua	12.55
FOBOM3IB12-M	OM3 12 Count Indoor/Outdoor OFNP Bulk Fiber Breakout Cable	Aqua	21.60
PATCH STYLE DUPLEX (ZIPCORDER) WITH 2mm CABLE OD			
FOBOM3Z-M	OM3 Duplex (Zipcord) Indoor OFNR Bulk Fiber Cable	Aqua	2.30

OM3 10 Gig, Laser Optimized 50/125 Pigtails - 900µm or 3mm OFNR Jackets

L-com's fiber optic pigtails provide a fast way to make factory terminations in the field. They can easily be fusion or mechanically spliced to an existing fiber line. All connectors utilize PC polish and all jackets are Riser (OFNR) rated. See L-com.com for complete listings including additional connectors and modes.

PIGTAIL CABLES - 900µm (Only available in ORG)




FPT90M3-LC-ORG-1	OM3 Fiber Optic Pigtail, OFNR Jacket, 900µm, 1.0m	4.60
FPT90M3-LC-ORG-2	OM3 Fiber Optic Pigtail, OFNR Jacket, 900µm, 2.0m	5.45
FPT90M3-LC-ORG-3	OM3 Fiber Optic Pigtail, OFNR Jacket, 900µm, 3.0m	6.25

PIGTAIL CABLES - 3mm (Only available in AQU)

FPT30M3-LC-AQU-1	OM3 Fiber Optic Pigtail, OFNR Jacket, 3mm, 1.0m	4.70
FPT30M3-LC-AQU-2	OM3 Fiber Optic Pigtail, OFNR Jacket, 3mm, 2.0m	5.60
FPT30M3-LC-AQU-3	OM3 Fiber Optic Pigtail, OFNR Jacket, 3mm, 3.0m	6.50



Complete Listings on L-com.com

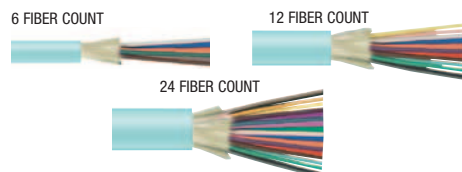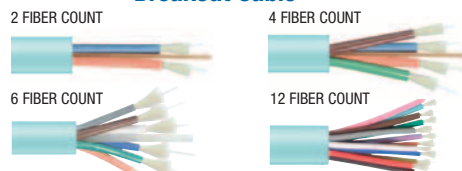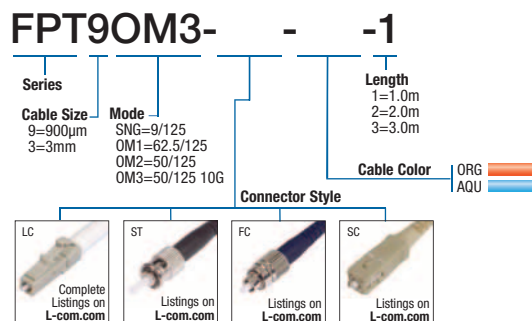Distribution Cable**Breakout Cable****Duplex Zipcord****Explanation of FPT Series Part Numbers****Check out L-com's Custom Cable Configurator!**

We understand that many applications require specific and precise lengths and connector combinations that off-the-shelf cables often don't address. We created our Custom Cable Configurator to meet this need. Found on L-com.com/productconfigurator, the Custom Cable Configurator will let anyone create a custom cable in just 4 easy steps.


Step 1: Go to L-com's Home Page

Step 2: Click Technical Resources

Step 3: Choose Custom Cable Configurators

Step 4: Follow the drop-down menu and make your choices

The Configurator allows you to create a cable in any whole number length in feet, meters or inches (length options may vary by cable type). You can also select your own connector options to choose what you need for each end of the cable. There is no minimum order requirement for fiber or coax cables and many assemblies can be produced in less than one week. Current configurable options include fiber optic, low-loss coaxial, RG style coaxial and modular Ethernet assemblies. Give L-com a call today and one of our trained reps will be happy to walk you through the menus to get you exactly what you are looking for.

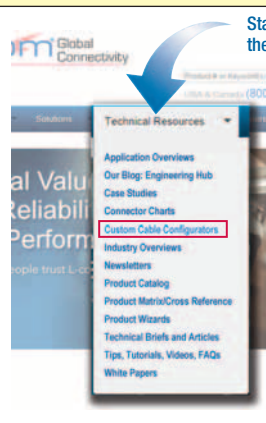

Start at the L-com.com Home Page, click Technical Resources and then choose Custom Cable Configurators

Product Type: Fiber Optic [Reset]

Product Style: Multimode Duplex Fiber (Best Delivery)

Connector 1: LC (Clipped)


Connector 2: ST

Cable Type (Mode, Jacket, and Color): 62.5/125 OM1 OFNP Green (Mtr)

Length: 1

Quantity: 1 [Calculate Price]

Connector 1: [Image] Cable Type (Mode, Jacket, and Color): [Image] Connector 2: [Image]

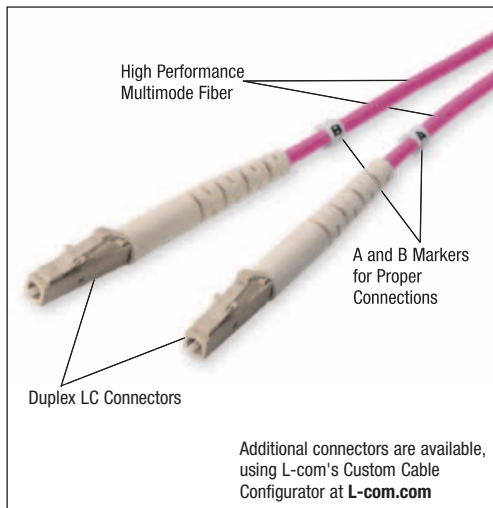

OM4 100 Gig Rated, Laser Optimized 50/125 Multimode Duplex Patch Cords

L-com's OM4 100 Gig rated 50/125 fiber optic cables are 100% optically tested and utilize a PC polish. Check L-com.com for more length, color and connector options. Cable measurements are in meters, 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
--------	-------------	-----

OM4 100 Gig Rated, Laser Optimized 50/125 Multimode Duplex Fiber Patch Cords

PVC RISER (OFNR) RATED OPTIONS

FODLC-OM4-1	OM4 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 1.0m	28.69
FODLC-OM4-2	OM4 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 2.0m	29.99
FODLC-OM4-3	OM4 Fiber Cable, Dual LC/Dual LC, OFNR Jacket, Aqua, 3.0m	31.29

LOW SMOKE ZERO HALOGEN (LSZH) OPTIONS

FODZLC-OM4-1	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 1.0m	31.15
FODZLC-OM4-2	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 2.0m	32.45
FODZLC-OM4-3	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Aqua, 3.0m	33.75
FODZLC-OM4-MAG-1	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Magenta, 1.0m	31.15
FODZLC-OM4-MAG-2	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Magenta, 2.0m	32.45
FODZLC-OM4-MAG-3	OM4 Fiber Cable, Dual LC/Dual LC, LSZH Jacket, Magenta, 3.0m	33.75

OM4 100 Gig Rated, Laser Optimized 50/125 Multimode MPO Ribbon and Fanout Cables

These multi-fiber MPO assemblies provide significant advantages in size by offering 12 times the density when compared to using separate SC connectors. Fanout assemblies are ideal for making connections within rack or wall mounted fiber enclosures that utilize single fiber connectors and new Flex boot LC connectors are available for applications requiring a 90° bend or other situation with tight space constraints. Please note that OM4 MPO cables are only available with Low Smoke Zero Halogen (LSZH) jackets.

12 FIBER RIBBON CABLES - MPO to MPO


MPMM120M4-25	OM4 12 Fiber Ribbon Cable, MPO Male/MPO Male, LSZH Jacket, Aqua, 25.0m	430.50
MPMM120M4-50	OM4 12 Fiber Ribbon Cable, MPO Male/MPO Male, LSZH Jacket, Aqua, 50.0m	781.75
MPMM120M4-100	OM4 12 Fiber Ribbon Cable, MPO Male/MPO Male, LSZH Jacket, Aqua, 100.0m	1485.25
MPFF120M4-25	OM4 12 Fiber Ribbon Cable, MPO Female/MPO Female, LSZH Jacket, Aqua, 25.0m	426.40
MPFF120M4-50	OM4 12 Fiber Ribbon Cable, MPO Female/MPO Female, LSZH Jacket, Aqua, 50.0m	778.15
MPFF120M4-100	OM4 12 Fiber Ribbon Cable, MPO Female/MPO Female, LSZH Jacket, Aqua, 100.0m	1481.10

12 FIBER FANOUT CABLES - MPO to LC or SC FANOUT

MPM120M4-LC-1	OM4 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, LSZH Jacket, Aqua, 1.0m	124.60
MPM120M4-LC-5	OM4 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, LSZH Jacket, Aqua, 5.0m	185.35
MPM120M4-LC-10	OM4 12 Fiber Ribbon Cable, MPO Male/12x LC Fanout, LSZH Jacket, Aqua, 10.0m	261.60
MPM120M4-SC-1	OM4 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, LSZH Jacket, Aqua, 1.0m	107.60
MPM120M4-SC-5	OM4 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, LSZH Jacket, Aqua, 5.0m	168.90
MPM120M4-SC-10	OM4 12 Fiber Ribbon Cable, MPO Male/12x SC Fanout, LSZH Jacket, Aqua, 10.0m	245.10

12 FIBER FANOUT CABLES - MPO to LC FLEX BOOT FANOUT


MPM120M4-FLC-1	OM4 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, LSZH Jacket, Aqua, 1.0m	139.55
MPM120M4-FLC-5	OM4 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, LSZH Jacket, Aqua, 5.0m	207.60
MPM120M4-FLC-10	OM4 12 Fiber Ribbon Cable, MPO Male/12x Flex LC Fanout, LSZH Jacket, Aqua, 10.0m	293.00

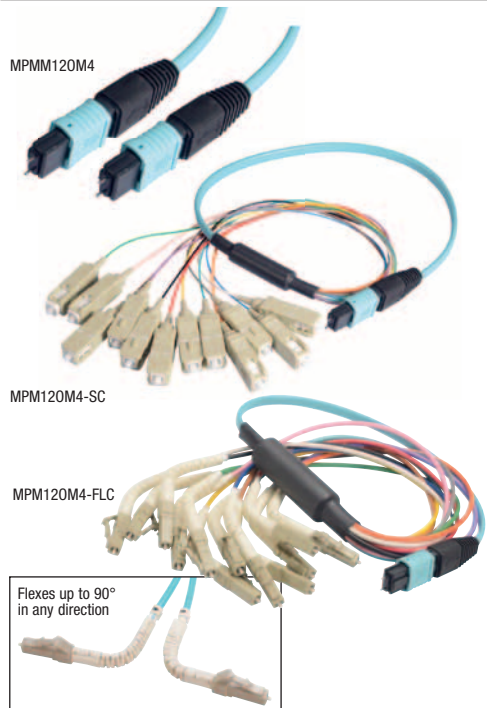


Bulk Fiber Optic Cabling - Sold by the Meter (1m = 3.28ft)

L-com offers the most popular types of Simplex, Duplex, Breakout and Distribution style cables. All are available from stock in 1 meter intervals with a 25 meter minimum unless otherwise noted. Other cabling types are available by request. Jacket color of bulk cable may vary. Contact L-com today for custom termination of bulk cable. **NOTE:** Bulk cable custom lengths are non-returnable.


Breakout Cable

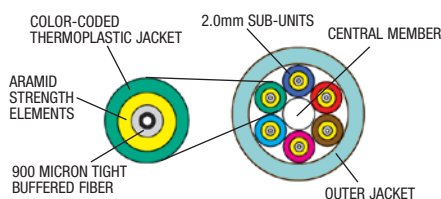


Distribution Cable



Duplex Zipcord



Simplex Cable



Item #	Description	Color	1-9
--------	-------------	-------	-----

OM4 100 Gig Rated, Laser Optimized 50/125 Multimode Bulk Fiber Cable

DISTRIBUTION STYLE WITH 900µm SUB UNITS (153 meter minimum)

FOBOM4D6-M	OM4 6 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	10.45
FOBOM4D12-M	OM4 12 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	16.80
FOBOM4D24-M	OM4 24 Count Indoor/Outdoor OFNP Bulk Fiber Distribution Cable	Aqua	29.80


BREAKOUT STYLE WITH 2mm SUB UNITS (50 meter minimum)

FOBOM4IB2-M	OM4 2 Count Indoor/Outdoor 62.5/125 Bulk Breakout Cable	Aqua	7.80
FOBOM4IB4-M	OM4 4 Count Indoor/Outdoor 62.5/125 Bulk Breakout Cable	Aqua	9.58
FOBOM4IB6-M	OM4 6 Count Indoor/Outdoor 62.5/125 Bulk Breakout Cable	Aqua	15.80
FOBOM4IB12-M	OM4 12 Count Indoor/Outdoor 62.5/125 Bulk Breakout Cable	Aqua	23.10


PATCH STYLE SIMPLEX OR DUPLEX (ZIPCORD) WITH 2mm CABLE OD

FOBOM4S-M	OM4 Simplex Indoor OFNR Bulk Fiber Cable, 2mm OD	Aqua	1.95
FOBOM4Z-M	OM4 Duplex (Zipcord) Indoor OFNR Bulk Fiber Cable, 3mm OD	Aqua	2.90

Distribution Cable

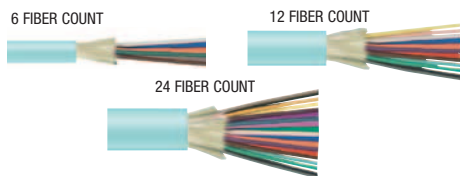

Breakout Cable

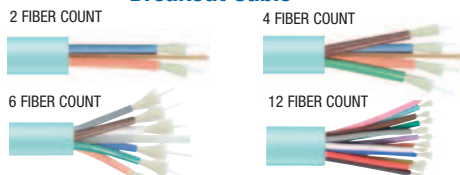

Simplex Cable



Duplex Zipcord



Colored Fiber Patch Cords

Looking for a duplex fiber assembly in a non-standard color or to differentiate between similar cables of the same mode without hard to read cable labels? You can do that easily with L-com's colored fiber assemblies. Different colored jackets make it a snap to visually identify a cable. All cables have OFNR (Riser) jackets and utilize PC polish connectors. See **L-com.com** for complete listings and use L-com's custom cable configurator to create your own custom lengths.

Item #	Description	1-9
--------	-------------	-----

9/125 Single mode Colored Duplex Patch Cords

LC configurations shown below; see **L-com.com** for SC or ST listings

Available in Blue, Green, Orange or Red (see standard offerings for Yellow)

SFODLC-___-01	Single mode Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 1.0m	22.10
SFODLC-___-03	Single mode Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 3.0m	24.00
SFODLC-___-05	Single mode Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 5.0m	26.00
SFODLC-___-10	Single mode Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 10.0m	32.55

OM1 62.5/125 Multimode Colored Duplex Patch Cords

LC configurations shown below; see **L-com.com** for SC or ST listings

Available in Blue, Green, Orange, Red or Yellow (see standard offerings for Gray)

FODLC-___-01	OM1 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 1.0m	20.00
FODLC-___-03	OM1 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 3.0m	22.00
FODLC-___-05	OM1 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 5.0m	24.00
FODLC-___-10	OM1 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 10.0m	31.20

OM2 50/125 Multimode Colored Duplex Patch Cords


LC configurations shown below; see **L-com.com** for SC or ST listings

Available in Blue, Green, Red or Yellow (see standard offerings for Orange)

FODLC50-___-01	OM2 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 1.0m	20.80
FODLC50-___-03	OM2 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 3.0m	22.90
FODLC50-___-05	OM2 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 5.0m	24.00
FODLC50-___-10	OM2 Fiber Cable, Clipped LC/Clipped LC, OFNR Colored Jacket, 10.0m	31.20

A and B markers make the connection

The "A" and "B" markers on duplex fiber jumpers assist in the proper connection between two transceivers. The transmit (Tx) port of one transceiver connects to the Receive (Rx) port of the second transceiver as illustrated at right. It is important to determine how the individual fibers in a duplex assembly are marked (A to A or A to B) to assure proper connections are made between the Tx and Rx ports of the transceivers. L-com's cables are labeled A to B.

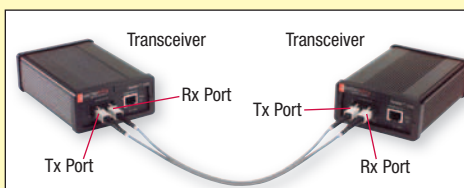

A and B markers explained



Online Video

L-com.com/Videos/A06

Bend Insensitive Fiber Patch Cords with Flex Boot LC or SC Connectors

These Flex Boot assemblies are designed to fit in tight spaces and in applications where a non-standard angle of connection is required. These patch cables are built using Bend-Insensitive fiber and feature OFNR (Riser) jackets along with LC or SC style Flex Boot connectors. These special boots can be bent in any angle up to 90° without exceeding the bend tolerance of the cable. Bend them into the angle that best fits your application. All connectors are PC polish. Please see **L-com.com** for complete listings and use L-com's custom cable configurator to create your own custom lengths.

Item #	Description	1-9
--------	-------------	-----

9/125 Single mode Flex Boot, Bend-Insensitive Duplex Patch Cords

LC configurations shown below; see **L-com.com** for SC or LC to SC listings

SFODBIFLC-01	Single mode Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Yellow, 1.0m	76.00
SFODBIFLC-03	Single mode Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Yellow, 3.0m	79.70
SFODBIFLC-05	Single mode Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Yellow, 5.0m	83.50
SFODBIFLC-10	Single mode Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Yellow, 10.0m	101.25

OM2 50/125 Multimode Flex Boot, Bend-Insensitive Duplex Patch Cords

LC configurations shown below; see **L-com.com** for SC or LC to SC listings

FODBIFLC-01	OM2 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Orange, 1.0m	59.10
FODBIFLC-03	OM2 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Orange, 3.0m	66.75
FODBIFLC-05	OM2 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Orange, 5.0m	74.65
FODBIFLC-10	OM2 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Orange, 10.0m	93.85

OM3 50/125 10 Gig Rated Multimode Flex Boot, Bend-Insensitive Duplex Patch Cords




LC configurations shown below; see **L-com.com** for SC or LC to SC listings




FODBIFLC-OM3-01	OM3 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Aqua, 1.0m	60.85
FODBIFLC-OM3-03	OM3 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Aqua, 3.0m	68.75
FODBIFLC-OM3-05	OM3 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Aqua, 5.0m	76.85
FODBIFLC-OM3-10	OM3 Bend-Insensitive Fiber Cable, Dual Flex LC/Dual Flex LC, OFNR Jacket, Aqua, 10.0m	85.55



L-com's Flex Boot fiber connectors explained

Did you know L-com's Flex Boot fiber connectors can be bent in any direction from 180° to 90° without negatively affecting the performance of the fiber? They are great for connector stacking (shown right), tight spaces and right angles. They are also built using Bend Insensitive cable which has superior bend performance with negligible signal loss, even with a very small bend radius.

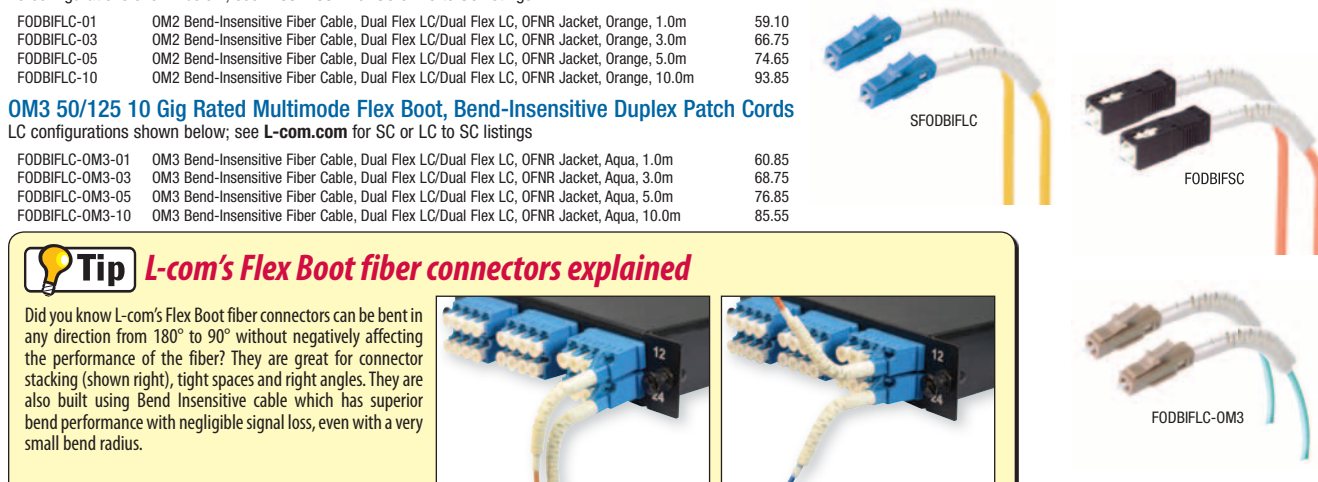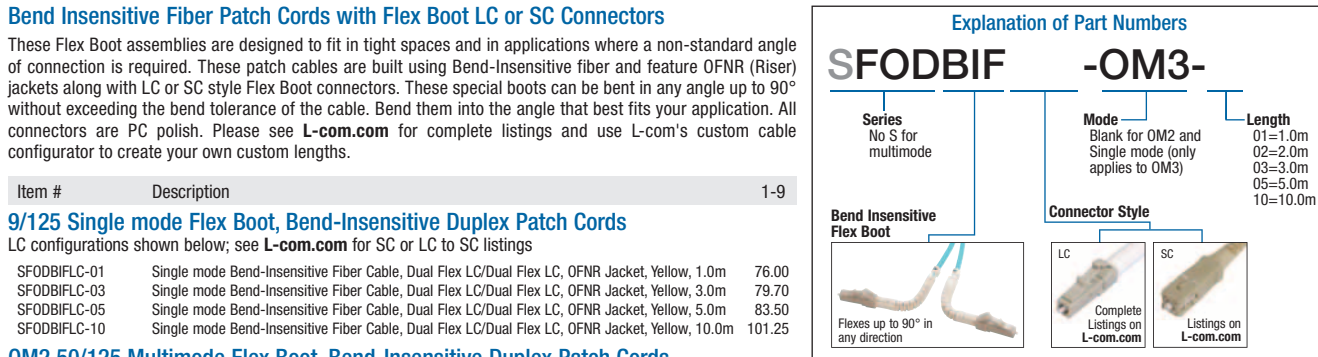

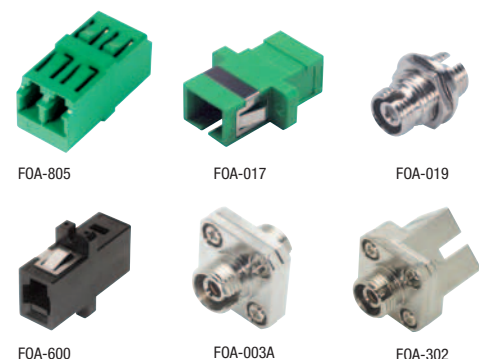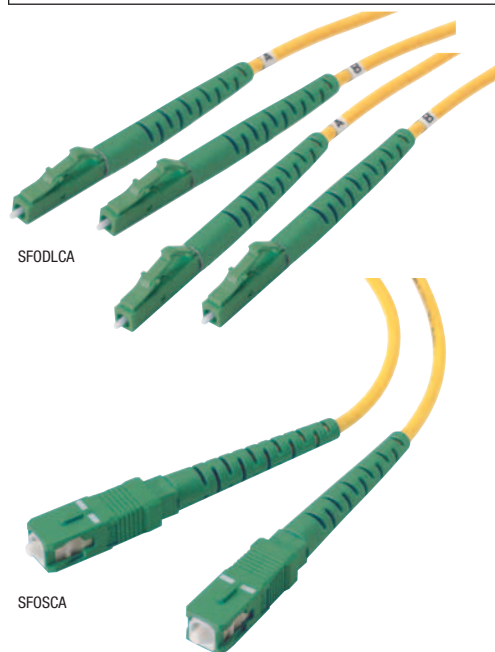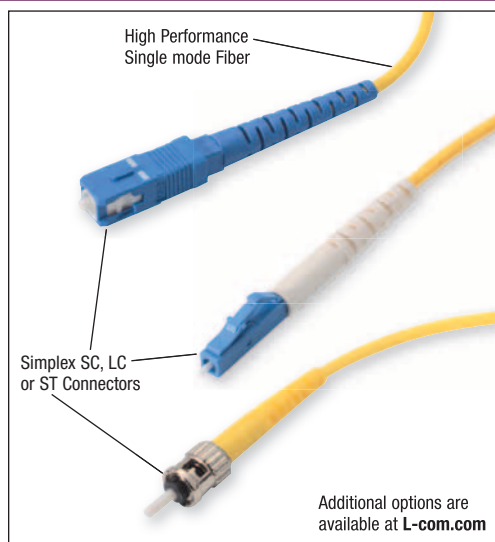

9/125 Single mode Simplex Fiber Assemblies

L-com's 9/125 Single mode simplex fiber optic cables are 100% optically tested and utilize a PC polish. Check **L-com.com** for additional length and connector options. All cable measurements are in meters. 1m=3.28ft. See L-com's Custom Cable Configurator to make your own length variations of existing cables in any whole foot or meter increment.

Item #	Description	1-9
9/125 Single mode Simplex Fiber Patch Cords		
LC, SC and ST configurations shown below; see L-com.com for complete listings.		
SFOLC-01	Single mode Fiber Cable, LC/LC, OFNR Jacket, Yellow, 1.0m	21.65
SFOLC-03	Single mode Fiber Cable, LC/LC, OFNR Jacket, Yellow, 3.0m	22.70
SFOLC-05	Single mode Fiber Cable, LC/LC, OFNR Jacket, Yellow, 5.0m	23.70
SFOSC-01	Single mode Fiber Cable, SC/SC, OFNR Jacket, Yellow, 1.0m	10.50
SFOSC-03	Single mode Fiber Cable, SC/SC, OFNR Jacket, Yellow, 3.0m	11.55
SFOSC-05	Single mode Fiber Cable, SC/SC, OFNR Jacket, Yellow, 5.0m	12.60
SFOST-01	Single mode Fiber Cable, ST/ST, OFNR Jacket, Yellow, 1.0m	10.50
SFOST-03	Single mode Fiber Cable, ST/ST, OFNR Jacket, Yellow, 3.0m	11.55
SFOST-05	Single mode Fiber Cable, ST/ST, OFNR Jacket, Yellow, 5.0m	12.60
SFOSC-LC-01	Single mode Fiber Cable, SC/LC, OFNR Jacket, Yellow, 1.0m	15.45
SFOSC-LC-03	Single mode Fiber Cable, SC/LC, OFNR Jacket, Yellow, 3.0m	16.50
SFOSC-LC-05	Single mode Fiber Cable, SC/LC, OFNR Jacket, Yellow, 5.0m	17.55
SFOST-LC-01	Single mode Fiber Cable, ST/LC, OFNR Jacket, Yellow, 1.0m	15.75
SFOST-LC-03	Single mode Fiber Cable, ST/LC, OFNR Jacket, Yellow, 3.0m	16.80
SFOST-LC-05	Single mode Fiber Cable, ST/LC, OFNR Jacket, Yellow, 5.0m	17.85

9/125 Single mode APC Fiber Assemblies

Looking for Single mode assemblies with APC (Angled Physical Contact) connectors for the lowest possible back reflection? Check them out here. All APC assemblies utilize OFNR (Riser) jackets. See L-com's Custom Cable Configurator to make your own custom lengths.

9/125 Single mode APC Fiber Patch Cords

LC and ST options shown, see **L-com.com** for complete listings including FC connector assemblies

SFOLCA-01	Single mode Fiber APC Cable, LC/LC, OFNR Jacket, Yellow, 1.0m	25.75
SFOLCA-03	Single mode Fiber APC Cable, LC/LC, OFNR Jacket, Yellow, 3.0m	26.80
SFOLCA-05	Single mode Fiber APC Cable, LC/LC, OFNR Jacket, Yellow, 5.0m	27.00
SFODLCA-01	Single mode Fiber APC Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 1.0m	51.45
SFODLCA-03	Single mode Fiber APC Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 3.0m	53.55
SFODLCA-05	Single mode Fiber APC Cable, Dual LC/Dual LC, OFNR Jacket, Yellow, 5.0m	55.65
SFOSCA-01	Single mode Fiber APC Cable, SC/SC, OFNR Jacket, Yellow, 1.0m	12.60
SFOSCA-03	Single mode Fiber APC Cable, SC/SC, OFNR Jacket, Yellow, 3.0m	13.65
SFOSCA-05	Single mode Fiber APC Cable, SC/SC, OFNR Jacket, Yellow, 5.0m	14.70
SFODSCA-01	Single mode Fiber APC Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 1.0m	24.10
SFODSCA-03	Single mode Fiber APC Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 3.0m	26.25
SFODSCA-05	Single mode Fiber APC Cable, Dual SC/Dual SC, OFNR Jacket, Yellow, 5.0m	27.85

9/125 Single mode APC Couplers

In order to achieve low back reflection values, some fiber assemblies utilize a connector with an APC (Angled Physical Contact) connector. These APC connectors require special couplers that have tight tolerance alignment slots to assure proper orientation of the mated APC connectors. These APC couplers are specifically designed for this application.

Item #	Description	Body	Sleeve	1-9
9/125 Single mode APC Couplers				
FOA-804	Simplex LC/LC APC Coupler Low Profile	Plastic	Ceramic	14.40
FOA-805	Duplex LC/LC APC Coupler Low Profile	Plastic	Ceramic	15.40
FOA-017	Simplex SC/SC APC Coupler with Mounting Flange	Plastic	Ceramic	10.30
FOA-018	Duplex SC/SC APC Coupler with Mounting Flange	Plastic	Ceramic	19.10
FOA-019	Simplex FC/FC APC Coupler with D-Hole Mount	Metal	Ceramic	15.45

MTRJ to MTRJ Fiber Optic Coupler

Use of this coupler requires one of the two mating MTRJ connectors to contain alignment pins.

FOA-600	MTRJ Coupler with Mounting Flange	Plastic	None	4.20
---------	-----------------------------------	---------	------	------

Assorted FC Couplers/Adapters Not Shown Elsewhere

FOA-003	Simplex FC Fiber Coupler with Square Mount	Metal	Bronze	6.85
FOA-003A	Simplex FC Fiber Coupler with Square Mount	Metal	Ceramic	10.00
FOA-013	Simplex FC Fiber Coupler with Rectangular Mount	Metal	Bronze	6.85
FOA-013A	Simplex FC Fiber Coupler with Rectangular Mount	Metal	Ceramic	10.00
FOA-033	Simplex FC Fiber Coupler with D-Hole Mount	Metal	Bronze	6.70
FOA-033A	Simplex FC Fiber Coupler with D-Hole Mount	Metal	Ceramic	9.80
FOA-301	Simplex ST-FC Fiber Adapter with Square Mount	Metal	Bronze	9.75
FOA-311	Simplex ST-FC Fiber Adapter with Rectangular Mount	Metal	Bronze	3.70
FOA-311A	Simplex ST-FC Fiber Adapter with Rectangular Mount	Metal	Ceramic	11.05
FOA-302	Simplex SC-FC Fiber Adapter with Square Mount	Metal	Bronze	9.75

Fiber Optic Bulkhead Coupler Kit - Great for Tool Kits

The FOA-123 Fiber Optic Bulkhead Coupler Kit comes complete with two ST-ST (FOA-001), two SC-SC (FOA-002), one FC-FC (FOA-003) and a handy four compartment carrying case. All couplers are bulkhead mountable.

FOA-123	Fiber Optic Bulkhead Coupler Kit	20.60
---------	----------------------------------	-------

Fiber Optic Coupler/Adapter Kit - Complete Flexibility


This is the most complete kit of fiber adapters and couplers we offer, allowing connections between nearly all like interfaces and adapting from one style interface to another including LC-LC (FOA-500A), MPO-MPO (FOA-012), ST-ST (FOA-001), SC-SC (FOA-002), ST-SC (FOA-201), FC-FC (FOA-003), ST-FC (FOA-301), SC-FC (FOA-302), MTRJ-MTRJ (FOA-600), SMA-SMA (FOA-004), and MU-MU (FOA-701).

FOA-321	Fiber Optic Coupler/Adapter Kit	91.70
---------	---------------------------------	-------

Fiber Optic Couplers and Adapters

These devices are used to join together individual connectorized fiber assemblies. They are often used in a patch panel and are mounted on sub-panels. If the two fiber assemblies to be connected have the same style fiber connectors (ST to ST, ST to ST,

SC to SC, etc.) then the connecting device is called a coupler. If the two fiber assemblies to be connected have different style connectors (ST to LC, SC to LC) then the connecting device is called an adapter.

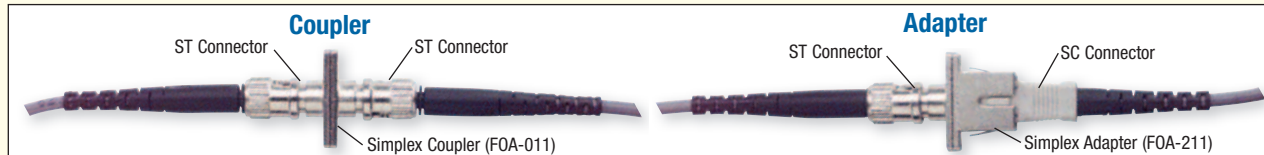

Fiber Optic Coupler / Adapter Selection Matrix

Use this matrix to locate the fiber optic coupler or adapter with the desired interface combination and with the appropriate body and alignment sleeve material.


If a specific type is not listed, please visit our web site at L-com.com for the latest information or call our technical support group at **800-343-1455** for assistance.

BODY MATERIAL		SIMPLEX						DUPLEX				QUAD	
		METAL	METAL	METAL	PLASTIC	PLASTIC	PLASTIC	METAL	METAL	PLASTIC	PLASTIC	PLASTIC	PLASTIC
ALIGNMENT SLEEVE MATERIAL		BRONZE	CERAMIC	NONE	BRONZE	CERAMIC	NONE	BRONZE	CERAMIC	BRONZE	CERAMIC	BRONZE	CERAMIC
COUPLERS	ST to ST	FOA-001 FOA-011	FOA-001A FOA-011A					FOA-401	FOA-401A				
	SC to SC	FOA-002M	FOA-002MA		FOA-002	FOA-002A FOA-017 (APC)		FOA-005M	FOA-005MA	FOA-005	FOA-005A FOA-018 (APC)		
	FC to FC	FOA-003 FOA-013 FOA-033	FOA-003A FOA-013A FOA-033A FOA-019 (APC)										
	SMA906 to SMA906			FOA-004									
	LC to LC					FOA-500A FOA-804 (APC)				FOA-802 FOA-803	FOA-550A FOA-805 (APC) FOA-801	FOA-560	FOA-570
	MT-RJ to MT-RJ						FOA-600						
ADAPTERS	MPO to MPO						FOA-MPO FOA-MPOF						
	ST to SC	FOA-201 FOA-211	FOA-211A					FOA-006M	FOA-006MA		FOA-006		
	ST to FC	FOA-301 FOA-311	FOA-311A										
	SC to FC	FOA-302											
	SC to LC				FOA-020C	FOA-014							



What are alignment sleeves?

The alignment sleeve is the most critical component of a fiber optic adapter. Bronze sleeves are more durable but the precision is not as good as ceramic. Ceramic ferrules offer a more precise alignment, but they are somewhat less durable. Bronze alignment sleeves are commonly used in multimode applications where precision alignment is not as critical.



Cavity for alignment sleeve

CERAMIC



- Better alignment
- More expensive
- Typically single mode

BRONZE



- Better durability
- Less expensive
- Typically multimode

Item #	Description	1-9
--------	-------------	-----

LC and SC Fiber Connector Field Termination Kit

The XPFIT-Kit connector installation kit contains everything needed to install LC or SC XPFIT connectors onto standard 900µm cable. Kit includes a fiber stripper for 250µm or 125µm fiber, a thermal buffer removal tool, replacement blades, a precision cleaver, lint free dry wipes, a fiber optic cleaning pen, Kevlar scissors, a fiber disposal unit, a fine permanent marker pen, a light source fiber checker, a 2.5mm to 1.25mm adapter and a soft carrying case to hold it all. No epoxy, polishing film or other consumables are required and there is no need for electrical power, allowing installers to get in and out of installation sites quickly and efficiently. Connectors can be terminated in less than 2 minutes.

XPFIT-KIT	Fiber Optic LC/SC Field Termination Kit	1279.95
-----------	---	---------

LC and SC Field Terminable Fiber Connectors


XPFIT Plus LC and SC connectors are pre-polished, pre-assembled connectors that can be terminated reliably in the field with little equipment or expertise. Each connector contains index matching gel and utilizes an internal mechanical grip to gently but effectively hold the fiber in place for installation, eliminating the need for costly splicing equipment or curing ovens. Plugs exceed TIA/EIA-568-B.3 standards. Each 12 pack of connectors comes with an assembling jig and fiber holder for 900µm tight buffered fiber as well as boots for each connector. Used with the XPFIT-KIT (sold separately), fiber termination in the field is easy and painless. See L-com.com for full installation instructions.

FOC-XPFC-LC-MMBG	LC Connector for XPFIT-KIT, 62.5/125, OM1, Beige, Pkg/12	174.95
FOC-XPFC-LC-MMBK	LC Connector for XPFIT-KIT, 50/125, OM2, Black, Pkg/12	174.95
FOC-XPFC-LC-MMAQ	LC Connector for XPFIT-KIT, 50/125, OM3 10Gig, Aqua, Pkg/12	174.95
FOC-XPFC-LC-SMBL	LC Connector for XPFIT-KIT, 9/125 Single mode, Blue, Pkg/12	197.45
FOC-XPFC-SC-MMBG	SC Connector for XPFIT-KIT, 62.5/125, OM1, Beige, Pkg/12	175.95
FOC-XPFC-SC-MMBK	SC Connector for XPFIT-KIT, 50/125, OM2, Black, Pkg/12	175.95
FOC-XPFC-SC-MMAQ	SC Connector for XPFIT-KIT, 50/125, OM3 10Gig, Aqua, Pkg/12	175.95
FOC-XPFC-SC-SMBL	SC Connector for XPFIT-KIT, 9/125 Single mode, Blue, Pkg/12	194.95



XPFIT-KIT





FOC-SS250



FOC-SS125



FOC-SS-MPO



FOC-CA



FOC-KN



FOC-AP



FOC-EYE

How to clean fiber cable



Online Video

L-com.com/videos/A05



F01

F01REF



Tip Avoid the number one cause of fiber optic network failure

In fiber optic networks, the number one cause of network failure is not cable breakage, it's actually dirty or damaged connectors.

In a fiber optic coupling, connectors are in physical contact with each other. Picture a small rock placed between two pieces of glass and then pressed together. This is similar to what a particle of dust is in relation to the glass fiber. Note that a typical fiber's glass core is 1/10 to 1/2 the diameter of a human hair so a little dust can go a long way towards obstructing an optical signal. At right are images of common problems found on connectors installed in the field.

Connectors need to be cleaned before any connection is made. If the cable is disconnected, it needs to be cleaned again. This is a simple process especially with the Senko SMART Cleaners. Just insert the cleaner into the port and then use the same cleaner on the cable connector.



Note: One of the dust particles is larger than the fiber in the center of the connector. This dust, if it covered the fiber, would completely block the light from passing through.



Item #	Description	List Price
--------	-------------	------------

Fiber Optic Cleaner for SC, FC, and ST Connectors

The Senko Fiber Optic Cleaner for SC, FC and ST simplex connections is a dry cloth cleaner specially designed to clean single fiber connectors. The dust cap of the cleaner acts as an adapter for cleaning unmated connectors. The FOC-SS250 Fiber Optic Cleaner is simple, easy to use and highly effective at removing oil and dust contaminants that can inhibit optical performance. Cleaner gets more than 750 cleanings per unit.

FOC-SS250	Fiber Optic Cleaner for SC, FC and ST Connectors	72.05
-----------	--	-------

Fiber Optic Cleaner for LC and MU Connectors

Working with LC connectors often means technicians are faced with a high density of the connectors, making it difficult to get in between to service and clean them. Using Senko's Fiber Optic Cleaner specifically made to be used with LC connectors is the perfect solution with its thin, extendable shaft that can easily get into hard to reach areas. Cleaner gets more than 750 cleanings per unit.

FOC-SS125	Fiber Optic Cleaner for LC and MU Connectors	72.05
-----------	--	-------

Fiber Optic Cleaner for MPO Connectors

MPO has become a popular interface in data centers due to its high density of connections in a very small form factor. This makes it extra important to keep your MPO cables and ports clean for the best performance of your network. This easy to use cleaner will remove dirt, oil and debris from MPO connectors and ports. Its extended shaft makes it easy to get into hard to reach places without having to un-mate nearby connectors. The cleaner is disposable and gets over 600 cleanings per unit.

FOC-SS-MPO	Fiber Optic Cleaner for MPO Connectors	80.05
------------	--	-------

Fiber Optic Consumables - Commonly Used Fiber Optic Cleaning Components

Cleaning fiber optic connections is crucial for proper optical transmission. Compressed air is great for cleaning couplers and connector ends. Kimwipes are lint free tissues, commonly used for cleaning glass surfaces.

FOC-CA	Compressed Air, 12 oz. Can	10.45
FOC-KN	4.5" x 8.5" (11.4cm x 21.6cm) Box Kimwipes, 280 Count	5.45
FOC-AP	Pre-moistened Alcohol Pads, 20 Count	10.25

Fiber Optic Pulling Eye for Duplex Cable Assemblies

A pulling eye is used to protect the terminated end of fiber cable assemblies when pulling through walls or ceilings. 16" long x 0.75" (40.6 x 1.9 cm) diameter plastic tube fits most cables with two connectors.

FOC-EYE	Dual Fiber Pulling Eye	29.65
---------	------------------------	-------

Hellermann-Tyton Fiberclean - Fiber Optic Connector Cleaning System

This is a convenient, economical and easy to use cleaning dispenser system for your fiber optic connectors. This hand held device exposes a portion of "ultra white", non-woven, lint free material sufficient to clean up to six connectors. Used cleaning material is dispensed out of the back of the unit. Up to 400 connectors can be cleaned with a single dispenser.

F01	Fiberclean Dispenser with Cleaning Film	20.50
F01REF	Fiberclean Cleaning Film Refills	15.95

Keep fiber cables clean to maintain performance

It is critically important for fiber optic connectors to be free of dust and dirt to maintain optimum performance. A simple and effective way to do this is to clean the ends of your fiber optic cables often when they are disconnected, as illustrated.




STEP 1



Softly press fiber tip in cleaning window using a figure 8 motion.

STEP 2



Repeat 3 times, inspecting fiber tip for cleanliness.



Fiber enclosures secure sub-panels and cables

STEP 1



Install snap-in sub-panel with couplers.

STEP 2




Prepare distribution cable for installation on rear of panel by sliding tray out of case, either from the front or rear.

STEP 3



Attach feed cables to couplers on rear of panel.

STEP 4



Route and attach patching jumpers to couplers on front of panel.

STEP 5



Slide tray back into case.

STEP 6



Close cover on unit.



FE-RM1U12PSP



FE-WM24PP



FE-ST7MC



FE-STMAB

Item #	Description	List Price
--------	-------------	------------

19 Inch (48.3cm) Rack Mounted Fiber Enclosures - For Splice Trays and Fiber Patch Panels

FE-RM1U12PSP	Fiber Enclosure Rack Mount, 1U, with 3 FSP Series Sub-Panel Openings	199.95
FE-RM2U24PSP	Fiber Enclosure Rack Mount, 2U, with 4 FSP Series Sub-Panel Openings	224.95
FE-RM3U48PSP	Fiber Enclosure Rack Mount, 3U, with 8 FSP Series Sub-Panel Openings	259.95
FE-RM4U72PSP	Fiber Enclosure Rack Mount, 4U, with 12 FSP Series Sub-Panel Openings	269.95

Wall Mounted Fiber Enclosures - To Mount Splice Trays and Fiber Patch Panels

FE-WM12PP	Fiber Enclosure Wall Mount, with 2 FSP Series Sub-Panel Openings	89.95
FE-WM24PP	Fiber Enclosure Wall Mount, with 4 FSP Series Sub-Panel Openings	93.95

Splice Trays for Fiber Splices - Terminations and Distribution in Fiber Enclosures

FE-ST7MC	Fiber Enclosure Splice Tray, 7 in (17.8 cm) with Metal Cover	19.95
FE-ST7PC	Fiber Enclosure Splice Tray, 7 in (17.8 cm) with Lexan® Cover	17.95
FE-ST875MC	Fiber Enclosure Splice Tray, 8.75 in (22.2 cm) with Metal Cover	22.95
FE-ST875PC	Fiber Enclosure Splice Tray, 8.75 in (22.2 cm) with Lexan® Cover	19.95

Splice Tray Mounting Assembly Bracket with Accessories

FE-STMAB	Splice Tray Mounting Assembly Bracket with Accessories	15.00
----------	--	-------

Sub-Panels for FSP Series Patch Panels, FE & FSP DIN Rail Mount Enclosures

FSP-BNK	Blank Sub-Panel	13.95
FSP-SCMTLC-BNK	Blank Sub-Panel with 6 SC Simplex/MT-RJ/LC Duplex Openings	13.95
FSP-MTRJ	Fiber Sub-Panel, 6 MT-RJ Couplers	39.95
FSP-SC-APC	Fiber Sub-Panel, 6 APC SC Simplex Couplers, Ceramic Sleeve	79.95
FSP-LCD6-BR	Fiber Sub-Panel, 6 LC Duplex Couplers, Bronze Sleeve	43.95
FSP-LCD6-CR	Fiber Sub-Panel, 6 LC Duplex Couplers, Ceramic Sleeve	57.95
FSP-SC-BR	Fiber Sub-Panel, 6 SC Simplex Couplers, Bronze Sleeve	39.95
FSP-SC-CR	Fiber Sub-Panel, 6 SC Simplex Couplers, Ceramic Sleeve	49.95
FSP-STFC-BNK	Blank Sub-Panel with 6 ST/FC Simplex Openings	13.95
FSP-ST-BR	Fiber Sub-Panel, 6 ST Couplers, Bronze Sleeve	36.95
FSP-ST-CR	Fiber Sub-Panel, 6 ST Couplers, Ceramic Sleeve	52.95
FSP-SCDLCQ6-BNK	Blank Sub-Panel with 6 SC Duplex/LC Quad Openings	16.95
FSP-LCD6-10G	Fiber Sub-Panel, 6 LC Duplex 10G Couplers, Bronze Sleeve	46.95
FSP-LCQ6-BR	Fiber Sub-Panel, 6 LC Duplex Couplers, Bronze Sleeve	121.95
FSP-LCQ6-CR	Fiber Sub-Panel, 6 LC Duplex Couplers, Ceramic Sleeve	148.95
FSP-SCD6-APC	Fiber Sub-Panel, 6 SC Duplex Couplers, Ceramic Sleeve	138.95
FSP-SCD6-BR	Fiber Sub-Panel, 6 SC Duplex Couplers, Bronze Sleeve	52.95
FSP-SCD6-CR	Fiber Sub-Panel, 6 SC Duplex Couplers, Ceramic Sleeve	69.95
FSP-ECF-BNK	Blank Sub-Panel with 3 ECF Style Openings	13.95
FSP-05D-BNK	Blank Sub-Panel with (4) 0.5" (1.3cm) D-Hole Openings	13.95

Plunger and Grommet Kit for FSP Series Sub-Panels - Pkg/50

FSP-FASTENERS	Plunger and Grommet Kit for FSP Series Sub-Panels, Pkg/50	28.95
---------------	---	-------

Item #	Description	Color	List Price
--------	-------------	-------	------------

MPO Cassettes for FSP Series Patch Panels, FE and FSP DIN Rail Mount Enclosures

Used for connecting MPO trunk cables and splitting them out to various patch cables.

FSP-MPO-SC12-OM2	MPO Cassette 1-MPO-M/12 SC OM2	Beige	299.95
FSP-MPO-LC24-OM3	MPO Cassette 2-MPO-M/24 LC OM3	Aqua	564.95
FSP-MPO-LC24-OS1	MPO Cassette 2-MPO-M/24 LC Single mode	Blue	579.95

Fiber Sub-Panels




FSP-BNK



FSP-SC-BR
FSP-SC-CR



FSP-SCD6-BR
FSP-SCD6-CR



FSP-SCD6-APC



FSP-LCQ6-BR
FSP-LCQ6-CR



FSP-LCD6-CR



FSP-ECF-BNK



FSP-05D-BNK



FSP-FASTENERS
Pkg/50



FSP-MPO-SC12-OM2



FSP-MPO-LC24-OM3




Mil/Aero MIL-STD-1553B Interconnect Solutions

The MIL-STD-1553B standard has been a mainstay of Military and Aeronautic networks since it was first introduced in 1978. First deployed on the workhorse F-16 Falcon jet fighter for the US Air Force and the AH-64A Apache Attack Helicopter for the US Army, products made under MIL-STD-1553B have provided exceptional network functionality, reliability and longevity for more than 30 years. MIL-STD-1553B has become the internationally accepted networking standard for integrating military platforms.


L-com now offers MilesTek brand components as well as low and high volume custom configured components to meet customers' needs for MIL-STD-1553B networks. L-com and MilesTek products are all manufactured to the highest standards of design and quality, and have been crucial components of Mil/Aero networks for over 30 years.

When network reliability is crucial, L-com and MilesTek Mil/Aero products are the right solution.

Relay Bus Switching




Twinaxial Cable
and Assemblies



Triaxial Cable and Assemblies

- MIL-STD-1553B Components
- Complex Harness Manufacturing
- Custom Cable Connectivity Solutions

Data Bus Coupler Kits

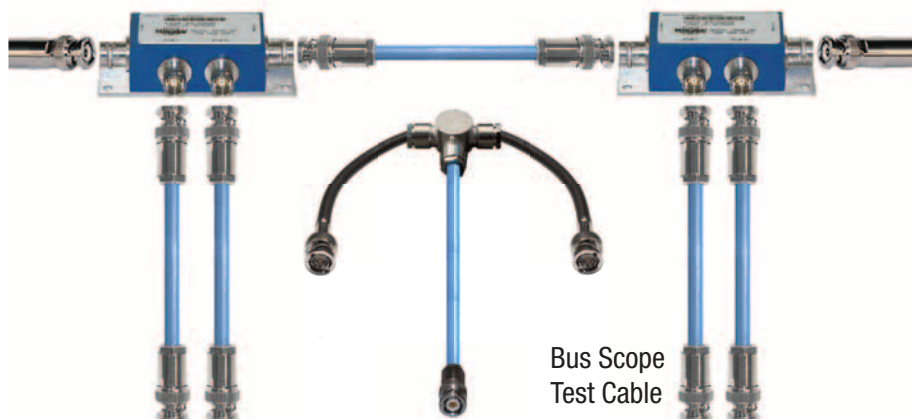

Bus Scope
Test Cable



Parallel Adapter

Item #	Description	List Price
--------	-------------	------------

Military Avionics and MIL-STD-1553B Solutions

MilesTek stocks and offers the industry's most complete line of data bus couplers for MIL-STD 1553B, including box-style and in-line coupler designs. Configurations include one through eight stub box style couplers, one through four stub inline couplers and bus couplers kits.

1-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with one stub connections.

90-50201	TRB 3-Lug Jacks, Non-terminated	162.00
90-50211	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	176.00
90-51211	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	191.00
90-52211	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	191.00
90-50231	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	199.00

2-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with two stub connections.

90-50202	TRB 3-Lug Jacks, Non-terminated	265.00
90-50212	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	277.00
90-51212	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	304.00
90-52212	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	304.00
90-50222	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	363.00

3-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with three stub connections.

90-50203	TRB 3-Lug Jacks, Non-terminated	332.00
90-50213	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	345.00
90-51213	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	375.00
90-52213	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	375.00
90-50223	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	415.00

4-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with four stub connections.

90-50204	TRB 3-Lug Jacks, Non-terminated	402.00
90-50214	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	418.00
90-51214	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	443.00
90-52214	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	443.00
90-50224	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	494.00



90-50201
90-50211



90-50202
90-50212



90-50203
90-50213



90-50204
90-50214



Cable Assemblies [page 219](#)



Connectors [page 220](#)



Terminators [page 220](#)



RFI Caps [page 220](#)



Adapters [page 221](#)

5-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with five stub connections.

90-50205	TRB 3-Lug Jacks, Non-terminated	478.00
90-50215	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	500.00
90-51215	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	523.00
90-52215	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	523.00
90-50225	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	567.00



90-50205
90-50215

6-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with six stub connections.

90-50206	TRB 3-Lug Jacks, Non-terminated	579.00
90-50216	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	613.00
90-51216	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	625.00
90-52216	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	625.00
90-50226	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	670.00



90-50206
90-50216

7-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with seven stub connections.

90-50207	TRB 3-Lug Jacks, Non-terminated	665.00
90-50217	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	693.00
90-51217	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	700.00
90-52217	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	700.00
90-50227	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	749.00



90-50207
90-50217

8-Stub Data Bus Couplers

Each MilesTek box-style coupler can be single-, double- or non-terminated. This category encompasses all box couplers with eight stub connections.

90-50208	TRB 3-Lug Jacks, Non-terminated	772.00
90-50218	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	807.00
90-51218	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	818.00
90-52218	TRB 3-Lug Jacks, Single-terminated, 1 - 78.7 Ohm Resistor	818.00
90-50228	TRB 3-Lug Jacks, Dual-terminated, 2 - 78.7 Ohm Resistors	863.00



90-50208
90-50218



Item #	Description	Termination	Bus Termination	Weight	List Price
--------	-------------	-------------	-----------------	--------	------------

Stub Inline Bus Couplers

Predominantly used in airborne applications, inline bus couplers offer the performance and utility of a box-style coupler in a smaller form-factor. MiletTek inline couplers with one bus lead and one internal terminator to prevent signal interference caused by electrical reflection.

1-Stub Inline Bus Couplers

Available in single-terminated, double-terminated or non-terminated varieties, these inline couplers provide a means of adding a single stub to a bus network.

90-50251-12	12" M17/176-00002 Blunt Ends	Non-terminated	None	1.50 oz (42.52 g)	274.00
90-50261-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	1.10 oz (31.18 g)	289.00
90-50361-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	1.10 oz (31.18 g)	289.00
90-50461-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	0.70 oz (19.74 g)	300.00

2-Stub Inline Bus Couplers

Available in single-terminated, double-terminated or non-terminated varieties, these inline couplers provide a means of adding a pair of stubs to a bus network.

90-50252-12	12" M17/176-00002 Blunt Ends	Non-terminated	None	1.90 oz (53.86 g)	375.00
90-50262-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	1.50 oz (42.52 g)	409.00
90-50362-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	1.50 oz (42.52 g)	409.00
90-50462-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	1.10 oz (31.18 g)	432.00
90-50562-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	1.10 oz (31.18 g)	442.00

3-Stub Inline Bus Couplers

Available in single-terminated, double-terminated or non-terminated varieties, these inline couplers provide a means of adding a 3 stubs to a bus network.

90-50253-12	12" M17/176-00002 Blunt Ends	Non-terminated	None	2.70 oz (76.54 g)	442.00
90-50263-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	2.30 oz (65.20 g)	488.00
90-50363-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	2.30 oz (65.20 g)	488.00
90-50463-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	2.30 oz (65.20 g)	488.00
90-50563-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	1.90 oz (53.86 g)	523.00
90-50663-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	1.90 oz (53.86 g)	523.00

4-Stub Inline Bus Couplers

Available in single-terminated, double-terminated or non-terminated varieties, these inline couplers provide a means of adding a 4 stubs to a bus network.

90-50254-12	12" M17/176-00002 Blunt Ends	Non-terminated	None	3.10 oz (87.88 g)	590.00
90-50264-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	2.70 oz (76.54 g)	613.00
90-50364-12	12" M17/176-00002 Blunt Ends	Single-terminated	One 78.7 Ohm Resistor	2.70 oz (76.54 g)	613.00
90-50464-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	2.30 oz (65.20 g)	637.00
90-50564-12	12" M17/176-00002 Blunt Ends	Dual-terminated	Two 78.7 Ohm Resistors	2.30 oz (65.20 g)	637.00

Item #	Nominal Coil Voltage	Input Jack	Input Jack	Interface Connector	List Price
--------	----------------------	------------	------------	---------------------	------------

Relay Devices

Eliminate the task of manually switching cables using MiletTek Relay Devices. These act as on-off switches to connect and disconnect individual remote terminals or entire bus segments to/from a bus network. Relay devices will reduce long-term wear and tear on data bus couplers and cables.

Stub Switching Relays

Stub switching relays allow an external DC control signal to engage and disengage a stub from the bus network.

90-50270	28V Stub Switching Relay	One TRB 3-Lug Jack	One TRB 3-Lug Jack	DB9 Female (9 Pin)	273.00
90-50271	5V Stub Switching Relay	One TRB 3-Lug Jack	One TRB 3-Lug Jack	DB9 Female (9 Pin)	273.00

Bus Switching Relays

Bus switching relays allow an external DC control signal to toggle the input between two different remotely-coupled bus connections.

90-50272	28V Bus Switching Relay	One TRB 3-Lug Jack	Two TRB 3-Lug Jacks	DB9 Female (9 Pin)	341.00
90-50273	5V Bus Switching Relay	One TRB 3-Lug Jack	Two TRB 3-Lug Jacks	DB9 Female (9 Pin)	341.00

Bus Segmenting Relays

Bus segmentation relays allow an external DC control signal to toggle which bus the input is directly connected to. The unused bus is terminated inside the relay with an appropriate load to prevent network failure.

90-50274	28V Bus Switching Relay	Two TRB 3-Lug Jacks	One TRB 3-Lug Jack	DB9 Female (9 Pin)	420.00
90-50275	5V Bus Switching Relay	Two TRB 3-Lug Jacks	One TRB 3-Lug Jack	DB9 Female (9 Pin)	420.00

Dual Bus Switching

Bus switching relays allow an external DC control signal to toggle the input between two different remotely-coupled bus connections.

90-50277	28V Bus Switching Relay	Two TRB 3-Lug Jacks	Four TRB 3-Lug Jacks	DB9 Female (9 Pin)	727.00
90-50278	5V Bus Switching Relay	Two TRB 3-Lug Jacks	Four TRB 3-Lug Jacks	DB9 Female (9 Pin)	727.00
90-50280	28V Bus Switching Relay	Two TRB 3-Lug Jacks	Four TRB 3-Lug Jacks	DB9 Female (9 Pin)	769.23
90-50279	5V Bus Switching Relay	Two TRB 3-Lug Jacks	Four TRB 3-Lug Jacks	DB9 Female (9 Pin)	727.00

Item #	Description	List Price
--------	-------------	------------

2 - Terminal Bus Coupler Kit

These kits come with everything you need to create a 2-terminal, dual terminated bus network: 2 one-stub box couplers, 2 terminators, 2 six-foot cable assemblies and 1 four-foot cable assembly.

TK-1037	2 Terminal Bus Coupler Kit	643.00
---------	----------------------------	--------

4 - Terminal Bus Coupler Kit

Like the 2-terminal Bus Kit, these kits come with everything you need to create a complete bus network with 4 stub terminals: 2 two-stub box couplers, 2 terminators, 4 six-foot cable assemblies and 1 four-foot cable assembly.

TK-1038	4 Terminal Bus Coupler Kit	991.00
---------	----------------------------	--------

Bus/Scope Test Cables

CA-5111	Bus Scope Test Cable 60" Twinaxial Cable 6"	295.00
CA-5112	Bus Scope Test Cable 10" Twinaxial Cable 60"	295.00

Item #	Description	(Per Foot) List Price
--------	-------------	-----------------------

78 Ohm Twinaxial Cable

MilesTek stocks and offers both PVC (30-02001) and PFA (Teflon®) (M17/176-00002) jacketed Twinax Cable for lab and high temperature applications, respectively. Bulk spool reels and cut-to-length quantities are available for same day shipment.

30-02001	Lab-rated Twinaxial Cable, 78 Ohm	1.10
30-02003	Lab-rated Twinaxial Cable, 78 Ohm	1.10
M17/176-00002	Vehicle-rated High-Temp Twinaxial Cable, 78 Ohm	3.60
30-02002	Vehicle-rated High-Temp Twinaxial Cable, 78 Ohm	4.00

Item #	Description	Attachment	Application	Cable Type	Length	List Price
--------	-------------	------------	-------------	------------	--------	------------

TRB Cable Plugs

CA-2009-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	12" (304.8mm)	68.00
CA-2009-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	24" (610.0mm)	69.00
CA-2009-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	36" (914.4mm)	70.00
CA-2009-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	48" (1219.2mm)	71.00
CA-2009-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	60" (1524.0mm)	72.00
CA-2014-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	12" (304.8mm)	70.00
CA-2014-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	24" (609.6mm)	71.00
CA-2014-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	36" (914.4mm)	72.00
CA-2014-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	48" (1219.2mm)	73.00
CA-2014-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	60" (1524.0mm)	74.00
CA-2008-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	12" (304.8mm)	79.00
CA-2008-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	24" (609.6mm)	83.00
CA-2008-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	36" (914.4mm)	86.00
CA-2008-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	48" (1219.2mm)	90.00
CA-2008-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	60" (1524.0mm)	93.00
MP-2168-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	12" (304.8mm)	89.00
MP-2168-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	24" (609.6mm)	93.00
MP-2168-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	36" (914.4mm)	97.00
MP-2168-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	48" (1219.2mm)	101.00
MP-2168-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	60" (1524.0mm)	105.00

TRB Cable Plugs with Bend Relief Springs

MP-2151-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	12" (304.8mm)	112.00
MP-2151-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	24" (609.6mm)	113.00
MP-2151-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	36" (914.4mm)	114.00
MP-2151-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	48" (1219.2mm)	115.00
MP-2151-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02001	60" (1524.0mm)	116.00
MP-2164-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	12" (304.8mm)	114.00
MP-2164-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	24" (609.6mm)	115.00
MP-2164-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	36" (914.4mm)	116.00
MP-2164-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	48" (1219.2mm)	117.00
MP-2164-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	Lab-rated	30-02003	60" (1524.0mm)	118.00
MP-2165-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	12" (304.8mm)	124.00
MP-2165-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	24" (609.6mm)	128.00
MP-2165-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	36" (914.4mm)	131.00
MP-2165-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	48" (1219.2mm)	135.00
MP-2165-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	M17/176-00002	60" (1524.0mm)	138.00
MP-2360-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	12" (304.8mm)	203.85
MP-2360-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	24" (609.6mm)	132.40
MP-2360-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	36" (914.4mm)	135.56
MP-2360-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	48" (1219.2mm)	138.76
MP-2360-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Solder / Clamp	High-Temp	30-02002	60" (1524.0mm)	141.93

TRB Cable Plugs, Full Crimp

CA-2171-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02001	12" (304.8mm)	193.10
CA-2171-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02001	24" (609.6mm)	131.03
CA-2171-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02001	36" (914.4mm)	131.86
CA-2171-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02001	48" (1219.2mm)	132.73
CA-2171-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02001	60" (1524.0mm)	133.60
MP-2352-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02003	12" (304.8mm)	414.20
MP-2352-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02003	24" (609.6mm)	126.33
MP-2352-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02003	36" (914.4mm)	126.90
MP-2352-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02003	48" (1219.2mm)	127.46
MP-2352-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Lab-rated	30-02003	60" (1524.0mm)	128.03
CA-2001-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	12" (304.8mm)	96.00
CA-2001-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	24" (609.6mm)	100.00
CA-2001-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	36" (914.4mm)	103.00
CA-2001-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	48" (1219.2mm)	107.00
CA-2001-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	60" (1524.0mm)	110.00


TRB Right Angle Cable Plugs, Full Crimp

MP-2167-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	12" (304.8mm)	423.60
MP-2167-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	24" (609.6mm)	232.63
MP-2167-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	36" (914.4mm)	430.80
MP-2167-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	48" (1219.2mm)	434.40
MP-2167-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	60" (1524.0mm)	438.00

TRB Right Angle to Straight Cable Plugs, Full Crimp

MP-2166-12	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	12" (304.8mm)	279.00
MP-2166-24	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	24" (609.6mm)	283.00
MP-2166-36	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	36" (914.4mm)	286.00
MP-2166-48	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	48" (1219.2mm)	290.00
MP-2166-60	3 Slot, Twinaxial Cable, Plug to Plug, 78 Ohm	Full Crimp	Vehicle-rated	M17/176-00002	60" (1524.0mm)	293.00

Additional Lengths Available

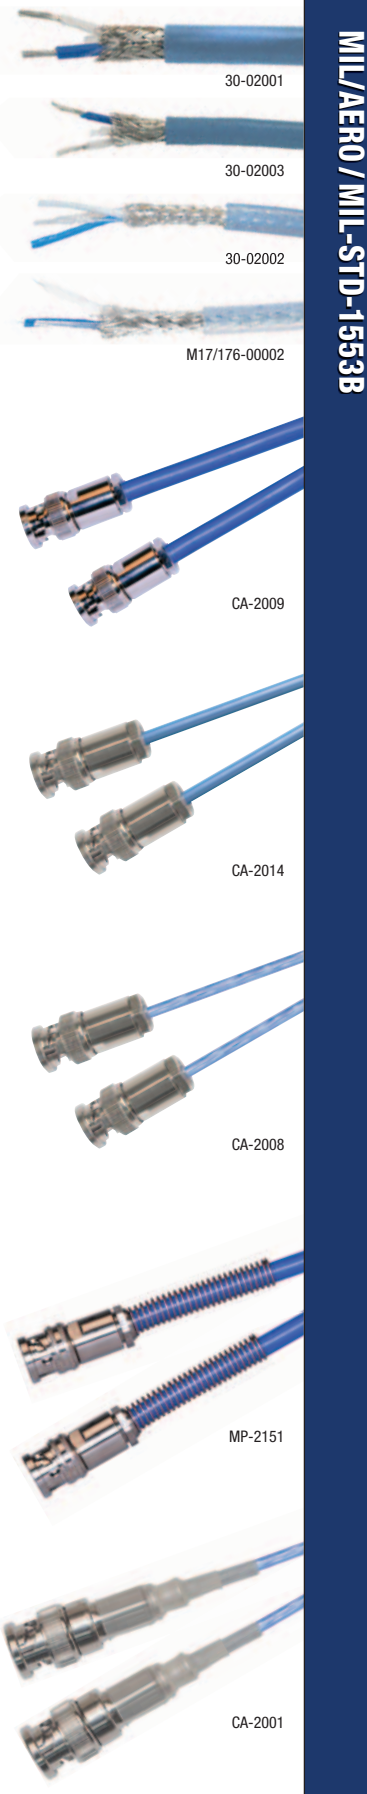



Item #	Description	Resistor Value	List Price
TRB Bus and Stub Terminators - without Chain			
10-06403-025	Bus Terminator, without Chain	78 Ohm	52.00
10-06403-033	Stub Terminator, without Chain	1000 Ohm	71.00
10-06403-044	Stub Terminator, without Chain	2000 Ohm	71.00
10-06403-024	Stub Terminator, without Chain	3000 Ohm	71.00

TRB Bus and Stub Terminators - with 3 Inch Stainless Steel Chain

10-06403-060	Bus Terminator, 3" Chain	78 Ohm	54.00
10-06403-066	Stub Terminator, 3" Chain	1000 Ohm	72.00
10-06403-065	Stub Terminator, 3" Chain	2000 Ohm	72.00
10-06403-064	Stub Terminator, 3" Chain	3000 Ohm	72.00

TRB Bus and Stub Terminators - with 6 Inch Stainless Steel Chain

10-06403-026	Bus Terminator, 6" Chain	78 Ohm	54.00
10-06403-034	Stub Terminator, 6" Chain	1000 Ohm	72.00
10-06403-042	Stub Terminator, 6" Chain	2000 Ohm	72.00
10-06403-038	Stub Terminator, 6" Chain	3000 Ohm	72.00

TRB RFI Dust Protection Caps - Stainless Steel Chain Options

10-06300	RFI Dust Cap, without Chain	11.00
10-06304	RFI Dust Cap, 3" Chain	12.00
10-06303	RFI Dust Cap, 6" Chain	12.00

Item #	Description	Twinaxial Cable Type	List Price
--------	-------------	----------------------	------------

TRB Cable Plug - 3 Slot, Solder/Clamp

10-06030-210	TRB Plug	30-02001, TWC-78-2, TWC-124-2	23.00
10-06030-231	TRB Plug	30-02003, TWC-78-1, TWC-124-1A	23.00
10-06030-206	TRB Plug	M17/176-00002	23.00
10-06030-242	TRB Plug	30-02002, TWAC-78-1F2	32.00
10-06030-227	TRB Plug	0024A0024-9X	37.00
10-06033-210	TRB Plug + Spring	30-02001, TWC-78-2, TWC-124-2	51.00
10-06033-231	TRB Plug + Spring	30-02003, TWC-78-1, TWC-124-1A	51.00
10-06033-206	TRB Plug + Spring	M17/176-00002	51.00
10-06033-242	TRB Plug + Spring	30-02002, TWAC-78-1F2	60.00
10-06033-227	TRB Plug + Spring	0024A0024-9X	60.00

TRB Cable Jack - 3 Lug, Solder/Clamp

10-06575-210	TRB Jack	30-02001, TWC-78-2, TWC-124-2	23.00
10-06575-231	TRB Jack	30-02003, TWC-78-1, TWC-124-1A	23.00
10-06575-206	TRB Jack	M17/176-00002	23.00
10-06575-242	TRB Jack	30-02002, TWAC-78-1F2	68.00
10-06570-210	TRB Jack + Spring	30-02001, TWC-78-2, TWC-124-2	32.00
10-06570-231	TRB Jack + Spring	30-02003, TWC-78-1, TWC-124-1A	32.00
10-06570-206	TRB Jack + Spring	M17/176-00002	32.00
10-06570-242	TRB Jack + Spring	30-02002, TWAC-78-1F2	50.00

TRB Bulkhead Cable Jack - 3 Lug, Solder/Clamp (Non-isolated)

10-06577-210	TRB Jack	30-02001, TWC-78-2, TWC-124-2	28.00
10-06577-231	TRB Jack	30-02003, TWC-78-1, TWC-124-1A	28.00
10-06577-206	TRB Jack	M17/176-00002	28.00
10-06577-242	TRB Jack	30-02002, TWAC-78-1F2	53.00
10-06579-210	TRB Jack + Spring	30-02001, TWC-78-2, TWC-124-2	75.00
10-06579-231	TRB Jack + Spring	30-02003, TWC-78-1, TWC-124-1A	75.00
10-06579-206	TRB Jack + Spring	M17/176-00002	75.00
10-06579-242	TRB Jack + Spring	30-02002, TWAC-78-1F2	75.00

TRB Bulkhead Cable Jack - 3 Lug, Solder/Clamp (Isolated)

10-06573-210	TRB Jack	30-02001, TWC-78-2, TWC-124-2	38.00
10-06573-231	TRB Jack	30-02003, TWC-78-1, TWC-124-1A	38.00
10-06573-206	TRB Jack	M17/176-00002	38.00
10-06573-242	TRB Jack	30-02002, TWAC-78-1F2	69.00
10-06574-210	TRB Jack + Spring	30-02001, TWC-78-2, TWC-124-2	43.00
10-06574-231	TRB Jack + Spring	30-02003, TWC-78-1, TWC-124-1A	43.00
10-06574-206	TRB Jack + Spring	M17/176-00002	43.00
10-06574-242	TRB Jack + Spring	30-02002, TWAC-78-1F2	74.00

TRB Cable Plug - 3 Slot, Full Crimp

10-06031-210	TRB Straight	30-02001, TWC-78-2, TWC-124-2	35.00
10-06031-231	TRB Straight	30-02003, TWC-78-1, TWC-124-1A	52.00
10-06031-206	TRB Straight	M17/176-00002	33.00
10-06032-206	TRB Right Angle	M17/176-00002	160.00

Item #	Description	Mating Interface	List Price
--------	-------------	------------------	------------

TRB Bulkhead Jack to Solder Pot (Non-isolated) - Mating Options

10-06569	TRB Front Mount	3-Lug Female Jack	23.00
10-06570	TRB Rear Mount	3-Lug Female Jack	30.00

TRB Bulkhead Jack to Solder Pot (Isolated) - Mating Options

10-06571	TRB Front Mount	3-Lug Female Jack	35.00
10-06572	TRB Rear Mount	3-Lug Female Jack	39.00

TRB Bulkhead Jack Feedthru (Isolated & Non-isolated) - Mating Options

10-06568	TRB Isolated	3-Lug Female Jack Feedthru	33.00
10-06567	TRB Non-isolated	3-Lug Female Jack Feedthru	30.00

TRB Hermetically-sealed Bulkhead Jack Feedthru (Non-isolated)

BJ78HS	TRB Bulkhead Jack	3-Lug Female Jack Feedthru	280.00
--------	-------------------	----------------------------	--------

Printed Circuit Board Bulkhead Jacks

CBBJ79	TRB Straight Bulkhead Jack	3-Lug Jack to Circuit Board Non-isolated	43.25
CBBJR79	TRB Right Angle Bulkhead Jack	3-Lug Jack to Circuit Board Non-isolated	46.00
CBBJR74	TRB Straight Bulkhead Jack	3-Lug Jack to Circuit Board Isolated	125.00

TRB Standard Within-series Adapters

10-06901	TRB 3-Lug Jack to TRB 3-Lug Jack	Feedthru Female to Female	23.00
10-06905	TRB 3-Slot Plug to Two TRB 3-Lug Jacks	Tee Female-Male-Female	83.00
10-06909	TRB 3-Slot Plug to TRB 3-Lug Jack	Right Angle Male to Female	80.00

Custom Inter-series Adapters

ADPL75-A1-PL75	TRB 3-Slot Plug to TRB 3-Slot Plug	Straight Body Male to Male	80.00
ADB20-E1-PL75	TRB 3-Slot Plug to BNC 2-Lug Jack	Straight Body Male to Female	38.99
ADBJ77-E1-PL20	BNC 2-Slot Plug to TRB 3-Lug Jack	Straight Body Female to Male	55.00

TRB Fixed Paralleling Jacks

TN2	TRB 3-Lug Jack to Two TRB 3-Slot Plugs	Goal-post Female-Male-Male	225.00
TN2A	TRB 3-Slot Plug to Two TRB 3-Lug Jacks	Goal-post Male-Female-Female	125.00

TRB and TRS Bushing / Shield Crimp Tools - Compatible Set

M22520/5-01	Bushing Shield Crimp Handle	475.00
CD5-8	TRB Crimp Die Set (Y778)	475.00
CD5-9	TRS Crimp Die Set (Y687)	575.00

TRB Center Contact Crimp Tools - Compatible Set

M22520/1-01	Center Contact Crimp Handle	475.00
010-0044	TRB Center Pin Positioner (TP837)	175.00
010-0045	TRB Center Socket Positioner (TP838)	175.00

TRS Subminiature Center Contact Crimp Tools - Compatible Set

M22520/2-01	Center Contact Crimp Handle	475.00
010-0041	TRS Center Pin Positioner (K815-S)	175.00

M17 / 176-00002 Cable Splicing Tools - Compatible Set

AD-1377	Splice Crimp Tool	325.00
10-06950	Eight Piece Splicing Kit	98.00

Crimp Tool Compatibility Guide

Full Crimp Connector Series	Cable Group	Cable Part Number	Bushing / Shield Crimp Handle	Bushing / Shield Crimp Die Set	Center Contact Crimp Handle	Center Contact Positioner
TRB Standard 10-06031-xxx 10-06032-xxx 10-06576-xxx	-210	30-02001, TEC-78-2 TWC-124-2	M22520/5-01	CD5-8 (Y778)	M22520/1-01	010-0044 (TP837) use for pin contacts (plugs)
	-231	30-02003, TEC-78-1 TWC-124-1A				010-0045 (TP838) use for socket contacts (jacks)
	-206	M17/176-00002				
	-242	30-02002				
TRS Subminiature 10-10031-xxx 10-10032-xxx	-231	30-02003, TEC-78-1 TWC-124-1A	M22520/5-01	CD5-9 (Y687)	M22520/2-01	010-0041 (K815-S) use for pin (plugs) & socket contacts (jacks)
	-206	M17/176-00002				
	-242	30-02002				

TRS Data Bus Couplers Subminiature

BC-1003-1	TRS 3-Lug Jacks, Non-terminated, 1-Stub	275.00
BC-1003-2	TRS 3-Lug Jacks, Non-terminated, 2-Stub	378.00
BC-1003-3	TRS 3-Lug Jacks, Non-terminated, 3-Stub	345.00
BC-1003-4	TRS 3-Lug Jacks, Non-terminated, 4-Stub	420.00
BC-1003-5	TRS 3-Lug Jacks, Non-terminated, 5-Stub	520.00
BC-1003-6	TRS 3-Lug Jacks, Non-terminated, 6-Stub	595.00
BC-1003-7	TRS 3-Lug Jacks, Non-terminated, 7-Stub	670.00
BC-1003-8	TRS 3-Lug Jacks, Non-terminated, 8-Stub	775.00





Item #	Description	Color	(Per Foot) List Price
100 Ohm Twinaxial Cable			
0024A0024-9X	Twinaxial Cable, 100 Ohm	White	10.00
MP-5771-12	3-Slot, Twinaxial Cable, Plug to Plug, 100 Ohm	White	151.00
MP-5771-24	3-Slot, Twinaxial Cable, Plug to Plug, 100 Ohm	White	158.00
MP-5771-36	3-Slot, Twinaxial Cable, Plug to Plug, 100 Ohm	White	165.00

Item #	Description	Compatible Twinaxial Cable Type	List Price
10-06030-227	TRB Plug	0024A0024-9X	37.00
10-06403-046	Bus Terminator without Chain		75.00
10-06403-072	Bus Terminator 3" Chain		85.00
10-06403-071	Bus Terminator 6" Chain		85.00

Item #	Description	Color	(Per Foot) List Price
124 Ohm Twinaxial Cable			
TWC-124-2	Trompete Twinaxial Cable, 124 Ohm	Blue	1.75
TWC-124-1A	Trompete Twinaxial Cable, 124 Ohm	Blue	1.50

Item #	Description	Twinaxial Cable Type	Length	List Price
124 Ohm Twinaxial Cable, PVC, 0.025" Diameter				
MP-2205-12	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-2	12" (304.8mm)	86.00
MP-2205-24	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-2	24" (609.6mm)	87.00
MP-2205-36	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-2	36" (914.4mm)	88.00
MP-2205-48	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-2	48" (1219.2mm)	89.00
MP-2205-60	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-2	60" (1524.0mm)	90.00
MP-2302-12	TRB 3-Slot Plug to Blunt	TWC-124-2	12" (304.8mm)	46.74
MP-2302-24	TRB 3-Slot Plug to Blunt	TWC-124-2	24" (609.6mm)	48.48
MP-2302-36	TRB 3-Slot Plug to Blunt	TWC-124-2	36" (914.4mm)	50.22
MP-2302-48	TRB 3-Slot Plug to Blunt	TWC-124-2	48" (1219.2mm)	51.96
MP-2302-60	TRB 3-Slot Plug to Blunt	TWC-124-2	60" (1524.0mm)	53.70
MP-2152-12	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-2	12" (304.8mm)	91.74
MP-2152-24	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-2	24" (609.6mm)	93.48
MP-2152-36	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-2	36" (914.4mm)	95.22
MP-2152-48	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-2	48" (1219.2mm)	91.96
MP-2152-60	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-2	60" (1524.0mm)	98.70
MP-2600-12	TRB 3-Slot Plug to TRB 3-Lug Jack	TWC-124-2	12" (304.8mm)	76.74
MP-2600-24	TRB 3-Slot Plug to TRB 3-Lug Jack	TWC-124-2	24" (609.6mm)	78.48
MP-2600-36	TRB 3-Slot Plug to TRB 3-Lug Jack	TWC-124-2	36" (914.4mm)	80.22
MP-2600-48	TRB 3-Slot Plug to TRB 3-Lug Jack	TWC-124-2	48" (1219.2mm)	81.96
MP-2600-60	TRB 3-Slot Plug to TRB 3-Lug Jack	TWC-124-2	60" (1524.0mm)	83.70
MP-2601-12	TRB 3-Lug Jack to TRB 3-Lug Jack	TWC-124-2	12" (304.8mm)	76.74
MP-2601-24	TRB 3-Lug Jack to TRB 3-Lug Jack	TWC-124-2	24" (609.6mm)	78.48
MP-2601-36	TRB 3-Lug Jack to TRB 3-Lug Jack	TWC-124-2	36" (914.4mm)	80.22
MP-2601-48	TRB 3-Lug Jack to TRB 3-Lug Jack	TWC-124-2	48" (1219.2mm)	81.96
MP-2601-60	TRB 3-Lug Jack to TRB 3-Lug Jack	TWC-124-2	60" (1524.0mm)	83.70

124 Ohm Twinaxial Cable, PVC, 0.150" Diameter

MP-2292-12	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	12" (304.8mm)	81.50
MP-2292-24	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	24" (609.6mm)	83.00
MP-2292-36	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	36" (914.4mm)	84.50
MP-2292-48	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	48" (1219.2mm)	86.00
MP-2292-60	TRB 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	60" (1524.0mm)	87.50
MP-2602-12	TRB 3-Slot Plug to Blunt	TWC-124-1A	12" (304.8mm)	51.50
MP-2602-24	TRB 3-Slot Plug to Blunt	TWC-124-1A	24" (609.6mm)	53.00
MP-2602-36	TRB 3-Slot Plug to Blunt	TWC-124-1A	36" (914.4mm)	54.50
MP-2602-48	TRB 3-Slot Plug to Blunt	TWC-124-1A	48" (1219.2mm)	56.00
MP-2602-60	TRB 3-Slot Plug to Blunt	TWC-124-1A	60" (1524.0mm)	57.50
MP-2487-12	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-1A	12" (304.8mm)	96.50
MP-2487-24	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-1A	24" (609.6mm)	98.00
MP-2487-36	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-1A	36" (914.4mm)	99.50
MP-2487-48	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-1A	48" (1219.2mm)	101.00
MP-2487-60	TRB 3-Slot Plug, Bend Relief to TRB 3-Slot Plug, Bend Relief	TWC-124-1A	60" (1524.0mm)	102.50
MP-2603-12	TRS 3-Slot Plug to TRS 3-Slot Plug	TWC-124-1A	12" (304.8mm)	81.50
MP-2603-24	TRS 3-Slot Plug to TRS 3-Slot Plug	TWC-124-1A	24" (609.6mm)	83.00
MP-2603-36	TRS 3-Slot Plug to TRS 3-Slot Plug	TWC-124-1A	36" (914.4mm)	84.50
MP-2603-48	TRS 3-Slot Plug to TRS 3-Slot Plug	TWC-124-1A	48" (1219.2mm)	86.00
MP-2603-60	TRS 3-Slot Plug to TRS 3-Slot Plug	TWC-124-1A	60" (1524.0mm)	87.50
MP-2344-12	TRS 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	12" (304.8mm)	81.50
MP-2344-24	TRS 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	24" (609.6mm)	83.00
MP-2344-36	TRS 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	36" (914.4mm)	84.50
MP-2344-48	TRS 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	48" (1219.2mm)	86.00
MP-2344-60	TRS 3-Slot Plug to TRB 3-Slot Plug	TWC-124-1A	60" (1524.0mm)	87.50

Additional Lengths Available

Item #	Description	Twinaxial Cable Type	List Price
Twinaxial TRB Cable Plugs and Jacks			
10-06030-210	TRB 3-Slot Cable Plug, Solder/Clamp	TWC-124-2	23.00
10-06030-231	TRB 3-Slot Cable Plug, Solder/Clamp	TWC-124-1A	23.00
10-06575-210	TRB 3-Lug Cable Jack, Solder/Clamp	TWC-124-2	23.00
10-06575-231	TRB 3-Lug Cable Jack, Solder/Clamp	TWC-124-1A	23.00
10-06033-210	TRB 3-Slot Cable Plug + Spring with Bend Relief	TWC-124-2	51.00
10-06033-231	TRB 3-Slot Cable Plug + Spring with Bend Relief	TWC-124-1A	51.00
10-10030-231	TRS Submin Plug 3-Slot, Solder/Clamp	TWC-124-1A	25.00

50 and 75 Ohm Triaxial Cable

Item #	Description	Color	(Per Foot) List Price
TRC-50-2	Trompeter Triaxial Cable, 50 Ohm	Yellow	2.25
TRC-50-1	Trompeter Triaxial Cable, 50 Ohm	Yellow	2.25
TRC-75-2	Trompeter Triaxial Cable, 75 Ohm	Yellow	2.25
TRC-75-1	Trompeter Triaxial Cable, 75 Ohm	Yellow	2.25

50 Ohm Triaxial Cable, PVC, 0.242" Diameter

Item #	Description	Triaxial Cable Type	Length	List Price
CA-3017-12	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	12" (304.8mm)	100.00
CA-3017-24	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	24" (609.6mm)	102.30
CA-3017-36	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	36" (914.4mm)	104.60
MP-2604-12	TRB Plug 3-Slot Male to Blunt	TRC-50-2	12" (304.8mm)	65.00
MP-2604-24	TRB Plug 3-Slot Male to Blunt	TRC-50-2	24" (609.6mm)	67.30
MP-2604-36	TRB Plug 3-Slot Male to Blunt	TRC-50-2	36" (914.4mm)	69.60
MP-2605-12	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	12" (304.8mm)	120.00
MP-2605-24	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	24" (609.6mm)	122.30
MP-2605-36	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-2	36" (914.4mm)	124.60
MP-2606-12	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-2	12" (304.8mm)	130.00
MP-2606-24	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-2	24" (609.6mm)	132.30
MP-2606-36	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-2	36" (914.4mm)	134.60
MP-2607-12	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-50-2	12" (304.8mm)	150.00
MP-2607-24	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-50-2	24" (609.6mm)	152.30
MP-2607-36	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-50-2	36" (914.4mm)	154.60

50 Ohm Triaxial Cable, PVC, 0.156" Diameter

MP-2346-12	TRB 3-Slot Plug to TRB 3-Slot Plug	TRC-50-1	12" (304.8mm)	100.00
MP-2346-24	TRB 3-Slot Plug to TRB 3-Slot Plug	TRC-50-1	24" (609.6mm)	103.30
MP-2346-36	TRB 3-Slot Plug to TRB 3-Slot Plug	TRC-50-1	36" (914.4mm)	106.60
MP-2608-12	TRB 3-Slot Male to Blunt	TRC-50-1	12" (304.8mm)	78.00
MP-2608-24	TRB 3-Slot Male to Blunt	TRC-50-1	24" (609.6mm)	81.00
MP-2608-36	TRB 3-Slot Male to Blunt	TRC-50-1	36" (914.4mm)	84.00
MP-2609-12	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-1	12" (304.8mm)	130.00
MP-2609-24	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-1	24" (609.6mm)	133.30
MP-2609-36	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-50-1	36" (914.4mm)	136.36
MP-2610-12	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-50-1	12" (304.8mm)	130.00
MP-2610-24	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-50-1	24" (609.6mm)	133.30
MP-2610-36	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-50-1	36" (914.4mm)	136.36
MP-2611-12	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-1	12" (304.8mm)	120.00
MP-2611-24	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-1	24" (609.6mm)	123.30
MP-2611-36	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-50-1	36" (914.4mm)	126.60

75 Ohm Triaxial Cable, PVC, 0.245" Diameter

CA-3013-12	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	12" (304.8mm)	100.00
CA-3013-24	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	24" (609.6mm)	102.30
CA-3013-36	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	36" (914.4mm)	104.60
MP-2612-12	TRB Plug 3-Slot Male to Blunt	TRC-75-2	12" (304.8mm)	85.00
MP-2612-24	TRB Plug 3-Slot Male to Blunt	TRC-75-2	24" (609.6mm)	87.30
MP-2612-36	TRB Plug 3-Slot Male to Blunt	TRC-75-2	36" (914.4mm)	89.60
MP-2613-12	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	12" (304.8mm)	130.00
MP-2613-24	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	24" (609.6mm)	132.30
MP-2613-36	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-2	36" (914.4mm)	134.60
MP-2614-12	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-2	12" (304.8mm)	110.00
MP-2614-24	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-2	24" (609.6mm)	112.30
MP-2614-36	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-2	36" (914.4mm)	114.60
MP-2615-12	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-75-2	12" (304.8mm)	120.00
MP-2615-24	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-75-2	24" (609.6mm)	122.30
MP-2615-36	TRB Jack 3-Lug Female to TRB Jack 3-Lug Female	TRC-75-2	36" (914.4mm)	124.60

75 Ohm Triaxial Cable, PVC, 0.189" Diameter

MP-3000-12	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	12" (304.8mm)	130.00
MP-3000-24	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	24" (609.6mm)	133.30
MP-3000-36	TRB Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	36" (914.4mm)	136.60
MP-2616-12	TRB Plug 3-Slot Male to Blunt	TRC-75-1	12" (304.8mm)	85.00
MP-2616-24	TRB Plug 3-Slot Male to Blunt	TRC-75-1	24" (609.6mm)	87.30
MP-2616-36	TRB Plug 3-Slot Male to Blunt	TRC-75-1	36" (914.4mm)	89.60
MP-2617-12	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-1	12" (304.8mm)	145.00
MP-2617-24	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-1	24" (609.6mm)	148.30
MP-2617-36	TRB Plug 3-Slot Male to TRB Jack 3-Lug Female	TRC-75-1	36" (914.4mm)	151.60
MP-2618-12	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-75-1	12" (304.8mm)	135.00
MP-2618-24	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-75-1	24" (609.6mm)	138.30
MP-2618-36	TRS Plug 3-Slot Male to TRS Plug 3-Slot Male	TRC-75-1	36" (914.4mm)	141.60
MP-2619-12	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	12" (304.8mm)	130.00
MP-2619-24	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	24" (609.6mm)	132.50
MP-2619-36	TRS Plug 3-Slot Male to TRB Plug 3-Slot Male	TRC-75-1	36" (914.4mm)	135.00

Item #	Description	Triaxial Cable Type	List Price
--------	-------------	---------------------	------------


Triaxial TRB Cable Plugs and Jacks

10-06030-310	Triaxial TRB 3-Slot Cable Plug, Solder / Clamp	TRC-50-2, TRC-75-2	35.00
10-06030-370	Triaxial TRB 3-Slot Cable Plug, Solder / Clamp	TRC-50-1	35.00
10-06030-350	Triaxial TRB 3-Slot Cable Plug, Solder / Clamp	TRC-75-1	35.00
10-06575-310	Triaxial TRB 3-Lug Cable Jack, Solder / Clamp	TRC-50-2, TRC-75-2	35.00
10-06575-370	Triaxial TRB 3-Lug Cable Jack, Solder / Clamp	TRC-50-1	35.00
10-06575-350	Triaxial TRB 3-Lug Cable Jack, Solder / Clamp	TRC-75-1	35.00
10-06033-310	Triaxial TRB 3-Slot Cable Plug + Spring with Bend Relief	TRC-50-2, TRC-75-2	45.00
10-06033-370	Triaxial TRB 3-Slot Cable Plug + Spring with Bend Relief	TRC-50-1	45.00
10-06033-350	Triaxial TRB 3-Slot Cable Plug + Spring with Bend Relief	TRC-75-1	45.00
10-10030-370	Triaxial TRS Submin Plug 3-Slot, Solder / Clamp	TRC-50-1	45.00
10-10030-350	Triaxial TRS Submin Plug 3-Slot, Solder / Clamp	TRC-75-1	45.00



Additional Lengths Available



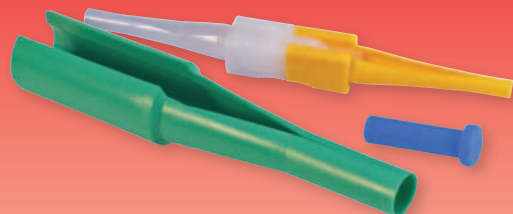

Mil/Aero Electrical Interconnect Products

Aiconics is the preferred manufacturer of plastic insertion/removal tools and sealing plugs used for assembly and maintenance of electrical connectors.

Our superior quality tools and sealing plugs are used worldwide by the Industry's leading connector companies and have been the reliable choice for over 20 years.

We also supply a variety of connector production and maintenance products including:

- Pin and Socket Contacts
- Die Sets
- Crimping Tools
- Metal Insertion/Removal Tools

We are Military/Aerospace qualified and our products service most Circular, D-Sub Miniature, and Coax connectors. Count on us for minimum to zero lead times, outstanding service and exceptional quality.


Sealing Plugs



Contact Installing & Removal Tools




A - INSTALLING AND REMOVAL TOOLS B - SEALING PLUGS FOR UNUSED CAVITIES

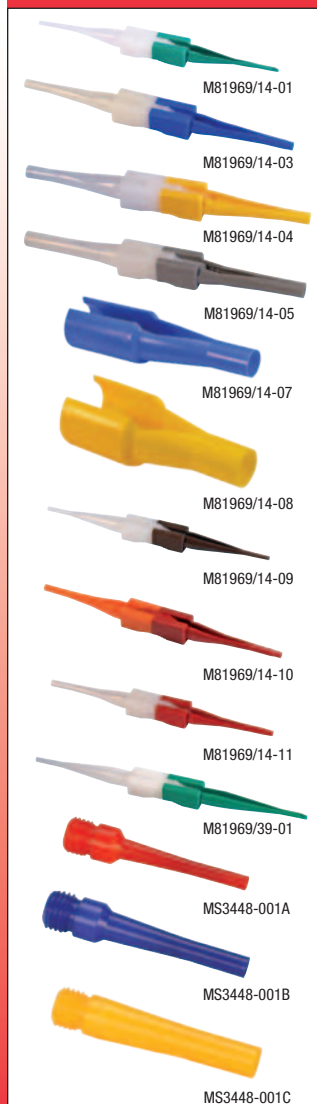

A INSTALLING AND REMOVAL TOOLS - PLASTIC					
Item #	Size	Color Code	Connector Series	List Price	
M81969/14-01	22	Green/White	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714	1.02	
M81969/14-02	20	Red/White	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714 and MIL-C-5015	1.03	
M81969/14-03	16	Blue/White	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714 and MIL-C-5015	1.08	
M81969/14-04	12	Yellow/White	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714 and MIL-C-5015	1.40	
M81969/14-05	10	Gray/White	MIL-C-38999	3.98	
M81969/14-06	8	Red	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-T-81714 and MIL-C-5015	3.48	
M81969/14-07	4	Blue	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714 and MIL-C-5015	3.48	
M81969/14-08	0	Yellow	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-C-38999, MIL-T-81714 and MIL-C-5015	4.13	
M81969/14-09	22	Brown/White	MIL-C-55302/169/171	3.25	
M81969/14-10	20	Red/Orange	MIL-C-38999	1.02	
M81969/14-11	20	Red/White	MIL-C-26482, MIL-C-81703, MIL-C-83723, MIL-T-81714 and MIL-C-5015	1.02	
M81969/14-12	8	Green	MIL-C-38999	3.58	
M81969/16-01	20	Red/White	MIL-C-81511 Series 3 & 4	2.80	
M81969/16-02	16	Blue/White	MIL-C-81511 Series 3 & 4	4.23	
M81969/16-03	12	Yellow/White	MIL-C-81511 Series 3 & 4	4.70	
M81969/16-04	22	Green/White	MIL-C-81511 Series 3 & 4	3.10	
M81969/39-01	20	Green/White	MIL-C-24308 and MIL-C-81659	1.65	
M15570-22-1	22	Yellow/White	D-Sub Miniature Types RE, RSM, RTK, etc. and MIL-C-81511	2.15	
ACET20-11	20	Green	MIL-C-24308, MIL-C-81659 as well as Cannon and Matrix Equivalents	1.98	
ACET-C8	8	White	Coax	11.88	
MS3448-001A	20	Red	MIL-C-5015, MIL-C-26482, MIL-C-81511 Class L, MIL-C-81703, MIL-C-83723 and MIL-C-83733	19.17	
MS3448-001B	16	Blue	MIL-C-5015, MIL-C-26482, MIL-C-81511 Class L, MIL-C-81703, MIL-C-83723 and MIL-C-83733	19.17	
MS3448-001C	12	Yellow	MIL-C-5015, MIL-C-26482, MIL-C-81511 Class L, MIL-C-81703, MIL-C-83723 and MIL-C-83733	19.17	


A INSTALLING AND REMOVAL TOOLS - PLASTIC BODY / METAL TIP


Item #	Size	Color Code	Connector Series	List Price
M81969/1-01	22	Green/White	MIL-C-24308 and MIL-C-81659	6.93
M81969/1-02	20	Red/White	MIL-C-24308 and MIL-C-81659	5.25
M81969/1-03	16	Blue/White	MIL-C-24308 and MIL-C-81659	6.93
M81969/1-04	22D	Green/White	MIL-C-24308 and MIL-C-81659	5.25

**B SEALING PLUGS - *Sold in Packs of 100**

Item #	Size	Color Code	Connector Series	List Price*
MS27488-22-2	22	Black	MIL-DTL-26500, MIL-DTL-28804, MIL-C-29600, MIL-DTL-38999, MIL-C-81511 Series 3 & 4, SAE-AS81659	6.00
MS27488-22-1	22	Black	MIL-DTL-26500, MIL-DTL-28804, MIL-C-29600, MIL-DTL-38999, MIL-C-81511 Series 3 & 4, SAE-AS81659	5.83
MS27488-22	22	Black	MIL-DTL-26500, MIL-DTL-38999, MIL-C-81511 SERIES 3 & 4, SAE-AS81659	5.67
MS27488-20-2	20	Red	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	6.33
MS27488-20-1	20	Red	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	6.33
MS27488-20	20	Red	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	5.83
MS27488-16-3	16	Blue	MIL-DTL-5015	8.33
MS27488-16-2	16	Green	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	8.17
MS27488-16-1	16	Blue	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	7.50
MS27488-16	16	Blue	MIL-DTL-5015, MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	7.17
MS27488-12-3	12	Yellow	MIL-DTL-5015	10.33
MS27488-12-2	12	Orange	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	10.17
MS27488-12-1	12	Yellow	MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-C-29600, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	9.83
MS27488-12	12	Yellow	MIL-DTL-5015, MIL-DTL-26482 SERIES 1 & 2, MIL-DTL-26500, MIL-DTL-26518, MIL-DTL-38999 ALL SERIES, MIL-C-81511 SERIES 3 & 4, MIL-C-81582, SAE-AS81659, MIL-C-81703, SAE-AS81714, MIL-DTL-83527, MIL-DTL-83538, MIL-DTL-83723 SERIES II & III	9.50
MS27488-8-3	8	Red	MIL-DTL-5015	45.71
MS27488-8-1	8	Red	MIL-DTL-5015	45.71
MS27488-8	8	Red	MIL-DTL-5015	41.43
MS27488-4-3	4	Blue	MIL-DTL-5015	60.00
MS27488-4-1	4	Blue	MIL-DTL-5015	57.14
MS27488-4	4	Blue	MIL-DTL-5015	51.43
MS27488-0-3	0	Yellow	MIL-DTL-5015	115.71
MS27488-0-1	0	Yellow	MIL-DTL-5015	122.86
MS3187A20	20	Red	MIL-DTL-26482 Series 1 and MIL-C-81703 Series 2	5.83
MS3187-16	16	Blue	MIL-DTL-26482 Series 1 and MIL-C-81703 Series 2	5.83
MS25251-20	20	Red	MIL-DTL-5015 and MIL-DTL-26482	5.00
MS25251-16	16	Blue	MIL-DTL-5015 and MIL-DTL-26482	5.00
MS25251-12	12	Yellow	MIL-DTL-5015 and MIL-DTL-26482	5.83
MS25251-8	8	White	MIL-DTL-5015 and MIL-DTL-26482	7.50

*NOTE: Sold in Packs of 100

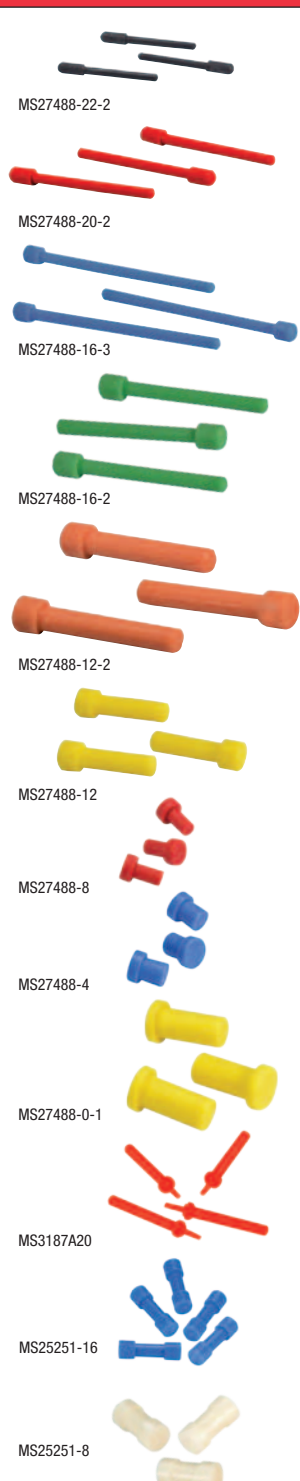

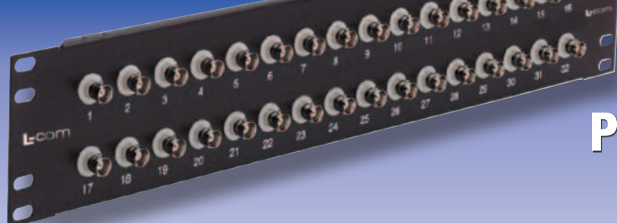

Patch Panels / Racks Tutorial

What are racks, enclosures and patch panels?

Racks, enclosures and patch panels are typically constructed of steel, sheet metal and plastic and are used to secure and organize cables and communications equipment in a data center.


How are racks, enclosures and patch panels used?

Patch panels are screwed into the racks and enclosures. Patch panels are populated with couplers and adapters of various types which allow connection points for patch cables.

Where are racks, enclosures and patch panels used?

Racks, enclosures and patch panels are mostly used in data closets and larger data centers and are used by commercial business, governments, the military and many other industries.

Rack and Enclosure Construction

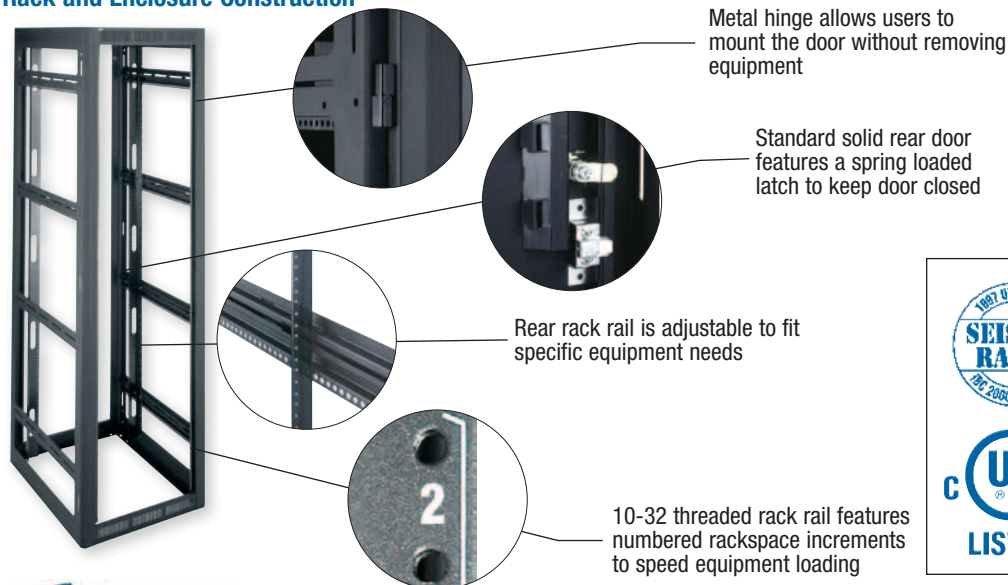

Seismic Rated to Uniform Building Code Zone 4 for up to 1,000 lbs (454.5kg) of equipment when installed with WRK-Z4 Mounting Bracket




Enclosures are UL Listed with a weight capacity of up to 2,500 lbs (1136.4kg)




The racks and enclosures manufactured by Middle Atlantic Products have been designed specifically to address both the needs of the equipment that is being mounted, as well as to address any limitations or restrictions of the jobsite. In addition, these racks are contractor-friendly and have been designed with many essential time-saving features.




Thermal Management Best Practices

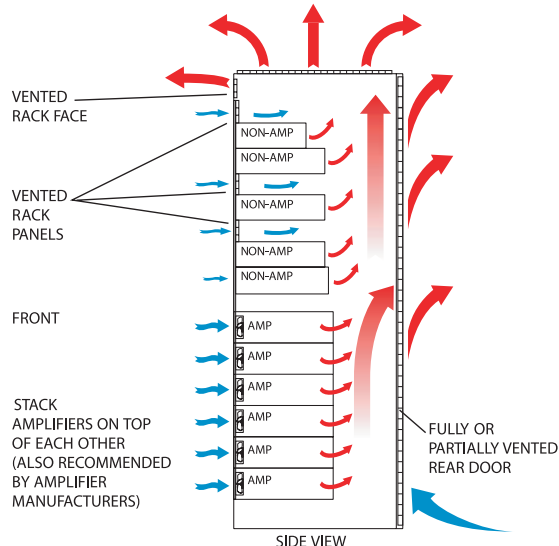PROPER
PASSIVE CONVECTION
with front-intakes on equipment

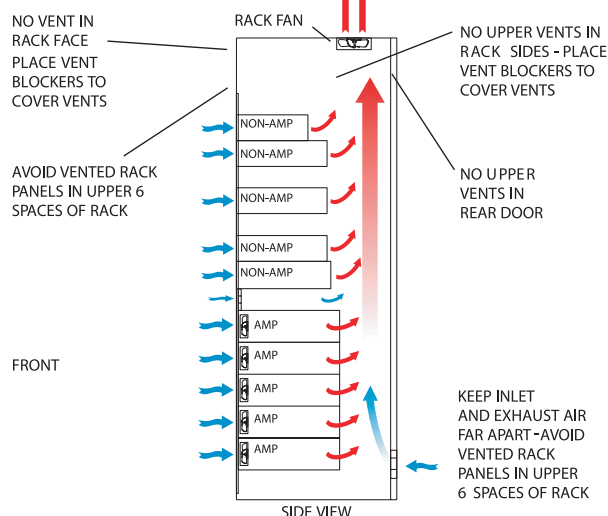


PROPER
FORCED AIR
with front-intakes on equipment



Server Cabinet	Security Cabinet	Network Cabinet
 <ul style="list-style-type: none"> Fully vented front and split rear doors Fully vented top Temperature sensor Cable management Power distribution Cage nut rackrail Hardware Other options available <p>WMRK Series</p>	 <ul style="list-style-type: none"> Fully welded construction, open sides 2,500 lb (1136.4kg) weight capacity Seismic certified (1994 UBC for seismic zone 4) for protecting 1,000 lbs (454.5kg) of essential equipment when used in conjunction with the WRK-Z4 brackets Generous 24.25" (61.6cm) OD width provides room for cables 2 extra-wide pairs of 10-32 threaded rackrail standard Grounding and bonding stud installed in base <p>WRK Series</p>	 <ul style="list-style-type: none"> 30" (76.2cm) OD width, 31.5" (80cm), 36" (91.4cm) and 42" (106.7cm) OD depth Fully welded construction provides a 2,500 lb (1136.4kg) weight capacity Seismic certified (UBC 1997 & CBC 1998 Zone 4; IBC 2000, IBC 2003, ASCE7-01, NFPA 5000 Seismic Use Group III) for protecting 750 lbs (340.9kg) of essential equipment when used in conjunction with the MRK-Z4 brackets Vented rear door standard .125" (0.3cm) thick structural steel internal braces include 100 rack screws Grounded and bonding stud installed in base <p>DRK Series</p>

Item #	Racking Height	Overall Height	Shipping Weight	1-9	10-24	25-99	100+
36-42" (91.4cm - 106.7cm) Outside Depth Server Cabinets, with or without Side Panels							
WMRK-2436SVR	42" (106.7cm) (24 Space)	48.63" (123.5cm)	270 lbs (122.7kg)	2795.52	2739.61	2627.79	CALL
WMRK-2436SVR-AB	42" (106.7cm) (24 Space)	48.63" (123.5cm)	205 lbs (93.2kg)	2227.35	2182.80	2093.71	CALL
WMRK-4236SVR	73.50" (186.7cm) (42 Space)	80.07" (203.4cm)	230 lbs (122.7kg)	3125.07	3062.57	2937.57	CALL
WMRK-4236SVR-AB	73.50" (186.7cm) (42 Space)	80.07" (203.4cm)	165 lbs (104.5kg)	2386.40	2338.67	2243.22	CALL
WMRK-4242SVR	73.50" (186.7cm) (42 Space)	80.07" (203.4cm)	245 lbs (111.4kg)	3329.63	3263.04	3129.85	CALL
WMRK-4242SVR-AB	73.50" (186.7cm) (42 Space)	80.07" (203.4cm)	180 lbs (81.8kg)	2556.91	2505.77	2403.50	CALL
27.5" (69.9cm) Outside Depth 25.75" (65.4cm) Stand Alone, Non-Gangable Network Enclosures with Side Panels							
WRKSA-2427	42" (106.7cm) (24 Space)	48.13" (122.3cm)	146 lbs (66.4kg)	1092.63	1070.78	1027.07	CALL
WRKSA-3727	64.75" (164.5cm) (37 Space)	70.88" (180.0cm)	202 lbs (91.8kg)	1244.78	1219.88	1170.09	CALL
WRKSA-4027	70" (177.8cm) (40 Space)	76.13" (193.4cm)	212 lbs (96.4kg)	1327.71	1301.16	1248.05	CALL
WRKSA-4427	77" (195.6cm) (44 Space)	83.13" (211.2cm)	226 lbs (102.7kg)	1369.27	1341.88	1287.11	CALL
WRKSA-4427LRD*	77" (195.6cm) (44 Space)	83.13" (211.2cm)	195 lbs (88.6kg)	1244.78	1219.88	1170.09	CALL
*Enclosure does not include rear door							
32.5" (82.6cm) Outside Depth 30.75" (78.1cm) Stand Alone, Non-Gangable Network Enclosures with Side Panels							
WRKSA-2432	42" (106.7cm) (24 Space)	48.13" (122.3cm)	164 lbs (74.5kg)	1189.40	1165.61	1118.04	CALL
WRKSA-3732	64.75" (164.5cm) (37 Space)	70.88" (180.0cm)	218 lbs (99.1kg)	1327.71	1301.16	1248.05	CALL
WRKSA-4032	70" (177.8cm) (40 Space)	76.13" (193.4cm)	234 lbs (106.4kg)	1355.40	1328.29	1274.08	CALL
WRKSA-4432	77" (195.6cm) (44 Space)	83.13" (211.2cm)	250 lbs (113.6kg)	1479.86	1450.26	1391.07	CALL
WRKSA-4432LRD*	77" (195.6cm) (44 Space)	83.13" (211.2cm)	212 lbs (96.4kg)	1355.40	1328.29	1274.08	CALL
*Enclosure does not include rear door							
27.5" (69.9cm) Outside Depth 25.75" (65.4cm) Gangable Security/Data Cabinet Enclosures without Side Panels							
WRK-2427	42" (106.7cm) (24 Space)	48.13" (122.3cm)	124 lbs (56.4kg)	1064.95	1043.65	1001.05	CALL
WRK-3727	64.75" (164.5cm) (37 Space)	70.88" (180.0cm)	160 lbs (72.7kg)	1203.27	1179.20	1131.07	CALL
WRK-4027	70" (177.8cm) (40 Space)	76.13" (193.4cm)	168 lbs (76.4kg)	1286.27	1260.54	1209.09	CALL
WRK-4427	77" (195.6cm) (44 Space)	83.13" (211.2cm)	176 lbs (80.0kg)	1327.71	1301.16	1248.05	CALL
WRK-4427LRD*	77" (195.6cm) (44 Space)	83.13" (211.2cm)	152 lbs (69.1kg)	1203.27	1179.20	1131.07	CALL
*Enclosure does not include rear door							
32.5" (82.6cm) Outside Depth 30.75" (78.1cm) Gangable Security/Data Cabinet Enclosures without Side Panels							
WRK-2432	42" (106.7cm) (24 Space)	48.13" (122.3cm)	138 lbs (62.7kg)	1134.14	1111.46	1066.09	CALL
WRK-3732	64.75" (164.5cm) (37 Space)	70.88" (180.0cm)	178 lbs (80.9kg)	1258.58	1233.41	1183.07	CALL
WRK-4032	70" (177.8cm) (40 Space)	76.13" (193.4cm)	184 lbs (83.6kg)	1313.91	1287.63	1235.08	CALL
WRK-4432	77" (195.6cm) (44 Space)	83.13" (211.2cm)	181 lbs (82.3kg)	1369.27	1341.88	1287.11	CALL
WRK-4432LRD*	77" (195.6cm) (44 Space)	83.13" (211.2cm)	161 lbs (73.2kg)	1244.78	1219.88	1170.09	CALL
*Enclosure does not include rear door							
DRK Series 31.5" (80.0cm), 36" (91.4cm) and 42" (106.7cm) Networking Cabinet, Deep Enclosures with Vented Rear Door							
DRK19-44-31	77" (195.6cm) (44 Space)	83.50" (212.1cm)	195 lbs (88.6kg)	1979.05	1939.47	1860.31	CALL
DRK19-44-31PRO	77" (195.6cm) (44 Space)	83.50" (212.1cm)	195 lbs (88.6kg)	2069.01	2027.63	1944.87	CALL
DRK19-44-36	77" (195.6cm) (44 Space)	83.50" (212.1cm)	220 lbs (100.0kg)	2191.96	2148.12	2060.44	CALL
DRK19-44-36PRO	77" (195.6cm) (44 Space)	83.50" (212.1cm)	220 lbs (100.0kg)	2281.87	2236.23	2144.96	CALL
DRK19-44-42	77" (195.6cm) (44 Space)	83.50" (212.1cm)	240 lbs (109.1kg)	2434.17	2385.49	2288.12	CALL
DRK19-44-42PRO	77" (195.6cm) (44 Space)	83.50" (212.1cm)	240 lbs (109.1kg)	2523.33	2472.86	2371.93	CALL
R4CN Series 19" (48.3cm) Relay and 4 Post Universal Rack Enclosures with Cage Nut Rackrails							
R4CN-4524B	78.75" (200.0cm) (45 Space)	84.22" (213.9cm)	72 lbs (32.7kg)	788.74	772.97	741.42	CALL
R4CN-4530B	78.75" (200.0cm) (45 Space)	84.22" (213.9cm)	85 lbs (38.6kg)	916.88	898.54	861.87	CALL
R4CN-4536B	78.75" (200.0cm) (45 Space)	84.22" (213.9cm)	78 lbs (35.5kg)	994.19	974.31	934.54	CALL
R4CN-5124B	91" (231.1cm) (52 Space)	96.47" (245.0cm)	76 lbs (34.5kg)	855.40	838.29	804.08	CALL
R4CN-5130B	91" (231.1cm) (52 Space)	96.47" (245.0cm)	79 lbs (35.9kg)	1000.42	980.41	940.39	CALL
R4CN-5136B	91" (231.1cm) (52 Space)	96.47" (245.0cm)	82 lbs (37.3kg)	1087.39	1065.64	1022.15	CALL

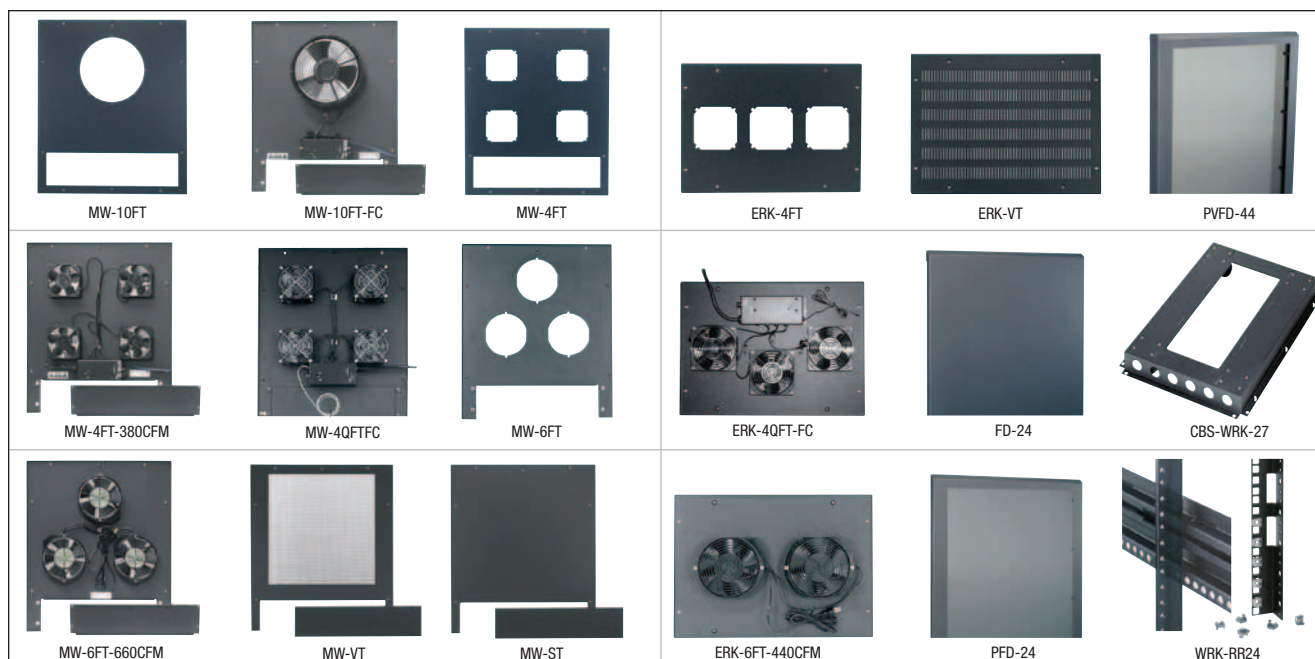

Item #	Description	Shipping Weight	1-9	10-24	25-99	100+
MW-10FT	10" (25.4cm) Fan Top (Excluding Fan)	11 lbs (5.0kg)	60.89	59.67	57.24	CALL
MW-10FT-FC	Integrated 10" (25.4cm) Fan Top, Includes 1 Fan and Proportional Speed Fan Control	15 lbs (6.8kg)	604.96	592.86	568.66	CALL
MW-10FT-550CFM	Integrated 10" (25.4cm) Fan Top, Includes 1 Fan, 550 Cfm	16 lbs (7.3kg)	434.78	426.08	408.69	CALL
MW-4FT	4.5" (11.4cm) Fan Top (Excluding Fans)	13 lbs (5.9kg)	60.89	59.67	57.24	CALL
MW-4FT-380CFM	Integrated 4.5" (11.4cm) Fan Top, Includes 4 Fans	18 lbs (8.2kg)	401.32	393.29	377.24	CALL
MW-4QFTFC	Integrated 4.5" (11.4cm) Fan Top, Includes 4 Quiet Fans	16 lbs (7.3kg)	721.96	707.52	678.64	CALL
MW-6FT	6" (15.2cm) Fan Top (Excluding Fans)	13 lbs (5.9kg)	58.80	57.62	55.27	CALL
MW-6FT-660CFM	Integrated 6" (15.2cm) Fan Top, Includes 3 Fans	14 lbs (6.4kg)	506.23	496.11	475.86	CALL
MW-LVT	64% Open Area Top	10 lbs (4.5kg)	91.84	90.00	86.33	CALL
MW-VT	Vented Top Plate	12 lbs (5.5kg)	60.89	59.67	57.24	CALL
MW-ST	Solid Top Plate	10 lbs (4.5kg)	60.89	59.67	57.24	CALL

Top Plate Options - For WRKSA, WRK and DRK Series Enclosures

ERK-4FT	4.5" (11.4cm) Fan Top (Excluding Fans)	6 lbs (2.7kg)	49.06	48.08	46.12	CALL
ERK-4FT-285CFM	Integrated 4.5" (11.4cm) Fan Top, Includes 3 Fans	11 lbs (5.0kg)	331.53	324.90	311.64	CALL
ERK-4QFT-FC	Integrated 4.5" (11.4cm) Fan Top, Includes 3 Quiet Fans	11 lbs (5.0kg)	597.51	585.56	561.66	CALL
ERK-6FT	6" (15.2cm) Fan Top (Excluding Fans)	6 lbs (2.7kg)	47.33	46.38	44.49	CALL
ERK-6FT-440CFM	Integrated 6" (15.2cm) Fan Top, Includes 2 Fans	9 lbs (4.1kg)	381.12	373.50	358.25	CALL
ERK-ST	Solid Top for any WRK or ERK Series Rack	6 lbs (2.7kg)	49.06	48.08	46.12	CALL
ERK-VT	Vented Top for any WRK or ERK Series Rack	6 lbs (2.7kg)	49.06	48.08	46.12	CALL

Solid Front Door Options - For WRKSA and WRK Series Enclosures

FD-24	Solid Front Door for 42" (106.7cm) Enclosures	23 lbs (10.5kg)	216.08	211.76	203.12	CALL
FD-37	Solid Front Door for 64.75" (164.5cm) Enclosures	44 lbs (20.0kg)	270.86	265.44	254.61	CALL
FD-40	Solid Front Door for 70" (177.8cm) Enclosures	46 lbs (20.9kg)	279.53	273.94	262.76	CALL
FD-44	Solid Front Door for 77" (195.6cm) Enclosures	52 lbs (23.6kg)	288.15	282.39	270.86	CALL

Plexi Front Door Options - For WRKSA and WRK Series Enclosures

PFD-24	Plexi Front Door for 42" (106.7cm) Enclosures	19 lbs (8.6kg)	376.83	369.29	354.22	CALL
PFD-37	Plexi Front Door for 64.75" (164.5cm) Enclosures	50 lbs (22.7kg)	572.24	560.80	537.91	CALL
PFD-40	Plexi Front Door for 70" (177.8cm) Enclosures	52 lbs (23.6kg)	607.58	595.43	571.13	CALL
PFD-44	Plexi Front Door for 77" (195.6cm) Enclosures	58 lbs (26.4kg)	649.99	636.99	610.99	CALL

Vented Front Door Options - For WRKSA and WRK Series Enclosures

VFD-24	Vented Front Door for 42" (106.7cm) Enclosures	20 lbs (9.1kg)	302.61	296.56	284.45	CALL
VFD-37	Vented Front Door for 64.75" (164.5cm) Enclosures	38 lbs (17.3kg)	374.59	367.10	352.11	CALL
VFD-40	Vented Front Door for 70" (177.8cm) Enclosures	44 lbs (20.0kg)	397.67	389.72	373.81	CALL
VFD-44	Vented Front Door for 77" (195.6cm) Enclosures	48 lbs (21.8kg)	432.20	423.56	406.27	CALL

Vented Plexi Front Door Options - For WRKSA and WRK Series Enclosures

PVFD-44	Vented Plexi Front Door for 77" (195.6cm) Enclosures	50 lbs (22.7kg)	802.69	786.64	754.53	CALL
---------	--	-----------------	--------	--------	--------	------

Caster Base Options - For WRKSA and WRK Series Enclosures

CBS-WRK-27	Caster Base for 27" (68.6cm) Depth Enclosures, 1300 lbs (590.9kg) Capacity	24 lbs (10.9kg)	184.96	181.26	173.86	CALL
CBS-WRK-32	Caster Base for 32" (81.3cm) Depth Enclosures, 1300 lbs (590.9kg) Capacity	27 lbs (12.3kg)	206.86	202.72	194.45	CALL

Rack Rail Options - For WRKSA and WRK Series Enclosures

WRK-RR24	Rail Kit, 10-32 Threads, 24U WRK Series Enclosures	12 lbs (5.5kg)	106.56	104.43	100.17	CALL
WRK-RR37	Rail Kit, 10-32 Threads, 37U WRK Series Enclosures	15 lbs (6.8kg)	118.19	115.83	111.10	CALL
WRK-RR40	Rail Kit, 10-32 Threads, 40U WRK Series Enclosures	17.3 lbs (7.9kg)	126.81	124.27	119.20	CALL



Item #	Description	Spaces	Height	Shipping Weight	1-9	10-24	25-99	100+
--------	-------------	--------	--------	-----------------	-----	-------	-------	------

19" (48.3cm) Relay /Frame Racks - Rugged Telecom Equipment and Patch Panel Mounting

For the highest quality rack system choose the Middle Atlantic 19" (48.3cm) Relay Rack. Constructed with 11-gauge 10-32 threaded steel side channels, this rack can handle up to 400 lbs (181.8kg) of equipment and cabling. Incorporating a self-squaring, self-leveling design greatly reduces assembly time. Unique gusseted base means no shimming on uneven floors.

DCR38	19" (48.3cm) Relay Rack Kit	38	72.00" (182.9cm)	36 lbs (16.3kg)	294.09	288.21	276.44	CALL
DCR45	19" (48.3cm) Relay Rack Kit	45	84.00" (213.4cm)	38 lbs (17.2kg)	311.93	305.69	293.21	CALL

2 Post Relay Rack

RLA19-1245B	Aluminum Open Frame Rack	45	78.75" (200cm)	39 (17.7kg)	242.94	238.08	228.36	CALL
RLA-CC	Cable Management Duct For RLA Series Open Frame Racks	45	77.00" (195.6cm)	20 (9.1kg)	313.64	307.37	294.82	CALL

19" (48.3cm) Wall Mount Pivoting Rack Cabinets with Security Door

The DWR series wall mount pivoting rack cabinets allow users an ideal method for securing equipment in a compact, lockable wall cabinet. The Wall Mount Pivoting Rack Cabinets feature fully welded construction with heavy-duty hinges for supporting heavy electronics. With abundant cable lacing points, cable pathways and proper cable bend radius can be maintained throughout the cabinet. Cabinet is shipped fully assembled with a plexiglass front door.

DWR-1017PD	19" (48.3cm) Wall Mount Pivoting Rack Cabinet	10	17.50" (44.5cm)	86 lbs (39.1kg)	720.30	705.89	677.08	CALL
DWR-1617PD	19" (48.3cm) Wall Mount Pivoting Rack Cabinet	16	28.00" (71.1cm)	110 lbs (50.0kg)	887.86	870.10	834.59	CALL
DWR-2417PD	19" (48.3cm) Wall Mount Pivoting Rack Cabinet	24	42.00" (106.7cm)	138 lbs (62.7kg)	1128.89	1106.31	1061.16	CALL

19" (48.3cm) Wall Mount Rack Cabinet

The SBX series wall mount rack cabinet features standard 18-gauge all steel construction and a removable backpan for simpler wall mounting. The backpan and cabinet top/bottom have laser cut electrical knockouts for easier cable installation. A locking front door secures valuable equipment inside and swings a full 180 degrees on a heavy-duty hinge allowing easy access to equipment.

SBX-10	19" (48.3cm) Wall Mount Rack Cabinet	10	17.50" (44.5cm)	50 lbs (22.7kg)	475.47	465.96	446.94	CALL
--------	--------------------------------------	----	-----------------	-----------------	--------	--------	--------	------

19" (48.3cm) Low Profile Wall Mounted Rack Enclosures

The low profile wall mounted rack enclosures offer a secure housing for rackmountable equipment up to 23" (58.4cm) in depth. The top cover is keyed separately from the hinged door providing user access to equipment controls while restricting access to rear connections within the enclosure. Enclosures are available in 4-8U rack heights and support up to 150lbs (68.2kg).

WRS-4	19" (48.3cm) Low Profile Wall Mounted Rack Enclosure	4	7.00" (17.8cm)	50 lbs (22.7kg)	468.03	458.67	439.95	CALL
WRS-6	19" (48.3cm) Low Profile Wall Mounted Rack Enclosure	6	10.50" (26.7cm)	60 lbs (27.3kg)	485.49	475.78	456.36	CALL
WRS-8	19" (48.3cm) Low Profile Wall Mounted Rack Enclosure	8	14.00" (35.6cm)	65 lbs (29.5kg)	547.71	536.76	514.85	CALL

Wall Mountable 19" (48.3cm) Relay Racks - Great for Telecom Equipment

These wall mountable relay racks are especially useful when a stand up 19" (48.3cm) rack can't be used due to floor space limitations. Units come in 12" (30.5cm) or 18" (45.7cm) depths and various rack heights. Rugged steel construction and black powder coat finish. Rack screws included.

WM812	12" (30.5cm) Deep Wall Mount Rack	8	14.00" (35.6cm)	18 lbs (8.2kg)	186.14	182.42	174.97	CALL
WM1512	12" (30.5cm) Deep Wall Mount Rack	15	26.25" (66.7cm)	19 lbs (8.6kg)	191.60	187.77	180.10	CALL
WM3012	12" (30.5cm) Deep Wall Mount Rack	30	52.50" (133.4cm)	28 lbs (12.7kg)	224.53	220.04	211.06	CALL
WM818	18" (45.7cm) Deep Wall Mount Rack	8	14.00" (35.6cm)	23 lbs (10.5kg)	213.56	209.29	200.75	CALL
WM1518	18" (45.7cm) Deep Wall Mount Rack	15	26.25" (66.7cm)	23 lbs (10.5kg)	232.68	228.03	218.72	CALL
WM3018	18" (45.7cm) Deep Wall Mount Rack	30	52.50" (133.4cm)	28 lbs (12.7kg)	260.10	254.90	244.49	CALL

19" (48.3cm) Swing Frame Wall Racks - Sturdy, Effective Wall or Corner Mounting Device

These swing gate wall racks are available in two heights with 12" (30.5cm) and 18" (45.7cm) depths. Rails are 10-32 thread with standard EIA hole spacing. Nominal 150 lb (68.2kg) capacity. They have convenient tie points and velcro loops for maximum internal cable management. EIA, TIA, RETMA compliant.

SFR-20-12	Swing Frame Rack, 12" (30.5cm) Deep	20	35.00" (88.9cm)	38 lbs (17.3kg)	301.54	295.51	283.45	CALL
SFR-12-18	Swing Frame Rack, 18" (45.7cm) Deep	12	21.00" (53.3cm)	38 lbs (17.3kg)	255.06	249.96	239.76	CALL
SFR-20-18	Swing Frame Rack, 18" (45.7cm) Deep	20	35.00" (88.9cm)	46 lbs (20.9kg)	324.08	317.60	304.64	CALL
SFR-25-18	Swing Frame Rack, 18" (45.7cm) Deep	25	44.00" (111.8cm)	30 lbs (13.6kg)	367.20	359.86	345.17	CALL
SFR-12-24	Swing Frame Rack, 24" (61.0cm) Deep	12	21.00" (53.3cm)	44 lbs (20.0kg)	292.92	287.06	275.34	CALL
SFR-20-24	Swing Frame Rack, 24" (61.0cm) Deep	20	35.00" (88.9cm)	43 lbs (19.5kg)	379.56	371.97	356.79	CALL
SFR-25-24	Swing Frame Rack, 24" (61.0cm) Deep	25	44.00" (111.8cm)	51 lbs (23.2kg)	427.00	418.46	401.38	CALL

19" (48.3cm) Pivoting Panel Mount Cabinets - Handy Wall Mounting Allows Rear Access

Conserve valuable floor space with these pivoting panel mount cabinets. The pivoting feature allows punching down while fully open. Rails are tapped 10-32 with standard EIA hole spacing. Available in four basic heights and 6" (15.2cm) or 12" (30.5cm) depth. Other features include: numerous cable tie points and velcro cable loops. Made of .060" (0.2cm) steel and .125" (0.3cm) thick tapped rails.

DPPM2	6" (15.2cm) Pivoting Panel Wall Mount Cabinet	2	3.50" (8.9cm)	8 lbs (3.6kg)	95.16	93.26	89.45	CALL
DPPM4	6" (15.2cm) Pivoting Panel Wall Mount Cabinet	4	7.00" (17.8cm)	10 lbs (4.5kg)	109.52	107.33	102.95	CALL
DPPM6	6" (15.2cm) Pivoting Panel Wall Mount Cabinet	6	10.50" (26.7cm)	12 lbs (5.5kg)	118.19	115.83	111.10	CALL
DPPM6-12	12" (30.5cm) Pivoting Panel Wall Mount Cabinet	6	10.50" (26.7cm)	19 lbs (8.6kg)	195.94	192.02	184.18	CALL
DPPM8-12	12" (30.5cm) Pivoting Panel Wall Mount Cabinet	8	14.00" (35.6cm)	21 lbs (9.5kg)	210.35	206.14	197.73	CALL



Item #	Description	Spaces	Height	Shipping Weight	1-9	10-24	25-99	100+
--------	-------------	--------	--------	-----------------	-----	-------	-------	------

19" (48.3cm) Steel Lockboxes - 9" (22.9cm) Depth Allows Rack Mountable Security

Safely secure gear in the LBX series of lockboxes. 3 and 4 rack space models are available, both are 9" (22.9cm) deep. Black powder coat finish.

LBX-3	19" (48.3cm) Rack Mountable Lockbox	3	5.25 in (13.3cm)	11 lbs (5.0kg)	115.77	113.45	108.82	CALL
LBX-4	19" (48.3cm) Rack Mountable Lockbox	4	7.00 in (17.8cm)	12 lbs (5.5kg)	125.79	123.27	118.24	CALL

19" (48.3cm) Steel Utility Drawer in 2, 3 and 4 Rack Space Heights

These steel utility drawers are available in two, three and four rack space heights for storing equipment and supplies. Full extension ball bearing slides smoothly extending to a full 14" (35.6cm). Inside dimensions 15.88" x 14.5" (40.3cm x 36.8cm). Knockouts in rear allow cable pass through. Black powder coat finish.

UD-2	19" (48.3cm) Rack Mountable Utility Drawer	2	3.50 in (8.9cm)	16 lbs (7.3kg)	152.24	149.20	143.11	CALL
UD-3	19" (48.3cm) Rack Mountable Utility Drawer	3	5.25 in (13.3cm)	19 lbs (8.6kg)	162.10	158.86	152.37	CALL
UD-4	19" (48.3cm) Rack Mountable Utility Drawer	4	7.00 in (17.8cm)	22 lbs (9.5kg)	186.73	183.00	175.53	CALL

3.5" (8.9cm) and 5.25" (13.3cm) High (2 and 3 Rack Spaces) Heavy Duty Shelves for 19" (48.3cm) Racks

Two heavy duty shelves are available for 19" (48.3cm) rack panels. Cantilever shelf is 17" (43.2cm) deep and occupies three rack spaces vertically. The center weight shelf is 18" (45.7cm) deep in total and occupies two rack spaces vertically. Both shelves have vented bottoms. Color: Matte black.

U317	19" (48.3cm) Rack Mountable Heavy Duty Cantilever Shelf, 17" (43.2cm) Dp	3	5.25 in (13.3cm)	10 lbs (4.5kg)	89.38	87.59	84.02	CALL
U2MS	19" (48.3cm) Rack Mountable Heavy Duty Center Weight Shelf, 18" (45.7cm) Dp	2	3.50 in (8.9cm)	9 lbs (4.1kg)	90.63	88.82	85.19	CALL

19" (48.3cm) Rackmount Slide-Away Computer Keyboard System

The rackmount computer keyboard system occupies only 1.75" (1 space) and features a high quality keyboard with built in trackball. A built in cable support arm provides secure cable management.

RM-KB-LCD17	19" (48.3cm) Rackmount Slide-Away 17" (43.2cm) LCD Monitor, Keyboard and Touchpad	1	1.75 in (4.4cm)	43 lbs (19.5kg)	2675.31	2621.80	2514.79	CALL
RM-KB	19" (48.3cm) Rackmount Computer Keyboard with Trackball	1	1.75 in (4.4cm)	16 lbs (7.3kg)	602.11	590.07	565.98	CALL

19" (48.3cm) Rackmount Sliding Shelves

The rackmount shelves slide out giving easy access to equipment. A telescopic rear support offers flexibility in rack mounting depths. Each shelf requires a minimum rack depth of 14.75" (37.5cm).

SSL	19" (48.3cm) Sliding Shelf, 14" x 16.75" (35.6cm x 42.5cm) Work Surface, 35 lb (15.9kg) Capacity	1	1.75 in (4.4cm)	11 lbs (5kg)	118.40	116.03	111.30	CALL
SS	19" (48.3cm) Sliding Shelf, 14.75" x 17.5" (37.5cm x 44.5cm) Work Surface, 50 lb (22.7kg) Capacity	1+	2.40 in (6.1cm)	15 lbs (6.8kg)	175.27	171.76	164.75	CALL


High Capacity Stationary Shelf, 4 Point Mount

VSA-1626	Adjustable Heavy Duty Vented Rackshelf, 16"-26" Usable Shelf Area	<1	1.50 in (3.8cm)	12 lbs (5.5kg)	141.80	138.96	133.29	CALL
VSA-2744	Adjustable Heavy Duty Vented Rackshelf, 27"-44" Usable Shelf Area	<1	1.50 in (3.8cm)	19 lbs (8.6kg)	174.68	171.19	164.20	CALL

19" (48.3cm) Rack Filler Panels

A variety of 19" (48.3cm) rack filler panels allow installers to give a custom look to their rack installation while allowing proper thermal venting.

PR175BLK	1.75" (4.4cm) Blank Filler Panel, Solid Steel	1	1.75 in (4.4cm)	1 lb (0.5kg)	22.95	22.03	21.11	CALL
PR35BLK	3.50" (8.9cm) Blank Filler Panel, Solid Steel	2	3.50 in (8.9cm)	2 lbs (0.9kg)	29.95	28.75	27.55	CALL
PR175-EVTBLK	1.75" (4.4cm) Blank Filler Panel, Vertical Vented Steel	1	1.75 in (4.4cm)	.5 lbs (.2kg)	13.39	13.12	12.59	CALL
PR35-EVTBLK	3.50" (8.9cm) Blank Filler Panel, Vertical Vented Steel	2	3.50 in (8.9cm)	1 lb (0.5kg)	19.23	18.46	17.69	CALL
PR175-VTPBLK	1.75" (4.4cm) Blank Filler Panel, Horizontal Vented Steel	1	1.75 in (4.4cm)	.5 lbs (.2kg)	31.33	30.70	29.45	CALL
PR35-VTPBLK	3.50" (8.9cm) Blank Filler Panel, Horizontal Vented Steel	2	3.50 in (8.9cm)	1 lb (0.5kg)	34.22	33.54	32.17	CALL
FILTER	5.25" x 19" (13.3cm x 48.3cm) Rack Filter	3	5.25 in (13.3cm)	1 lb (0.5kg)	44.39	43.50	41.73	CALL
QTFF-2	5.25" x 19" (13.3cm x 48.3cm) Panel with Dual 4.5" (11.4cm) Fans	3	5.25 in (13.3cm)	5 lbs (2.3kg)	160.86	157.64	151.21	CALL

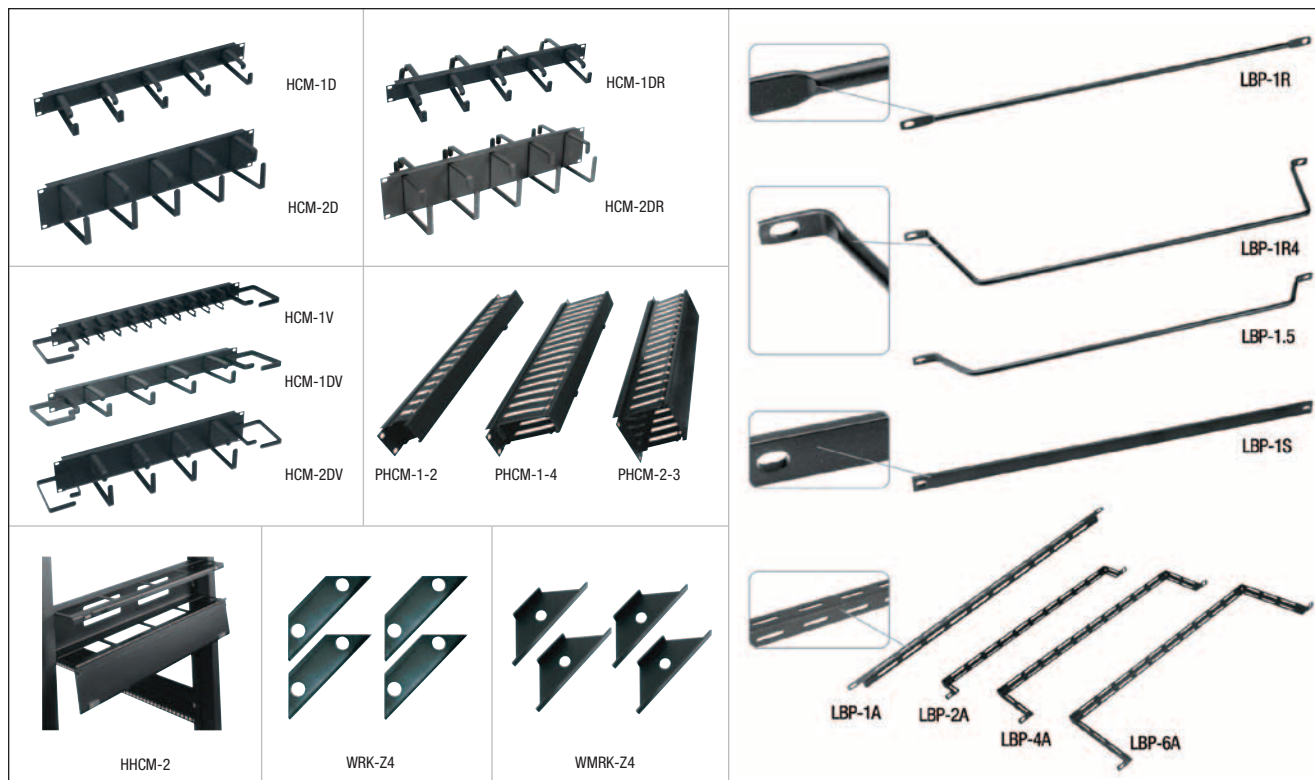

Item #	Description	Spaces	Height	Shipping Weight	1-9	10-24	25-99	100+
Rackmount Cable Managers with D-Rings								
HCM-1	19" (48.3cm) Rack Mountable Horizontal Cable Manager	1	1.75" (4.4cm)	1 lb (0.5kg)	33.74	33.07	31.72	CALL
HCM-1D	19" (48.3cm) D-Ring Horizontal Cable Manager	1	1.75" (4.4cm)	2 lbs (0.9kg)	42.15	41.31	39.62	CALL
HCM-1DR	19" (48.3cm) Rackmount Cable Manager	1	1.75" (4.4cm)	3.5 lbs (1.6kg)	52.27	51.22	49.13	CALL
HCM-1DV	19" (48.3cm) Rackmount Cable Manager with End Rings	1	1.75" (4.4cm)	2 lbs (0.9kg)	45.47	44.56	42.74	CALL
HCM-1V	19" (48.3cm) Rackmount Cable Manager with End Rings	1	1.75" (4.4cm)	2 lbs (0.9kg)	45.47	44.56	42.74	CALL
HCM-2D	19" (48.3cm) D-Ring Horizontal Cable Manager	2	3.50" (8.9cm)	2.35 lbs (1.1kg)	45.47	44.56	42.74	CALL
HCM-2DR	19" (48.3cm) Rackmount Cable Manager	2	3.50" (8.9cm)	6 lbs (2.7kg)	55.64	54.53	52.30	CALL
HCM-2DV	19" (48.3cm) Rackmount Cable Manager with End Rings	2	3.50" (8.9cm)	3 lbs (1.4kg)	48.89	47.91	45.96	CALL
PHCM-1-2	Plastic Finger Horizontal Cable Manager	1	1.75" (4.4cm)	1 lb (0.5kg)	31.80	31.16	29.89	CALL
PHCM-1-2-P4	Plastic Finger Horizontal Cable Manager - 4 Pack	1	1.75" (4.4cm)	4 lbs (1.8kg)	120.16	117.76	112.95	CALL
PHCM-1-4	Plastic Finger Horizontal Cable Manager	1	1.75" (4.4cm)	1.2 lbs (0.5kg)	34.60	33.91	32.52	CALL
PHCM-1-4-P4	Plastic Finger Horizontal Cable Manager - 4 Pack	1	1.75" (4.4cm)	4.8 lbs (2.2kg)	132.01	129.37	124.09	CALL
PHCM-2-3	Plastic Finger Horizontal Cable Manager	2	3.50" (8.9cm)	1.5 lbs (0.7kg)	39.63	38.84	37.25	CALL
PHCM-2-3-P4	Plastic Finger Horizontal Cable Manager - 4 Pack	2	3.50" (8.9cm)	6 lbs (2.7kg)	151.12	148.10	142.05	CALL

Rackmount Cable Lacing Bars

Horizontal Cable Lacing Bars provide users with a simple method for managing cables horizontally on a rack. All lacing bars are sold in packages of ten.

LBP-1R	19" (48.3cm) Rackmount Lacing Bar Round, Pkg/10			2.65 lbs (1.2kg)	50.64	0.00	0.00	CALL
LBP-1S	19" (48.3cm) Rackmount Lacing Bar Rectangular, Pkg/10			2.2 lbs (1.0kg)	66.89	65.55	62.88	CALL
LBP-1R4	19" (48.3cm) Rackmount Lacing Bar Round with 4" (10.2cm) Offset, Pkg/10			3 lbs (1.4kg)	95.26	93.35	89.54	CALL
LBP-1A	19" (48.3cm) Rackmount Lacing Bar 'L' Shaped with Cable Tie Slots, Pkg/10			2.35 lbs (1.1kg)	42.84	41.98	40.27	CALL
LBP-6A	19" (48.3cm) Rackmount Lacing Bar 'L' Shaped with Cable Tie Slots, Pkg/10			4.10 lbs (1.9kg)	92.75	90.89	87.18	CALL
LBP-1.5	Rackmount Lacing Bar Round with 1.5" (3.8cm) Offset, Pkg/10			2.75 lbs (1.3kg)	96.29	94.36	90.51	CALL
LBP-2A	Rackmount Lacing Bar 'L' Shaped with 2" (5.1cm) Offset, Pkg/10			3 lbs (1.4kg)	73.42	71.95	69.01	CALL
LBP-4A	Rackmount Lacing Bar 'L' Shaped with 4" (10.2cm) Offset, Pkg/10			5 lbs (2.3kg)	81.61	79.98	76.71	CALL

Hinged Covered Cable Managers

These panels are made from the highest quality materials to provide a strong yet attractive method for keeping cables organized and properly routed through a rack. Each panel features front mounted D-rings to support cables. All panels feature a durable black powder coat finish.

HHCM-1	Hinged Horizontal Cable Manager	1	1.75" (4.4cm)	2 lbs (0.9kg)	55.59	54.48	52.25	CALL
HHCM-2	Hinged Horizontal Cable Manager	2	3.50" (8.9cm)	3.5 lbs (1.6kg)	62.65	61.40	58.89	CALL

19" (48.3cm) Rack Accessories - 10-32 and 12-24 Mounting Screws

HP24	12-24 Mounting Screws and Nylon Washer, Pkg/100			1 lb (0.5kg)	29.07	28.49	27.33	CALL
HP24-500	12-24 Mounting Screws and Nylon Washer, Pkg/500			4.5 lb (2.0kg)	145.01	142.11	136.31	CALL
HP32	10-32 Mounting Screws and Nylon Washer, Pkg/100			1 lb (0.5kg)	24.74	24.25	23.26	CALL
HP32-500	10-32 Mounting Screws and Nylon Washer, Pkg/500			4 lbs (1.8kg)	117.30	114.95	110.26	CALL

Rackmount Seismic Floor Anchors

When properly installed, seismic floor anchor kits bring any seismic certified WRK, MRK and WMRK series enclosures to seismic design category 'D', Zone 4, and Seismic Use Group III Upper Floor essential equipment rating and have an Ip rating of 1.5. Kits include four brackets.

WRK-Z4	Seismic Floor Anchor for the WRK Series				43.23	42.37	40.64	CALL
MRK-Z4	Seismic Floor Anchor for the MRK, WMRK and DRK Series				43.23	42.37	40.64	CALL
WMRK-Z4	Seismic Floor Anchor for the WMRK Series				43.42	42.55	40.81	CALL



Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Cable Ladders and Accessories

The CL Series are fully welded heavy-duty cable ladders and accessories. Ladder sections are individually boxed with handles for ease of transport. Compatible with most popular brands and accessories of cable ladders. These cable ladders work on both new and existing installations. They are highly scratch resistant with a durable black powder coat.

12 Inch (30.5cm) Wide Cable Ladders

CLB-6	6 foot (1.83m) Long Straight Ladder Section, Black	89.96	88.16	84.56	CALL
CLB-10	10 foot (3.05m) Long Straight Ladder Section, Black	144.00	141.12	135.36	CALL
CLB-90HB	90° Horizontal Bend, Black	151.52	148.49	142.43	CALL
CLB-VI90	90° Vertical Inside Bend, Black	131.41	128.78	123.53	CALL
CLB-V090	90° Vertical Outside Bend, Black	131.41	128.78	123.53	CALL

12 Inch (30.5cm) Wide Bulk Pack Cable Ladders

CLB-6-12	6 foot (1.83m) Long Straight Ladder Section, Black, 12 Pack	1031.05	1010.43	969.19	CALL
CLB-10-12	10 foot (3.05m) Long Straight Ladder Section, Black, 12 Pack	1649.61	1616.62	1550.63	CALL
CLB-90HB-4	90° Horizontal Bend, Black, 4 Pack	596.49	584.56	560.70	CALL
CLB-VI90-4	90° Vertical Inside Bend, Black, 4 Pack	492.77	482.91	463.20	CALL
CLB-V090-4	90° Vertical Outside Bend, Black, 4 Pack	492.77	482.91	463.20	CALL

18 Inch (45.7cm) Wide Cable Ladders

CLB-6-W18	6 foot (1.83m) Long Straight Ladder Section, Black	126.97	124.43	119.35	CALL
CLB-10-W18	10 foot (3.05m) Long Straight Ladder Section, Black	172.48	169.03	162.13	CALL
CLB-90HB-W18	90° Horizontal Bend, Black	189.30	185.51	177.94	CALL
CLB-VI90-W18	90° Vertical Inside Bend, Black	165.36	162.05	155.44	CALL
CLB-V090-W18	90° Vertical Outside Bend, Black	165.36	162.05	155.44	CALL

24 Inch (61cm) Wide Cable Ladders

CLB-6-W24	6 foot (1.83m) Long Straight Ladder Section, Black	148.54	145.57	139.63	CALL
CLB-10-W24	10 foot (3.05m) Long Straight Ladder Section, Black	194.06	190.18	182.42	CALL
CLB-90HB-W24	90° Horizontal Bend, Black	196.48	192.55	184.69	CALL
CLB-VI90-W24	90° Vertical Inside Bend, Black	177.30	173.75	166.66	CALL
CLB-V090-W24	90° Vertical Outside Bend, Black	177.30	173.75	166.66	CALL

12 Inch (30.5cm) Wall Ceiling Mounts (also available in Bulk Packs)

CLB-CSB	Center Support Bracket	41.51	40.68	39.02	CALL
CLB-TSB	Triangle Wall Support Bracket	55.37	54.26	52.05	CALL
CLH-WRS	Ladder Wall Support Angle	37.54	36.79	35.29	CALL
CLH-58CHK	.625 inch (1.6cm) Slotted Ceiling Kit, Fits All Widths	27.36	26.81	25.72	CALL
CLH-5-8ROD-12-4	12 inch (30.5cm) Long Section .625 inch (1.6cm) Threaded Rod, 4 pieces	32.24	31.60	30.31	CALL
CLH-5-8ROD-6	6 inch (15.2cm) Long Section .625 inch (1.6cm) Threaded Rod, 1 piece	49.37	48.38	46.41	CALL
CLH-RES	Ladder End Support Hardware, Fits All Widths	38.07	37.31	35.79	CALL
CLH-RWC	Ladder Wall Clamp, Fits all Widths	24.20	23.72	22.75	CALL

18 Inch (45.7cm) Wall Ceiling Mounts

CLB-CSB-W18	Center Support Bracket	88.68	86.91	83.36	CALL
CLB-TSB-W18	Triangle Wall Support Bracket	76.68	75.15	72.08	CALL
CLH-WRS-W18-W24	Ladder Wall Support Angle	50.39	49.38	47.37	CALL

24 Inch (61cm) Wall Ceiling Mounts

CLB-CSB-W24	Center Support Bracket	117.43	115.08	110.38	CALL
CLB-TSB-W24	Triangle Wall Support Bracket	93.45	91.58	87.84	CALL
CLH-WRS-W18-W24	Ladder Wall Support Angle	50.39	49.38	47.37	CALL



Item #	Description	List Price
--------	-------------	------------

Single, Two, Three or Four Panel DIN Rail Termination Enclosure - For Easy Cable Mounting at the Workplace

Use this simple enclosure for terminating fiber cabling within industrial workplaces or anyplace that needs a small cable drop. The unit mounts to 35mm DIN Rail allowing cable entry from the top. The DIN connector is also removable for mounting to walls, etc. FSP Series Sub-Panels mount to the front of the enclosure for quick and easy cable termination. Built from .060 inch (16 ga) Cold Rolled Steel. Color: black.

FSP-1DIN	DIN Rail / Wall Mount Termination Enclosure for 1 FSP Series Sub-Panel	63.95
FSP-2DIN	DIN Rail / Wall Mount Termination Enclosure for 2 FSP Series Sub-Panels	71.95
FSP-3DIN	DIN Rail / Wall Mount Termination Enclosure for 3 FSP Series Sub-Panels	79.95
FSP-4DIN	DIN Rail / Wall Mount Termination Enclosure for 4 FSP Series Sub-Panels	86.95

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

19" (48.3cm) Rack Panels Accept 3, 6 or 12 FSP Series Sub-Panels


This series of 19" (48.3cm) rack panels accepts any of our FSP Series Sub-Panels. They snap into place using push button rivets which allow for easy installation or removal of the sub-panels. Built from .060" (0.2cm) (16 ga) cold rolled steel, these panels are rugged and economically priced. Rear cable management option is available as an accessory. Color: black.

PR175-FSP-3	1.75" (1U) (4.4cm) Rack Panel for 3 FSP Series Sub-Panels	43.95	42.19	40.43	CALL
PR35-FSP-6	3.50" (2U) (8.9cm) Rack Panel for 6 FSP Series Sub-Panels	54.95	52.75	50.55	CALL
PR525-FSP-12	5.25" (3U) (13.3cm) Rack Panel for 12 FSP Series Sub-Panels	65.95	63.31	60.67	CALL
PR-CMB	Cable Management Bracket Kit for 19" (48.3cm) Panels One 19" (48.3cm) Crossbar, 6 Management Brackets, 18 Flathead Screws	48.95	46.99	45.03	CALL




The PR-CMB cable management kit is designed for maximum flexibility.

A unique extension and crossbar design permits side and rear cable routing. All surfaces are perforated for ample cable tie points.



Rear Crossbar: Useful for reducing connector stress from hanging cable lengths.



Management Brackets: Enable cable routing and provide ample tie-down points.

Sub-Panels Used to Populate FSP Series Patch Panels, FE & FSP DIN Rail Mount Enclosures

These versatile sub-panels are used to populate L-com's FE Series Wall Mount & Rack Mount Fiber Enclosures, FSP Series Rack Panels and FSP DIN-Rail Mount Enclosures. Offered in a variety of connector types in Simplex, Duplex and Quad configurations. Ceramic sleeve versions are primarily used in single mode applications while multimode applications typically utilize the bronze sleeve configuration. These units feature a black finish with snap on mounting for easy installation and removal.

FSP-BNK	Blank Sub-Panel	13.95	13.39	12.83	CALL
FSP-SCMTLC-BNK	Blank Sub-Panel with 6 SC Simplex / MT-RJ / LC Duplex Openings	13.95	13.39	12.83	CALL
FSP-MTRJ	Fiber Sub-Panel, 6 MT-RJ Couplers	39.95	38.35	36.75	CALL
FSP-SC-APC	Fiber Sub-Panel, 6 APC SC Simplex Couplers, Ceramic Sleeve	79.95	76.75	73.55	CALL
FSP-LCD6-BR	Fiber Sub-Panel, 6 LC Duplex Couplers, Bronze Sleeve	43.95	42.19	40.43	CALL
FSP-LCD6-CR	Fiber Sub-Panel, 6 LC Duplex Couplers, Ceramic Sleeve	57.95	55.63	53.31	CALL
FSP-SC-BR	Fiber Sub-Panel, 6 SC Simplex Couplers, Bronze Sleeve	39.95	38.35	36.75	CALL
FSP-SC-CR	Fiber Sub-Panel, 6 SC Simplex Couplers, Ceramic Sleeve	49.95	47.95	45.95	CALL
FSP-STFC-BNK	Blank Sub-Panel with 6 ST / FC Simplex Openings	13.95	13.39	12.83	CALL
FSP-ST-BR	Fiber Sub-Panel, 6 ST Couplers, Bronze Sleeve	36.95	35.47	33.99	CALL
FSP-ST-CR	Fiber Sub-Panel, 6 ST Couplers, Ceramic Sleeve	52.95	50.83	48.71	CALL
FSP-SCDLCQ6-BNK	Blank Sub-Panel with 6 SC Duplex / LC Quad Openings	16.95	16.27	15.59	CALL
FSP-LCD6-10G	Fiber Sub-Panel, 6 LC Duplex 10G Couplers, Bronze Sleeve	46.95	45.07	43.19	CALL
FSP-LCQ6-BR	Fiber Sub-Panel, 6 LC Quad Couplers, Bronze Sleeve	121.95	117.07	112.19	CALL
FSP-LCQ6-CR	Fiber Sub-Panel, 6 LC Quad Couplers, Ceramic Sleeve	148.95	142.99	137.03	CALL
FSP-SCD6-APC	Fiber Sub-Panel, 6 SC Duplex Couplers, Ceramic Sleeve	138.95	133.39	127.83	CALL
FSP-SCD6-BR	Fiber Sub-Panel, 6 SC Duplex Couplers, Bronze Sleeve	52.95	50.83	48.71	CALL
FSP-SCD6-CR	Fiber Sub-Panel, 6 SC Duplex Couplers, Ceramic Sleeve	69.95	67.15	64.35	CALL
FSP-ECF-BNK	Blank Sub-Panel with 3 ECF Style Openings	13.95	13.39	12.83	CALL
FSP-OSD-BNK	Blank Sub-Panel with (4) 0.5" (1.3cm) D-Hole Openings	13.95	13.39	12.83	CALL

Fiber Sub-Panel with 6 LC Keyed Multimode Couplers

These sub-panels are used to populate L-com's FE Series Wall Mount & Rack Mount Fiber Enclosures, FSP Series Rack Panels and FSP DIN-Rail Mount Enclosures. Secured, keyed, LC adapters are designed specifically for mission critical circuits where networks are segregated by color for identification and protected from accidental moves, adds, or changes. They offer mechanical network security for organizations desiring to segregate networks because of privacy or security concerns. Note: The couplers in these sub-panels are designed to only work with L-com's Keyed LC Patch Cords.

FSP-LCK-PNK	Fiber Panel, 6 LC Keyed Multimode, Pink	109.95	105.55	101.15	CALL
FSP-LCK-WHT	Fiber Panel, 6 LC Keyed Multimode, White	109.95	105.55	101.15	CALL
FSP-LCK-YLW	Fiber Panel, 6 LC Keyed Multimode, Yellow	109.95	105.55	101.15	CALL
FSP-LCK-RED	Fiber Panel, 6 LC Keyed Multimode, Red	109.95	105.55	101.15	CALL
FSP-LCK-ORG	Fiber Panel, 6 LC Keyed Multimode, Orange	109.95	105.55	101.15	CALL
FSP-LCK-VLT	Fiber Panel, 6 LC Keyed Multimode, Violet	109.95	105.55	101.15	CALL
FSP-LCK-GRY	Fiber Panel, 6 LC Keyed Multimode, Gray	109.95	105.55	101.15	CALL
FSP-LCK-CBT	Fiber Panel, 6 LC Keyed Multimode, Cobalt	109.95	105.55	101.15	CALL
FSP-LCK-BRN	Fiber Panel, 6 LC Keyed Multimode, Brown	109.95	105.55	101.15	CALL
FSP-LCK-TRQ	Fiber Panel, 6 LC Keyed Multimode, Turquoise	109.95	105.55	101.15	CALL
FSP-LCK-MAG	Fiber Panel, 6 LC Keyed Multimode, Magenta	109.95	105.55	101.15	CALL
FSP-LCK-OLV	Fiber Panel, 6 LC Keyed Multimode, Olive	109.95	105.55	101.15	CALL

Item #	Description	List Price
--------	-------------	------------

Plunger and Grommet Kit for FSP Series Sub-Panels - Pkg/50

FSP-FASTENERS	Plunger and Grommet Kit for FSP Series Sub-Panels, Pkg/50	28.95
---------------	---	-------




PR175-FSP-3



PR35-FSP-6



PR525-FSP-12




PR-CMB

Includes:

- One 19" (48.3cm) perforated crossbar
- (18) 4-40 flathead screws
- Six perforated Management Brackets

Fiber Sub-Panels




FSP-BNK FSP-SC-BR FSP-SCD6-BR
FSP-SC-CR FSP-SCD6-CR





FSP-OSD-BNK FSP-LCK-PNK FSP-LCK-ORG



FSP-FASTENERS
Pkg/50

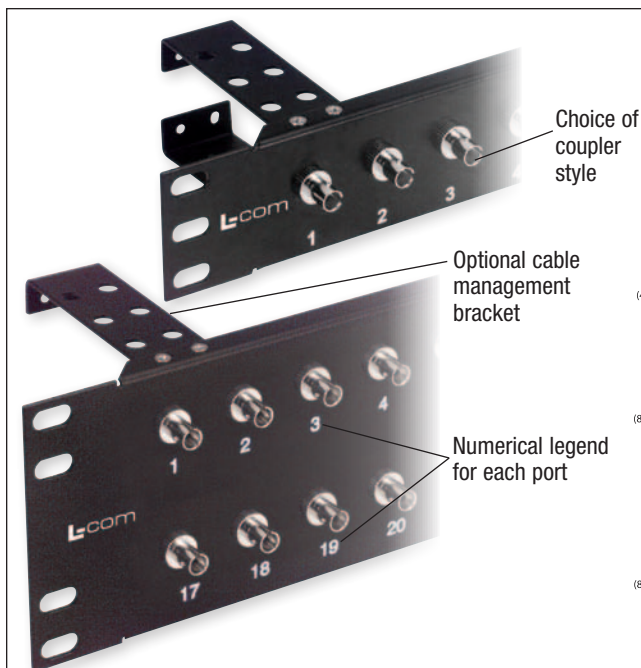

System designers have a complete selection of panel configurations for fiber optic connections to choose from. Each panel features a numerical legend below each port. This allows users a fast and simple way to identify ports for their equipment. Our panels are made with .060 inch (16 ga) cold-rolled steel and finished with a durable black powder coat. An optional cable management bracket kit used on the rear of the panel gives a secure place to tie off cable bundles and prevent connector fatigue. Panels are available with ST, FC, SC, MTRJ, LC or MPO style couplers.

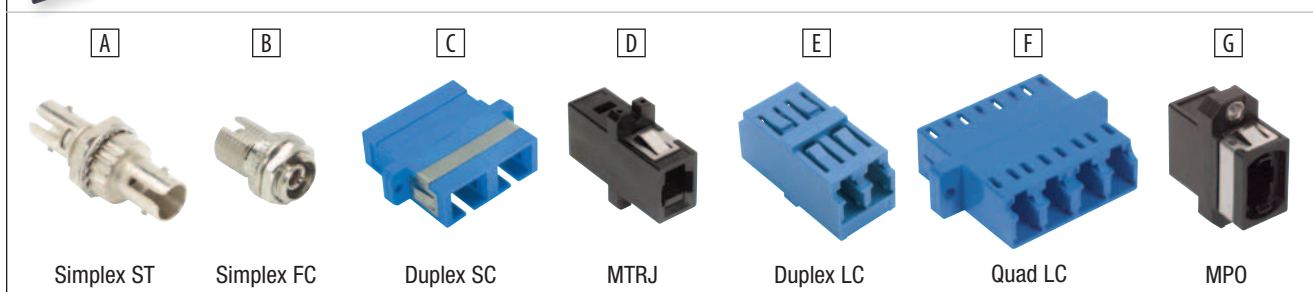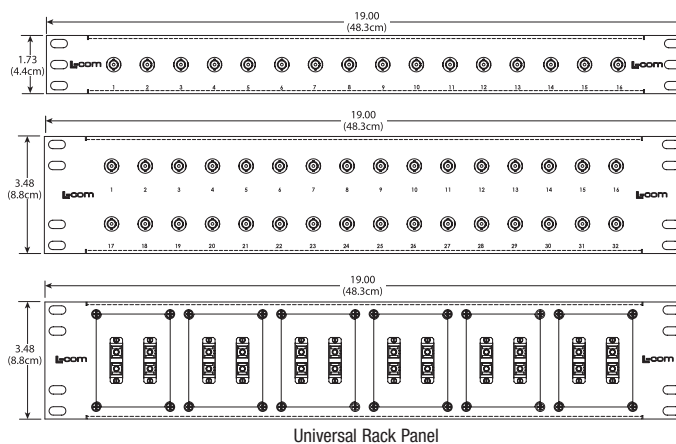

Item #	Code	Description	Color	1-9	10-24	25-99	100+
19" (48.3cm) Fiber Optic Rack Panels							
PR175ST16CMB	A	1.75" (4.4cm) Panel, 16 Port, ST Multimode Couplers with Cable Management Bracket	Black	142.95	137.23	131.51	CALL
PR35ST32CMB	A	3.50" (8.9cm) Panel, 32 Port, ST Multimode Couplers with Cable Management Bracket	Black	207.95	199.63	191.31	CALL
PR175ST16CMB-SM	A	1.75" (4.4cm) Panel, 16 Port, ST Single mode Couplers with Cable Management Bracket	Black	175.95	168.91	161.87	CALL
PR35ST32CMB-SM	A	3.50" (8.9cm) Panel, 32 Port, ST Single mode Couplers with Cable Management Bracket	Black	262.95	252.43	241.91	CALL
UPR35-12STB	A	3.50" (8.9cm) Universal Rack Panel, 12 Port, ST Multimode Couplers	Black	124.95	119.95	114.95	CALL
UPR35-24STB	A	3.50" (8.9cm) Universal Rack Panel, 24 Port, ST Multimode Couplers	Black	164.95	158.35	151.75	CALL
PR175FC16CMB	B	1.75" (4.4cm) Panel, 16 Port, FC Multimode Couplers with Cable Management Bracket	Black	219.95	211.15	202.35	CALL
PR35FC32CMB	B	3.50" (8.9cm) Panel, 32 Port, FC Multimode Couplers with Cable Management Bracket	Black	366.95	352.27	337.59	CALL
PR175FC16CMB-SM	B	1.75" (4.4cm) Panel, 16 Port, FC Single mode Couplers with Cable Management Bracket	Black	241.95	232.27	222.59	CALL
PR35FC32CMB-SM	B	3.50" (8.9cm) Panel, 32 Port, FC Single mode Couplers with Cable Management Bracket	Black	388.95	373.39	357.83	CALL
PR175FC16CM-SMA	B	1.75" (4.4cm) Panel, 16 Port, FC (APC) Singlemode Couplers with Cable Management Bracket	Black	294.95	283.15	271.35	CALL
PR35DSC32C	C	3.50" (8.9cm) Panel, 64 Port, 32 Duplex SC Multimode Couplers	Black	294.95	283.15	271.35	CALL
PR35DSC32C-SM	C	3.50" (8.9cm) Panel, 64 Port, 32 Duplex SC Single mode Couplers	Black	349.95	335.95	321.95	CALL
UPR35-6DSCB	C	3.50" (8.9cm) Universal Rack Panel, 12 Port, 6 Duplex SC Multimode Couplers	Black	142.95	137.23	131.51	CALL
UPR35-12DSCB	C	3.50" (8.9cm) Universal Rack Panel, 24 Port, 12 Duplex SC Multimode Couplers	Black	164.95	158.35	151.75	CALL
PR175MT16B	D	1.75" (4.4cm) Panel, 32 Port, 16 MTRJ Couplers	Black	109.95	105.55	101.15	CALL
PR175DLC16B	E	1.75" (4.4cm) Panel, 32 Port, 16 LC Duplex Multimode Couplers	Black	196.95	189.07	181.19	CALL
PR175DLC16B	E	1.75" (4.4cm) Panel, 32 Port, 16 LC Duplex Single mode Couplers	Black	115.95	111.31	106.67	CALL
PR175LC96	F	1.75" (4.4cm) Panel, 96 Port, 24 LC Quad Multimode Couplers	Black	284.95	273.55	262.15	CALL
PR175LC96-SM	F	1.75" (4.4cm) Panel, 96 Port, 24 LC Quad Single mode Couplers	Black	537.95	516.43	494.91	CALL
PR175DLC24B	N/A	1.75" (4.4cm) Panel, 48 Port, 24 LC Duplex Multimode Couplers	Black	218.95	210.19	201.43	CALL
PR175DLC24B-SM	N/A	1.75" (4.4cm) Panel, 48 Port, 24 LC Duplex Single mode Couplers	Black	357.95	343.63	329.31	CALL
PR17516MTP	G	1.75" (4.4cm) Panel, 16 MPO Couplers	Black	218.95	210.19	201.43	CALL
PR-CMB	N/A	Cable Management Bracket Kit for most L-com 19" (48.3cm) Panels Kit Contains: (Qty: 6) Extension Brackets, (Qty: 1) 19" (48.3cm) Crossbar, (Qty: 18) Flathead Screws		48.95	46.99	45.03	CALL

5" (1.3cm) D-holes

Optional cable management bracket

Numerical legend for each port

A 50 Ohm BNC Insulated

B 75 Ohm BNC Insulated

C Auto-Terminating 50 Ohm BNC

D Type F

E RCA

F HDMI

G DVI

Best Seller

Item #	Code	Description	Color	1-9	10-24	25-99	100+
PR175-16BLK	N/A	1.75" (4.4cm) Panel, 16 0.5" (1.3cm) D-Holes	Black	27.95	26.83	25.71	CALL
PR175-16CMB	N/A	1.75" (4.4cm) Panel, 16 0.5" (1.3cm) D-Holes and Cable Minder	Black	41.95	40.27	38.59	CALL
PR35-32BLK	N/A	3.50" (8.9cm) Panel, 32 0.5" (1.3cm) D-Holes	Black	32.95	31.63	30.31	CALL
PR35-32CMB	N/A	3.50" (8.9cm) Panel, 32 0.5" (1.3cm) D-Holes and Cable Minder	Black	54.95	52.75	50.55	CALL
PR175B16BLK	A	1.75" (4.4cm) Panel, 16 BNC Couplers, 50 Ohm Insulated	Black	109.95	105.55	101.15	CALL
PR35B32BLK	A	3.50" (8.9cm) Panel, 32 BNC Couplers, 50 Ohm Insulated	Black	197.95	190.03	182.11	CALL
PR175B16CMB	A	1.75" (4.4cm) Panel, 16 BNC Couplers, 50 Ohm Insulated with Cable Minder	Black	131.95	126.67	121.39	CALL
PR35B32CMB	A	3.50" (8.9cm) Panel, 32 BNC Couplers, 50 Ohm Insulated with Cable Minder	Black	219.95	211.15	202.35	CALL
PR175B1675BLK	B	1.75" (4.4cm) Panel, 16 BNC Couplers, 75 Ohm Insulated	Black	120.95	116.11	111.27	CALL
PR35B3275BLK	B	3.50" (8.9cm) Panel, 32 BNC Couplers, 75 Ohm Insulated	Black	230.95	221.71	212.47	CALL
PR175BX16GBLK	C	1.75" (4.4cm) Panel, 16 BNC Auto-Terminating Couplers, 50 Ohm	Black	141.95	136.27	130.59	CALL
PR35BX32GBLK	C	3.50" (8.9cm) Panel, 32 BNC Auto-Terminating Couplers, 50 Ohm	Black	252.95	242.83	232.71	CALL
PR175F16	D	1.75" (4.4cm) Panel, 16 Type F Couplers, Insulated	Black	87.95	84.43	80.91	CALL
PR35F32	D	3.50" (8.9cm) Panel, 32 Type F Couplers, Insulated	Black	109.95	105.55	101.15	CALL


19" (48.3cm) Audio/Video Rack Panels

PR175RCA16	E	1.75" (4.4cm) Panel, 16 RCA Couplers, Grounded	Black	98.95	94.99	91.03	CALL
PR35RCA32	E	3.50" (8.9cm) Panel, 32 RCA Couplers, Grounded	Black	164.95	158.35	151.75	CALL
PR175HD16B	F	1.75" (4.4cm) Panel, 16 HDMI Female Couplers	Black	218.95	210.19	201.43	CALL
PR35HD32B	F	3.50" (8.9cm) Panel, 32 HDMI Female Couplers	Black	328.95	315.79	302.63	CALL
PR35DVIFB	G	3.50" (8.9cm) Panel, 16 DVI Female Adapters	Black	174.95	167.95	160.95	CALL
PR-CMB	N/A	Cable Management Bracket Kit for most L-com 19" (48.3cm) Panels Kit Contains: (Qty: 6) Extension Brackets, (Qty: 1) 19" (48.3cm) Crossbar, (Qty: 18) Flathead Screws		48.95	46.99	45.03	CALL




What is Impedance?

Impedance is a measurement of opposition to the flow of current within a cable. Two of the most common impedance values used in coaxial cable are 50 Ohms primarily used for data transmission and 75 Ohms primarily used for video transmission. In twisted pair cable, common impedance values are 100 and 120 Ohms.

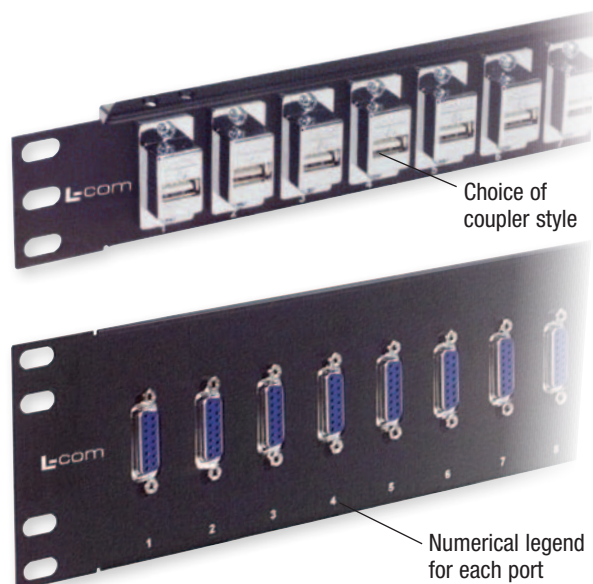

L-com offers system designers a complete selection of panel configurations for data and serial connections. Each panel features a numerical legend below each port. This allows users a fast and simple way to identify ports for their equipment. Our panels are made with .060 inch (16 ga) cold-rolled steel and finished with a durable black powder coat. An optional cable management bracket kit used on the rear of the panel gives a secure place to tie off cable bundles and prevent connector fatigue. Panels are available with USB, D-Sub or HDMI style couplers.

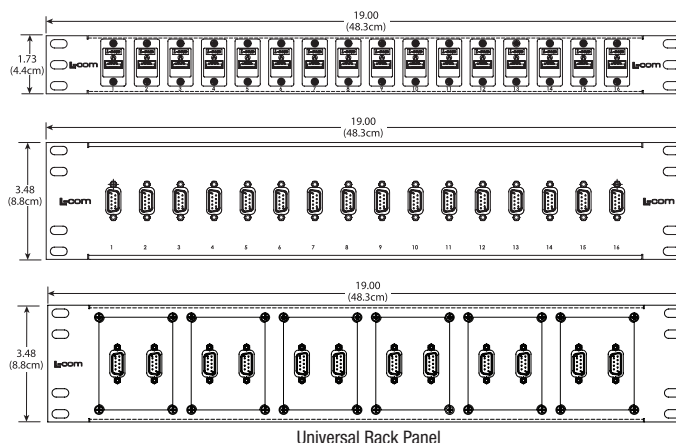

A



USB A

B



USB A Shielded

C



DB9

D



HD15

E



DB15

F



DB25

G




DB37

H




HDMI

Item #	Code	Description	Color	1-9	10-24	25-99	100+
19" (48.3cm) D-Sub, USB, HDMI® Rack Panels							
PR175F504-UAB	A	1.75" (4.4cm) Panel, 16 USB A/B Couplers	Black	131.95	126.67	121.39	CALL
PR35F504-UAB	A	3.50" (8.9cm) Panel, 32 USB A/B Couplers	Black	219.95	211.15	202.35	CALL
PR175F504-UABS	B	1.75" (4.4cm) Panel, 16 Shielded USB A/B Couplers	Black	142.95	137.23	131.51	CALL
PR35F504-UABS	B	3.50" (8.9cm) Panel, 32 Shielded USB A/B Couplers	Black	252.95	242.83	232.71	CALL
PR175DS916B	N/A	1.75" (4.4cm) Panel, 16 DB9/HD15/HDMI Cutouts	Black	58.95	56.59	54.23	CALL
PR35DS932B	N/A	3.50" (8.9cm) Panel, 32 DB9/HD15/HDMI Cutouts	Black	61.95	59.47	56.99	CALL
PR35DS1516B	N/A	3.50" (8.9cm) Panel, 16 DB15/HD26/DVI Cutouts	Black	32.95	31.63	30.31	CALL
PR35DS2516B	N/A	3.50" (8.9cm) Panel, 16 DB25/HD44 Cutouts	Black	32.95	31.63	30.31	CALL
PR35DS3716B	N/A	3.50" (8.9cm) Panel, 16 DB37/HD62 Cutouts	Black	65.95	63.31	60.67	CALL
PR175GB9FB	C	1.75" (4.4cm) Panel, 16 DB9 Female Couplers	Black	126.95	121.87	116.79	CALL
PR35GB932B	C	3.50" (8.9cm) Panel, 32 DB9 Female Couplers	Black	196.95	189.07	181.19	CALL
UPR35-2DB9FB	C	3.50" (8.9cm) Universal Rack Panel, 12 DB9 Female Couplers	Black	131.95	126.67	121.39	CALL
PR175HD1516B	D	1.75" (4.4cm) Panel, 16 HD15 Female Couplers	Black	137.95	132.43	126.91	CALL
PR35HD1532B	D	3.50" (8.9cm) Panel, 32 HD15 Female Couplers	Black	214.95	206.35	197.75	CALL
PR35GB15FB	E	3.50" (8.9cm) Panel, 16 DB15 Female Couplers	Black	137.95	132.43	126.91	CALL
PR35GB25FB	F	3.50" (8.9cm) Panel, 16 DB25 Female Couplers	Black	153.95	147.79	141.63	CALL
PR35GB37FB	G	3.50" (8.9cm) Panel, 16 DB37 Female Couplers	Black	189.95	182.35	174.75	CALL
PR175HD16B	H	1.75" (4.4cm) Panel, 16 HDMI Female Couplers	Black	218.95	210.19	201.43	CALL
PR35HD32B	H	3.50" (8.9cm) Panel, 32 HDMI Female Couplers	Black	328.95	315.79	302.63	CALL
PR-CMB	N/A	Cable Management Bracket Kit for most L-com 19" (48.3cm) Panels Kit Contains: (Qty: 6) Extension Brackets, (Qty: 1) 19" (48.3cm) Crossbar, (Qty: 18) Flathead Screws		48.95	46.99	45.03	CALL

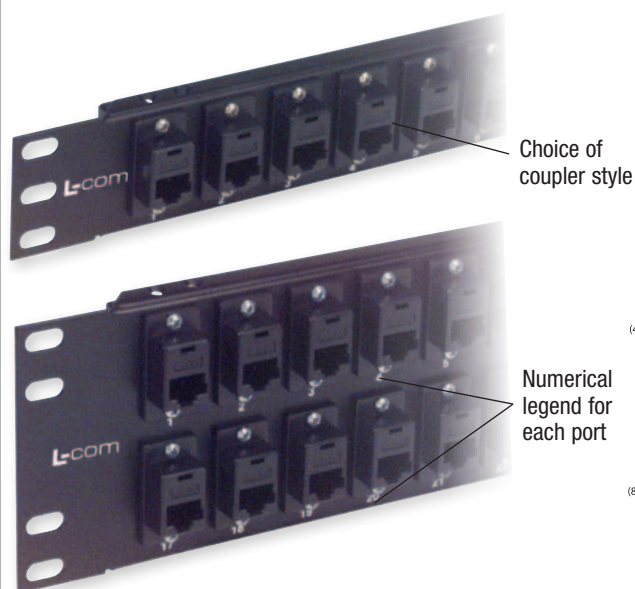

L-com offers system designers a complete selection of panel configurations for telecom connections. Each panel features a numerical legend below each port allowing users a fast and simple way to identify ports for their equipment. Our panels are made with .060 inch (16 ga) cold-rolled steel and finished with a durable black powder coat. An optional cable management bracket kit used on the rear of the panel gives a secure place to tie off cable bundles and prevent connector fatigue. Panels are available with RJ11/12 or RJ45 style couplers.

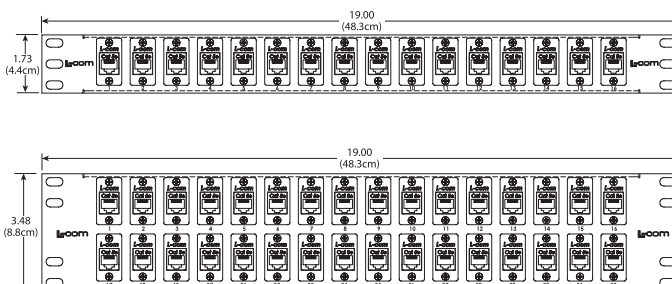

A



RJ11/12, RJ45

B



RJ45

C



RJ45

D



RJ45

E



RJ11/12, RJ45

F



RJ45

G





RJ45

Item #	Code	Description	Color	1-9	10-24	25-99	100+
19" (48.3cm) Telecom/Network Rack Panels							
PR175F504B-4S	A	1.75" (4.4cm) Panel, 16 RJ11 (6x4) Couplers, Straight-Thru	Black	82.95	79.63	76.31	CALL
PR175F504B-6S	A	1.75" (4.4cm) Panel, 16 RJ12 (6x6) Couplers, Straight-Thru	Black	91.95	88.27	84.59	CALL
PR175F504B-8SK	A	1.75" (4.4cm) Panel, 16 RJ45 (8x8) Couplers, Straight-Thru	Black	98.95	94.99	91.03	CALL
PR35F504B-4S	A	3.50" (8.9cm) Panel, 32 RJ11 (6x4) Couplers, Straight-Thru	Black	142.95	137.23	131.51	CALL
PR35F504B-6S	A	3.50" (8.9cm) Panel, 32 RJ12 (6x6) Couplers, Straight-Thru	Black	159.95	153.55	147.15	CALL
PR35F504B-8SK	A	3.50" (8.9cm) Panel, 32 RJ45 (8x8) Couplers, Straight-Thru	Black	186.95	179.47	171.99	CALL
PR175F504B-C5	C	1.75" (4.4cm) Panel, 16 Category 5e Couplers	Black	186.95	179.47	171.99	CALL
PR175F504B-SC5	C	1.75" (4.4cm) Panel, 16 Category 5e Couplers, Shielded	Black	252.95	242.83	232.71	CALL
PR175F504B-C6	C	1.75" (4.4cm) Panel, 16 Category 6 Couplers	Black	219.95	211.15	202.35	CALL
PR175F504B-SC6	C	1.75" (4.4cm) Panel, 16 Category 6 Couplers, Shielded	Black	274.95	263.95	252.95	CALL
PR35F504B-C5	C	3.50" (8.9cm) Panel, 32 Category 5e Couplers	Black	351.95	337.87	323.79	CALL
PR35F504B-SC5	C	3.50" (8.9cm) Panel, 32 Category 5e Couplers, Shielded	Black	439.95	422.35	404.75	CALL
PR35F504B-C6	C	3.50" (8.9cm) Panel, 32 Category 6 Couplers	Black	384.95	369.55	354.15	CALL
PR35F504B-SC6	C	3.50" (8.9cm) Panel, 32 Category 6 Couplers, Shielded	Black	472.95	454.03	435.11	CALL
PR175F504B	N/A	1.75" (4.4cm) Panel, 16 ECF Style Cutouts	Black	43.95	42.19	40.43	CALL
PR35F504B	N/A	3.50" (8.9cm) Panel, 32 ECF Style Cutouts	Black	43.95	42.19	40.43	CALL
PR175UT568	B	1.75" (4.4cm) Panel, 16 Category 5e Couplers	Black	204.95	196.75	188.55	CALL
PR175UT568S	F	1.75" (4.4cm) Panel, 16 Category 5e Couplers, Shielded	Black	244.95	235.15	225.35	CALL
PR35UT568	B	3.50" (8.9cm) Panel, 32 Category 5e Couplers	Black	344.95	331.15	317.35	CALL
PR35UT568S	F	3.50" (8.9cm) Panel, 32 Category 5e Couplers, Shielded	Black	399.95	383.95	367.95	CALL
PR175C6-16	G	1.75" (4.4cm) Panel, 16 Category 6 Couplers	Black	208.95	200.59	192.23	CALL
PR175C6-16S	D	1.75" (4.4cm) Panel, 16 Category 6 Couplers, Shielded	Black	263.95	253.39	242.83	CALL
PR35C6-32	G	3.50" (8.9cm) Panel, 32 Category 6 Couplers	Black	351.95	337.87	323.79	CALL
PR35C6-32S	D	3.50" (8.9cm) Panel, 32 Category 6 Couplers, Shielded	Black	406.95	390.67	374.39	CALL
PR175UJ16B	N/A	1.75" (4.4cm) Panel, 16 Keystone Style Cutouts	Black	32.95	31.63	30.31	CALL
PR35UJ16B	N/A	3.50" (8.9cm) Panel, 32 Keystone Style Cutouts	Black	43.95	42.19	40.43	CALL
PR175-1606	E	1.75" (4.4cm) Panel, 16 Voice Grade RJ12 (6x6) IDC Jacks	Black	64.95	62.35	59.75	CALL
PR175-1608	E	1.75" (4.4cm) Panel, 16 Voice Grade RJ45 (8x8) IDC Jacks	Black	126.95	121.87	116.79	CALL
PR35-3206	E	3.50" (8.9cm) Panel, 32 Voice Grade RJ12 (6x6) IDC Jacks	Black	86.95	83.47	79.99	CALL
PR35-3208	E	3.50" (8.9cm) Panel, 32 Voice Grade RJ45 (8x8) IDC Jacks	Black	164.95	158.35	151.75	CALL
PR-CMB	N/A	Cable Management Bracket Kit for most L-com 19" (48.3cm) Panels Kit Contains: (Qty: 6) Extension Brackets, (Qty: 1) 19" (48.3cm) Crossbar, (Qty: 18) Flathead Screws		48.95	46.99	45.03	CALL

Best Seller

UPR35-6B

UPR-S-KIT
UPR-A-KITUSPB
USP-A

USP2MC5B



USP4MC5B



USP2SMC5B



USP4SMC5B



USP2MC6B



USP4MC6B



USP2SMC6B



USP4SMC6B



USP2MK-C5B



USP4MK-C5B

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Universal Master Rack Panel with 6 Openings


L-com's Universal Master Rack Series offers installers the ability to customize their installation with different connections within a single rack panel. The Universal Series panels can save time, money and rack space in an installation project. The master panels feature six punched rectangular openings that will accept any of the numerous USP Series sub-panels shown in this catalog. Sub-panel openings are 2.20" x 2.75" (5.6cm x 7.0cm).

UPR35-6B	Master Rack Panel, Black	27.95	26.83	25.71	CALL
UPR-S-KIT	Master Rack Panel with 6 Black Steel Blanks	51.95	49.87	47.79	CALL
UPR-A-KIT	Master Rack Panel with 6 Black Aluminum Blanks	51.95	49.87	47.79	CALL
PR-CMB	Cable Management Bracket Kit for most L-com 19" (48.3cm) Panels	48.95	46.99	45.03	CALL
Kit Contains: (Qty: 6) Extension Brackets, (Qty: 1) 19" (48.3cm) Crossbar, (Qty: 18) Flathead Screws					

Universal Series Blank Sub-Panels

Universal Series blank sub-panels can be used to cover unused openings or may be used to customize a panel assembly. These panels come in 3 different styles for users to choose from: black anodized aluminum, white high impact plastic or black steel. The aluminum and plastic panels offer the easiest option for custom drilling or punching holes. The black steel panels are constructed of sturdy .060 inch (0.2cm) (16 ga) cold rolled steel for durability. Each sub-panel is equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USPB	Universal Steel Blank Sub-Panel, Black	4.95	4.75	4.55	CALL
USP-A	Universal Aluminum Blank Sub-Panel, Black	4.95	4.75	4.55	CALL
USP-P	Universal Plastic Blank Sub-Panel, White	4.95	4.75	4.55	CALL

**Build Custom Panels with L-com's Universal Sub-Panel System****STEP 1**

Start with the Master Rack Panel, UPR35-6B.

STEP 2

Now select a ready made sub-panel that works with your rack panel.

STEP 3

Using a Phillips or Flat screwdriver, install your sub-panels in the master rack panel.

Universal Series Sub-Panels Featuring Telecom/Network Grade Connections

This Universal sub-panel series offers connections for telecom and network equipment. Choose between Category 5e or Category 6 rated connections either shielded or non-shielded. Panel choices offer both feed-thru style couplers and jacks with 110 style punch terminations. Either 2 or 4 connections per panel can be chosen and blank panels are available for further customization. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP2MC5B	Sub-Panel with 2 Category 5e RJ45 Couplers	17.95	17.23	16.51	CALL
USP4MC5B	Sub-Panel with 4 Category 5e RJ45 Couplers	28.95	27.79	26.63	CALL
USP2SMC5B	Sub-Panel with 2 Category 5e RJ45 Couplers, Shielded	21.95	21.07	20.19	CALL
USP4SMC5B	Sub-Panel with 4 Category 5e RJ45 Couplers, Shielded	37.95	36.43	34.91	CALL
USP2MC6B	Sub-Panel with 2 Category 6 RJ45 Couplers	19.95	19.15	18.35	CALL
USP4MC6B	Sub-Panel with 4 Category 6 RJ45 Couplers	32.95	31.63	30.31	CALL
USP2SMC6B	Sub-Panel with 2 Category 6 RJ45 Couplers, Shielded	24.95	23.95	22.95	CALL
USP4SMC6B	Sub-Panel with 4 Category 6 RJ45 Couplers, Shielded	41.95	40.27	38.59	CALL
USP2MK-C5B	Sub-Panel with 2 Category 5e RJ45/110 Punch Connectors	13.95	13.39	12.83	CALL
USP4MK-C5B	Sub-Panel with 4 Category 5e RJ45/110 Punch Connectors	19.95	19.15	18.35	CALL
USP2MK-SC5B	Sub-Panel with 2 Category 5e RJ45/110 Punch Connectors, Shielded	17.95	17.23	16.51	CALL
USP4MK-SC5B	Sub-Panel with 4 Category 5e RJ45/110 Punch Connectors, Shielded	28.95	27.79	26.63	CALL
USP2MK-C6B	Sub-Panel with 2 Category 6 RJ45/110 Punch Connectors	24.95	23.95	22.95	CALL
USP4MK-C6B	Sub-Panel with 4 Category 6 RJ45/110 Punch Connectors	41.95	40.27	38.59	CALL
USP2MK-SC6B	Sub-Panel with 2 Category 6 RJ45/110 Punch Connectors, Shielded	19.95	19.15	18.35	CALL
USP4MK-SC6B	Sub-Panel with 4 Category 6 RJ45/110 Punch Connectors, Shielded	32.95	31.63	30.31	CALL
USP238B	Blank Sub-Panel with 2 Keystone Openings, Pre-Punched	6.95	6.67	6.39	CALL
USP231B	Blank Sub-Panel with 4 Keystone Openings, Pre-Punched	6.95	6.67	6.39	CALL



USP2MK-SC5B



USP4MK-SC5B



USP2MK-C6B



USP4MK-C6B




USP2MK-SC6B



USP4MK-SC6B



USP231B

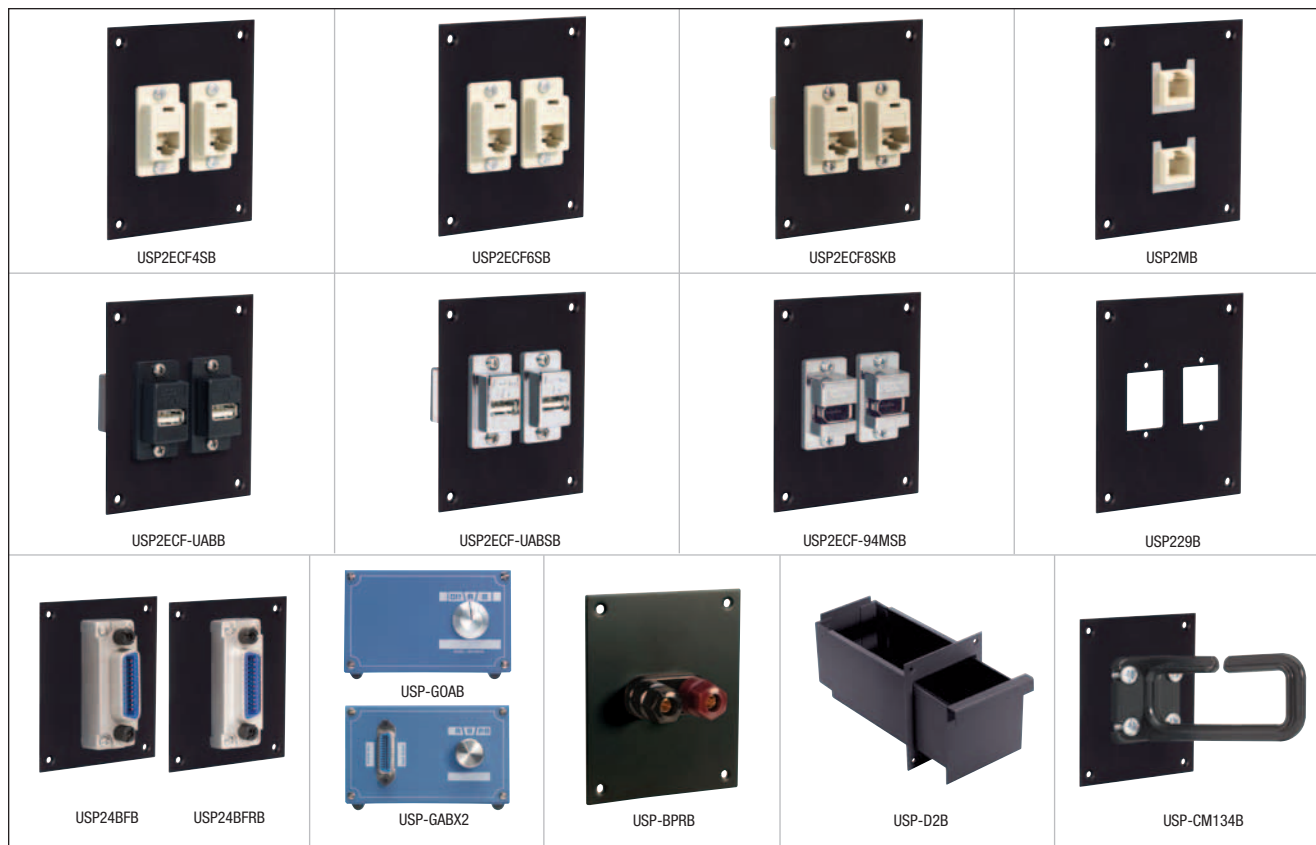

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Universal Series Sub-Panels Featuring Telecom, USB and Firewire Connections

This Universal sub-panel series offers connections for today's modern computer systems. Installers can choose the sub-panel that fits their specific connection needs. Panels come in a choice of feed-thru style couplers with either 2 or 4 connections per panel. A blank panel with ECF Series style openings is available for further customization. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP2ECF4SB	Sub-Panel with 2 RJ11 (6x4) Couplers, Straight Wired	15.95	15.31	14.67	CALL
USP2ECF6SB	Sub-Panel with 2 RJ12 (6x6) Couplers, Straight Wired	15.95	15.31	14.67	CALL
USP2ECF8SKB	Sub-Panel with 2 RJ45 (8x8) Couplers, Straight Wired	17.95	17.23	16.51	CALL
USP2MB	Sub-Panel with 2 RJ12 (6x6) Couplers, Straight Wired	11.95	11.47	10.99	CALL
USP4MB	Sub-Panel with 4 RJ12 (6x6) Couplers, Straight Wired	18.95	18.19	17.43	CALL
USP2ECF-UABB	Sub-Panel with 2 USB Type A to Type B Couplers	19.95	19.15	18.35	CALL
USP2ECF-UABSB	Sub-Panel with 2 USB Type A to Type B Couplers, Shielded	21.95	21.07	20.19	CALL
USP2ECF-94MSB	Sub-Panel with 2 Firewire Type 1 Couplers, Shielded	26.95	25.87	24.79	CALL
USP229B	Blank Sub-Panel with 2 ECF Style Openings, Pre-Punched	6.95	6.67	6.39	CALL

Universal Series Sub-Panels Featuring GPIB (IEEE-488) Couplers and Switch Boxes

This Universal sub-panel series offers couplers and switch boxes for IEEE-488 cabling installations. Panels come with either a standard GPIB coupler or a reverse entry style coupler mounted. We also carry a line of GPIB Switch Boxes that can be mounted into the Universal Series Master Frames. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP24BFB	Sub-Panel with 1 IEEE-488 (GPIB) Normal Entry Coupler	38.95	37.39	35.83	CALL
USP24BFRB	Sub-Panel with 1 IEEE-488 (GPIB) Reverse Entry Coupler	38.95	37.39	35.83	CALL
USP-GOAB	Switch Box, A to Rear I/O, B to Rear I/O, Off	97.41	93.51	89.62	CALL
USP-GABX2	Switch Box, A or B to Front I/O	97.41	93.51	89.62	CALL

Universal Series Sub-Panels Featuring Binding Post Connections for Test Applications


This Universal sub-panel series offers connections for test applications. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP-BPRB	Sub-Panel with Binding Post Pair, Black/Red	9.95	9.55	9.15	CALL
----------	---	------	------	------	------

Universal Series Sub-Panel Accessories

Users can keep extra adapters handy with the optional drawer that fits into any one of the 6 Master Rack sub-panel openings. A D-Ring style cable manager mounted to a sub-panel is also available allowing for another convenient way to secure cables on the rack panel.

USP-D2B	Sub-Panel Mounted Drawer, 6" (15.2cm) Depth	21.95	21.07	20.19	CALL
USP-CM134B	Sub-Panel Mounted Cable D-Ring	18.95	18.19	17.43	CALL

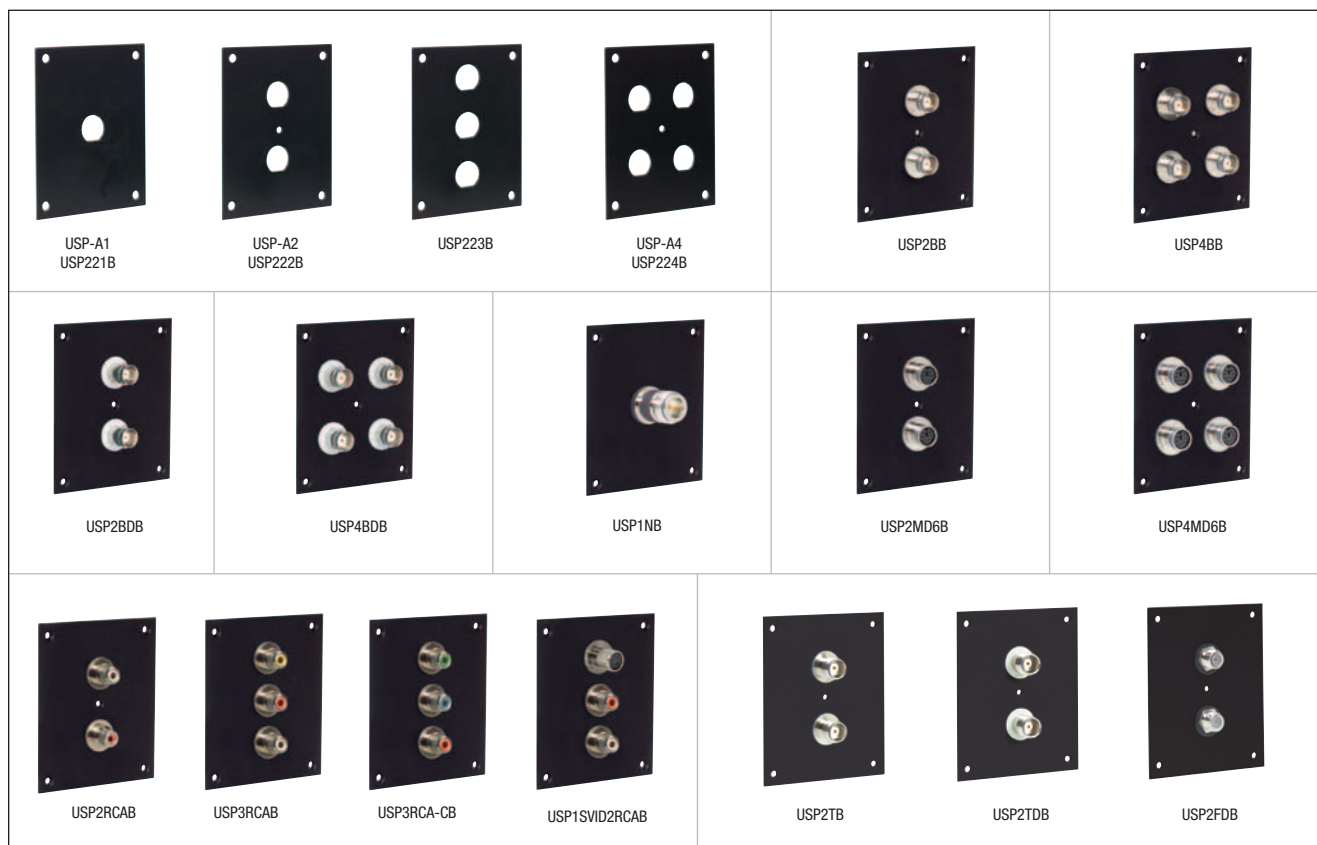


Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Universal Series Sub-Panels Featuring Coaxial and Mini DIN Couplers

This Universal sub-panel series offers connections for data transmission over coaxial and DIN style connectors. Installers can choose the sub-panel that fits their specific connection needs. Panel choices offer feed-thru style couplers in either 2 or 4 connections per panel. Blank panels are also available for further customization. All panels come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP-A1	Blank Sub-Panel with 1 0.5" (1.3cm) D-Hole, Black Aluminum	5.95	5.71	5.47	CALL
USP-A2	Blank Sub-Panel with 2 0.5" (1.3cm) D-Holes, Black Aluminum	5.95	5.71	5.47	CALL
USP-A4	Blank Sub-Panel with 4 0.5" (1.3cm) D-Holes, Black Aluminum	5.95	5.71	5.47	CALL
USP221B	Blank Sub-Panel with 1 0.5" (1.3cm) D-Hole, Black Steel	5.95	5.71	5.47	CALL
USP222B	Blank Sub-Panel with 2 0.5" (1.3cm) D-Holes, Black Steel	5.95	5.71	5.47	CALL
USP223B	Blank Sub-Panel with 3 0.5" (1.3cm) D-Holes, Black Steel	5.95	5.71	5.47	CALL
USP224B	Blank Sub-Panel with 4 0.5" (1.3cm) D-Holes, Black Steel	5.95	5.71	5.47	CALL
USP2BB	Sub-Panel with 2 BNC Couplers	15.95	15.31	14.67	CALL
USP4BB	Sub-Panel with 4 BNC Couplers	24.95	23.95	22.95	CALL
USP2BDB	Sub-Panel with 2 BNC Couplers, Insulated	16.95	16.27	15.59	CALL
USP4BDB	Sub-Panel with 4 BNC Couplers, Insulated	27.95	26.83	25.71	CALL
USP1NB	Sub-Panel with 1 Type N Coupler	21.95	21.07	20.19	CALL
USP2MD6B	Sub-Panel with 2 Mini DIN 6 Couplers	24.95	23.95	22.95	CALL
USP4MD6B	Sub-Panel with 4 Mini DIN 6 Couplers	43.95	42.19	40.43	CALL
USP2RCAB	Sub-Panel with 2 RCA Couplers, Red/White	14.95	14.35	13.75	CALL
USP3RCAB	Sub-Panel with 3 RCA Couplers, Yellow/Red/White	17.95	17.23	16.51	CALL
USP3RCA-CB	Sub-Panel with 3 RCA Couplers, Green/Blue/Red	17.95	17.23	16.51	CALL
USP1SVID2RCAB	Sub-Panel with 1 Mini DIN 4 and 2 RCA Couplers	22.95	22.03	21.11	CALL
USP2TB	Sub-Panel with 2 TNC Couplers	16.95	16.27	15.59	CALL
USP2TDB	Sub-Panel with 2 TNC Couplers, Insulated	18.95	18.19	17.43	CALL
USP2FDB	Sub-Panel with 2 Type F Couplers, Insulated	11.95	11.47	10.99	CALL

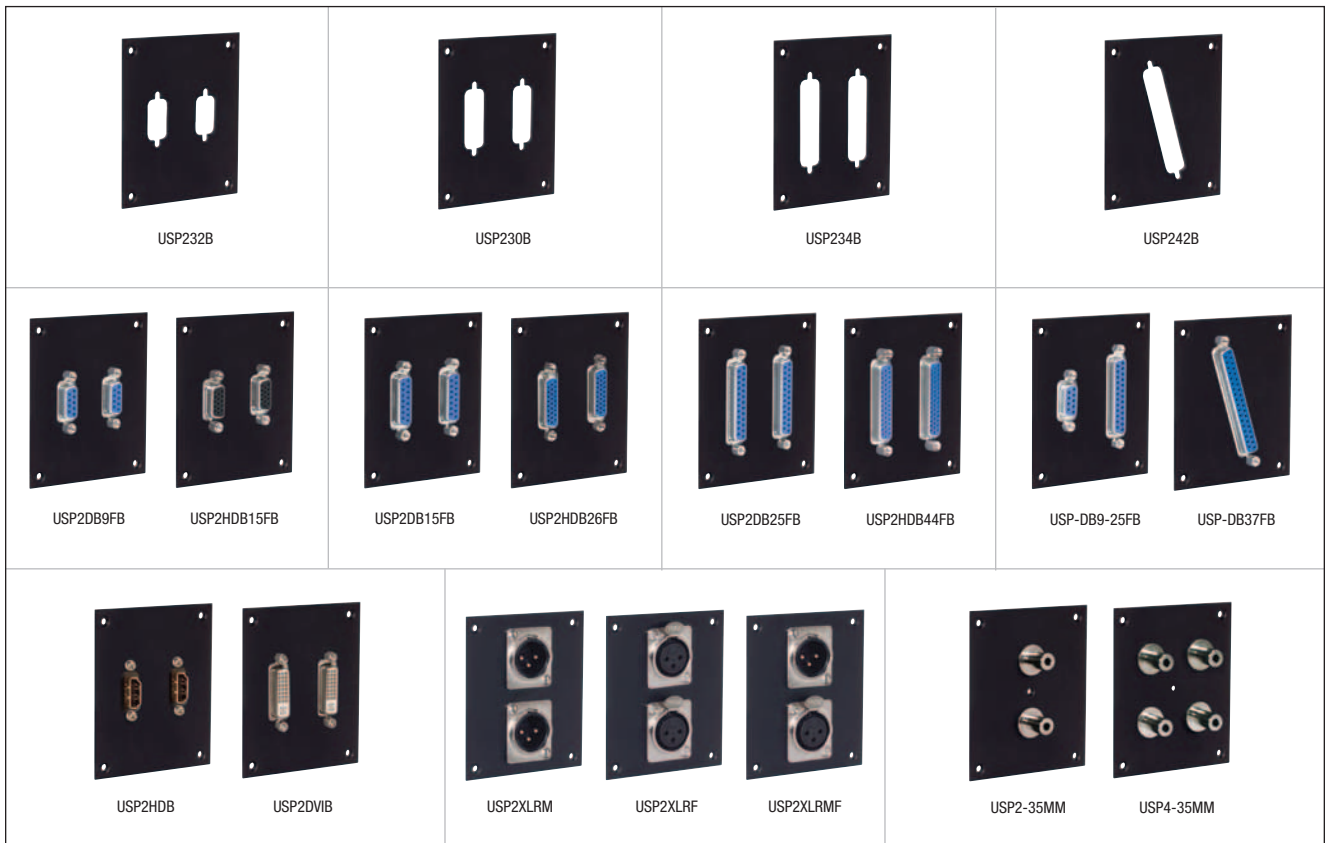

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Universal Series Sub-Panels Featuring D-Sub Connections


This Universal sub-panel series offers connections for D-Sub style cables. Installers can choose the sub-panel that fits their specific connection needs. Panel choices are available with up to 2 feed-thru style couplers per panel. Blank panels are available for further customization. All panels come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP232B	Blank Sub-Panel with 2 DB9/HD15 Cutouts	6.95	6.67	6.39	CALL
USP230B	Blank Sub-Panel with 2 DB15/HD26 Cutouts	6.95	6.67	6.39	CALL
USP234B	Blank Sub-Panel with 2 DB25/HD44 Cutouts	6.95	6.67	6.39	CALL
USP242B	Blank Sub-Panel with 1 DB37/HD62 Cutout	6.95	6.67	6.39	CALL
USP2DB9FB	Sub-Panel with 2 DB9 Female Couplers	17.95	17.23	16.51	CALL
USP2HDB15FB	Sub-Panel with 2 HD15 Female Couplers	23.95	22.99	22.03	CALL
USP2DB15FB	Sub-Panel with 2 DB15 Female Couplers	19.95	19.15	18.35	CALL
USP2HDB26FB	Sub-Panel with 2 HD26 Female Couplers	25.95	24.91	23.87	CALL
USP2DB25FB	Sub-Panel with 2 DB25 Female Couplers	21.95	21.07	20.19	CALL
USP2HDB44FB	Sub-Panel with 2 HD44 Female Couplers	28.95	27.79	26.63	CALL
USP-DB9-25FB	Sub-Panel with 1 DB9 and 1 DB25 Female Coupler	19.95	19.15	18.35	CALL
USP-DB37FB	Sub-Panel with 1 DB37 Female Coupler	15.95	15.31	14.67	CALL

Universal Series Audio/Video Sub-Panels

Design and build your own custom rack panel using simple pre-fabricated sub-panels. These steel sub-panels feature a variety of couplers and connectors with a black matte finish. Supplied with four 6-32 screws for quick installation into L-com's Universal Master Rack Frame.

USP2HDB	Sub-Panel with 2 HDMI Female Couplers	29.95	28.75	27.55	CALL
USP2DVIB	Sub-Panel with 2 DVI Female Couplers	39.95	38.35	36.75	CALL
USP2XLRM	Sub-Panel with 2 XLR Male Connectors	14.95	14.35	13.75	CALL
USP2XLRF	Sub-Panel with 2 XLR Female Connectors	14.95	14.35	13.75	CALL
USP2XLRFM	Sub-Panel with 1 XLR Male Connector and 1 XLR Female Connector	14.95	14.35	13.75	CALL
USP2-35MM	Sub-Panel with 2 3.5mm Audio Couplers	22.95	22.03	21.11	CALL
USP4-35MM	Sub-Panel with 4 3.5mm Audio Couplers	15.95	15.31	14.67	CALL

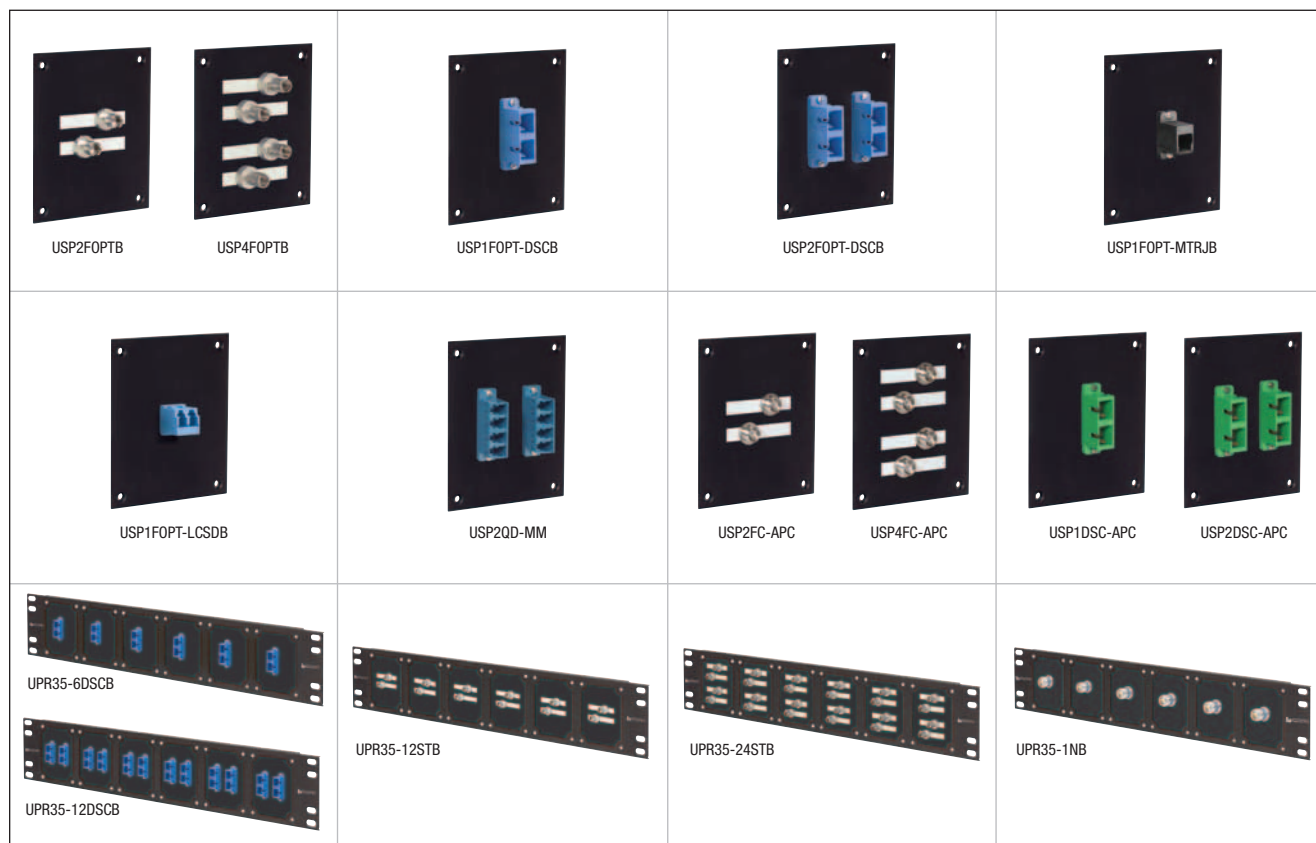

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Universal Series Sub-Panels Featuring Fiber Optic Couplers

This Universal sub-panel series offers connections for fiber networks. Panel choices available in ST, SC, MTRJ, LC or FC coupler configurations. All panels are black steel and come equipped with four pre-tapped holes to accept the four 6-32 mounting screws which are supplied.

USP2FOPTB	Sub-Panel with 2 Simplex ST Couplers	16.95	16.27	15.59	CALL
USP4FOPTB	Sub-Panel with 4 Simplex ST Couplers	21.95	21.07	20.19	CALL
USP1FOPT-DSCB	Sub-Panel with 1 Duplex SC Coupler	18.95	18.19	17.43	CALL
USP2FOPT-DSCB	Sub-Panel with 2 Duplex SC Couplers	21.95	21.07	20.19	CALL
USP1FOPT-MTRJB	Sub-Panel with 1 MTRJ Coupler	27.95	26.83	25.71	CALL
USP1FOPT-LCSDb	Sub-Panel with 1 Duplex LC Coupler	18.95	18.19	17.43	CALL
USP2QD-MM	Sub-Panel with 2 Multimode Quad LC Couplers	27.95	26.83	25.71	CALL
USP2QD-SM	Sub-Panel with 2 Single mode Quad LC Couplers	43.95	42.19	40.43	CALL
USP2FC-APC	Sub-Panel with 2 Simplex APC FC Couplers	29.95	28.75	27.55	CALL
USP4FC-APC	Sub-Panel with 4 Simplex APC FC Couplers	47.95	46.03	44.11	CALL
USP1DSC-APC	Sub-Panel with 1 Duplex APC SC Coupler	26.95	25.87	24.79	CALL
USP2DSC-APC	Sub-Panel with 2 Duplex APC SC Couplers	28.95	27.79	26.63	CALL

Universal Series Master Rack Panel Pre-Populated with USP Series Fiber Optic Sub-Panels

These Master Rack Panels come with our USP Series Fiber Sub-panels already pre-installed. Available in 12 and 24 Port configurations, these panels are offered in SC or ST versions. These panels provide a straight out of the box solution to many connectivity needs. No need for assembly on site, just install these panels on your rack and start patching in your cables right away.

UPR35-6DSCB	3.50" (8.9cm) Universal Rack Panel, 6 Duplex SC Couplers	142.95	137.23	131.51	CALL
UPR35-12DSCB	3.50" (8.9cm) Universal Rack Panel, 12 Duplex SC Couplers	164.95	158.35	151.75	CALL
UPR35-12STB	3.50" (8.9cm) Universal Rack Panel, 12 ST Couplers	124.95	119.95	114.95	CALL
UPR35-24STB	3.50" (8.9cm) Universal Rack Panel, 24 ST Couplers	164.95	158.35	151.75	CALL

Universal Rack Panel with 6 Type N Coaxial Grounded Couplers, 50 Ohm

L-com's Universal Sub-Panel system offers you an easy way to configure a customized rack panel with various connectors. This rack frame comes pre-loaded with six Type N Coaxial coupler panels.

UPR35-1NB	3.50" (8.9cm) Universal Rack Panel, 6 Type N Coaxial Couplers	153.95	147.79	141.63	CALL
-----------	---	--------	--------	--------	------

Note: Type N Coupler Grounded to Sub-Panel & Sub-Panel Mounting Screws
Each of the 6 Sub-Panels are electrically isolated from each other.

Item #	Description	1-9	10-24	25-99	100+
--------	-------------	-----	-------	-------	------

Domestic and International Power Cords - UL/CSA or European Approved

L-com stocks several popular external power cords for domestic, international and medical applications. All assemblies are fully molded and meet the required safety specifications.

Domestic LSZH Power Cords - UL/CSA Approved

LSZH (Low Smoke Zero Halogen) Versions of our Standard North American N5/15 to C13 Power cords in 2 & 3 meter lengths. Available in three gauges 18 AWG, 16 AWG & 14 AWG to meet your particular power requirements.

LCPWR18Z-2M	LSZH Power Cord SJE3 - 18 AWG, N5/15 - C13 Black, 2m (6.6ft)	14.98	14.38	13.78	CALL
LCPWR18Z-3M	LSZH Power Cord SJE3 - 18 AWG, N5/15 - C13 Black, 3m (9.8ft)	19.98	19.18	18.38	CALL
LCPWR16Z-2M	LSZH Power Cord SJE3 - 16 AWG, N5/15 - C13 Black, 2m (6.6ft)	15.98	15.34	14.70	CALL
LCPWR16Z-3M	LSZH Power Cord SJE3 - 16 AWG, N5/15 - C13 Black, 3m (9.8ft)	21.98	21.10	20.22	CALL
LCPWR14Z-2M	LSZH Power Cord SJE3 - 14 AWG, N5/15 - C13 Black, 2m (6.6ft)	20.98	20.14	19.30	CALL
LCPWR14Z-3M	LSZH Power Cord SJE3 - 14 AWG, N5/15 - C13 Black, 3m (9.8ft)	27.98	26.86	25.74	CALL

Domestic Power Cords - UL/CSA Approved

Connector options include N1/15 to C7, N5/15 to Regular and Locking C13 and pigtail end. Heavy duty 18 AWG cable, color is Black.

PCM1000	Power Cord SPT2 - 18 AWG, N1/15 - C7 Black, 2m (6.6ft)	3.95	3.79	3.63	CALL
PCM1010	Power Cord SVT3 - 18 AWG, N5/15 - Pigtail Black, 2m (6.6ft)	4.95	4.75	4.55	CALL
PCM1012	Power Cord SVT3 - 18 AWG, N5/15 - C13 Black, 2.3m (7.6ft)	5.95	5.71	5.47	CALL
PCM1014	Power Cord SJT3 - 18 AWG, N5/15 - C13 Black, 3m (9.8ft)	6.95	6.67	6.39	CALL
LC-PWRN15LK-6	Locking IEC Power Cord SJT3 - 18 AWG, N5/15 - Locking C13 Black, 1.8m (6.0ft)	8.75	8.40	8.05	CALL

Hospital Grade Power Cords - UL/CSA Approved

Connector options are Hospital Grade N5/15 Molded Gray/Clear and Black to Regular and Locking C13. Heavy duty 18 AWG cable, colors are Gray and Black.

PCM1050	Power Cord SJT3 - 18 AWG, N5/15 - Hospital Grade Gray Mold - C13 Gray, 3.1m (10.0ft)	9.45	9.07	8.69	CALL
PCM1052	Power Cord SJT3 - 18 AWG, N5/15 - Hospital Grade Clear Mold - C13 Gray, 3.1m (10.0ft)	9.45	9.07	8.69	CALL
LC-PWRN15HLK-10	Locking IEC Cord SJT3 - 18 AWG, N5/15 Hospital Grade - Locking C13 Black, 3.1m (10.0ft)	17.95	17.23	16.51	CALL

International Power Cords - Meets VDE and Several Other Approvals

Connector options are CEE 7/7 to C13, EN50075/XVI (CEE 7/16 "Europlug" Type C) to C7 and BS1363 to Locking C13, color is Black.










PCM1020	Power Cord H05VVF3G - 18 AWG, CEE 7/7 - C13 Black, 2.5m (8.2ft)	7.95	7.63	7.31	CALL
PCM1030	Power Cord H03VH2F2 - 21 AWG, CEE 7/16 - C7 Black, 1.8m (6.0ft)	6.95	6.67	6.39	CALL
LC-PWREUROLK-2M	Locking IEC Power Cord H05VVF3G - 18 AWG, CEE 7/7 - Locking C13 Black, 1.8m (6.0ft)	11.35	10.90	10.44	CALL
LC-PWRUKLK-2M	Locking IEC Power Cord H05VVF3G - 21 AWG, BS1363 - Locking C13 Black, 1.8m (6.0ft)	13.15	12.62	12.10	CALL

Universally Approved Jumper Cords - Domestic and European Approved, UL/CSA, VDE

Connector options are C14 to Regular and Locking C13, heavy duty 18 AWG cable, color is Black.

PCM1040	Power Cord SJT3 - 18 AWG, C14 - C13 Black, 1m (3.3ft)	4.95	4.75	4.55	CALL
PCM1042	Power Cord SJT3 - 18 AWG, C14 - C13 Black, 2m (6.6ft)	5.95	5.71	5.47	CALL
PCM1044	Power Cord SJT3 - 18 AWG, C14 - C13 Black, 3m (9.8ft)	6.95	6.67	6.39	CALL
LC-PWRC14LK-6	Locking IEC Power Cord SJT3 - 18 AWG, C14 - Locking C13 Black, 1.8m (6.0ft)	11.35	10.90	10.44	CALL

Power Cord Identification Guide

  CEE 7/16 "Europlug"	 NEMA 1/15 Polarized	 NEMA 5/15	 NEMA 5/15 Hospital Grade	  CEE 7/7 "Schuko" BS1363 "UK"	  C13 C14
---	---	---	--	---	--

Switching Power Supplies, Power Cords, PoE Power Supplies and Lighter Power Adapters

We offer a broad range of switching power supplies which support 110/220 VAC operation. Models in this series include 9 VDC, 12 VDC, 15 VDC and 48 VDC options. Additionally, PoE power supplies are available which provide data and power over a single Cat5 cable to end devices which are compliant with IEEE standard PoE pinout (Pins 4 & 5 Power +/Pins 7 & 8 Power -).

Switching Power Supplies

PS909-21R	9 VDC @ 1A (9W), 2.1mm DC Plug	10.30	9.89	9.48	CALL
PS1212-21R	12 VDC @ 1A (12W), 2.1mm Right Angle DC Plug	13.40	12.86	12.33	CALL
PS1224-21R	12 VDC @ 2A (24W), 2.1mm Right Angle DC Plug	15.00	14.40	13.80	CALL
PS1240-21R	12 VDC @ 3.33A (40W), 2.1mm Right Angle DC Plug	22.00	21.12	20.24	CALL
PS1566	15 VDC @ 4.4A (66W), 2.1mm DC Plug	90.00	86.40	82.80	CALL
PS4820-POE-1	48 VDC @ 20W, Dual RJ45 Jacks	25.00	23.50	22.00	CALL
PS4870-25R	48 VDC @ 1.5A (70W), 2.5mm Right Angle DC Plug	60.80	58.37	55.94	CALL
PS4848-25R	48 VDC @ 1A (48W) 2.5mm Right Angle DC Plug	24.95	24.45	23.95	CALL
PS4860-POE	48 VDC @ 1.25A (60W), Dual RJ45 PoE, Requires PSCORD3	80.00	75.20	70.40	CALL

Lighter Plug to 2.1mm Right Angle DC Plug, 3A Fuse

PS-LIGHTER-06	Cigarette Plug to 2.1mm Right Angle DC Plug, 3A Fuse, 6ft (1.8m)	10.00	9.60	9.20	CALL
---------------	--	-------	------	------	------



12 Volt to 48 Volt DC/DC Boost Converter (Regulator)

The PC12480.8 DC-to-DC Converter is designed to convert 12VDC (12-26) battery voltage to 48VDC @ 0.85A. It is ideal for mobile applications that require 48VDC electronic equipment to be powered by converting the 12VDC (12-26) power from most cars, trucks or aircraft.

PC12480.8	12 Volt to 48 Volt DC/DC Boost Converter (Regulator)	55.00	52.80	50.60	CALL
-----------	--	-------	-------	-------	------


Accessories

PSX-EU1	US Flat or Euro Round to Euro 4.8mm Round Pins A/C Adapter	4.00	3.60	3.20	CALL
PSX-EU2	EU 4/4.8mm Round to US NEMA 6-15R Flat Blades A/C Adapter	4.00	3.60	3.20	CALL
PSCORD2	2 Conductor Plug, USA/AC Power Cord, 1ft (0.3m)	4.00	3.84	3.68	CALL
PSCORD3	3 Conductor Plug, USA/AC Power Cord, 1ft (0.3m)	3.48	3.34	3.20	CALL



PD-915R
(Front View)PD-915R
(Rear View)

TL-SS7415-15



TL-DNET1

TL-IBAR12
(rack mount)

TL-RS1215



TL-OFFICE300

TL-OFFICE500
(Front and Rear View)SU1500RTXL2UA
(Front and Rear View)

Middle Atlantic 19" x 1.75" (48.3 x 4.4cm) Rackmountable Power Distribution Unit with Surge Protection

The PD-915R rackmount power distribution unit is equipped with 8 rear outlets and one front outlet. Standard equipment includes surge and spike protection, EMI filtering and a 9 foot cord. A generous 8.75" (22.2cm) depth offers easy access to the 15 amp rear panel outlets which are solidly mounted on yokes to eliminate deflection. An illuminated combination power switch/circuit breaker is located on the front panel. Occupies one rackspace, finished with a durable Black powder coat. UL recognized, listing pending. **As an authorized Middle Atlantic reseller, we can bid on RFQs for any Middle Atlantic part numbers. Contact us to request a non-obligatory quote.**

Item #	System Type	Number of Outlets	Dimensions (Inches)	Rack Mounting	Shipping Weight	Price
PD-915R	Surge Only	9	7.5w x 1.75h x 8.75d	1 Space	8.5	123.20

Tripp Lite 16 and 24 Outlet Power Strips with Surge Suppression

These Tripp Lite power strips with AC surge suppression offer a convenient method of horizontal or vertical power distribution in equipment racks, computer rooms, workbenches, raceways and more. By utilizing these power strips you can protect connected equipment from transient surges and line noise with built-in surge suppression rated at 450 joules. Corded, multi-outlet strip reduces cabling clutter and enables the connection of multiple electrical devices to a single AC wall socket. Features rugged all-metal housing, lighted power switch with transparent guard to prevent accidental shutoff, 15A resettable circuit breaker and attractive gray housing with black output receptacles. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	System Type	Number of Outlets	Dimensions (Inches)	Shipping Weight	Price
TL-SS7415-15	Surge Only	16	48w x 1.5h x 1.5d	4.5	75.00
TL-SS7619-15	Surge Only	24	72w x 1.5h x 1.5d	6.0	89.00

Tripp Lite Network and Telephone Surge Suppressors

Protecting equipment at the power input is not complete protection. Static discharge, lightning and faulty wiring can send damaging surges through data ports. This vulnerability can be easily eliminated with an inline suppressor. In considering the cost of replacing damaged equipment and resultant lost productivity, the cost of protection is truly small. Two-year manufacturer's warranty. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Connector	Application	Lines Protected	Peak Pulse Clamping Voltage	Maximum Current	Price
TL-DNET1	RJ45	100Base-T, 10Base-T, Token Ring, RS422, AS400	1 - 8	7.5 V	750 Amps	29.07

Tripp Lite Network Grade Rackmount Surge Suppressor

Tripp Lite's IBAR12 offers network-grade surge and noise suppression in a versatile all-metal multi-mount cabinet. Detachable mounting flanges are configurable for rackmount (1U), wallmount and under-counter installation. Features network grade AC surge suppression with EMI/RFI noise filtering. Outlets are arranged in exclusive isolated filter banks to limit noise interaction among connected items. Includes 12 outlets (2 front/10 rear), 15 ft AC power cord and guarded power switch to reduce the risk of accidental shutoff. Diagnostic LEDs indicate AC present, line fault and protection status. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	System Type	Number of Outlets	Dimensions (Inches)	Rack Mounting	Shipping Weight	Price
TL-IBAR12	Surge Only	12	17.5w x 1.75h x 4d	1 Space	6.5	126.98

Tripp Lite Rack Mount Power Strip

This rack mount power strip packs many useful features into a slim single rack space of 1.75" height. Outlets are conveniently located on both sides of the unit. Two-year manufacturer's warranty. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	System Type	Number of Outlets	Dimensions (Inches)	Rack Mounting	Shipping Weight	Price
TL-RS1215	Non-Surge	12	17.5w x 1.75h x 4.5d	1 Space	4.0	49.95

Note: This power strip does not provide surge or line noise protection.

Tripp Lite Internet Office Series Power Back-up System

Tripp Lite's Internet Office standby UPS systems offer complete protection from blackouts, brownouts and transient surges on both AC and dialup modem lines. The Internet Office offers complete power protection in an ultra-compact, flat-pack housing. Includes 3 battery supported outlets for computer, monitor and one vital system peripheral, plus 3 additional surge suppression-only outlets for printers and other system accessories not requiring battery support. A built-in single line RJ11 phone suppression jacks protect modem, fax machine, cordless phone or other peripheral with standard dialup phone connection. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
TL-OFFICE300	300/150	Line Interactive	6	10/4 min	2.6w x 11h x 4.5d	5.0	75.00
TL-OFFICE500	500/280	Line Interactive	6	5/17 min	4.75w x 8.25h x 7d	16.0	119.00

Tripp Lite SmartOnline UPS Series

Tripp Lite's SmartOnline UPS Systems provide the highest level of power protection for mission-critical applications. True on-line operation completely isolates connected equipment from all power problems: blackouts, brownouts, surges, line noise, even harmonic distortion. Double-conversion operation continually converts incoming AC power into DC power, and then resynthesizes it back into normal AC power. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Rack Mounting	Shipping Weight	Price
TL-SU750XL	750/600	Line Interactive	6	11/4 min	6.75w x 10h x 13.25d	No	28.7	479.00
TL-SU750RTXL2U	750/600	Line Interactive	6	11/4 min	17.5w x 3.5h x 13.5d	2 Space	29.0	529.00
SU1500RTXL2UA	1500/1200	Line Interactive	6	17/5 min	17.5w x 3.5h x 19d	2 Space	44.1	799.00
SU2200RTXL2UA	2200/1600	Line Interactive	6	18/5 min	17.5w x 3.5h x 19d	2 Space	47.4	1229.00
SU3000RTXR3U	3000/2400	Line Interactive	9	33/14 min	17.75w x 5.25h x 26d	3 Space	111.33	1949.00

Tripp Lite Smart Pro® Intelligent UPS System

The Tripp Lite Smart Pro® Intelligent UPS System is an ideal power protection solution for hubs, routers, switches, telephone systems and other critical moderate power devices. Innovative design packs battery backup and automatic voltage protection into an ultra small rack mountable package only a single rack space (1.75" / 4.4cm) high. Unattended shutdown capable via an RS232 port (PowerAlert® software included). The battery replacement door is conveniently located on the front panel. Shipping weight is 18.5lb / 8.4kg. Two-year manufacturer's warranty. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Rack Mounting	Shipping Weight	Price
TL-SMART500RT1U	500/300	Line Interactive	7	17/5 min	17.5w x 1.75h x 11.75d	1 Space	18.8	195.00

Tripp Lite Eco Series Energy-Saving Standby UPS System

The ECO550UPS, by Tripp Lite, is comprised of four battery back and surge suppression outputs and four surge suppression-only outputs, three of which offer an intelligent, power-saving design that power off any attached unused equipment. As well as a USB port (cable included) allowing for built-in power management and automatic shutdown, controlled via Tripp Lite's free PowerAlert software. Convenient audible alarm and front panel L.E.D.s offer easy status information regarding line and battery operation. The unit's 550VA/300W power allows entry-level PCs power for up to 17 minutes, mitigating data loss and allowing time for shutdown. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
ECO550UPS	550/300	Surge / Battery	8	10/3.5 min	3.1w x 10.8h x 5.7d	6.6	109.80

Tripp Lite OMNIVS1000 Tower Line-Interactive UPS System

The OMNIVS1000, by Tripp Lite, offers a tower form factor, housing six battery and surge suppression outputs along with two surge suppression-only outlets. This unit offers up to 60 minutes of power for entry-level PCs with its 1000VA/500W power supply. The unit supports battery replacement via the built-in access panel, with built-in audible alarm and 4 front panel LEDs indicate line power status, battery power status, battery low/replace status and overload. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
OMNIVS1000	1000/500	Surge / Battery	8	14/3.5 min	10.8w x 5.2h x 7.5d	18.4	219.60

Tripp Lite BC PERSONAL Series Compact UPS System

The BC350, by Tripp Lite, offers an ultra-compact space-saving design. Six widely spaced outlets accommodate transformer plugs without blocking neighboring outlets. The unit's six outlets are comprised of three surge suppression with full battery support, and three surge suppression-only outputs. Convenient audible alarm and front panel LEDs offer easy status information regarding line and battery operation. The unit's 350VA/180W power allows entry-level PCs power for up to 12 minutes, mitigating data loss and allowing time for shutdown. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
TL-BC350	350/180	Surge / Battery	6	10/2.5 min	3w x 10.5h x 5d	10	72.90

Tripp Lite AVR Series Ultra-Compact Line-Interactive UPS System

The AVR750U, by Tripp Lite, offers an uninterruptible, professional and consumer level, power supply solution in an ultra-compact design. The ability to switch to backup battery power within milliseconds allows connected equipment smooth and continuous operation during power interruption. The unit is comprised of six surge suppression and battery backup outputs and six surge suppression-only outlets. As well as a USB port allowing for built-in power management and automatic shutdown, controlled via Tripp Lite's free PowerAlert software. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
AVR750U	750/450	Surge / Battery	12	10/3 min	4w x 12h x 7d	15.3	88.59

Tripp Lite SMARTPRO Series 2U Rack/Tower UPS System

The SMART1500LCD, by Tripp Lite, is a digital UPS System offering voltage regulation, surge suppression and long-lasting battery support via 1500VA/900W. Multiple configurations: upright tower, flat shelf-mount or 2U rack-mount installation in attractive all-black cabinet design. Built-in USB and DB9 serial port enables optional unattended system shutdown in case of extended power failure (cabling included). Built-in audible alarm and large LCD front panel voltage display indicates line power status, battery power status, battery low/replace status and voltage boost operation. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
SMART1500LCD	1500/900	Line Interactive	8	13/3.5 min	17.3w x 3.5h x 10.5d	33.4	338.40

Tripp Lite BCPR0 Series Desktop UPS Systems

Tripp Lite's BCPR0600 standby UPS system offers surge suppression and long lasting battery support for personal computers, internet working equipment and other sensitive electronics. Internal UPS circuits support entry level PC systems for up to 45 minutes during power failures and brownouts so that connected equipment can be shutdown without data loss. Includes 3 battery supported outlets for computer, monitor and one vital system peripheral, plus 3 additional surge suppression-only outlets for printers and other system accessories not requiring battery support. USB port enables optional unattended system shutdown without data loss in the case of extended power failure, USB cable included. **As an authorized Tripp Lite reseller, we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

Item #	Capacity (VA/Watts)	System Type	Number of Outlets	Backup Time Half / Full Load	Dimensions (Inches)	Shipping Weight	Price
TL-BCPR0600	600/345	Line Interactive	6	14.5/5.7 min	5.2w x 10.8h x 7.5d	17.2	139.00



TL-SMART500RT1U



ECO550UPS



OMNIVS1000




TL-BC350



AVR750U



SMART1500LCD

TL-BCPR0600
(Front and Rear View)



Ethernet Media Converters Tutorial

What is an Ethernet Media Converter?

An Ethernet Media Converter is a network device used to extend network connection beyond the 100 meter maximum segment length of traditional copper UTP/STP Ethernet cabling. It is also useful if EMI/RFI emissions or interference are of concern as the device will convert the electrical data signals into light pulses that will travel over the fiber optic cabling. This has two additional benefits. It electrically isolates both network nodes from each other eliminating any ground loop concerns or voltage spikes from lightning. It also provides a measure of security to your network transmissions as it is virtually impossible to tap into the transmitted signal without detection.

How is an Ethernet Media Converter used?

Ethernet Media Converters typically have two types of ports; one for the copper (UTP/STP) side of the conversion, (usually an RJ45 jack), and one for fiber side, which can vary depending on the unit (usually ST, SC or LC). Once you have selected the media converter that meets your needs, you simply plug your copper network cable into the RJ45 jack and then make your connection to your Fiber optic cabling. For the majority of unmanaged Ethernet Media Converters once you power up the unit you are done with your installation.

Where are Ethernet Media Converters used?

Ethernet Media Converters are used when long network runs are required that exceed the 100 meter maximum segment length of traditional copper UTP/STP such as large Corporate or University campuses, large high rise buildings or Municipal buildings that cover a wide area or wherever ground loops or voltage spikes from lightning may be cause for concern. You will also find these products wherever intense EMI/RFI which could interfere with your network is present such as Industrial/Manufacturing Facilities or in environments where the introduction of stray electrical signals are strictly regulated such as hospitals, clean rooms and aircraft just to provide a few examples.

Distance Limitations of Copper and Fiber Optic Network Cabling Types:

Cable Type	Distance Limitation	Cable Type	Distance Limitation
Category 5/5e/6 UTP and STP cable	100 Meters Max.	Multimode Fiber Cable 50/125µ	2 Km Max. (550m for some Gigabit applications)
Multimode Fiber Cable 62.5/125µ	2 Km Max. (220m for some Gigabit applications)	Single mode Fiber Cable 9/125µ	*15 Km to 80 Km (Typical)

***Note:** Some Single mode fiber media converters can extend up to 100 Km. These devices use special high powered laser transceivers to achieve these distances.

Form Factors


There are typically three styles of Ethernet Media Converters, 1) Standalone units with completely enclosed cases, 2) Card based chassis only models and 3) DIN Rail Mount Industrial Models. Standalone converters are typically used in locations where only

one or two conversions are needed. The chassis based options are often used in large MDF or IDF locations where multiple fiber links are converted to UTP. The DIN Rail Mount Industrial Ethernet Media Converters as the name would suggest are used in large

manufacturing plants where the harsh conditions and limited space and power options make it ideally suited. Note: some standalone unmanaged models can also be used in special multi-slot chassis designed specifically for them. (see LC-MCC14AA on [page 247](#)).



Standalone [page 247](#)

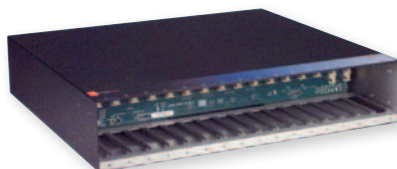


Chassis [page 248](#)



Industrial [page 249](#)

Managed and Unmanaged

Unmanaged or "plug and play" Ethernet Media Converters are easy to install and trouble shoot. The disadvantage with unmanaged converters is when a network issue is occurring, there is no way to access the Ethernet Media Converter to see exactly what might be causing the issue. Many chassis based Ethernet Media Converter solutions feature an option for an SNMP card that shows statistics and overall health of all the media converters in the chassis. This is helpful when you have multiple chassis filled with Ethernet Media Converters in a large data center. Additionally there are some standalone converters on the market today that support SNMP management.

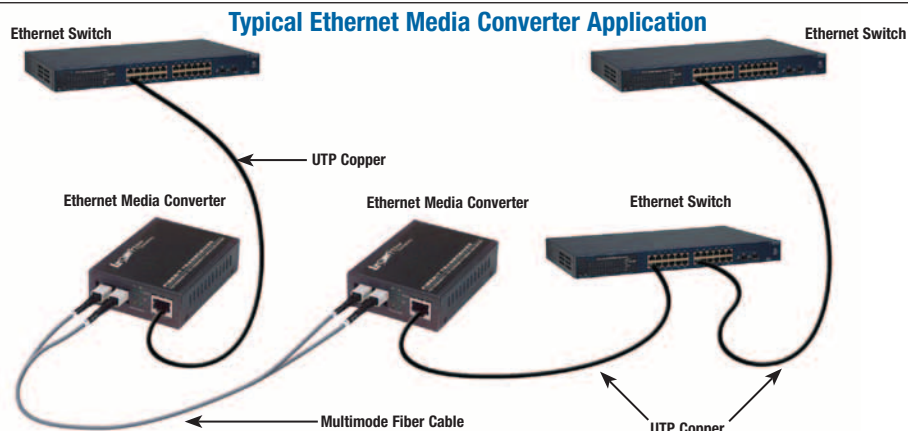

Item #	Description	Maximum Segment Length	List Price
--------	-------------	------------------------	------------

L-com 10Base-T RJ45 to 10Base-5 DB15M AUI Media Converter/Transceiver

L-com's Super-Slim 10Base-T transceiver is small & lightweight, designed to connect your existing Thick Ethernet Adapter Card to a 10Base-T UTP network. This super-slim model accommodates installation into narrow slot spaces typically found in older SUN SPARC™, IBM®, RISC/6000™ and old Apple Macintosh™ systems. The transceiver converts 10Base-5 signals via a DB15M/AUI connector to a standard RJ45 Jack for 10Base-T Ethernet transmission over Unshielded Twisted-Pair (UTP) cable. Port powered, no external power required.

LCTP-10BT-10B5	L-com Ethernet Media Converter/Transceiver, 10Base-T RJ45 to 10Base-5 DB15M AUI	100m/500m	38.00
----------------	---	-----------	-------

L-com 10Base-T RJ45 to 10Base-2 Thinner Coax BNC Media Converter

L-com's 10Base-T RJ45 to 10Base-2 media converter is designed to connect your existing Thin Ethernet adapter card or Thin Ethernet Network to a 10Base-T UTP network. This converter repeats signals from Thin Ethernet for transmission over Unshielded Twisted-Pair (UTP) cable to a 10Base-T hub. Powered by an external 12V DC 1.0A power supply (included).

LCTP-10BT-10B2	L-com Ethernet Media Converter, 10Base-T RJ45 to 10Base-2 Thinner Coax BNC	100m/185m	84.98
----------------	--	-----------	-------

L-com 10/100TX to 100FX Fast Ethernet Media Converters

L-com's LCMC series of economical plug and play media converters are the perfect solution for extending Ethernet LANs. These robust media converters support half and full duplex operation, and feature easy to read system status LEDs. These converters are powered by an external 5V DC power supply (included).

LCMC-MC-2	L-com Ethernet Media Converter 10/100TX RJ45 to 100FX Multimode Duplex SC	100m/2km	59.00
LCMC-SA-25	L-com Ethernet Media Converter 10/100TX RJ45 to 100FX Single mode Duplex SC	100m/25km	88.00
LCMC-SA-40	L-com Ethernet Media Converter 10/100TX RJ45 to 100FX Single mode Duplex SC	100m/40km	128.00
LCMC-SA-60	L-com Ethernet Media Converter 10/100TX RJ45 to 100FX Single mode Duplex SC	100m/60km	148.00
LCMC-SA-80	L-com Ethernet Media Converter 10/100TX RJ45 to 100FX Single mode Duplex SC	100m/80km	228.00

L-com 10/100/1000TX to 1000FX ST/SC Gigabit Ethernet Media Converters

L-com's LC-MCGxx-XX line of gigabit ethernet media converters offer users a cost effective solution to extend their gigabit network over Fiber optic cabling to a maximum distance up to 20km. Our LC-MCGxx-XX series of media converters are fully compliant with IEEE802.3, IEEE802.3U, IEEE802.3ab, 10/100/1000Base-Tx, and IEEE802.3z 1000Base-SX/LX standards. They can be used as standalone converters or installed into our LC-MCC14AA 14 slot Media Converter chassis. Operation status can be locally monitored through a set of diagnostic LEDs located on the front panel. These converters are powered by an external 5V DC power supply (included).

LC-MCGMM-ST	L-com Ethernet Media Converter 10/100/1000TX RJ45 to 1000SX Multimode ST	100m/2km	74.98
LC-MCGMM-SC	L-com Ethernet Media Converter 10/100/1000TX RJ45 to 1000SX Multimode SC	100m/2km	74.98
LC-MCGSM-ST	L-com Ethernet Media Converter 10/100/1000TX RJ45 to 1000LX Single mode ST	100m/20km	109.98
LC-MCGSM-SC	L-com Ethernet Media Converter 10/100/1000TX RJ45 to 1000LX Single mode SC	100m/20km	109.98

L-com 10/100/1000TX to 1000SX/LX (SFP) Slot Gigabit Ethernet Media Converter

L-com's LC-MCGSFP Gigabit Ethernet Media Converter is designed to meet the various needs for extending your network and is able to extend a copper based network via fiber cable to a maximum distance up to 80km. Our LC-MCGSFP is fully compliant with IEEE802.3, IEEE802.3U, IEEE802.3ab, 10/100/1000Base-Tx, and IEEE802.3z 1000Base-SX/LX standards. It can be used as a standalone converter or installed into our LC-MCC14AA Series 14 slot Media Converter chassis. Operation status can be locally monitored through a set of diagnostic LEDs located on the front panel. Powered by an external 5V DC power supply (included).

LC-MCGSFP	L-com Ethernet Media Converter 10/100/1000TX RJ45 to Single SFP Socket		74.98
LC-SFPMM-220-550M	L-com SFP Module Multimode Duplex LC (850nm)	220/550m	34.98
LC-SFPMM-2	L-com SFP Module Multimode Duplex LC (1310nm)	2km	44.98
LC-SFSPM-10	L-com SFP Module Single mode Duplex LC (1310nm)	10km	64.98
LC-SFSPM-20	L-com SFP Module Single mode Duplex LC (1310nm)	20km	74.98
LC-SFSPM-40	L-com SFP Module Single mode Duplex LC (1310nm)	40km	84.98
LC-SFSPM-60	L-com SFP Module Single mode Duplex LC (1550nm)	60km	94.98
LC-SFSPM-80	L-com SFP Module Single mode Duplex LC (1550nm)	80km	104.98
LC-SFP-CAP	L-com SFP Module Replacement Cap, Pkg/10		6.98

L-com 14 Slot Media Converter Chassis with Dual Power Supplies

L-com's LC-MCC14AA 14 Slot Media Converter Chassis provides real-time power backup. Each chassis comes equipped right out of the box with dual redundant power supplies. The LC-MCC14AA chassis is compatible with any of the L-com LC-MCG series media converters found on this page. The LC-MCG series Media Converters can be hot-swapped to change configuration requirements or replace malfunctioning units without the need to power down the chassis. Both power supplies feature status LEDs (Green = Functioning) (Red = Problem) to help you quickly identify which unit is experiencing a problem. There is also an audible alarm that sounds to alert you to the situation. The Dual power supplies are also truly hot-swappable, allowing you to replace a bad unit while the second unit continues to power the chassis and installed converters minimizing network disruptions. L-com also offers replacement power supplies so that you can keep an emergency spare on hand or be able to quickly order a replacement in the event you need one.

- 19 Inch Rack Mount Ready
- Supports up to 14 Media Converters
- Hot Swap Media Converters
- Easy to Install and Maintain
- Dual Redundant Power Supplies
- Hot Swap Power Supplies
- Status LEDs and Audible Alarm to Alert of Power Supply Problem

LC-MCC14AA	L-com 14 Slot Media Converter Chassis Dual 120V - 220V AC 60/50 Hz Power Supplies	224.98
------------	---	--------

Accessories

LC-MCCPWR-AC	L-com Replacement AC Power Supply for LC-MCC14AA Chassis	54.98
LC-MCC14-BRKT	L-com Replacement Retention Bracket for LC-MCC14AA Chassis, Pkg/5	9.98
LC-MCC14-SCRW	L-com Replacement Media Converter Bracket Screw for LC-MCC14AA Chassis, Pkg/10	2.98



LCTP-10BT-10B5



LCTP-10BT-10B2



LCMC-MC-2



LC-MCGMM-SC



LC-MCGSM-ST



LC-MCGSFP



LC-SFPMM-220-550M



LC-SFSPM-40

LC-SFP-CAP
10 per packageLC-MCC14AA
FrontLC-MCC14AA
Back




TN-S4120-1048



TN-DAC-10G-SFP-01M




PT-ENW-9801



PT-ENW-9803



PT-MTB-LR




LCR5000-17HS



LCR1000-AAF




LCR643-13



LCR502-M



LCR231-13



LC2643-14

Item #	Description	Maximum Segment Length	List Price
Transition Networks 10GBase-T to SFP+ Media Converter			
The Transition Networks 10GBase-T to SFP+ Media Converter is the perfect way to help growing networks using high speed 10G signals to span long distances, or even to easily convert over to a network switch. This device uses the SFP+ format on the fiber end, which allows for a wide variety of mode and distance options. As an authorized Transition Networks reseller, we can bid on RFQs for any Transition Networks part numbers. Contact us to request a non-obligatory quote.			
TN-S4120-1048	Transition Networks 10GBase-T to SFP+ Media Converter		1771.00

Transition Networks Point System Media Converter Modules

The Transition Networks TN-DAC-10G-SFP Series of Copper Direct Attached Cables provide a low cost, easy to use solution to short range 10G connectivity. These cables are ideal for a desktop when only a SFP+ port is available, or to stack two network switches. These cables connect two SFP+ ports using one simple plug and play cable. **As an authorized Transition Networks reseller, we can bid on RFQs for any Transition Networks part numbers. Contact us to request a non-obligatory quote.**

TN-DAC-10G-SFP-01M	Transition Networks 10G Direct Attached Cable SFP+ 1 Meter	68.00
TN-DAC-10G-SFP-03M	Transition Networks 10G Direct Attached Cable SFP+ 3 Meters	98.00
TN-DAC-10G-SFP-05M	Transition Networks 10G Direct Attached Cable SFP+ 5 Meters	130.00
TN-DAC-10G-SFP-07M	Transition Networks 10G Direct Attached Cable SFP+ 7 Meters	160.00

PLANET 10G SFP+ PCI Express Card

The PT-ENW-9801 is a PCI Express 10Gbps Ethernet Adapter designed to meet high-performance system application requirements. With the innovative PCI Express Bus Architecture, the PT-ENW-9801 provides superior performance over 32/64bit PCI architecture network cards. It provides the best solution to one of the largest issues of Server Farm Networks - communication speed. Ten times faster than the existing 1000Base-SX/LX fiber solutions, the PLANET PT-ENW-9801 is designed to connect your servers and workstations, guaranteeing extremely high throughput and excellent signal quality. Moreover, the PT-ENW-9801 supports IEEE 902.1Q VLAN which allows it to operate in a flexible and secure network environment. With 16K Jumbo Frame ability and IEEE 802.3 Flow Control support, it further optimizes throughput and wire-speed packet transfer performance without risk of packet loss. The high data throughput of the device makes it ideal for most 10 Gigabit Ethernet environments. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact your L-com Sales Representative to request a non-obligatory quote.**

PT-ENW-9801	PLANET 10G SFP+ PCI Express Card	253.00
-------------	----------------------------------	--------

PLANET 10G RJ45 PCI Express Card

The PLANET PT-ENW-9803 provides a fast and easy way to upgrade an existing system to be able to handle 10G speeds. The standard RJ45 interface will accept Cat6a or Cat7 cables, removing the need to bring fiber directly to the desktop. This card is also a great add-on for a network attached storage device (NAS), providing a fast 10G uplink to archive large blocks of data quickly. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact your L-com Sales Representative to request a non-obligatory quote.**

PT-ENW-9803	PLANET 10G RJ45 PCI Express Card	345.00
-------------	----------------------------------	--------

PLANET 10G XFP and SFP+ Single Mode and Multimode Modules

The PLANET PT-MTB series of 10G SFP+ and XFP modules provide a flexible option when using a 10G switch or media converter that contains the applicable port. With Single mode and Multimode options and distances from 300 meters up to 10 kilometers, there is an option available for most high speed data applications. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact your L-com Sales Representative to request a non-obligatory quote.**

PT-MTB-LR	PLANET 10G Single mode LC SFP+ 10km	272.00
PT-MTB-SR	PLANET 10G Multimode LC SFP+ 300m	142.00
PT-MTB-XLR	PLANET 10G Single mode LC XFP 10km	431.00
PT-MTB-XSR	PLANET 10G Multimode LC XFP 300m	322.00

Metrobility/Telco Systems Radiance Series Converter Chassis - 1, 2 and 17 Slot Options

As an authorized Metrobility/Telco Systems reseller, we can bid on RFQs for any Metrobility/Telco Systems part numbers. Contact us to request a non-obligatory quote.

LCR5000-17HS	Telco Systems 17 Slot Radiance 19" (48.3cm) Rack Mountable Chassis	554.00
LCACPS-17HS	Telco Systems AC Power Supply for the LCR5000 Chassis	129.00
LCDCPS-17HS	Telco Systems DC Power Supply for the LCR5000 Chassis	534.00
LCR1000-AAF	Telco Systems 2 Slot Chassis with 2 Front Facing AC Power Supplies	619.00
LCR200-AC	Telco Systems 1 Slot Chassis with Single AC Power Supply	249.00
LCR200-DC	Telco Systems 1 Slot Chassis with Single DC Power Supply	294.00

Metrobility/Telco Systems 10/100 Mbps Ethernet Intelligent AutoTwister Modules for Radiance Series Chassis

As an authorized Metrobility/Telco Systems reseller, we can bid on RFQs for any Metrobility/Telco Systems part numbers. Contact us to request a non-obligatory quote.

LCR643-13	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode SC	100m/2km	254.00
LCR643-15	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode ST	100m/2km	294.00
LCR643-1K	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode LC	100m/2km	374.00
LCR643-14	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/15km	432.00
LCR643-17	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/40km	489.00
LCR643-1J	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/100km	1689.00
LCR643-1M	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode LC	100m/15km	509.00

Metrobility/Telco Systems Radiance SNMP Management Module

As an authorized Metrobility/Telco Systems reseller, we can bid on RFQs for any Metrobility/Telco Systems part numbers. Contact us to request a non-obligatory quote.

LCR502-M	Telco Systems SNMP Management Module for Radiance R5000 Chassis	594.00
----------	---	--------

Metrobility/Telco Systems 100 Mbps Fast Ethernet "Twister" Modules for Radiance Series Chassis

As an authorized Metrobility/Telco Systems reseller, we can bid on RFQs for any Metrobility/Telco Systems part numbers. Contact us to request a non-obligatory quote.

LCR231-13	Telco Systems 100Base-TX, RJ45 to 100Base-FX, Multimode SC	100m/2km	594.00
-----------	--	----------	--------

Metrobility/Telco Systems 10/100 Mbps Fast Ethernet Twister Stand-alone Media Converters

As an authorized Metrobility/Telco Systems reseller, we can bid on RFQs for any Metrobility/Telco Systems part numbers. Contact us to request a non-obligatory quote.

LC2643-13	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode SC	100m/2km	324.00
LC2643-15	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode ST	100m/2km	339.00
LC2643-1K	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Multimode LC	100m/2km	379.00
LC2643-14	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/15km	464.00
LC2643-17	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/40km	509.00
LC2643-1J	Telco Systems 10/100Base-TX, RJ45 to 100Base-FX, Single mode SC	100m/100km	1734.00

Item #	Description	List Price
--------	-------------	------------

L-com 10/100TX to 100FX Industrial Fast Ethernet Media Converters (24 VDC)

L-com offers a series of plug and play Industrial Ethernet Media Converters which feature dual 10/100TX RJ45 ports as well as one duplex SC fiber port. The LCMC series consist of Multimode and Single mode versions with optics supporting up to 80 kilometers over Single mode for long haul industrial media converter applications. Each unit is powered by an external 24V DC power supply (sold separately) and is 35mm DIN rail mountable. Easy to read LEDs provide at-a-glance systems status information. Operating temperature -40°C to +70°C (-40°F to 158°F).

LCMC-M-2	L-com Industrial Ethernet Media Converter (2) 10/100TX to 100FX Multimode Duplex SC 2km	158.00
LCMC-S-20	L-com Industrial Ethernet Media Converter (2) 10/100TX to 100FX Single mode Duplex SC 20km	228.00
LCMC-S-40	L-com Industrial Ethernet Media Converter (2) 10/100TX to 100FX Single mode Duplex SC 40km	308.00
LCMC-S-60	L-com Industrial Ethernet Media Converter (2) 10/100TX to 100FX Single mode Duplex SC 60km	568.00
LCMC-S-80	L-com Industrial Ethernet Media Converter (2) 10/100TX to 100FX Single mode Duplex SC 80km	898.00

24 Volt DC DIN Rail Mount Power Supplies

The LCPS series of power supplies provide a cost effective and reliable 24V DC power source for L-com's line of industrial Ethernet switches and media converters. These units can be installed on any standard 35mm DIN Rail and are NEC Class 2/LPS compliant. They also provide protection against short circuits, overloads and over voltages.

LCPS-4024	DIN Rail Mount Power Supply 24V DC 40W (1.6A)	79.00
LCPS-6024	DIN Rail Mount Power Supply 24V DC 60W (2.5A)	90.00

EtherWAN 10/100TX to 100FX Industrial Fast Ethernet Media Converters (-10°C to +60°C) (12 to 48 VDC)

EtherWAN's EX42011 series of Industrial Media Converters are able to function at temperatures ranging from -10°C to 60°C (14°F to 140°F) and can be conveniently mounted to any standard 35mm DIN Rail. The single 10/100Base-TX port supports Auto-Negotiation, Auto-MDI/MDIX. The duplex fiber port is available in both Multimode and Single mode versions. Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment. The variable power terminal block input can support voltages ranging from 12 to 48 VDC. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX42011-1A-1-A	EtherWAN Industrial Media Converter 10/100 TX to 100FX, Multimode Duplex SC 2km	156.98
EW-EX42011-2A-1-A	EtherWAN Industrial Media Converter 10/100 TX to 100FX, Single mode Duplex SC 20km	264.98

EtherWAN 10/100TX to 100FX Industrial Fast Ethernet Media Converters (-10°C to +60°C) with PoE/PSE

EtherWAN's EL1032 series of Industrial Media Converters are able to function at temperatures ranging from -10°C to 60°C (14°F to 140°F) and can be conveniently mounted to any standard 35mm DIN Rail. The single 10/100Base-TX port supports Auto-Negotiation, Auto-MDI/MDIX. The duplex fiber port is available in both Multimode and Single mode versions. Easy power source management from dual power interfaces. The EL1032 supports 48 VDC. The EL1032P support voltages ranging from 48 to 52 VDC up to 15.4 Watts or 52 to 57 VDC up to 30 Watts. The EL1032 series also supports the IEEE802.3af PoE/PSE standard and is available in standard 15.4W versions as well as a 30W High Power version. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EL1032-10B	EtherWAN Industrial Media Converter 10/100 TX to 100FX, Multimode Duplex SC (15.4W 802.3af PoE/PSE) 2km	438.98
EW-EL1032P-20B	EtherWAN Industrial Media Converter 10/100 TX to 100FX, Multimode Duplex ST (30W High Power PoE/PSE) 2km	495.00
EW-EL1032-A0B	EtherWAN Industrial Media Converter 10/100 TX to 100FX, Single mode Duplex SC (15.4W 802.3af PoE/PSE) 20km	574.98

EtherWAN 10/100TX to 100FX NEMA Hardened Fast Ethernet Media Converters (-40°C to +75°C) (12 to 48 VDC)

EtherWAN's EL900 Series of NEMA Hardened Media Converters function at temperatures ranging from -40°C to 75°C (-40°F to 167°F) and are tested for functional operation up to 85°C (185°F). Whether on the factory floor or the street corner, the EL900 will provide flawless communications when you need it most. The RJ45 ports on these units provide Auto-MDIX and auto-negotiation. The link-fault-pass-through feature allows the network management agent on adjacent equipment to react to a broken link. Flexibility is the main feature of the EL900, it may be DIN rail or Panel mounted and comes with power options to match the applications that require a tough, environmentally hardened product. Complies with NEMA TS1 & TS2 Environmental requirements for Traffic control equipment. Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment, ISA 12.12.01 (UL1604) Class I, Division 2 Classified for use in hazardous locations (Applicable to versions with DC Terminal Block power option). The variable power terminal block input can support voltages ranging from 12 to 48 VDC. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EL900-A-B-1-A	EtherWAN Media Converter 10/100 TX to 100FX, MM, 2km, SC	225.00
EW-EL900-A-N-1-A	EtherWAN Media Converter 10/100 TX to 100FX, SM, 20km, SC	335.00

EtherWAN 1000TX to 1000SX/LX NEMA Hardened Gigabit Ethernet Media Converters (-40°C to +75°C)

EtherWAN's EL9000 Series of NEMA Hardened Media Converters function at temperatures ranging from -40°C to 75°C (-40°F to 167°F) and are tested for functional operation up to 85°C (185°F). Whether on the factory floor or the street corner, the EL9000 will provide flawless communications when you need it most. The RJ45 ports on these units provide Auto-MDIX and auto-negotiation. The link-fault-pass-through feature allows the network management agent on adjacent equipment to react to a broken link. Flexibility is the main feature of the EL9000, it may be DIN rail, Panel or Rack mounted and comes with power options to match the applications that require a tough, environmentally hardened product. Complies with NEMA TS1 & TS2 Environmental requirements for Traffic control equipment. Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment, ISA 12.12.01 (UL1604) Class I, Division 2 Classified for use in hazardous locations (Applicable to versions with DC Terminal Block power option). The variable power terminal block input can support voltages ranging from 12 to 48 VDC. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EL9000-A-B-1-A	EtherWAN Gigabit Media Converter 1000Base T to 1000Base SX, MM, 550km, SC	314.98
EW-EL9000-A-C-1-A	EtherWAN Gigabit Media Converter 1000Base T to 1000Base SX, MM, 2km, SC	420.00
EW-EL9000-A-N-1-A	EtherWAN Gigabit Media Converter 1000Base T to 1000Base LX, SM, 20km, SC	510.00

Hirschmann PROFIBUS, MODBUS and GENIUSBUS Fiber to Copper DIN Rail Media Converters (24 VDC)

Hirschmann's PROFIBUS, MODBUS and GENIUSBUS media converters are perfect for transmitting data over several miles/kilometers. They connect terminal devices such as computers, image-processing devices, programmable logic controllers (PLCs) and peripheral devices together. With their high availability and redundancy, they are able to hold their own in the harsh world of industrial applications. Fiber optic cables can be laid directly on high-power equipment or parallel to power cables, reducing planning and commissioning costs. Each converter in this series can be mounted on a DIN rail and is powered by an external 24 VDC power supply (see page 252). **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

PROFI-TX-FX	Hirschmann PROFIBUS Media Converter DB9F to BFOC Multimode	623.00
QZD PROFI 12M G12	Hirschmann PROFIBUS Media Converter DB9F to 2 BFOC Multimode	833.00
PROFI-TX-FX-SM	Hirschmann PROFIBUS Media Converter DB9F to BFOC Single mode	1763.00
PROFI-TX-2FX-SM	Hirschmann PROFIBUS Media Converter DB9F to 2 BFOC Single mode	2340.00
MODBUS-TX-2FX	Hirschmann MODBUS Media Converter DB9F to 2 BFOC Multimode	870.00
MODBUS-TX-2FXSM	Hirschmann MODBUS Media Converter DB9F to 2 BFOC Single mode	1830.00
GENIUS-TX-2FX	Hirschmann GENIUSBUS Media Converter 4-Pin Terminal to 2 BFOC Multimode	1139.00
GENIUS-TX-2FXSM	Hirschmann GENIUSBUS Media Converter 4-Pin Terminal to 2 BFOC Single mode	1800.00



LCMC-M-2



LCPS-4024



LCPS-6024



EW-EX42011-1A-1-A



EW-EL1032-10B



EW-EL900



EW-EL9000



PROFI-TX-FX



GENIUS-TX-2FX

MODBUS-TX-2FXSM



What is an Ethernet Switch?

An Ethernet switch is a multi-port network bridge used to connect multiple PCs, servers, laptops or other Ethernet IP enabled devices such as Networked Printers, NAS (Network Attached Storage), or IP cameras to a Local Area Network (LAN). Most switches feature 10/100 Megabit

per second RJ45 ports although many newer switch designs now offer 10/100/1000 triple speed ports that auto-negotiate up to 1 Gigabit per second access. The switch uses a MAC address table to keep track of where PCs, servers or other connected devices are located. Each device has a unique MAC (Media Access Control) address "burned" into the hardware. For example; if a PC on port one needs to "talk" to a file server, the switch will look at its MAC address table and determine which port the file server is located on and send the PCs data to only that port. This effectively relieves network congestion and is able to scale as your network grows.

How is an Ethernet Switch used?

Ethernet switches typically utilize RJ45 ports for UTP or STP connectivity to PCs, servers, routers etc. Many switches also feature high speed uplink ports where modules can be purchased to connect fiber optic or UTP cabling supporting speeds of 1 Gigabit per second or more. Cables are used to plug into the ports on the switch and then into the Ethernet device (PC, router etc.) on the other end.

Managed and Unmanaged

Unmanaged Ethernet switches, typically referred to as "plug and play", are easy to install but do not provide port level statics, management and control that is often required in larger networks where many switches are installed. Managed switches typically feature an SNMP agent that allows port level control and statistics such as collisions, packets in, packet out etc. Some managed switches also feature filters where only certain devices, PCs etc. are allowed to communicate on a certain port of the switch. By using managed switches a network administrator can see if a port may be malfunctioning and sending bad packets onto the network and shut that port off so the whole network does not go down.

Accessing Scheme:	CSMA/CD - Carrier sense multiple access with Collision Detection.
Speed:	10 Mbps / 100 Mbps / 1000 Mbps (1 Gbps).
Network Architecture:	Bus, Star, Ring, Hybrid

The diagram below shows a typical Ethernet Switch application



In the diagram above you can see that Ethernet switches are used for sharing resources such as printers, networked file servers and router connections to the Internet or Wide Area Network (WAN).

Commercial Ethernet Switches


Commercial grade Ethernet switches are designed to be used in controlled environments such as an IT closet or data center. Unlike Industrial Ethernet switches, commercial grade Ethernet switches typically have more of a limited operating temperature range and often times have more moving parts such as cooling fans which could be a single point of failure (SPOF). Additionally, commercial grade switches will not stand up to shock and vibration as an Industrial Ethernet switch would. Another concern is mean time between failure (MTBF). Some commercial grade switches may have a lower MTBF than their industrial counterparts. Commercial grade switches typically cost less than industrial switches and are the perfect choice for controlled office/business environments.



page 254

Industrial Ethernet Switches

There is a class of Ethernet Switches referred to as Industrial Ethernet switches which are designed to work in harsh environments where extreme temperatures, vibration, dust and moisture are present. These Industrial rated switches generally have no moving parts such as fans and utilize components that are designed for extreme temperatures etc. In very moist environments or areas where condensation is present a conformal coating is sometimes used to cover the entire PCB to protect the components. Typical installations for Industrial Ethernet switches include manufacturing facilities, mining, oil production, power plants, waste water treatment plants and any other application where environmental extremes exist.

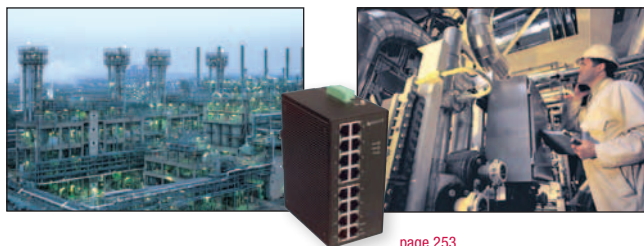

page 253

Item #	Description	List Price
--------	-------------	------------

L-com 10/100/1000TX 5 and 8 Port Desktop Ethernet Switch

L-com's LC-SW805G five port and LC-SW808G eight port Gigabit Ethernet switches provide you with a high-performance, low-cost, easy-to-use, seamless upgrade to existing networks that can provide up to 1000Mbps transfer speeds between gigabit compliant equipment while still supporting older legacy equipment. Power users in home or offices can now move large, bandwidth-intensive files faster. Transfer graphics, CGI, CAD, Multimedia files or any other applications that requires you to move large files across your network in a fraction of the time.

LC-SW805G	L-com 5 Port 10/100/1000 Mbps Gigabit Ethernet Switch	34.98
LC-SW808G	L-com 8 Port 10/100/1000 Mbps Gigabit Ethernet Switch	44.98

PLANET 10/100TX 5 and 8 Port Desktop Ethernet Switches

The SW series Ethernet switches from PLANET Technology provide cost-conscious businesses and home users with the foundation of an integrated system for small-office/home-office networking. These economical 10/100 switches are perfect for smaller networks of 10 to 50 users. These easy to install plug and play switches feature easy to read LEDs for monitoring network connectivity and packet flow. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact us to request a non-obligatory quote.**

SW-504	PLANET 5 Port 10/100 Mbps Desktop Ethernet Switch (Plastic Case)	16.00
SW-804	PLANET 8 Port 10/100 Mbps Desktop Ethernet Switch (Plastic Case)	25.95

PLANET 10/100TX 8 Port Fast Ethernet Switches + 1 Port 100FX

The PLANET FSD-805 series 10/100Mbps Ethernet switches provide an economical way to connect eight 10/100 RJ45 copper ports to a fiber backbone or network via a built in fiber port. Features include automatic speed and duplex mode sensing and MDI/MDI-X auto-detection. Covered by a 3 year manufacturer's warranty. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact us to request a non-obligatory quote.**

FSD-805SC	PLANET 8 Port 10/100 Mbps - 1 Port 100FX MM SC Ethernet Switch	89.95
-----------	--	-------

PLANET 10/100TX 16, 24 & 48 Port 19 Inch Rack Mount Fast Ethernet Switches

The PLANET 16, 24 & 48 port 10/100Base-TX Fast Ethernet Switches provide an economical and high performance Higher Port Density 19 inch Rack mountable Ethernet switching solution. These switches provide high-speed network connections with standard 10/100 Auto-Negotiation capability on all of the RJ45/STP ports. In addition, these switches are equipped with the MDI/MDIX auto-detection for easy plug and play connections, regardless of cabling types. Both straight through and crossover cables are supported. With high-performance throughput at filtering/forwarding rate is up to 14,880 packets per second in 10 Mbps, and 148,800pps in 100 Mbps, along with its dynamic shared memory buffer. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact us to request a non-obligatory quote.**

SWTC-PT1601	PLANET 16 Port 10/100 Mbps Fast Ethernet Switch	59.00
SWTC-PT2401	PLANET 24 Port 10/100 Mbps Fast Ethernet Switch	79.00
SWTC-PT4800	PLANET 48 Port 10/100 Mbps Fast Ethernet Switch	166.00

PLANET 24 100/1000 SFP Port Managed Rack Mount Switch With 4 10G SFP+ Ports

The PLANET MGSW-28240F Managed Rack Mount Switch allows for gradually updating a network from Gigabit speeds up to 10G, or in networks where requirements change. This switch has 24 100/1000 speed SFP slots, allowing for a vast array of communication options where a module can be quickly swapped out if needed. The 10G SFP+ uplinks provide a wide backbone for connecting other portions of the network. Power can be provided to this switch either via the dual terminal block, or a standard AC power cable. **As an authorized PLANET reseller, we can bid on RFQs for any PLANET part numbers. Contact us to request a non-obligatory quote.**

MGSW-28240F	PLANET 24 SFP Port Managed Switch With 4 SFP+ Ports	1127.00
-------------	---	---------

NETGEAR® 10/100TX 5, 8 and 16 Port Desktop Ethernet Switches (Metal Case)

NETGEAR's 10/100Mbps Fast Ethernet Switches provide your LAN with economical, high-speed, 10/100 Mbps auto-sensing connectivity. Just plug in your Ethernet cables and connect a power cord and you network is up and running. These switches are engineered without the need for an internal fan, thus providing silent operation. The switches feature a very compact footprint and a sturdy metal case for years of dependable use. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

SWTC-FS105NA	NETGEAR 10/100Mbps 5 Port RJ45 Switch	32.98
SWTC-FS108NA	NETGEAR 10/100Mbps 8 Port RJ45 Switch	52.98
SWTC-FS108P	NETGEAR 10/100Mbps 8 Port with 4 PoE Ports Switch	174.98
SWTC-FS116NA	NETGEAR 10/100Mbps 16 Port RJ45 Switch	85.00

NETGEAR® 10/100/1000TX 24-Port plus 2 SFP Gigabit Ethernet Switch

This NETGEAR 24-port Gigabit Ethernet switch is high on value and capability. With 24 10/100/1000 Mbps ports, each capable of powering 2,000 Mbps of data throughput in full-duplex mode, plus two optional fiber ports, the SWTC-GS724T provides a fast backbone and connects servers or power users, delivering large amounts of multimedia, image, and video information in no time at all. In addition, an intuitive, web-browser interface offers SimpleSmart Switch management, making it a snap to monitor switch performance, configure ports, even set up port trunks, VLANs, and traffic prioritization. Alternatively, use SNMP-based software to manage your Smart Switch. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

SWTC-GS724TV4	NETGEAR 10/100/1000TX 24 Port Gigabit Ethernet Switch + 2 Optional SFP Fiber Ports	335.00
---------------	--	--------

NETGEAR® 8 1000/10GTX Port Smart Switch With 1 10G SFP+ Port

The NETGEAR SWTC-XS708E Unmanaged Plus 10 Gigabit Switch provides a simple to set up and use high speed networking solution. This switch provides 8 10 Gig RJ45 ports and one SFP+ slot to provide additional network flexibility. With the ability to rack mount, or simply use this as a standalone switch, the SWTC-XS708E is a versatile tool to upgrade into a 10G network. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non obligatory quote.**

SWTC-XS708E	NETGEAR 8 10G RJ45 Port Switch With 1 SFP+ Port	1330.00
-------------	---	---------

EtherWAN 24 10/100/1000TX Managed Switch with 4 Gigabit SFP Slots and 4 10G SFP+ Slots

The EtherWAN EW-EX25611 Managed 24 Port Ethernet Switch is a high speed, flexible networking solution that provides 4 Gigabit SFP combo ports and 4 1/10G SFP+ ports that lets users update their network from Gigabit to 10G gradually. The combo ports will accept Gigabit SFP modules, while the 10G ports will accept either Gigabit or 10G SFP modules. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non obligatory quote.**

EW-EX25611	EtherWAN 24 10/100/1000TX RJ45 Switch With 4 SFP and 4 SFP+ Ports	2565.00
------------	---	---------



LC-SW808G
Front View



LC-SW808G
Back View



SW-504



FSD-805SC



SWTC-PT1601



SWTC-PT2401



SWTC-PT4800



MGSW-28240F



SWTC-FS105NA



SWTC-FS108P




SWTC-GS724TV4



SWTC-XS708E



EW-EX25611



RS20800T1T1SDAE

RS32402T1T1SDAE



RS20-0800M2M2SDAE

M-SFP-LX/LC



MS20-1600SAAE



RS2-TX

EAGLE-1TX-1TX



RS2-5TX

RS2-5TX/FX



SWTC-SPIDER5TX

RH1-TP



RPS30

RPS120-EEC

Item #	Description	List Price
--------	-------------	------------

Hirschmann OpenRail RS20/RS30 Managed 24V DC Industrial Ethernet Switches

Hirschmann's OpenRail line of managed industrial Ethernet switches are available with a choice of "enhanced" or "professional" firmware. Users can decide which functionality their application requires and select the appropriate firmware option without having to pay for features they do not need. Features like IGMP Snooping and HIPER Ring are available in all OpenRail switches. These robust switches also feature a USB port for backing up and restoring the configuration using an Auto-Configuration Adapter or USB drive. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

RS20800T1T1SDAE	Hirschmann OpenRail Switch 8 10/100TX	1125.00
RS20-1600T1T1SDAE	Hirschmann OpenRail Switch 16 10/100TX	1838.00
RS20800S2S2SDAE	Hirschmann OpenRail Switch 6 10/100TX 2 Single mode SC	1798.98
RS32402T1T1SDAE	Hirschmann OpenRail Switch 24 10/100TX 2 10/100/1000TX	3345.00
RS20-0800M2M2SDAE	Hirschmann OpenRail Switch 6 10/100TX 2 Multimode SC	1580.00
M-SFP-SX/LC	Hirschmann SFP 1000BASE-SX LC 550m	188.00
M-SFP-LX/LC	Hirschmann SFP 1000BASE-LX LC 20km	338.00
M-SFP-LH/LC	Hirschmann SFP 1000BASE-LX LC 70km	1875.00
M-SFP-LH+/LC	Hirschmann SFP 1000BASE-LX LC 120km	3300.00

Hirschmann (MICE) Managed Modular 8 Port Ethernet/Fast Ethernet Rail Switch

Hirschmann Modular Industrial Communication Equipment (MICE) Ethernet/Fast Ethernet switches offer a unique combination of network management tools, redundancy features for high availability and modular media plug-ins for versatility. The compact switches are DIN Rail mountable, with redundant 24-volt power supplies and are compatible with 10BASE-T, 10BASE-FL, 100BASE-TX and 100BASE-FX. The switches will accommodate twisted pair, single mode or multimode fiber optic connections. MICE switches are made up of an integrated backplane and a modular dock that accepts the various media modules. The switches support SNMP management, web-based management, port mirroring, port security, remote monitoring (RMON), bootstrap protocol (BootP), Dynamic Host Configuration Protocol (DHCP) and Hirschmann's unique HIPER Ring. Hirschmann's HIPER Ring provides high availability through self-healing ring redundancy. The switches' rugged construction meets all standards for industrial Ethernet, making them suitable for applications where EMI interference, shock, vibration and temperature might otherwise cause concern. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

MS20-0800SAAE	Hirschmann MICE Backplane 2 Slots	1050.00
MS20-1600SAAE	Hirschmann MICE Backplane 4 Slots	1898.00
MS20-1602SAAE	Hirschmann MICE Backplane 4 10/100 Slots 1 Gig Slot	2355.00
MB-2T	Hirschmann 2 Slot Expansion Backplane for MS3124-4	194.00
MM2-4TX1	Hirschmann 4 10/100 Mbps RJ45 Ports	315.00
MM2-4FXM3	Hirschmann 4 100 Mbps Multimode MT-RJ Ports	1170.00
MM2-2FXM2	Hirschmann 2 100 Mbps Multimode SC Ports	630.00
MM2-2FXS2	Hirschmann 2 100 Mbps Single mode SC Ports	1290.00
MM2-2FXM3/2TX1	Hirschmann 2 10/100 Mbps RJ45s plus 2 100 Mbps Multimode MT-RJ Ports	743.00

Hirschmann 100 Mbps 24 VDC 8 Port DIN Rail Auto-negotiating Switch (8 Shielded RJ45 Ports)

The RS2-TX Rail switch provides a fast, easy and cost-effective solution for configuring small Fast Ethernet networks. Features eight auto-negotiating twisted pair ports with shielded RJ45 connectors. The 24V operating voltage is supplied via a plug-in terminal block which can be configured for redundancy. Integrated LEDs display device and network status for fast on-site troubleshooting. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

RS2-TX	Hirschmann DIN Rail 10/100Base-TX Switch	490.00
--------	--	--------

Hirschmann Eagle Series Industrial Firewall System

The Hirschmann Eagle series security firewalls provide secure access to and from your Ethernet network. These IP Routers feature one trusted port and one untrusted port to control user access to critical network services such as servers and PCs. Security features include NAT, PPOE, PPP, APR limiter MAC filtering and Kaspersky anti virus engine. These routers are powered by an external 24V DC power supply (sold separately) and are IP20 rated for harsh environments. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

EAGLE-1TX-1TX	Hirschmann Eagle Firewall System 1 RJ45 Trusted, 1 RJ45 Untrusted	1595.00
EAGLE-1TX-1FX	Hirschmann Eagle Firewall System 1 SC MM Trusted, 1 RJ45 Untrusted	1795.00

Hirschmann 10/100TX Industrial Compact Fast Ethernet Rail Switches

Hirschmann Industrial Compact Switches provide the industrial customer with a cost effective way to add Ethernet connectivity on the factory floor. The Hirschmann Industrial line features rugged metal enclosures and DIN Rail mounting. The switches also feature redundant 24 VDC inputs and an open relay contact to facilitate connection to PLCs, allowing reaction to malfunction or process control alarms. The FX switches feature the extended range of fiber optic cabling via an integrated multimode fiber optic port. The fiber port can be used to create a fiber optic backbone to a central control room. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

RS2-5TX	Hirschmann Industrial Switch 10/100 Mbps 5-Port RJ45	394.98
RS2-5TX/FX	Hirschmann Industrial Switch 10/100 Mbps 4 RJ45s + 1 Multimode MT-RJ	513.00

Hirschmann Unmanaged SPIDER 10/100TX Fast Ethernet Rail Switches

The Hirschmann SPIDER unmanaged Industrial Ethernet Rail Switches are the perfect small form factor solution for your Industrial Ethernet connectivity needs. Each switch features store and forward operation which stops corrupt packets from entering your network and five RJ45 10/100Base-TX Ethernet (10 Mbit/s) and Fast-Ethernet (100 Mbit/s) Ports, which support auto-crossing, auto-negotiation, and auto-polarity. The SPIDER family utilizes a 24V DC Power source (sold separately) and is DIN rail mountable. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

SWTC-SPIDER3TX	Hirschmann Unmanaged SPIDER 3 Port 10/100 Ethernet Rail Switch	100.00
SWTC-SPDR4TX1FX	Hirschmann Unmanaged SPIDER 4 Port 10/100 1 Port 100FX Ethernet Rail Switch	210.00
SWTC-SPIDER5TX	Hirschmann Unmanaged SPIDER 5 Port 10/100 Ethernet Rail Switch	150.00

Hirschmann 10 Mbps 24 VDC 4 Port DIN Rail Hub (4 Shielded RJ45 Ports)

The Rail Hub RH1-TP is the perfect choice and cost-effective expansion of industrial networks. This unit has four twisted pair ports and can be easily fixed on a standard DIN Rail without any further configuration. The 24 VDC operating voltage is supplied through the terminal block and can also be configured for redundancy. Built-in LEDs indicate collisions, link status, power failure and data receipt for on-site diagnostics. **As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.**

RH1-TP	Hirschmann 4 Port DIN Rail Hub (4 10Base-T Ports)	353.00
--------	---	--------

Hirschmann 24 VDC DIN Rail Power Supply

As an authorized Hirschmann reseller, we can bid on RFQs for any Hirschmann part numbers. Contact us to request a non-obligatory quote.

RPS30	Hirschmann 24 VDC DIN Rail Power Supply, 1.3A	135.00
RPS80-EEC	Hirschmann 24 VDC DIN Rail Power Supply, 3.4A	218.00
RPS120-EEC	Hirschmann 24 VDC DIN Rail Power Supply, 5A	365.00

Item #	Description	List Price
--------	-------------	------------

L-com 10/100TX IES-Series 5, 8 and 16 Port Industrial Fast Ethernet Switches

L-com's IES-Series Industrial Ethernet Switch line offers ease of deployment, cost savings and robust switching. These rugged Industrial Ethernet switches feature auto-negotiating 10/100 RJ45 ports as well as easy to read system status LEDs. These switches are powered by an external 24V DC power supply (sold separately) and feature standard 35mm DIN rail mounting brackets. The IES-Series switches are unmanaged and can be installed in minutes providing industrial network connectivity for myriad applications including industrial automation, factory automation, process control networking and energy network connectivity.

IES-2205	L-com IES-Series 5 Port 10/100TX Industrial Ethernet Switch	118.00
IES-2208	L-com IES-Series 8 Port 10/100TX Industrial Ethernet Switch	178.00
IES-2216	L-com IES-Series 16 Port 10/100TX Industrial Ethernet Switch	428.00

L-com 10/100TX +2 Port 100FX IES-2206 Series Industrial Fast Ethernet Switches

The IES-2206 Series Industrial Ethernet Switches feature four 10/100TX RJ45 ports and two fiber SC ports supporting Ethernet IP communications at 100Mbps. These easy to install DIN rail mountable Industrial Ethernet switches are perfect for applications where IP enabled devices require networked communications. The rugged switches can be mounted to standard 35mm DIN rail and are powered by a 24V DC power supply (sold separately). Easy to read LEDs provide at-a-glance system monitoring.

IES-2206-M2	L-com IES-2206 4 Port 10/100TX, 2 Port 100FX SC MM 2km	218.00
IES-2206-S20	L-com IES-2206 4 Port 10/100TX, 2 Port 100FX SC SM 20km	248.00
IES-2206-S40	L-com IES-2206 4 Port 10/100TX, 2 Port 100FX SC SM 40km	288.00
IES-2206-S60	L-com IES-2206 4 Port 10/100TX, 2 Port 100FX SC SM 60km	548.00
IES-2206-S80	L-com IES-2206 4 Port 10/100TX, 2 Port 100FX SC SM 80km	928.00

L-com 10/100TX +2 Port 100FX IES-2210 Series Industrial Fast Ethernet Switches

L-com's IES-2210 Series Industrial Ethernet Switches feature eight 10/100TX RJ45 ports and two fiber SC ports supporting Ethernet IP communications at 100Mbps. These easy to install DIN rail mountable Industrial Ethernet switches are perfect for applications where IP enabled devices require networked communications. The rugged switches can be mounted to standard 35mm DIN rail and are powered by a 24V DC power supply (sold separately). Easy to read LEDs provide at-a-glance system monitoring. The IES-Series switches are unmanaged and can be installed in minutes providing industrial network connectivity for myriad applications including industrial automation, factory automation, process control networking and energy network connectivity.

IES-2210-M2	L-com IES-2210 8 Port 10/100TX, 2 Port 100FX SC MM 2km	368.00
IES-2210-S20	L-com IES-2210 8 Port 10/100TX, 2 Port 100FX SC SM 20km	418.00
IES-2210-S40	L-com IES-2210 8 Port 10/100TX, 2 Port 100FX SC SM 40km	458.00
IES-2210-S60	L-com IES-2210 8 Port 10/100TX, 2 Port 100FX SC SM 60km	698.00
IES-2210-S80	L-com IES-2210 8 Port 10/100TX, 2 Port 100FX SC SM 80km	1078.00

L-com 10/100TX +4 Port 100FX IES-2220 Series Industrial Fast Ethernet Switches

IES-2220 Series Industrial Ethernet Switches are perfect for applications where IP enabled devices require networked communications. The rugged switches can be mounted to standard 35mm DIN rail and are powered by a 24V DC power supply (sold separately). Easy to read LEDs provide at-a-glance system monitoring. These IES-Series switches are unmanaged and can be installed in minutes providing industrial network connectivity for myriad applications including industrial automation, factory automation, process control networking and energy network connectivity.

IES-2220-M2	L-com IES-2220 16 Port 10/100TX, 4 Port 100FX SC MM 2km	738.00
IES-2220-S20	L-com IES-2220 16 Port 10/100TX, 4 Port 100FX SC SM 20km	758.00
IES-2220-S40	L-com IES-2220 16 Port 10/100TX, 4 Port 100FX SC SM 40km	828.00
IES-2220-S60	L-com IES-2220 16 Port 10/100TX, 4 Port 100FX SC SM 60km	1088.00
IES-2220-S80	L-com IES-2220 16 Port 10/100TX, 4 Port 100FX SC SM 80km	1349.00

24 Volt DC DIN Rail Mount Power Supplies

The LCPS series of power supplies provide a cost effective and reliable 24V DC power source for L-com's line of industrial Ethernet switches and media converters. These units can be installed on any standard 35mm DIN rail and are NEC Class 2/LPS compliant. They also provide protection against short circuits, overloads and over voltages.

LCPS-4024	DIN Rail Mount Power Supply 24V DC 40W (1.6A)	79.00
LCPS-6024	DIN Rail Mount Power Supply 24V DC 60W (2.5A)	90.00



IES-2205

IES-2208



IES-2216



IES-2206

IES-2210



IES-2220



LCPS-4024




LCPS-6024

IES Series Industrial Ethernet Switches


DIN Rail Mounting



Dual Power Input Plus Relay



Ribbed Aluminum Heat Sink Case



- 10Base-T / 100Base-TX Full / Half Duplex support
- MDI-MDI-X support
- Broadcast Storm protection
- Redundant power inputs
- Fan-less design
- DIN Rail mounting
- MAC Address Table Size: 1K
- Forwarding Rate: 148,800pps
- Operating Temp: -40°C to +70°C
- Relay output option for visual or audible alarms



EW-EX17008



EW-EX42005-00-1-A



EW-EX61800A-00B



EW-EX94008-00-1-A



EW-EX71800-00B



EW-48VDC-120

Item #	Description	List Price
--------	-------------	------------

EtherWAN 10/100TX PoE Switches - Web Based Management

EtherWAN's EX17000 series PoE 10/100BASE Fast Ethernet Web-Smart PoE Ethernet Switches are designed to operate in the small or medium network environment to provide Power to PoE driven devices, such as PoE IP cameras. These PoE switches may be desktop or rack mounted and all ports support IEEE802.3af Power over Ethernet (PoE) Power Sourcing Equipment (PSE) and can detect an IEEE802.3af compliant Powered Device (PD). Additionally the EX17000 series switches feature a web browser interface that allows the user to configure IP settings, Port Based VLAN, QoS settings, and more. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX17008	EtherWAN Web Based Managed Industrial Ethernet Switch 8 10/100TX PoE Ports	240.00
EW-EX17016	EtherWAN Web Based Managed Industrial Ethernet Switch 16 10/100TX PoE Ports	398.00
EW-EX17082	EtherWAN Web Based Managed Industrial Ethernet Switch 8 10/100TX PoE Ports + 2GIG SFP Combo	378.98
EW-EX17162	EtherWAN Web Based Managed Industrial Ethernet Switch 16 10/100TX PoE Ports + 2GIG SFP Combo	524.98
EW-EX17242	EtherWAN Web Based Managed Industrial Ethernet Switch 24 10/100TX PoE Ports + 2GIG SFP Combo	824.98

EtherWAN 10/100TX Unmanaged Industrial Fast Ethernet Switches (Some Models Include 100FX Duplex SC Fiber Ports)

The EX42000 & EX43000 series compact Fast Ethernet Switches are equipped with 10/100Base-TX RJ45 ports and Multimode or Single mode fiber uplink ports. By using standard auto-negotiation and the inclusion of auto-MDIX, EtherWAN provides a cost-effective way of integrating legacy 10Mbps networks with 100Mbps Fast Ethernet networks. The TX ports auto-negotiate for 10/100Mbps speed and auto-detect full or half-duplex mode. EX42000 & EX43000 series switches can be DIN-Rail mounted and are equipped with terminal block power inputs. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX42005-00-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 5 10/100TX Ports	90.00
EW-EX42014-1A-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 4 10/100TX Ports + 1 100FX, MM, 2Km, SC	185.00
EW-EX42014-2A-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 4 10/100TX Ports + 1 100FX, SM, 20Km, SC	290.00
EW-EX43008-00-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 8 10/100TX Ports	135.00
EW-EX43018-1A-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 8 10/100TX Ports + 1 100FX MM, 2Km, SC	234.98
EW-EX43018-2A-1-A	EtherWAN Unmanaged Industrial Ethernet Switch 8 10/100TX Ports + 1 100FX SM, 20Km, SC	339.98

EtherWAN 10/100TX Managed Industrial Fast Ethernet Switch (Some Models with 1000SX or 1000LX Duplex SC Fiber Ports)

The EX61800 series is designed to operate in harsh environments on the factory floor. The EX61800 functions at temperatures ranging from -10°C to 60°C (14°F to 140°F). The EX61800 will provide flawless communications when you need it most. The EX61800 is a managed switch with the flexibility of eight 10/100 Ethernet ports that may be configured in various combinations of copper and fiber optic interfaces. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX61800A-00B	EtherWAN Managed Industrial Ethernet Switch 8 10/100TX Ports	604.98
EW-EX61801A-03B	EtherWAN Managed Industrial Ethernet Switch 8 10/100TX Ports + 1 1000SX, MM, 550M, SC	769.98
EW-EX61801A-04B	EtherWAN Managed Industrial Ethernet Switch 8 10/100TX Ports + 1 1000LX, SM, 10Km, SC	844.98
EW-EX61802A-03B	EtherWAN Managed Industrial Ethernet Switch 8 10/100TX Ports + 2 1000SX, MM, 550M, SC	934.98
EW-EX61802A-04B	EtherWAN Managed Industrial Ethernet Switch 8 10/100TX Ports + 2 1000LX, SM, 10Km, SC	1079.98

EtherWAN 10/100TX Unmanaged NEMA Hardened Fast Ethernet Switches (-40°C to +75°C)

The EX94000 series of Unmanaged NEMA Hardened Fast Ethernet Switches are designed to function at temperatures ranging from -40°C to 75°C (-40°F to 167°F) and are tested for functional operation up to 85°C (185°F). Equipped with 10/100Base-TX RJ45 ports and Multimode or Single mode fiber uplink ports, they may be DIN rail, Panel or Rack mounted. The EX94000 series comes with power options to match the applications that require a tough, environmentally hardened product. Complies with NEMA TS1 & TS2 Environmental requirements for traffic control equipment, complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment ISA 12.12.01 (UL1604) Class I, and Division 2 Classified for use in hazardous locations (applicable to versions with DC Terminal Block power option). The variable power terminal block input can support voltages ranging from 12 to 48 VDC. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX94008-00-1-A	EtherWAN Unmanaged NEMA Hardened Ethernet Switch 8 10/100TX Ports	249.98
EW-EX94018-1A-1-A	EtherWAN Unmanaged NEMA Hardened Ethernet Switch 8 10/100TX Ports + 1 100FX, MM, 2Km, SC	369.98
EW-EX94018-2A-1-A	EtherWAN Unmanaged NEMA Hardened Ethernet Switch 8 10/100TX Ports + 1 100FX, SM, 20Km, SC	469.98

EtherWAN 10/100TX Managed NEMA Hardened Fast Ethernet Switches (-40°C to +75°C)

The EX71000 series of Managed NEMA Hardened Fast Ethernet Switches are designed to function at temperatures ranging from -40°C to 75°C (-40°F to 167°F) and are tested for functional operation up to 85°C (185°F). Equipped with 10/100Base-TX RJ45 ports and Multimode or Single mode fiber uplink ports, they may be DIN rail, Panel or Rack mounted. The EX71000 series comes with power options to match the applications that require a tough, environmentally hardened product. Complies with NEMA TS1 & TS2 Environmental requirements for Traffic control equipment, complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment ISA 12.12.01 (UL1604) Class I, and Division 2 Classified for use in hazardous locations (applicable to versions with DC Terminal Block power option). The variable power terminal block input can support voltages ranging from 12 to 48 VDC. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-EX71800-00B	EtherWAN Managed NEMA Hardened Ethernet Switch 8 10/100TX Ports	774.98
EW-EX71802-01B	EtherWAN Managed NEMA Hardened Ethernet Switch 8 10/100TX Ports + 1 100FX, MM, 2Km, SC	959.98
EW-EX71802-04B	EtherWAN Managed NEMA Hardened Ethernet Switch 8 10/100TX Ports + 1 100FX, SM, 20Km, SC	1329.98

EtherWAN 24V and 48V AC/DC DIN Rail Power Supplies

EtherWAN offers several versions of AC/DC DIN Rail power supplies for providing safety low voltage to its Industrial Ethernet Switch and media converter lines. The EW-24VDC-30 provides 24 VDC power @ 30 Watt (2.5A) to connected equipment and the EW-48VDC-120 provides up to 48 volt DC @ 120 Watts. **As an authorized EtherWAN reseller, we can bid on RFQs for any EtherWAN part numbers. Contact us to request a non-obligatory quote.**

EW-24VDC-30	EtherWAN Unmanaged 24V DC 30 Watt (1.25A) DIN Rail Power Supply	79.00
EW-24VDC-60	EtherWAN Unmanaged 24V DC 60 Watt (2.5A) DIN Rail Power Supply	125.00
EW-24VDC-75	EtherWAN Unmanaged 24V DC 75 Watt (3A) DIN Rail Power Supply	170.00
EW-48VDC-75	EtherWAN Unmanaged 48V DC 75 Watt (1.5A) DIN Rail Power Supply	170.00
EW-48VDC-120	EtherWAN Unmanaged 48V DC 120 (2.5A) Watt DIN Rail Power Supply	189.00

Item #	Description	List Price
--------	-------------	------------

NETGEAR® ReadyNAS 100 Series - Network Storage Servers (Home)

NETGEAR's Ready NAS 100 Series is designed to service between 1-5 simultaneous users. The ReadyNAS 100 is an ideal desktop storage and media server solution for the home as it provides an easy way to centralize access and share your digital world, including, but not limited to, photographs, video clips, songs, web sites, and text messages.

Much more than just simple storage for all your information, every ReadyNAS features unprecedented protection of your files, the ability to manage stored data from any web enabled device and a library of add-ons that allow you to do more with your storage than you ever thought possible. Every networked attached storage (NAS) device from NETGEAR runs on the revolutionary ReadyNAS operating system. Designed with ease-of-use in mind, new devices are discovered automatically through the cloud and feature a sleek, modern interface. Also, stored data is protected not only with automatic RAID configuration, but this ReadyNAS is the first to offer home users the continuous data protection of unlimited snapshots along with real-time anti-virus and native encryption. In addition to the confidence of knowing data is secure from virtually any threat, ReadyNAS features remote access innovations, seamless cloud-based file synchronization (ReadyDROP) and the ability to backup data from your Mac anywhere in the world when using Apple Time Machine®. Detailed specifications can be found at L-com.com. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

RN10200-100NAS	NETGEAR ReadyNAS 102 2-Bay, Diskless	288.00
RN10400-100NAS	NETGEAR ReadyNAS 104 4-Bay, Diskless	507.00
RN10211D-100NAS	NETGEAR ReadyNAS 102 2-Bay, 1x1TB Desktop Drive	405.00
RN10421D-100NAS	NETGEAR ReadyNAS 104 4-Bay, 2x1TB Desktop Drive	725.00

NETGEAR® ReadyNAS 300 Series - Network Storage Servers (Business Class/Small Office)

NETGEAR's ReadyNAS 300 Series is designed to service between 5-25 simultaneous users, the ReadyNAS 300 is an ideal desktop storage solution for small offices. Application data, virtual images, client files, email, etc, the types of data central to running a successful business can seem endless. With ReadyNAS you finally have an advanced and easy-to use solution for centralizing, securing and controlling access to your digital assets. More than just simple unified (NAS and SAN) storage for your company, ReadyNAS allows you to do more than you ever thought you could afford by pairing the latest in performance with innovative efficiency technologies such as unlimited snapshots, thin provisioning and cloud-managed replication.

Every networked attached storage (NAS) device from NETGEAR runs on the revolutionary ReadyNAS operating system. This custom-built OS protects stored data not only with XRAID2 automatic expansion, but is the first desktop NAS for the SMB to feature the continuous data protection of unlimited snapshots along with real-time anti-virus and native encryption. Designed specifically for the unique needs of small business users, ReadyNAS devices utilize proprietary ReadyCLOUD technology for cloud-based discovery, provisioning and even ongoing management. In addition, these new devices are virtualization-ready with iSCSI support, thin provisioning capability and certification with VMware and Microsoft. Detailed specifications can be found at L-com.com. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

RN31200-100NAS	NETGEAR ReadyNAS 312, 2-Bay, Diskless	652.00
RN31400-100NAS	NETGEAR ReadyNAS 314, 4-Bay Diskless	905.00
RN31600-100NAS	NETGEAR ReadyNAS 316, 6-Bay Diskless	1147.00
RN31211D-100NAS	NETGEAR ReadyNAS 312, 2-Bay, 1x1TB Desktop Drive	757.00
RN31421D-100NAS	NETGEAR ReadyNAS 314, 4-Bay, 2x1TB Desktop Drive	1137.00
RN31661D-100NAS	NETGEAR ReadyNAS 316, 6-Bay, 6x1TB Desktop Drive	1809.00

NETGEAR® ReadyNAS 500 Series - Network Storage Servers (Business Class/Small Office)

NETGEAR's ReadyNAS 500 Series is designed to service between 25 - 250 simultaneous users, the ReadyNAS 500 is an ideal desktop storage solution for a small or medium size business. Application data, virtual images, client files, email, etc., the types of data central to running a successful business can seem endless. With ReadyNAS you finally have an advanced and easy-to use solution for centralizing, securing and controlling access to your digital assets. More than just simple unified (NAS and SAN) storage for your company, ReadyNAS allows you to do more than you ever thought you could afford by pairing the latest in performance with innovative efficiency technologies such as unlimited snapshots, thin provisioning and cloud-managed replication.

Every networked attached storage (NAS) device from NETGEAR runs on the revolutionary ReadyNAS operating system. This custom-built OS protects stored data not only with XRAID2 automatic expansion, but is the first desktop NAS for the SMB to feature the continuous data protection of unlimited snapshots along with real-time anti-virus and native encryption. Designed specifically for the unique needs of small business users, ReadyNAS devices utilize proprietary ReadyCLOUD technology for cloud-based discovery, provisioning and even ongoing management. In addition, these new devices are virtualization-ready with iSCSI support, thin provisioning capability and certification with VMware and Microsoft. Detailed specifications can be found at L-com.com. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

RN51600-100NAS	NETGEAR ReadyNAS 516, 6-Bay Diskless	1828.00
RN51661E-100NAS	NETGEAR ReadyNAS 516, 6-Bay, 6x1TB Enterprise Drive	2767.00
RN51662E-100NAS	NETGEAR ReadyNAS 516, 6-Bay, 6x4TB Enterprise Drive	3670.00

NETGEAR® ReadyNAS EDA500 - Expand the Capacity of your ReadyNAS 300 or ReadyNAS 500 Device

EDA500-100NAS	NETGEAR ReadyNAS Expansion Chassis, 5-Bay Diskless	712.00
---------------	--	--------

NETGEAR® ReadyNAS 2120 Series - Network Storage Servers (Rack Mount Business Class/Small Office)

NETGEAR's ReadyNAS 2120 Series is designed to service between 5-25 simultaneous users, the ReadyNAS 2120 is an ideal rack mount storage solution for small offices. Application data, virtual images, client files, email, etc, the types of data central to running a successful business can seem endless. With ReadyNAS you finally have an advanced and easy-to use solution for centralizing, securing and controlling access to your digital assets. More than just simple unified (NAS and SAN) storage for your company, ReadyNAS allows you to do more than you ever thought you could afford by pairing the latest in performance with innovative efficiency technologies such as unlimited snapshots, thin provisioning and cloud-managed replication.

Every networked attached storage (NAS) device from NETGEAR runs on the revolutionary ReadyNAS operating system. This custom-built OS protects stored data not only with XRAID2 automatic expansion, but is the first desktop NAS for the SMB to feature the continuous data protection of unlimited snapshots along with real-time anti-virus and native encryption. Designed specifically for the unique needs of small business users, ReadyNAS devices utilize proprietary ReadyCLOUD technology for cloud-based discovery, provisioning and even ongoing management. In addition, these new devices are virtualization-ready with iSCSI support, thin provisioning capability and certification with VMware and Microsoft. Detailed specifications can be found at L-com.com. **As an authorized NETGEAR reseller, we can bid on RFQs for any NETGEAR part numbers. Contact us to request a non-obligatory quote.**

RN2120-100NAS	NETGEAR ReadyNAS 2120, 1U, 4-Bay Diskless	1759.00
RN21241D-100NAS	NETGEAR ReadyNAS 2120, 1U, 4-Bay, 4x1TB Desktop Drive	2192.00
RN21242D-100NAS	NETGEAR ReadyNAS 2120, 1U, 4-Bay, 4x2TB Desktop Drive	2373.00



RN10400-100NAS



RN31200-100NAS



RN31400-100NAS



RN51662E-100NAS



EDA500-100NAS



RN2120-100NAS



Security / Surveillance Tutorial


Physical Layer Air Gap Network Switch Overview Air-Gap Network Switches = Secure Hardware Access Control

Unauthorized access to private networks presents the greatest security threat to any organization that deals in sensitive or classified data. Theft of classified information and trade secrets, corruption of data and unauthorized control of automated systems relentlessly challenge security officers and network administrators.

Hardware security centers on the control of the wired and wireless connections at the edges of

networks and systems that tie their elements together. These solutions are air-gap switches that open and close those connections. Whether the switches are controlled manually or automatically, their points of connection to the systems and networks they protect are managed with the absolute assurance of hardware that cannot be breached by unauthorized personnel through the communications channel that passes through the switch.

Hardware security solutions are traditionally applied to the control of physical spaces like buildings, laboratories and data centers. Card and key fob credentials are commonly used to gain access to those spaces. The same credentials can be used to control access to electronic and optical data streams when specialized hardware is integrated with an air gap network switch.

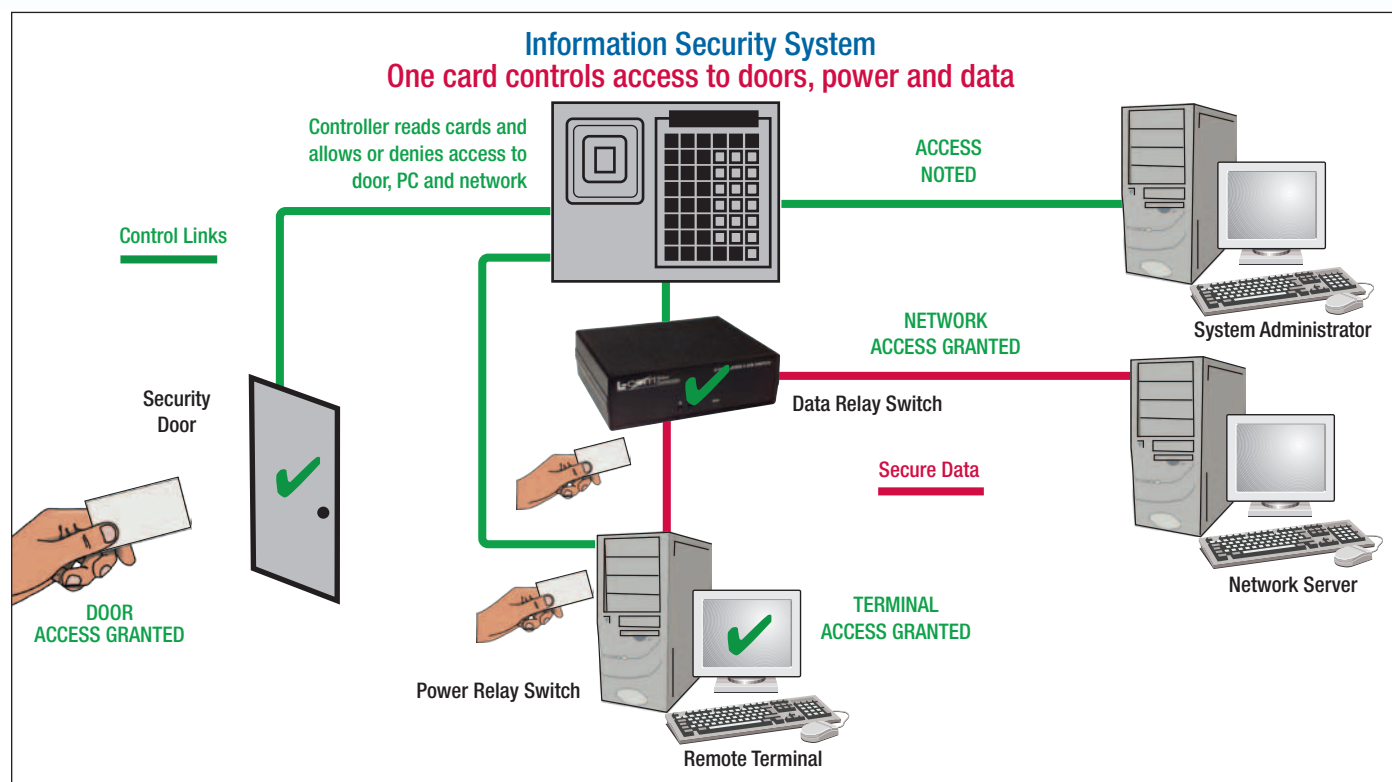

Optional Product Features

Ethernet IP Access/Control



Allows IP access to an Ethernet network for monitoring and control

Serial Access/Control



Allows RS232 serial access for monitoring and control

Latching or Non-Latching



Non-Latching versions provide automatic fail-over to the default port A to C connection state when power fails or is removed

Item #	Description	List Price
--------	-------------	------------

L-com Category 6 A/B Physical Layer Air Gap Network Switch Boxes

L-com's Category 6 A/B Network Switches are a physical layer hardware solution which supports a variety of applications including Secure or Simple Desktop Network Resource Sharing, Disaster Recovery, Network Access Control, and Auto Fail-Back. These switch boxes feature a unique relay technology that supports the switching mechanism. Additionally, all units incorporate technology that enables these switch boxes to operate independent of data rates, protocol and formats. This allows them to pass 10/100/1000Mbps, 10Gbps, and other future, high speed data rates. Non-latching or latching relay configurations are available. The non-latching units provide automatic fail-over to the default Port A to C connection state when power fails or is removed. Latching relays provide the benefit of maintaining the flow of data between the connected devices even when power is removed. **Note:** The Ethernet models may be controlled via telnet, web browser or SNMP. Ships with a universal 12V DC power supply with four different style country plugs.

L-com Category 6 A/B Physical Layer Air Gap Network Switch Boxes (RJ45 Ports)

LC-SNSW-C6-L	L-com Cat6 A/B Network Switch - Latching	350.70
LC-SNSW-C6	L-com Cat6 A/B Network Switch - Non-Latching	350.70
LC-SNSW-C6-LSC	L-com Cat6 A/B Network Switch with Serial Control - Latching	378.00
LC-SNSW-C6-SC	L-com Cat6 A/B Network Switch with Serial Control - Non-Latching	378.00
LC-SNSW-C6-LEC	L-com Cat6 A/B Network Switch with Ethernet Control - Latching	488.25
LC-SNSW-C6-EC	L-com Cat6 A/B Network Switch with Ethernet Control - Non-Latching	488.25

L-com Fiber Optic A/B Physical Layer Air Gap Network Switch Boxes (Multimode and Single mode)

L-com's fiber optic A/B Network Switches support a variety of switching, or access and control applications all in a compact desktop enclosure. These applications include Disaster Recovery, Air Gapped Network Access Control, Desktop Switching, and Secure Switching. The fiber optic switch boxes utilize special optical switching mechanisms that redirect the light beams between selected ports. There is no optical-to-electrical-to-optical conversion needed. Because of this, these switches are able to support any data rate, format, or protocol that can be sent over fiber optic cables that are attached to the switch. The Multimode Fiber Switch models support any/all wavelengths from 800 to 1600nm, while the Single mode Fiber Switches support 1310 and 1550nm wavelengths. Non-latching or latching relay configurations are available. The non-latching units provide automatic fail-over to the default Port A to C connection state when power fails or is removed. Latching versions provide the benefit of maintaining the flow of data between the connected devices even when power is removed. **Note:** The Ethernet models may be controlled via telnet, web browser or SNMP. Ships with a universal 12V DC power supply with four different style country plugs.

L-com Multimode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex SC Connectors)

LC-SNSW-FMMSC-L	L-com Multimode SC Fiber A/B Switch - Latching	794.85
LC-SNSW-FMMSC	L-com Multimode SC Fiber A/B Switch - Non-Latching	794.85
LC-SNSW-FMMSC-LSC	L-com Multimode SC Fiber A/B Switch with Serial Control - Latching	822.15
LC-SNSW-FMMSC-SC	L-com Multimode SC Fiber A/B Switch with Serial Control - Non-Latching	822.15
LC-SNSW-FMMSC-LEC	L-com Multimode SC Fiber A/B Switch with Ethernet Control - Latching	928.20
LC-SNSW-FMMSC-EC	L-com Multimode SC Fiber A/B Switch with Ethernet Control - Non-Latching	928.20

L-com Multimode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex ST Connectors)

LC-SNSW-FMMST-L	L-com Multimode ST Fiber A/B Switch - Latching	794.85
LC-SNSW-FMMST	L-com Multimode ST Fiber A/B Switch - Non-Latching	794.85
LC-SNSW-FMMST-LSC	L-com Multimode ST Fiber A/B Switch with Serial Control - Latching	822.15
LC-SNSW-FMMST-SC	L-com Multimode ST Fiber A/B Switch with Serial Control - Non-Latching	822.15
LC-SNSW-FMMST-LEC	L-com Multimode ST Fiber A/B Switch with Ethernet Control - Latching	928.20
LC-SNSW-FMMST-EC	L-com Multimode ST Fiber A/B Switch with Ethernet Control - Non-Latching	928.20

L-com Multimode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex LC Connectors)

LC-SNSW-FMMLC-L	L-com Multimode LC Fiber A/B Switch - Latching	991.20
LC-SNSW-FMMLC	L-com Multimode LC Fiber A/B Switch - Non-Latching	991.20
LC-SNSW-FMMLC-LSC	L-com Multimode LC Fiber A/B Switch with Serial Control - Latching	1017.45
LC-SNSW-FMMLC-SC	L-com Multimode LC Fiber A/B Switch with Serial Control - Non-Latching	1017.45
LC-SNSW-FMMLC-LEC	L-com Multimode LC Fiber A/B Switch with Ethernet Control - Latching	1124.55
LC-SNSW-FMMLC-EC	L-com Multimode LC Fiber A/B Switch with Ethernet Control - Non-Latching	1124.55

L-com Single mode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex SC Connectors)


LC-SNSW-FSMSC-L	L-com Single mode SC Fiber A/B Switch - Latching	1240.05
LC-SNSW-FSMSC	L-com Single mode SC Fiber A/B Switch - Non-Latching	1240.05
LC-SNSW-FSMSC-LSC	L-com Single mode SC Fiber A/B Switch with Serial Control - Latching	1266.30
LC-SNSW-FSMSC-SC	L-com Single mode SC Fiber A/B Switch with Serial Control - Non-Latching	1266.30
LC-SNSW-FSMSC-LEC	L-com Single mode SC Fiber A/B Switch with Ethernet Control - Latching	1376.55
LC-SNSW-FSMSC-EC	L-com Single mode SC Fiber A/B Switch with Ethernet Control - Non-Latching	1376.55

L-com Single mode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex ST Connectors)

LC-SNSW-FSMST-L	L-com Single mode ST Fiber A/B Switch - Latching	1240.05
LC-SNSW-FSMST	L-com Single mode ST Fiber A/B Switch - Non-Latching	1240.05
LC-SNSW-FSMST-LSC	L-com Single mode ST Fiber A/B Switch with Serial Control - Latching	1266.30
LC-SNSW-FSMST-SC	L-com Single mode ST Fiber A/B Switch with Serial Control - Non-Latching	1266.30
LC-SNSW-FSMST-LEC	L-com Single mode ST Fiber A/B Switch with Ethernet Control - Latching	1376.55
LC-SNSW-FSMST-EC	L-com Single mode ST Fiber A/B Switch with Ethernet Control - Non-Latching	1376.55

L-com Single mode Fiber A/B Physical Layer Air Gap Network Switch Boxes (Duplex LC Connectors)

LC-SNSW-FSMLC-L	L-com Single mode LC Fiber A/B Switch - Latching	1435.35
LC-SNSW-FSMLC	L-com Single mode LC Fiber A/B Switch - Non-Latching	1435.35
LC-SNSW-FSMLC-LSC	L-com Single mode LC Fiber A/B Switch with Serial Control - Latching	1461.60
LC-SNSW-FSMLC-SC	L-com Single mode LC Fiber A/B Switch with Serial Control - Non-Latching	1461.60
LC-SNSW-FSMLC-LEC	L-com Single mode LC Fiber A/B Switch with Ethernet Control - Latching	1568.70
LC-SNSW-FSMLC-EC	L-com Single mode LC Fiber A/B Switch with Ethernet Control - Non-Latching	1568.70

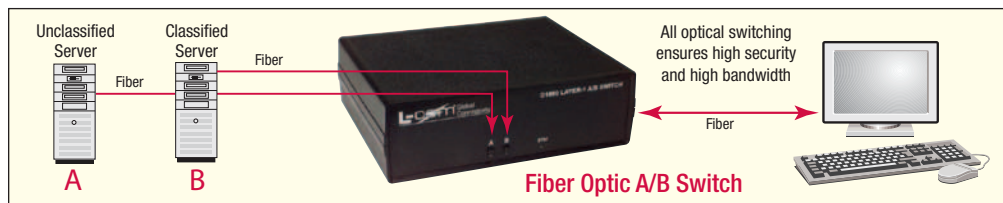LC-SNSW-C6-L
Back viewLC-SNSW-C6-L
Front viewLC-SNSW-FMMSC-EC
Back viewLC-SNSW-FMMSC-EC
Front viewLC-SNSW-FMMST
Back viewLC-SNSW-FMMST
Front viewLC-SNSW-FSMSC-EC
Back viewLC-SNSW-FSMSC-EC
Front viewLC-SNSW-FSMLC-LSC
Back viewLC-SNSW-FSMLC-LSC
Front view



Security surveillance equipment, more commonly referred to as CCTV (closed circuit television) equipment, is not just for large corporations and municipalities anymore. Changes in technology and the market have made CCTV more affordable than ever allowing consumers and small businesses to benefit from the additional layer of security provided by being able to record activities in their buildings and properties. This tutorial will provide an overview of the most common options available and how to choose what is best for you.

Camera Styles

The style of a camera refers to the shape and mounting options of a CCTV camera. The most common camera styles are dome, bullet, box, PTZ, and covert.



DOME CAMERAS

Dome cameras are becoming increasingly popular due to their ability to blend in with their surroundings. These cameras are used in residential applications as well as public places such as convenience stores, offices, and lobbies. Though they can be mounted to a wall, they are usually mounted on the ceiling.



BULLET CAMERAS

Bullet cameras are encased in cylindrical usually weather resistant housings. Their size, cost and integrated design make them a great choice for home and also for outdoor installations.



BOX CAMERAS

Box cameras can be used with or without a housing. In most instances, they are used with a housing and bracket unit for outdoor areas such as parking lots and entry gates. Lenses are purchased separately offering greater flexibility.



PTZ CAMERAS

PTZ cameras are more expensive but offer the operator more control with remote pan/tilt/zoom. They are used primarily when an operator is actively monitoring an area and needs to manipulate the camera. They are popular in department stores, government buildings, and casinos.




COVERT / SPY CAMERAS

Covert or Spy cameras are designed for discreet installations. They are commonly referred to as a nanny cam. Used frequently by private investigators, or concerned parents, they effectively capture video without others being aware.

Wired vs Wireless

Wired Surveillance

A wired CCTV system requires the cameras to be physically connected to your monitor, computer or DVR via a cable. The optimal choice for a camera security system is wired. Wired systems are more cost effective, provide the highest quality video, and no signal interruption. L-com currently offers both IP Based Cat5e (or better) Standalone cameras as well as DVR all-in-one kits that utilize coax cabling.

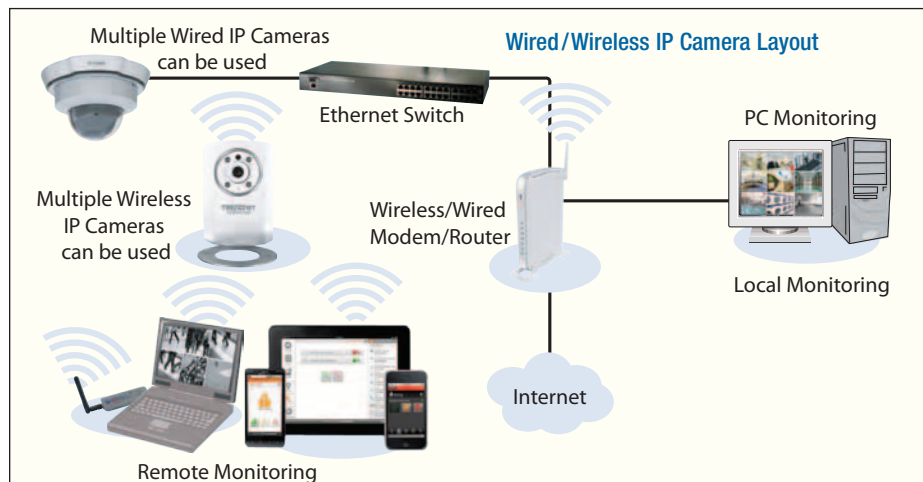

Wireless IP Surveillance

A wireless CCTV system typically uses the 2.4GHz frequency to transmit the signal through your LAN (Local Area Network) to your computer. Most wireless CCTV cameras have some range limitations with clear line of sight transmission requirements. Wall thickness and other interference may decrease this distance. Wireless IP cameras offer greater flexibility when placing your camera, and require no long cable runs. However most still require the use of an AC adapter.

Item #	Description	List Price
--------	-------------	------------

TRENDnet Wireless 802.11n Day/Night Internet Camera

The Wireless N Day/Night IP Camera, model TV-IP551WI, transmits real-time video over the internet. Record crisp video in complete darkness for distances of up to 7.5 meters. Wireless N technology provides unsurpassed wireless coverage and improved streaming video quality. Add this camera to your wireless network at the touch of a button with WiFi Protected Setup (WPS). Record 640 x 480 (VGA) video at up to 20 frames per second (fps). Manage up to 32 TRENDnet cameras with the included complimentary camera management software. Advanced features include adjustable motion detection recording areas, email alerts, scheduled recording sessions, one-way audio, an adjustable lens, and four times digital zoom. A wall/ceiling mounting kit is included and the camera's off white housing blends into most environments.

TV-IP551WI	TRENDnet Wireless 802.11n Day/Night Internet Camera	100.00
------------	---	--------

D-Link Wireless 802.11n Day/Night PTZ Internet Camera

The DCS-5635 is a high performance IP camera for professional surveillance and remote monitoring. This internet camera features motorized pan, tilt, and optical/digital zoom for ultimate versatility. The 10x optical zoom lens delivers the level of detail necessary to identify faces, license plate numbers, and other important details that are difficult to clearly distinguish using digital zoom alone. In addition, the DCS-5635 is equipped with Wireless N. The built-in antennas enable the camera to have versatile placement in more places without the hassle of additional wires.

DCS-5635	D-Link Wireless 802.11n Day/Night PTZ Internet Camera	1100.00
----------	---	---------

D-Link Outdoor Dome Enclosure for DCS-5635 IP Camera

D-Link's DCS-71W outdoor dome housing provides cost-effective protection and versatile connectivity options for the D-Link DCS-5635, motorized pan and tilt surveillance camera in outdoor environments. The DCS-71W provides wireless connection for the DCS-5635. A built-in power supply, heater and blower mean these housings can be used under adverse weather conditions.

DCS-71W	D-Link Outdoor Dome Enclosure for DCS-5635 IP Camera	320.00
---------	--	--------

D-Link Fixed Vandal Proof Dome Network Camera with Built in 802.3af PoE

The D-Link DCS-6510 is a fixed vandal proof dome IP camera with day and night functionality and 802.3af Power over Ethernet. It's ideal for use in places where a surveillance camera would require protection from tampering or vandalism. The DCS-6510 uses a CMOS sensor with low lux sensitivity to deliver truly superior image quality in all lighting conditions. A built-in Infrared Cut Removable (ICR) filter allows the camera to capture images in both regular and low light conditions. The built-in Infrared (IR) illuminators enable video capture up to 20 meters in total darkness. The DCS-6510 is equipped with a BNC video connector as well as one digital input and one digital output for integration with external devices.

DCS-6510	D-Link Fixed Vandal Proof Dome Network Camera with Built in 802.3af PoE	815.00
----------	---	--------

D-Link Day and Night Dome Network Camera with Built in 802.3af PoE

The D-Link DCS-6111 Day and Night Camera with WDR Sensor is designed for professional around-the-clock surveillance. It uses a Wide Dynamic Range (WDR) VGA Progressive CMOS sensor for better performance under various lighting conditions, delivering exceptional picture quality. The WDR provides the DCS-6111 the capability to capture high resolution, detailed images in high contrast lighting conditions and significantly improves the quality of real-time videos. The DCS-6111 is equipped with D-Link's System-on-Chip (SoC) products to provide high quality video compression in MPEG-4 and Motion JPEG formats. It also incorporates Varifocal lens with IR LEDs to offer enhanced flexibility and enhanced security, making it the ideal solution for 24/7 surveillance.

DCS-6111	D-Link Day and Night Dome Network Camera with Built in 802.3af PoE	550.00
----------	--	--------

Vonnic DVR All in One Kit Surveillance Systems

These all in one kits are available with either cost effective CMOS cameras or with high resolution CCD cameras. Both options are available with pre-installed 500GB HDD for out of the box installation. Models are also available with no HDD installed to allow you to install your own HDD or you can purchase one of our high quality Seagate Barracuda OEM drives. DVRs are upgradeable to 2TB. (More detailed specifications at L-com.com).

Vonnic Surveillance Systems 4 Channel DVR with 4 CMOS Cameras (Max Resolution 1024 x 768)

Capable of real time video display these kits also provide 3 distinct recording modes. Manual/Regular Continuous, Scheduled or Motion Detection at 30FPS per channel. The DVR uses H.264 compression to maximize HDD recording capacity. Multiple remote viewing options that also includes support for 1 channel viewing on 3G/4G mobile devices (iPhone®, iPad®, Android™, Blackberry®, NOKIA®, Motorola®). More detailed specifications available at L-com.com. **As an authorized Vonnic reseller, we can bid on RFQs for any Vonnic part numbers. Contact us to request a non-obligatory quote.**

VNC-DK4-C2404CM	Vonnic 4CH DVR with 4 CMOS Cameras, no HDD Installed	169.98
VNC-DK4-C2404CM-HD	Vonnic 4CH DVR with 4 CMOS Cameras, 500GB HDD Pre-installed	249.98

Vonnic Surveillance Systems 4 Channel DVR with 4 CCD Cameras (Max Resolution 1280 x 1024)

Capable of real time video display these kits also provide 3 distinct recording modes. Manual/Regular Continuous, Scheduled or Motion Detection at 30FPS per channel. The DVR uses H.264 compression to maximize HDD recording capacity. Multiple remote viewing options that also includes support for 4 channel viewing on 3G/4G mobile devices (iPhone®, iPad®, Android™, Blackberry®, NOKIA®, Motorola®). More detailed specifications available at L-com.com. **As an authorized Vonnic reseller, we can bid on RFQs for any Vonnic part numbers. Contact us to request a non-obligatory quote.**

VNC-DK4-K4404CCD	Vonnic 4CH DVR with 4 CCD Cameras, no HDD Installed	295.00
VNC-DK4-K4404CCD-HD	Vonnic 4CH DVR with 4 CCD Cameras, 500GB HDD Pre-installed	375.00

Western Digital Purple (OEM) Surveillance Grade Hard Drive Disks

The WD Purple Surveillance Storage is built for 24/7 always-on surveillance in high-definition security systems that use up to eight hard drives and up to 32 cameras. Exclusive AllFrame technology works with ATA streaming to reduce error pixilation and video interruptions that occur when desktop hard drives are incorrectly used as storage in security systems.

VNC-HDWD1TB	Western Digital Purple (OEM) Surveillance Grade Hard Drive Disk 1TB	105.00
VNC-HDWD2TB	Western Digital Purple (OEM) Surveillance Grade Hard Drive Disk 2TB	135.00
VNC-HDWD3TB	Western Digital Purple (OEM) Surveillance Grade Hard Drive Disk 3TB	175.00
VNC-HDWD4TB	Western Digital Purple (OEM) Surveillance Grade Hard Drive Disk 4TB	240.00

What are Digital Video Recorders (DVR)?

A digital video recorder (DVR) is the central component in any CCTV system where it is necessary to record and store the video from any camera. There are two main types, standalone DVRs and PC based DVRs. Standalone DVRs have been the most widely used but PC based DVRs are becoming increasingly more popular with their upgrade flexibility and decreasing costs.

Standalone DVR

Standalone DVRs are machines that run on Linux, Unix or other proprietary operating system. Designed for a single application, they are simple to use and offer many features. They are commonly available in 4 channel, 8 channel and 16 channel and typically include a central management software (CMS) for remote viewing, PTZ control, live and recording playback options and motion detection.

PC Based DVRs

A PC based IP (Wireless/Wired) Camera DVR is typically a windows based computer that you install the associated software that comes with the camera. Initial setup of a PC based DVR is more complicated as it requires some network configuration but you do have increased flexibility when adding cameras and storage, plus the added cost savings of using your existing computer equipment.



TV-IP551WI



DCS-5635



DCS-71W




DCS-6510



DCS-6111

VNC-DK4-C2404CM
VNC-DK4-C2404CM-HDVNC-DK4-K4404CCD
VNC-DK4-K4404CCD-HDVNC-HDWD1TB
VNC-HDWD2TB
VNC-HDWD3TB
VNC-HDWD4TB

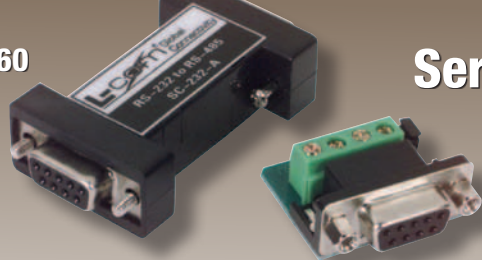

What is a Serial Converter?

A Serial Converter, sometimes referred to as an Interface converter, allows you to convert between different serial protocols to allow for the interconnectivity of various serial devices.

RS232:

First introduced in 1962, it is a series of standards for serial binary single-ended data and control signals for connecting a DTE (Data Terminal Equipment) (PC) and a DCE (Data Communication Equipment) (Modem).

It uses multi-conductor cabling and can function in half duplex as well as full duplex modes of operation. It was designed for point-to-point connections, (1) DTE & (1) DCE.

The accepted max distance for standard cabling is 50 feet (15m) with a maximum baud rate of 20 kbit/s. Theoretically, 1kbit/s can be achieved at 4,000 feet (1,200m). With low-capacitance cabling the 20 kbit/s can be effectively maintained up to a theoretical distance of 1,000 feet (300m).

RS422:

A high-speed protocol similar to RS232 but with differential signaling in a multi-drop configuration.

It was designed for half duplex mode of operation.

It uses Twisted Pair cabling and can support a maximum of 10 Devices (1) DTE & (10) DCE.

With appropriate cabling it can be effectively used up to a theoretical distance of 4,000 feet (1,200m).

With a maximum baud rate of 10 Mbit/s at 40 feet (12m) & 100 kbit/s at 4,000 feet (1,200m).

How is a Serial Converter used?

Serial Converters typically consist of a minimum of two bi-directional interfaces, one each for the different protocols being converted, for RS232 (Full Duplex / Half Duplex) for RS422 / 423 / 485 (Half Duplex). These interfaces can consist of any combination of Telephony style Modular Jacks, Terminal Blocks or D-Subs (DB9, DB25). In the case of an RS232 to RS485 Converter, one of the interfaces would be used to handle the RS232 signals while the other is used to handle the RS485 signals.

RS423:

A high-speed protocol similar to RS422 but with unbalanced signaling in a multi-drop configuration.

It uses multi-conductor cabling and was designed for half duplex mode of operation.

It can support a maximum of 10 Devices (1) DTE & (10) DCE.

With a maximum baud rate of 100 kbit/s at 40 feet (12m) 1kbit/s at 4,000 feet (1,200m).

RS485:

A protocol developed from RS422 that can be used as a bus in multi-drop / multipoint configurations.



It was designed for half duplex mode of operation.

It uses Twisted Pair cabling and can support a maximum of 32 Devices.

With appropriate cabling it can be effectively used up to a theoretical distance of 4,000 feet (1,200m).

With a maximum baud rate of 35 Mbit/s at 40 feet (12m) & 100 kbit/s at 4,000 feet (1,200m).

Typical Serial Converter Applications

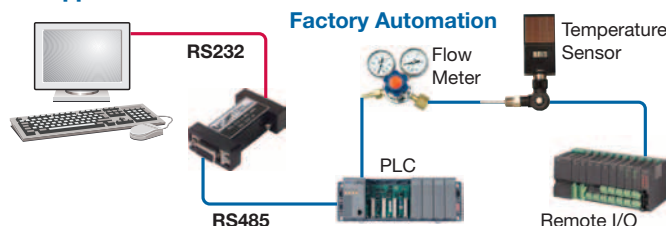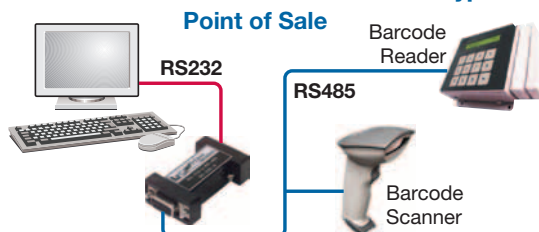


What is a Device Server?

A Device Server, sometimes referred to as a Serial Server, is used to connect a serial network or device such as RS232 to an Ethernet Network that uses the IP (Internet Protocol) data transmission.

How is a Device Server used?

A Device Server has one or more serial ports and typically one RJ45 Ethernet port. After connecting the serial devices to the server, then connecting the server to the Ethernet Network, some set up is required to configure the communication between the two networks via a management application built into the Device Server.

Typical Device Server Applications

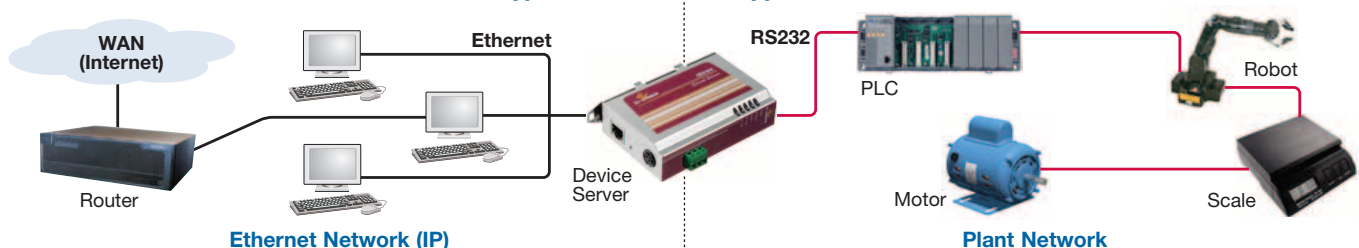

Item #	Description	List Price
--------	-------------	------------

L-com's SC-232 Series of RS232 to RS485 & 485/422 Interface Converters DB9M/DB9F

L-com's SC-232 series of RS232 to RS485 & RS232 to 485/422 converters provide an array of configuration options to meet your specific application requirements. Datasheets with additional specification details can be found on our website.

SC-232-A	L-com SC-232 Series RS232 to RS485 Interface Converter, DB9M/DB9F, Half Duplex, Port Powered	59.00
SC-232-B	L-com SC-232 Series RS232 to RS485 Interface Converter, DB9M/DB9F, Half Duplex, Externally Powered	69.00
SC-232-C	L-com SC-232 Series RS232 to RS485/422 Interface Converter, DB9M/DB9F, Half/Full Duplex, Port Powered	59.00
SC-232-D	L-com SC-232 Series RS232 to RS485/422 Interface Converter, DB9M/DB9F, Half/Full Duplex, Externally Powered, Opto-Isolated	69.00
SC-232-E	L-com SC-232 Series RS232 to RS485/422 Interface Converter, DB9M/DB9F, Half/Full Duplex, Port Powered, Opto-Isolated	68.00

5V DC Power Supply for SC-232 L-com's Series Interface Converters

SC-5VDC-PWR	5VDC Power Supply for SC-232 Series Interface Converters	5.50
-------------	--	------

Economy RS232 to Current Loop Converter with 4-Pin Terminal Block, DB25M (with DB25F Gender Changer)

The ICC47B-015 RS232 to current loop serial converter provides users with an economical and compact way to extend RS232 signals using standard twisted pair cabling. The ICC47B-015 features a DB25M input connector and a 4-pin terminal block for the current loop side. It also includes a DB25 Female/Female Gender Changer allowing for Female input. The ICC47B-015 supports data rates up to 128Kbps and distances up to 1,000 meters. The unit includes a 9 VDC external power supply and a one year manufacturer's warranty.

ICC47B-015	Economy RS232 to V.24 Interface Converter with 4-Pin Terminal Block, DB25M (with DB25F Gender Changer)	38.98
------------	--	-------

Telebyte RS232 to RS422 Serial Converter - Self-powered DB9 Connector

Adding an RS422 interface to a PC is now a snap. The TB253P serial converter does this for full duplex signals at data rates up to 19.2 KBPS, without AC or DC power. The unit features a DB9F connector, (allowing it to be plugged directly into any one of the PCs com ports) and an RJ11 (6x4) jack.

TB253P	Telebyte RS232 to RS422 Serial Converter, DB9F, Self-powered	69.95
--------	--	-------

Telebyte RS232 to Current Loop Converter

The TB65A is a small, versatile, RS232 to current loop converter for use with teletypes or computers providing local terminal input via a 20mA (or 60mA) current loop. The TB65A includes a wall-mounted transformer and internal power supply circuitry. Additionally the TB65A provides switch selection of all RS232 operating modes including: Half Duplex - Passive Loop, Half Duplex - Active Loop, Full Duplex - Passive Loop, and Full Duplex - Active Loop. This product will drive 20mA and accept 20mA or 60mA loop currents and operates from DC to 9.6 KBPS.

TB65A	Telebyte RS232 to Current Loop Converter (Includes Power Supply)	115.00
-------	--	--------

Telebyte RS232 Fiber Optic Line Drivers

The TB271 series of RS232 fiber optic line drivers provides maximum protection from ground currents and noise interference between equipment as well as increases operating distances to up to 2km. Three versions are available, supporting RS232 serial interfaces. The TB271 series achieves power from the transmit data line, whereas, the TB271A series has an external power supply (included). DB25M and DB25F versions available. Fiber optic connection utilizes dual ST connectors and duplex 62.5/125 multimode cabling.

TB271M	Telebyte RS232 Fiber Line Driver, DB25M, Self Powered	139.00
TB271F	Telebyte RS232 Fiber Line Driver, DB25F, Self Powered	132.95
TB271AF	Telebyte RS232 Fiber Line Driver, DB25F, Externally Powered	139.00

Telebyte RS422 and RS485 Fiber Optic Line Drivers

Similar to the TB271 series except designed for RS422 and RS485. Both units utilize DB25F and dual fiber ST ports. For use with duplex Multimode Fiber Optic cabling.

TB272F	Telebyte RS422 Fiber Line Driver, DB25F, Externally Powered	149.00
TB276F	Telebyte RS485 Fiber Line Driver, DB25F, Externally Powered	149.00

Telebyte RS232 Fiber Optic Line Driver - Auto Powered

The TB9271 RS232 fiber optic auto powered line driver features a standard DB9 Female interface and Dual ST style fiber connectors. It can be installed in applications requiring very high data transmission rates, offers resistance to Electromagnetic Interference (EMI) and isolation from lightning-induced current surges and ground loops. The unit employs an RS232 data interface, can achieve 56Kbps asynchronously and operates in either half or full duplex modes over dual fibers up to 2km in length.

TB9271	Telebyte RS232 Fiber Optic Auto Powered Line Driver	139.00
--------	---	--------

Telebyte RS232, RS422 or RS485 Fiber Optic Modem - DIN Rail Mountable


The model TB8277 is a unique asynchronous fiber optic modem whose optical interface can operate in either point to point or ring (daisy chain) configurations and whose electrical interface can also operate in point to point or multi-drop configurations depending on the user selected interface. The electrical interface is switch selectable between RS232, RS422 and RS485. The TB8277 is supplied with a power cord for the DC input. An optional AC power adapter is available for installations where 12 VDC is not accessible.

TB8277	Telebyte DIN Rail Fiber Optic Media	229.00
TB8277-110PSU	Telebyte Optional 110 VAC Power Supply	13.95

Telebyte Single mode to Multimode Fiber Converter

The TB279 provides transparent conversion between fiber optic devices utilizing multimode fiber and those with single mode fiber. Features of the TB279 include the ability to operate from DC to 2.5 Mbps. This allows a variety of applications to take advantage of the transmission capability of the device and fiber cable. The TB279 is powered by a wall-mounted 12 VDC adapter.

TB279	Telebyte Single mode to Multimode Converter	699.00
-------	---	--------



View of the SC-232-A with terminal block adapter attached



SC-5VDC-PWR



ICC47B-015



TB253P



TB65A



TB271M



TB276F



TB9271



TB8277-110PSU



TB279



Item #	Description	List Price
RS232/422/485 Fiber Modem		
The FRM220-Serial/485 provides a fiber converter solution to extend asynchronous RS485 or RS232 transmission distance up to 2km over multimode fiber or up to 120km over single mode fiber. The converter is equipped with multiple interface circuits for connection to RS232 or RS485/422 (2 or 4 wire, full or half duplex). The FRM220-Serial secures data transmission over EMI resistant fiber at speeds up to 460kbps for RS232 or up to 1024kbps for RS485/422. When the FRM220-Serial/485 card is placed in the FRM220 rack with SNMP management, in-band management allows viewing the card and remote converter's status, type, version, fiber link status, data link status and alarms. Both card and remote can be configured to enable or disable the port, reset the port and set the interface type.		
FRM220-SERIAL-ST002	RS232/423/422/485 Fiber Modem	249.98

ICP DAS USB to RS232/422/485 Converter

The CVTR-I-7561 is a rugged yet cost-effective module that is used for transferring serial data over USB. This converter allows you to connect your serial devices to systems using a USB interface such as a PC. The CVTR-I-7561 contains a Self Tuner chip, which auto-tunes the baud rate and data format to the RS485 network. CVTR-I-7561 module derives its power from the USB port and does not require an external power supply. This versatile converter also features a high-speed 115.2 Kb/s transmission rate, and supports a multitude of O.S. independent RS232/422/485 Ports. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**

CVTR-I-7561	ICP DAS USB to RS232/422/485 Converter	125.00
-------------	--	--------

ICP DAS RS232 to RS485 Protocol Converter

The CVTR-I-7520 seamlessly converts the RS232 protocol to RS485 all in one rugged, economical package. Features include auto switching baud rate of 300~115,200 BPS and a Self Tuner chip, which auto-tunes the baud rate and data format to the RS485 network. This converter also supports 256 modules max. in one RS485 network without repeater and 2,048 modules max. in one RS485 network with a repeater. Power supply sold separately. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**

CVTR-I-7520	ICP DAS RS232 to RS485 Protocol Converter	85.00
-------------	---	-------

ICP DAS RS232 to CAN Protocol Converter

The CVTR-I-7530 offers an economical yet rugged solution for converting RS232 to CAN protocol. Features include maximum transmission speeds up to 1Mbps for CAN and 115.2Kbps for RS232 as well as support for both CAN 2.0A and CAN 2.0B standards. This converter can be easily mounted on a DIN rail and features DB9 connectors. Power supply sold separately. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**

CVTR-I-7530	ICP DAS RS232 to CAN Protocol Converter	295.00
-------------	---	--------

ICP DAS USA RS232/RS485 Wireless Modem

The ICP DAS USA SST-2450 is a spread spectrum radio modem with an RS232/RS485 interface port. It is designed for data acquisition and control applications between host and remote sensors. The SST-2450 is also useful for those applications where hard wiring equipment is hard or impossible. The SST-2450 can be used not only in peer to peer mode but also in a multi-point architecture. Based on direct sequence spread spectrum and RF technology operating in ISM bands, frequency range is 2410.496MHz~2471.936MHz and the Channel Spacing is 4.096MHz. The SST-2450 is configured via a software utility included with the product. Antenna options are available for extended range applications. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**

SST-2450	ICP DAS USA RS232/RS485 Wireless Modem	569.00
----------	--	--------

EtherWAN Single Port Device Servers

EtherWAN offers both Industrial and Hardened versions of its popular single port RS232/422/485 to Ethernet Device Servers for converting legacy RS232/422/485 to Ethernet. The SE5101-00B equipped with 2KV optical isolation protection and 15KV ESD surge protection of serial interfaces and can be used in temperatures ranges from -10°C to 60°C (14°F to 140°F). The SE6101-00B is designed for harsh environments and operates within temperature ranges of -34°C to 75°C (-29.2°F to 167°F). **As an authorized EtherWan reseller, we can bid on RFQs for any EtherWan part numbers. Contact us to request a non-obligatory quote.**

SE5101-00B	EtherWAN Device Server 1 -10/100TX to 1 -RS232/422/485 (-10 to +60C)	159.00
SE6101-00B	EtherWAN Device Server 1 -10/100TX to 1 -RS232/422/485 (-34 to +75C)	329.00

Passport Networks ESport RS232/422/485 to Ethernet Device Servers

The ESport-10x Ethernet device servers connect RS232/422/485 serial devices to a 10/100 Ethernet LAN/WAN providing a reliable communications connection. The ESport-10x Windows driver installs virtual COM ports in the device manager of the operating system. The ESP101 features one RS232/422/485 DB9M port and one RJ45 10/100Ethernet port. The ESP102 features a single RJ45 10/100 Ethernet port and two DB9M ports, one port supports RS232/422/485 and the other only supports RS232. The ESP104 ships with its own external power supply (do not use the ESP-PWR power supply with the ESP104). These products can be powered by an external DC power supply or by an optional 9 VDC power adapter. An optional DIN Rail mounting kit is sold separately. Includes a 1-year manufacturer's warranty. **As an authorized Passport Networks reseller, we can bid on RFQs for any Passport Networks part numbers. Contact us to request a non-obligatory quote.**

ESP101	Passport Networks Single Port DB9 RS232/422/485 to RJ45 10/100 Device Server	125.00
ESP102	Passport Networks Dual Port DB9 RS232/422/485 to RJ45 10/100 Device Server	169.00
ESP104	Passport Networks Four Port DB9 RS232/422/485 to RJ45 10/100 Device Server	415.00
ESP-PWR	Passport Networks 9 VDC 500mA Power Adapter	10.00
PPN-12VDC-PWR	Passport Networks 12 VDC DIN Rail Power Supply	60.00
DK-35A	Passport Networks DIN Rail Mounting Kit (35 mm)	5.00

LAVA Ethernet-to-Serial 4 Port Device Server

The ES4-232 is ideal for POS systems, security systems, industrial automation, building automation, or any application using RS232 devices. The Lava ES4-232, four-port RS232 device server, provides four serial ports that are network-enabled, simple to install, configure and control. Any serial device can send its information to the ES4-232, which then places that information on the Ethernet network. The serial ports support 115.2 kbps throughput rates each. Additionally, each ES4-232 Includes Lava Ether Link Manager software that makes this the easiest device in its category to install and use. By utilizing the ES4-232 one PC is capable of managing hundreds of serial ports, even remotely. **As an authorized LAVA reseller, we can bid on RFQs for any LAVA part numbers. Contact us to request a non-obligatory quote.**


ES4-232	LAVA Ethernet-to-Serial 4 Port Device Server	269.00
---------	--	--------

Item #	Description	List Price
--------	-------------	------------

ICP DAS Remote Ethernet I/O Modules

The ICP DAS ET-7000 are remote web-based Ethernet I/O modules that feature a built-in web server. It allows configuration, I/O monitoring and I/O control through a regular web browser. Remote control is as easy as surfing the Internet. No more programming or HTML skills are needed; users can create dynamic and attractive web pages for I/O monitoring and I/O control. They support Modbus/TCP protocol for seamless integration to SCADA software. The ET-7000 series offers easy and safe access for users anytime and anywhere. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**


ICP-ET-7017	ICP DAS 8-Channel Analog Input with High Voltage Protection and 4-Channel Isolated Output Module	315.00
ICP-ET-7026	ICP DAS 6-Channel Analog Input, 2 Ch Analog Output, 2 Ch Digital Input and 2 Ch Digital Output Ethernet I/O Module	455.00
ICP-ET-7067	ICP DAS 8-Channel Power Relay Output Module	258.00

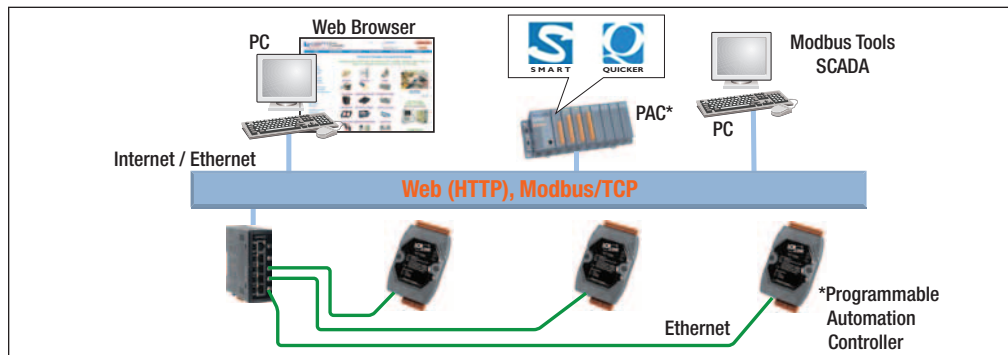

ICP DAS Power over Ethernet I/O Modules

The PET-7000 series is a family of Internet/Ethernet data acquisition and control modules that support Modbus TCP protocols. They are Ethernet remote I/O with a built-in web server for configuration, I/O data monitoring and control via a regular web browser. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**


ICP-PET-7005	ICP DAS 8-Channel Thermistor Input and 4-Channel Isolated Digital Output PoE Module	470.00
ICP-PET-7017-10	ICP DAS 10/20-Channel Analog Input Module with High Voltage Protection PoE Module	425.00
ICP-PET-7018Z	ICP DAS 10-Channel Thermocouple Input With High Voltage Protection and 6-Channel Isolated Digital Output PoE Module	538.00

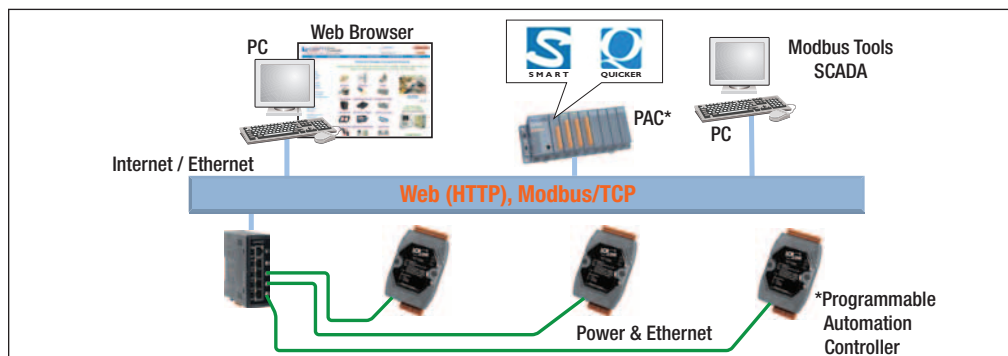

ICP DAS TouchPad Controller

TouchPAD is a tiny touch screen controller HMI which is designed for building and home automation. TPD-28X-W is equipped with a high resolution TFT color touch screen and fits in regular electrical wall-mount outlets. It can be easily integrated with I/O modules and has a beautiful, flexible and user-defined picture display. It is the best choice for upgrading mechanical switches to intelligent control pads. TouchPad comes with Ladder Designer Software For PLC users and a C/C++ language development environment for C/C++ Programmers. You can quickly and easily develop your programs with the development tools provided. **As an authorized ICP DAS reseller, we can bid on RFQs for any ICP DAS part numbers. Contact us to request a non-obligatory quote.**

ICP-TPD-280	ICP DAS Compact 2.8" Touch Screen PLC Controller with High Resolution TFT Color Touch Screen (RS485)	185.00
ICP-TPD-283	ICP DAS Compact 2.8" Touch Screen PLC Controller with High Resolution TFT Color Touch Screen (PoE)	185.00
ICP-TPD-430	ICP DAS 4.3" Touch Screen PLC Controller with High Resolution TFT Color Touch Screen (RS485)	408.00

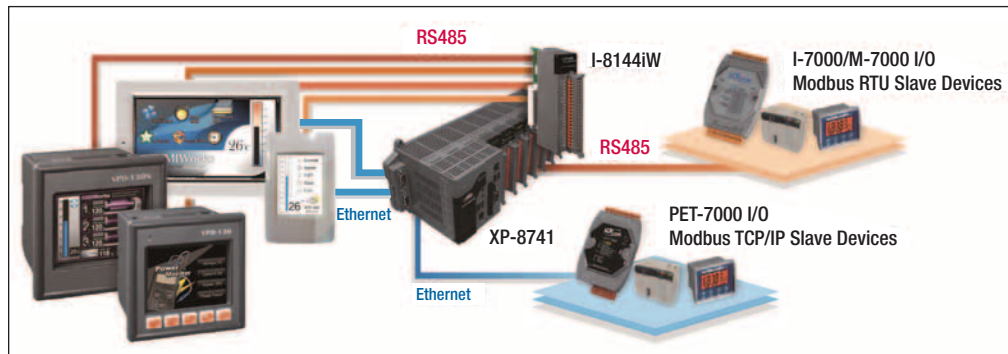

ICP-ET-7017



ICP-ET-7026



ICP-ET-7067



ICP-PET-7005



ICP-PET-7018Z



ICP-TPD-280



ICP-TPD-430



Cable and Network Test Equipment is vital to the uptime of any datacom system. Reports have shown that up to 70% of network downtime can be traced to the physical layer or a cable. By implementing basic go-no-go cable testers as well as more advanced network test and troubleshooting tools, network downtime can be greatly reduced. L-com offers testers for coax, Cat5e (or better), fiber optic, and RJ11/12 cabling and power. Additionally we offer environmental testers to measure light, sound and temperature.

Network Cable Testing Terms

NEXT: Near End Cross Talk. A signal that crosses between twisted pairs or between conductors. NEXT is measured at the transmission end (near end). Measured in dB, failures for this measurement are often caused by termination problems.

FEXT: Far End Cross Talk. Crosstalk that is measured on the conductors that are not being used for transmission at the receiver or far end of the transmission. Measured in dB, failures for this measurement are often caused by termination problems.

Propagation Delay Skew: Used to define the difference in signal speed between the fastest and slowest pair within a cable. It can also define the delay within an individual pair. Must be <45ns for a 4-pair horizontal cable.

Impedance: Measure of the total opposition a circuit offers to the flow of alternating current. Target impedance for UTP and STP cable is 100 Ohms. This can be affected by the twist of the conductors along with the thickness of the insulation around the

conductors. Return loss failures are often caused by cable impedance problems.


Return Loss: The ratio of reflected power to inserted power. It is the measure of the signal reflections occurring along a network cable system. It is often caused by imperfections in the cable conductors, impedance mismatches or bad contacts in a plug or jack.

Network Channel Testing

Network Channel Testing is a method used to verify performance from the workstation to the hub/switch including patch cords. Channel Testing is not accurate for individual patch cords. Both installers and IT professionals conduct this type of testing to insure that the entire cable system is capable of handling network traffic. Channel Testing differs from Permanent Link Testing in that it includes the patch cords on both ends of the installation. Often, patch cords are overlooked as the cause of network failures.


Permanent Link Testing

Permanent Link Testing is the preferred method used by installers to certify a cable installation at a customer site. This type of testing verifies the installation by measuring many factors such as cable lengths, NEXT, FEXT and Return Loss. Several certification testers exist on the market including Fluke Networks DTX-1800 series products. This type of tester features a Permanent Link adapter that connects from a workstation outlet to the telecom closet outlet.

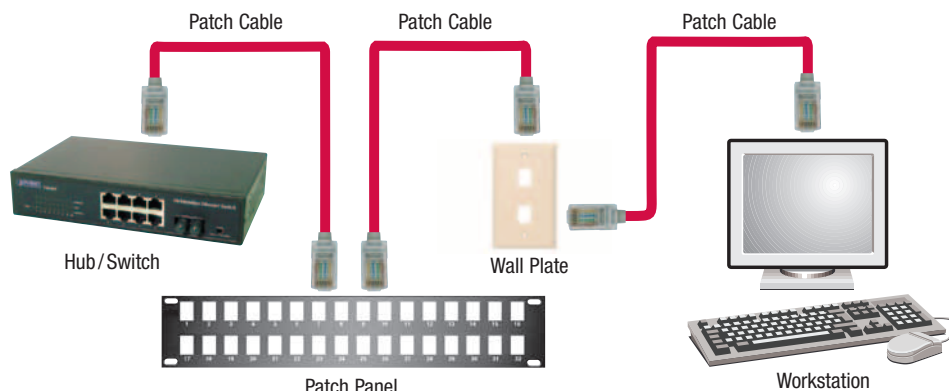

Continuity Testing

Continuity Testing is the most basic form of testing conducted on cables. These types of testers look for opens, shorts or crossed connections. For Ethernet, this type of testing does not confirm network transmission capability. The most common mistake in cable pin-out is an EIA568 A to B cross. A simple continuity tester such as the TL-N044-000-R, can easily find this error without the expense of a certification tester.

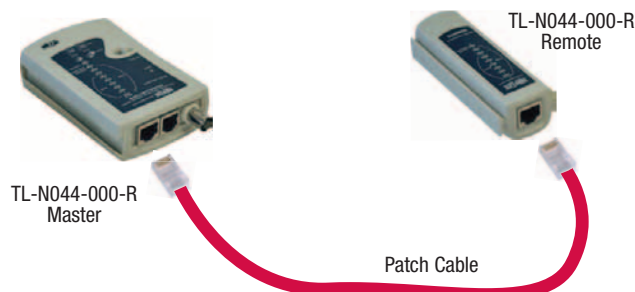

Wire Mapping /LAN and Cable Testing


If you require more than just a standard continuity test you might consider a Wire Mapping tester like the AEMC-CA7028. With a tester like this you would get a more detailed report of how your cable is wired / paired. All faults and setting info is displayed textually as well as graphically. But beyond that with TDR technology it can determine if the fault lies at the near end or remote end of the cable or if it is some-where



in between. It can even indicate the distance to the fault as well as determine the length of the cable or cable run being tested.



Using the TL-N044-000-R for checking premise wiring

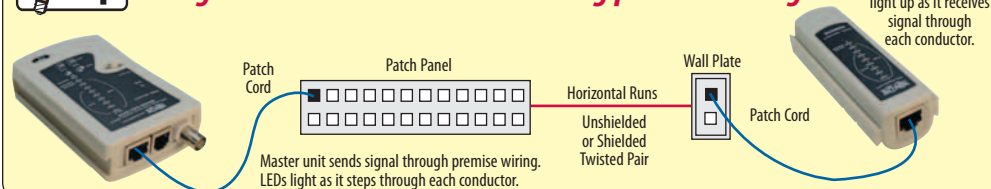

Item #	Description	List Price
--------	-------------	------------

Tripp Lite Multi-Function Network/Phone/Coax Cable Tester

Tripp Lite's Multi-Function Network Cable Tester allows you to test wiring continuity for Cat5/5e, Cat6, RJ11/12 telephone cord sets as well as 10Base2, RF and CATV coax cable assemblies. It can help identify miswired terminations, shorts and open circuits. It features a two piece design, a main unit and a remote unit. The remote unit is designed to slide onto the side of the main unit but can be removed when testing premise cabling where the two ends of the cable being tested are not close by. The Main unit features (1) Shielded RJ45 (8x8) Jack, (1) Shielded RJ11/12 (6x6) Jack and (1) Female BNC. The Remote unit features (1) Shielded RJ45 (8x8) Jack on one side of the unit and (1) Shielded RJ11/12 (6x6) Jack on the other. The tester also comes with (1) BNC Terminator with a Green LED on the end to Test BNC Coax assemblies. The kit also includes (2) BNC Male to F-Type Female adapters to allow for the testing of RG59/RG6 CATV Coax. A Storage pouch is provided for safe storage of the tester and accessories when not in use. Power supplied by 9V battery (not included). Comes with a Tripp Lite Lifetime Warranty. **As an authorized Tripp Lite reseller we can bid on RFQs for any Tripp Lite part numbers. Contact us to request a non-obligatory quote.**

TL-N044-000-R	Tripp Lite Multi-Function Network/Phone/Coax Cable Tester	47.98
---------------	---	-------

Pyle 13 Plug Pro Audio Cable Tester

The Pyle PCT40 gives you a simple and easy way to make sure your audio cables are working properly. The unit supports nearly all cable types used in the sound recording industry, providing you with an all-in-one solution to help identify cable continuity issues in your audio set-up. Supports 13 interface types that include USB Type A, TRS Jacks (which can also be used for testing TS), 3 and 5 Pin XLR, Speakon, RCA, RJ45 and more (see chart below for full listing). The Tester features a simple intuitive design, whereby you plug in both ends of the cable you are testing and you turn the selector knob to the different numbered setting to check each conductor individually (tester checks up to 8 conductors). Each numbered setting features two LEDs, one checks the continuity of the conductor the other verifies the ground. Power supplied by 9V battery (not included).

Supports the following connector interfaces:	
• 8 Pin Speakon (speaker twist connector)	• 3 Pin Din
• USB Type A	• 5 Pin Din
• RJ45	• 7 Pin Din
• Banana Plug	• 8 Pin Din
• 1/4" (6.3mm) TRS	• 5 Pin XLR
• RCA Phono	• 3 Pin XLR
	• 4 Pin Speakon (speaker twist connector)

PCT40	Pyle 13 Plug Pro Audio Cable Tester	42.98
-------	-------------------------------------	-------

Senko Fiber Visual Fault Locator

The Senko AFT-G-FC Fiber Visual Fault locator features a robust and handy design. It emits a 650nm visible red light in either continuous or pulse mode to allow for the quick inspection of fiber assemblies to confirm light path. Can also be used to visually trace fiber optic cable runs within a building.

SK-AFT-G-FC	Senko Fiber Visual Fault Locator with Universal 2.5mm Connection	119.98
SK-AFT-G-CAC	Senko Universal 2.5mm to 1.25mm Adapter for Fiber Visual Fault Locator	34.98

CoolMax ATX Power Supply Tester with LCD Display

The CoolMax ATX Power Supply Tester provides a simple and easy way to verify that your computer power supply is providing the correct power output. The Tester features a 1.7 inch x 0.8 inch illuminated LCD display that provides voltage information from the power supply's 20 or 24 pin power connector. The LCD display & readings are turned on by holding down the momentary on/off switch found on the face of the tester. The display provides 7 power readouts (+5V, +12V1, +3.3V, -12V, +12V2, 5VSB & PG). It also features an audible alarm alerting you to low voltage, over voltage or no voltage on one of these readings. The Tester also features 3 voltage LEDs for the other connector interfaces (15 pin SATA) (4 pin Molex) (4 pin Floppy) (6/8 pin PCIe) and (4/8 pin CPU) the voltage LEDs light up when the correct voltage is present. The tester's small compact design makes it an ideal tool to keep with your PC repair/maintenance kit, (no batteries required, power provided by power supply being tested).

CM-PS-228	CoolMax ATX Power Supply Tester with LCD Display	24.98
-----------	--	-------

PLANET IEEE 802.3af/at Power over Ethernet (PoE) Tester

PLANET's POE-TESTER is an easy to use PoE diagnostic adapter for network installers, company MIS and even home users to quickly identify the existence of Power over Ethernet on their network. It is designed to detect if IEEE 802.3af/at PoE voltage is running over your UTP cable, and you can use a short patch cord to test PoE ports on devices directly. The POE-TESTER has two simple LEDs one orange & one green that light up to identify 3 different possible PoE states, Mid-span 802.3af/at, End-span 802.3af/at as well as detecting a 4-pair 60-Watt PoE Injector. **As an authorized PLANET reseller we can bid on RFQs for any PLANET part numbers. Contact us to request a non-obligatory quote.**

POE-TESTER	PLANET IEEE 802.3af/at Power over Ethernet Tester	20.63
------------	---	-------

Microsemi PowerDsine Deluxe IEEE 802.3af/at Power over Ethernet (PoE) Tester

Microsemi's PD-AFAT-TESTER is a compact designed tester specifically tailored for system integrators and installers. The plug and play design makes it simple to use. The PD-AFAT-TESTER has two bi-color LEDs allowing it to display up to 6 possible PoE states which identifies the type of Power Sourcing Equipment Endspan (Data) or Midspan (Spare) on your network with the 2-pair states indicating 30W and the 4-pairs 60W.

- 802.3af (Over Spare)
- 802.3at (Over Spare)
- 802.3af (4 Pairs)
- 802.3af (Over Data)
- 802.3at (Over Data)
- 802.3at (4 Pairs)

PD-AFAT-TESTER	Microsemi PowerDsine Deluxe IEEE 802.3af/at PoE Tester	29.98
----------------	--	-------



Test Shielded RJ45



TL-N044-000-R




Carrying Case for TL-N044-000-R



PCT40



SK-AFT-G-FC



SK-AFT-G-CAC




CM-PS-228



POE-TESTER



PD-AFAT-TESTER



PTNX1

PTNX2




PTNX2-CABLE




PTNX8-CT



MULTI-TEST



UMATS



EC-LMTJ



AEMC-CA811

AEMC-CA832



AEMC-CA879

Item #	Description	List Price
--------	-------------	------------

Fluke Pocket Toner® NX1

Test for continuity and short circuits on coaxial cables in one easy step. Basic professional testing does not get any more compact and simple as PTNX1. This tool features lightweight aluminum construction, standard AAA battery, and new dual buzzers that audibly indicate continuity at both ends of the test cable. Like all Pocket Toner® NX test tools, the PTNX1 is 100% low voltage protected so connecting it to live low voltage systems will not damage the tool. **As an authorized Fluke reseller, we can bid on RFQs for any Fluke part numbers. Contact us to request a non-obligatory quote.**

PTNX1	Fluke Pocket Toner NX1	33.00
-------	------------------------	-------

Fluke Pocket Toner® NX2

The individual PTNX2 is for the technician that works primarily with coaxial cable that wants a powerful but super-compact tool to fit in his or her pocket. In addition to testing for continuity and short circuits PTNX2 is packed with advanced features like indication of AC or DC voltage, 50-75 Ohm terminators and auto shut-off to conserve battery life. PTNX2 instantly displays all test results on an easy to read 8-segment LED display as well as giving audible feedback at both ends of the test cable. Like all Pocket Toner® NX test tools, the NX2 is 100% low voltage protected so connecting it to live low voltage systems will not damage the tool. **As an authorized Fluke reseller, we can bid on RFQs for any Fluke part numbers. Contact us to request a non-obligatory quote.**

PTNX2	Fluke Pocket Toner NX2	43.00
-------	------------------------	-------

Fluke Pocket Toner® Cable Test Kits

Fluke PTNX series coax toners are unquestionably the ideal primary devices for testing the installation of coax cable. Test for continuity and short circuits on coaxial cables in one easy step. Basic professional coaxial testing does not get any more compact and simple as Fluke PTNX series. Fluke offers a wide variety of test kits to choose from. For detailed information on each kit, please refer to L-com.com. **As an authorized Fluke reseller, we can bid on RFQs for any Fluke part numbers. Contact us to request a non-obligatory quote.**

PTNX2-CABLE	Fluke PTNX2 Cable Test Kit	55.00
PTNX2-DLX	Fluke PTNX2 Deluxe Test Kit	93.00
PTNX8-CABLE	Fluke PTNX8 Cable Test Kit	89.00
PTNX8-DLX	Fluke PTNX8 Deluxe Test Kit	123.00
PTNX8-CT	Fluke Cable and Telephone Test Kit	103.00
PTNX8-VV-PRO	Fluke Voice/Video Test Kit	143.00

PC Cable Tester Pro ATA

This flexible cable tester will identify opens, shorts, miswiring and continuity on almost all popular PC cable types. The PC cable tester Pro ATA can test the following cable types: DB25 (M/F), DB9 (M/F), HDB15 (M/F), DB15 (M/F), BNC (F), RJ45, Centronics 36 (F), USB (A and B), ATA and Firewire. This tester is a must for installers and IT professionals in any industry.

MULTI-TEST	PC Cable Tester Pro ATA	139.00
------------	-------------------------	--------

V.35 Universal Modify and Test Set

The Universal Modify and Test Set (UMATS) is the ultimate tool for the data communication specialist or engineer's tool bag. The UMATS can be battery or line powered and supports most current WAN communication interface standards. More than just a breakout box, a bank of level shifters allows converting between any pair of interfaces: V.35 can be converted to RS232, RS422 to RS232, or RS530 to V.35, etc. Each level shifter is also connected to a tri-state LED to allow convenient monitoring of signals levels.

UMATS	V.35 Universal Modify and Test Set	599.00
-------	------------------------------------	--------

Inline Tester, RJ12 (6x6) M-F with Test LEDs and Contact Points

Use with 2 or 3 pair, RJ11/12 lines. Copper contacts have an angled edge to prevent alligator clips from falling off. Wire color coded for easy identification. Three 2-color LEDs identify activity. Complete with modular jack on the end.

EC-LMTJ	Test Adapter, 3 Pair Modular	9.95
---------	------------------------------	------

Environmental Testers

AEMC CA811 Lightmeter (20fc, 200fc, 2kfc, 20kfc) (20lux, 200lux, 2klux, 20klux)

The model CA811 Lightmeter is a portable, easy-to-use instrument which features optical sensors that are designed to match the response of the human eye, making them ideal instruments for workspace analysis and planning. The ergonomically designed case, large display and intuitive function selection make this instrument the right choice for any application. The Lightmeter model CA811 is designed for simple one-hand operation. It provides selectable lux or foot candle units for display and features a 3-1/2 digit backlit LCD and HOLD function. The model CA811 offers a MAX function. One 9V Alkaline battery is included. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA811	AEMC Model CA811 Lightmeter (20fc, 200fc, 2kfc, 20kfc) (20lux, 200lux, 2klux, 20klux)	119.00
------------	---	--------

AEMC CA832 Sound Level Meter (35db to 80dB) (50db to 100dB) (80db to 130dB)

The model CA832 Sound Level Meter is designed to assess sound ambiances or nuisances in accordance with international safety and quality standards. It complies with standard IEC 651. It is a portable, compact instrument with a 2000-count backlit LCD. It is designed for simple, one-hand operation and may be fitted on a tripod for long duration measurements. It features two weighting curves A and C for measurement integrating the sensitivity of the human ear according to sound frequency. Curve A is the general-purpose curve in an industrial environment and C is more suited in presence of low frequency sounds. Also, mode "F" (fast response time) corresponds to the response time of the ear. Mode "S" (slow response time) will be used to obtain a uniform reading when the sound signal level shows fluctuations. One 9V Alkaline battery is included. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA832	AEMC Model CA832 Sound Level Meter (35db to 80dB), (50db to 100dB), (80db to 130dB)	199.00
------------	---	--------

AEMC CA879 Infrared Thermometer (-58°F to +1,022°F) (-50°C to +550°C)

The model CA879 Infrared Thermometer is a non-contact temperature measuring instrument. It provides precision measurement with its laser target feature. To measure the temperature of an object, simply point the gun at the surface of the object and the temperature will appear on the digital display. The thermometer has an automatic shut-off feature. Shut-off will occur approximately 10 seconds after the trigger is released. One 9V Alkaline battery is included. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA879	AEMC Model CA879 Infrared Thermometer (-58°F to +1,022°F) (-50°C to +550°C)	149.00
------------	---	--------

Item #	Description	List Price
--------	-------------	------------

AEMC CA7024 TDR Fault Mapper

The model CA7024 Fault Mapper is a hand-held, alpha-numeric, TDR (Time Domain Reflectometer) Cable Length Meter and Fault Locator, designed to measure the length of electrical and communication cables. It can indicate the distance to a fault in the cable (open or short), given access to only one end of a two or more conductor cable. By incorporating fast-edge step TDR technology, the CA7024 measures cable length and indicates the distance to open or short circuit faults to a range of 6000ft (2000m), on virtually any type of cable. The CA7024 indicates the cable length or fault distance and description alpha-numerically on a 128 x 64 graphical LCD. Includes soft carrying case, BNC pigtail cable with alligator clips, four 1.5V AA batteries and user manual. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA7024	AEMC Model CA7024 TDR Fault Mapper	525.00
-------------	------------------------------------	--------

AEMC CA7027 Fault Mapper Pro® Telephone Cable Tester/Graphical TDR

The model CA7027 Fault Mapper Pro® is a hand-held graphical TDR (Time Domain Reflectometer) designed for identifying and locating faults on power and communication cables, given access to one end only. The Fault Mapper Pro® measures cable length and indicates the length and distance to cable faults to a range of 9ft (3m) to 19,000ft (6000m) on virtually any type of cable. It injects a series of pulses into the cable under test. The velocity at which the pulses travel is determined by the type of cable, which is known as the Velocity of Propagation (Vp) of the cable. The Velocity of Propagation (Vp) is adjustable between 1% and 99% enabling accurate calibration to the cable under test. The Vp value is expressed as a percentage of the speed of light (e.g. 67% or ft/mtrs/micro-second), this value will vary according to the type of cable under test. The Fault Mapper Pro® can accept user selectable values between 1 and 99% (or the equivalent value in feet or meters per micro-second). Based on the selected Vp and the time taken for the pulses to travel through the cable, a reflection profile of the cable under test is displayed. An adjustable cursor assists in locating faults and termination. The Fault Mapper Pro® incorporates an oscillating tone tracer, which is detectable with a standard tone tracer, for use in the tracing and identification of cable pairs. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA7027	AEMC Model CA7027 Fault Mapper Pro (Telephone Cable Tester/Graphical TDR)	995.00
-------------	---	--------

AEMC CA7028 Wire Mapper Pro LAN Cable Tester

The model CA7028 Wire Mapper Pro is a hand-held structured cable mapping and troubleshooting tester designed for use on UTP, STP, FTP and SSTP cabling equipped with RJ45 connectors and wired to either TIA568A/B (ISO 11801 and EN 50137), USOC or ISDN specifications. It detects open circuit pairs, shorts, crossed wires, crossed pairs, reversed pairs, split pairs and shield faults. The CA7028 has the ability to measure and indicate the length of the cable under test, using a Vp (Velocity of Propagation) set by the user, from a built-in library or manually. It will measure and report the length of all four pairs of wires in the cable under test. It also generates an audible tone that is transmitted into all four pairs on the cable under test. Includes soft carrying case, remote ID (#1), two patch cords, four 1.5V AA batteries and user manual. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-CA7028	AEMC Model CA7028 Wire Mapper Pro LAN Cable Tester	525.00
-------------	--	--------

AEMC Tone Receiver / Cable Tracer Model TR03

AEMC model TR03 Tone Receiver / Cable Tracer is a small, hand-held tracer that will aid in the identification of tone carrying wires without piercing their insulation. It has a self-contained amplifier and a rugged, moisture resistant speaker. When used in conjunction with the tone transmitter function of the models CA7024, CA7026 or CA7028, wire tracing and locating is quick and efficient. One button turns the unit on and while it is depressed, activates the receiver. A volume control allows you to set the speaker loudness to a desirable level. An audio output jack facilitates the use of an optional commercially available ear piece which inhibits the model TR03's internal speaker. This provides quiet operation in office environments while allowing the operator to hear the signal clearly. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-TR03	AEMC Model TR03 Tone Receiver / Cable Tracer	55.00
-----------	--	-------

AEMC 5233 5000/6000 - Count Digital Multimeters

The model 5233 is a rugged, economical TRMS digital multimeter with a function for non-electrical contact testing (NCV) for detecting live electrical circuits. This multimeter is designed for safety: IEC61010, 600V CAT IV. The multimeter model 5233 provides a Volt, Ohm, Continuity, Diode, Capacitance, Frequency, Duty Cycle and Ammeter function, as well as an AC voltmeter with low input impedance capable of finding ghost voltages by adding a burden to the circuit. It can measure up to 10 Amps directly and can measure temperature in both °C or °F using K-type thermocouples. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-5233	AEMC Model 5233 Digital Multimeter (TRMS, 6000-cts, V, A, AC/DC, CAP, Ohm, T, NCV)	99.00
-----------	--	-------

AEMC 502 Clamp on Meter

The model 502 Clamp-on Meter is a general-purpose professional clamp-on. A strong mechanical case design, quality materials, full ranges and compliance to international safety and quality standards ensure a professional and reliable tool. The model 502 is a true RMS clamp-on which provides RMS measurements for measuring in non-linear electrical environments. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-502	AEMC Model 502 Clamp-on Meter (TRMS, 400Aac, 600V AC/DC, Ohms, Continuity)	119.00
----------	--	--------

AEMC AX502 DC Power Supplies / Generators

The model AX502 offers dual 30V outputs. It provides the ability to display both voltage and current for each output. The model AX502 offers a unique master/slave tracking arrangement whereby the ratio between the master and slave can be setup on the fly as needed during the test. Adjusting the master voltage causes the slave to track. Adjusting the slave voltage causes the ratio from master to slave to change accordingly. It offers a coarse and fine voltage adjustment as well as a current limiting adjustment. It is built to provide many years of reliable, precise, easy-to-use operation and will be a welcome addition to any lab, test bench or production line. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-AX502	AEMC Model AX502 DC Power Supply (Dual outputs, 0 to 2.5A; 0 to 30Vdc)	829.00
------------	--	--------

AEMC NC1 Non-Contact AC Voltage Detector

The model NC1 offers a simple and safe way to detect the presence of live AC current on a line without the need to expose the wiring. For indoor use only. Includes 2 1.5v AAA batteries. **As an authorized AEMC reseller, we can bid on RFQs for any AEMC part numbers. Contact us to request a non-obligatory quote.**

AEMC-NC1	AEMC Model NC-1 Non-Contact AC Voltage Detector (100 to 240V AC 50/60Hz)	9.95
----------	--	------

Triplett Outlet/GFCI Tester 110V

The Triplett Outlet/GFCI Tester examines GFCI for proper operation. It detects faulty wiring in 120V three-wire receptacles. It detects open grounds and neutrals as well as reversed hot/ground connections. Ideal for use on 100 to 125VAC receptacles.

TP-GFCI-TSTR	Triplett Model TP-GFCI-TSTR Outlet/GFCI Tester 110V	7.95
--------------	---	------



AEMC-CA7024

AEMC-CA7027



AEMC-CA7028



AEMC-TR03



AEMC-5233



AEMC-502



AEMC-AX502



AEMC-NC1



TP-GFCI-TSTR



FOM120

FOS420



FOS430

AF-OLK52N-Q



AF-OLK51N-SM



TBX51MM



FTK51POF



SL-Z07-88-013P



AF-DI-1000

Item #	Description	List Price
--------	-------------	------------

Advanced Fiber Solutions Fiber Optic Power Meter for Multimode and Single mode Cabling

The FOM120 is a general-purpose power meter suitable for both premise and outside plant applications. This unit is ideal for measurement of optical power and optical loss/attenuations in a fiber optic network. The FOM120 meter is calibrated at the four most common industry standard wavelengths 850nm, 1300nm, 1310nm and 1550nm for both single mode and multimode transmitters. The 1mm Germanium detector offers a broad dynamic range of ~60dB which far exceeds the requirements of the majority of users.

FOM120	Advanced Fiber Solutions Fiber Optic Power Meter for Multimode and Single mode Cabling	425.00
--------	--	--------

Advanced Fiber Solutions Fiber Source for 850/1300nm Fiber Optic Cables

The FOS420 light source is for premises and campus cabling networks with multimode fiber, or single mode fibers under 5km. The ST connector outputs can be adapted to any cable plant with hybrid adapters or hybrid cables. The FOS420 becomes a powerful low cost troubleshooting and maintenance tool when used with an Advanced Fiber Solutions FOM120 power meter.

FOS420	Advanced Fiber Solutions Fiber Source for 850/1300nm Fiber Optic Cables	595.00
--------	---	--------

Advanced Fiber Solutions Fiber Source for 1310/1550nm Fiber Optic Cables

The FOS430 laser source is designed for testing single mode fiber cabling in premise or outside plant environments where long wavelengths are used. The single output allows the user to test at both 1310nm and 1550nm without disconnecting and reconnecting the cable. When used with an Advanced Fiber Solutions FOM120 or FOM220 the FOS430 is ideal for testing insertion loss for single mode fiber optic cables and connectors.

FOS430	Advanced Fiber Solutions Fiber Source for 1310/1550nm Fiber Optic Cables	1495.00
--------	--	---------

Advanced Fiber Solutions Multimode/Single mode Fiber Optic Test Kit

The AF-OLK52N-Q fiber optic test kit allows users to quickly test multimode and single mode fiber cabling. The kit features a power meter and two light sources in a convenient carry case. The power meter supports 850/1300/1310/1490/1550/1625nm light sources and features snap on ST, FC and SC connections. The single mode laser source features the same snap on 3 connector interface as the power meter, while the multimode light source uses an ST connector. The multimode LED source provides 850/1300nm signal and the single mode Laser source provides 1310/1550nm signal. The InGaAs detector in the power meter offers a broad dynamic range of ~60dB which far exceeds the requirements of the majority of users.

AF-OLK52N-Q	Advanced Fiber Solutions Multimode/Single mode Fiber Optic Test Kit	1575.00
-------------	---	---------

Advanced Fiber Solutions Multimode or Single mode Fiber Optic Test Kits

The AF-OLK51N-MM multimode or AF-OLK51N-SM single mode fiber optic test kits feature a fiber optic power meter and a light source to quickly and economically test either multimode or single mode fiber cabling. The power meter supports 850/1300/1310/1490/1550/1625nm light sources and features snap on ST, FC and SC connections. The single mode laser source features the same snap on 3 connector interface as the power meter, while the multimode light source uses an ST connector. The multimode LED source provides 850/1300nm signal and the single mode Laser source provides 1310/1550nm signal. The InGaAs detector in the power meter offers a broad dynamic range of ~60dB which far exceeds the requirements for most applications. Includes a convenient carrying case.

AF-OLK51N-MM	Advanced Fiber Solutions Multimode Fiber Optic Test Kit	795.00
AF-OLK51N-SM	Advanced Fiber Solutions Single mode Fiber Optic Test Kit	1395.00

Advanced Fiber Solutions Fiber Optic Test Kit with Power Meter, Light Source and Tool Kit

The TBX51MM features the OS420 light source for use with premises and campus cabling networks that utilize multimode fiber, or single mode fibers under 5km. The ST connector outputs can be adapted to any cable plant with hybrid adapters or hybrid cables. The OS420 becomes a powerful low cost troubleshooting and maintenance tool when used with an Advanced Fiber Solutions OM120 (included with this kit) or OM220. Tool kit includes: safety glasses, sapphire scribe, armored tubing cutters, Kevlar scissors, needle nose pliers, rotary cable stripper, fiber optic stripper, buffer tube stripper, crimp tool, tweezers, polishing puck, polishing plate, continuity tester and a 100x microscope.

TBX51MM	Advanced Fiber Solutions Fiber Optic Test Kit with Power Meter, Light Source and Tool Kit	1595.00
---------	---	---------

Advanced Fiber Solutions Plastic Optical Fiber (POF) Test Kit

The Advanced Fiber Solutions POF test kit is the perfect, portable solution for testing plastic and glass optical fiber cables. The FTK51POF includes the OM110 power meter, which is designed for POF (plastic optical fiber) and short wavelength applications (visible and near infrared). It optimizes a silicon detector suitable for large core fibers. It is the ideal tool for working with shorter wavelengths used with glass, plastic or multimode fibers. Additionally, the FTK51POF features the OS417-MD source which houses a 665nm LED in a modular adapter, which makes it adaptable to any connector style.

FTK51POF	Advanced Fiber Solutions Plastic Optical Fiber Test Kit	899.00
----------	---	--------

SunLite Series Handheld OTDRs

The SunLite series handheld full color display Optical Time Domain Reflectometer (OTDR) is one of the most compact OTDRs on the market today and is ideal for handheld use and pocket transportation. The unit is light weight, weighing 1.5 lbs. (0.7 kg) and is extremely rugged with a thick protective rubber boot surrounding the outer case. It also offers a long battery life enabling the technician to continue testing up to ten hours. It is a full featured OTDR offering seven different models to choose from, with a dynamic range starting at 26dB going to 42dB. This series supports a wide range of cable plant applications ranging from local area networks to long haul applications. Along with industry leading dynamic range and dead zones, the unit offers a number of wavelength options for both single mode and multimode applications with dual, tri and quad models available. Wavelength options include 850nm, 1300nm, 1310nm, 1490nm, 1550nm and 1625nm.

SL-Z07-88-023P	SunLite Multimode OTDR 850/1300nm DR (SNR=1) 26/28dB DZ 1M/5M	4450.00
SL-Z07-88-013P	SunLite Single mode OTDR 1310/1550nm DR (SNR=1) 27/25dB DZ 2M/10M	3550.00
SL-Z07-88-015P	SunLite Single mode OTDR 1310/1550nm DR (SNR=1) 37/34dB DZ 1M/5M	3995.00
SL-Z07-88-022P	SunLite Single mode OTDR 1310/1550nm DR (SNR=1) 42/41dB DZ 1.5M/9M	7900.00
SL-Z07-88-017P	SunLite Single mode Tri Wave OTDR 1310/1490/1550nm DR (SNR=1) 37/36/34dB DZ 1M/5M	5995.00
SL-Z07-88-016P	SunLite Single mode Tri Wave OTDR 1310/1550/1625nm DR (SNR=1) 37/36/34dB DZ 1M/5M	5600.00
SL-Z07-88-029P	SunLite Quad (SM/MM) OTDR 1300/1310/1550nm DR (SNR=1) 35/32/26/28dB DZ 1M/5M	6995.00

Advanced Fiber Solutions USB 2.0 Fiber Scope

Advanced Fiber solutions latest introduction to the DR500 series line is the ferrule end fiber scope which enables the technician to view the end surface of the ferrule with an enhanced image of the fiber core and cladding. With the AF-DI-1000 scope attached to an OTDR via the side USB port the technician is able to determine the quality of the surface of the ferrule. The fiber scope enables the technician to see scratches, scrapes, dirt or any residual that might be on the ferrules surface area. If desired the fiber end image can be saved and downloaded to the PC for further analysis. The AF-DI-1000 scope includes a range of connectors and tips for a wide range of applications.

AF-DI-1000	Advanced Fiber Solutions DR500 Series USB 2.0 Fiber Scope (Includes tips for SC, FC & LC PC Polish connectors)	995.00
------------	--	--------

Item #	Description	List Price
--------	-------------	------------

Brady BMP21-PLUS Label Printers

The BMP™21-PLUS is the next generation of the popular BMP21 label printer. The ruggedized construction of this device is designed to hold up in rough environments. This printer can handle labels between .25 inches and .75 inches in width. The BMP21-PLUS-KIT1 includes a rechargeable Lithium-ion battery, an AC adapter, and a hard carrying case. **As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non obligatory quote.**

BMP21-PLUS	Brady BMP21-PLUS Portable Label Printer	99.00
BMP21-PLUS-KIT1	Brady BMP21-PLUS Portable Label Printer with Battery, Case and Charger	195.00

Brady BMP Series Label Printers

The BMP41, BMP51 and BMP71 label printers provide solutions for a large array of labeling needs, and also for a demanding environment where large quantities of labels are needed. The BMP41 is able to print up to 1 inch labels in width, the BMP51 up to 1.5 inches in width and the BMP71 up to 2 inches. As you move up the line, the speed at which these labels print also increases, up to 1.5 inches per second with the BMP71. **As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non obligatory quote.**

BMP41	Brady BMP41 Portable Label Printer	299.00
BMP41-MAGNET	Brady BMP41 Magnetic Mount	25.00
BMP51	Brady BMP51 Portable Label Printer	430.00
BMP71	Brady BMP71 Portable Label Printer	895.00

Brady TLS2200™ Premium Thermal Transfer Label Printers

The TLS2200 system offers the lightweight of a hand-held printer (2.75lbs), while providing the superior capabilities of thermal transfer printing. The Brady printer features a two-line liquid crystal display and produces smear proof, ultra clear print quality and faster output than most other printers on the market. Useful for printing barcodes as well as text and numbers with crystal clear accuracy on labels up to 2" (5.1cm) wide. This means you can now print labels for wire markers, patch panels, circuit boards, cable markers and more, faster and easier than ever before. Includes a 6-month manufacturer's warranty. **As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.**

TLS2200	Brady TLS2200 Premium Brady Thermal Transfer Printer	795.00
TLS2200-BP	Brady Replacement Battery	95.00
R6210	Brady Replacement Ribbon for TLS2200	25.00

Item #	Description	Qty/Uom	List Price
--------	-------------	---------	------------

Brady BMP21-PLUS Cable Labels

As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.

M21-375-499	Brady Nylon Cloth White, 0.375"W x 16"L (1cm W x 4.9m L)	1/Roll	22.00
M21-500-499	Brady Nylon Cloth White, 0.50"W x 16"L (1.3cm W x 4.9m L)	1/Roll	22.95
M21-750-499	Brady Nylon Cloth White, 0.75"W x 16"L (1.9cm W x 4.9m L)	1/Roll	24.00
M21-375-423	Brady Permanent Polyester White, 0.375"W x 21"L (1cm W x 6.4m L)	1/Roll	19.00
M21-500-423	Brady Permanent Polyester White, 0.50"W x 21"L (1.3cm W x 6.4m L)	1/Roll	18.50
M21-750-423	Brady Permanent Polyester White, 0.75"W x 21"L (1.9cm W x 6.4m L)	1/Roll	21.00

Brady BMP41/BMP51 Cable Labels

As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.

M-51-427	Brady Self Laminating Vinyl White, 1.00"W x 2.50"H (2.5cm W x 6.4cm H)	110/Roll	40.45
M-91-427	Brady Self Laminating Vinyl White, 1.00"W x 1.50"H (2.5cm W x 3.8cm H)	180/Roll	39.74
M-141-499	Brady Nylon Cloth White, 1.00"W x 1.00"H (2.5cm W x 2.5cm H)	90/Roll	23.90

Brady BMP71 Cable Labels

As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.

M71-17-351	Brady Tamper-resistant Vinyl White, 1.00"W x 0.50"H (2.5cm W x 1.3cm H)	500/Roll	51.95
M71-30-427-AW	Brady Self Laminating Vinyl, 1.50"W x 0.750"H (3.8cm W x 1.9cm H)	250/Roll	35.50
M71-31-351	Brady Tamper-resistant Vinyl White, 1.50"W x 1.00"H (3.8cm W x 2.5cm H)	250/Roll	39.95
M71-20-351	Brady Tamper-resistant Vinyl White, 2.00"W x 1.00"H (5.1cm W x 2.5cm H)	100/Roll	31.95

Brady TLS2200 Cable Labels

As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.

PTL19427	Brady Cable Labels, 1.0"L x 1.0"W x .375"H (2.5cm L x 2.5cm W x 1cm H)	250/Roll	29.95
PTL31427	Brady Cable Labels, 1.0"L x 1.5"W x .50"H (2.5cm L x 3.8cm W x 1.3cm H)	250/Roll	47.89
PTL21427	Brady Cable Labels, 1.0"L x 2.5"W x .75"H (2.5cm L x 6.4cm W x 1.9cm H)	100/Roll	24.95

Brady Specialty Use Labels

These labels, designed for use in the BMP41/BMP51 printers utilize materials that are helpful in less typical situations, such as warning signs, outdoor usage, or a variety of other tasks. Other configurations are also available. **As an authorized Brady reseller, we can bid on RFQs for any Brady part numbers. Contact us to request a non-obligatory quote.**

MC-500-595-OR-BK	Brady Indoor/Outdoor Labels 0.5"W x 25"L (1.3cm W x 7.6m L) Orange/Black	1/Roll	35.25
MC-500-584	Brady Reflective Tape Labels 0.5"W x 20"L (1.3cm W x 6.1m L) White/Black	1/Roll	56.81
M-125-075-342	Brady Permasleeve Heat Shrink Labels 0.235"W x 0.75"H (0.6cm W x 1.9cm H)	80/Roll	45.57

Item #	Description	Qty/Uom	1-9	10-24	25-99	100+
--------	-------------	---------	-----	-------	-------	------

Cable Labels - Wraparound Style, 3 Sizes to Choose From

CL0515	Cable Labels, .50"L x 1.5"W x .50"H (1.3cm L x 3.8cm W x 1.3cm H)	30/Roll	6.85	6.71	6.58	CALL
CL1150	Cable Labels, 1.0"L x 1.5"W x .50"H (2.5cm L x 3.8cm W x 1.3cm H)	30/Roll	9.15	8.97	8.78	CALL
CL1375	Cable Labels, 1.0"L x 3.75"W x 1.0"H (2.5cm L x 9.5cm W x 2.5cm H)	30/Roll	6.85	6.71	6.58	CALL

Note: CL Series labels are not intended for use with Brady printers.



BMP21-PLUS



BMP41



BMP51



TLS2200

CLEARER AND
FASTER
THERMAL
TRANSFER
TYPE



M21-375-499



M-51-427



M71-17-351



PTL19427



MC-500-595-OR-BK

Labels wrap around cable for easy identification.

Applicability of Terms and Conditions

The Terms and Conditions on this page will govern all sales by L-com, Inc. and its subsidiaries ("us", "we") unless otherwise agreed to in writing, signed by L-com at its home office in North Andover, Massachusetts, by an authorized agent. Terms and Conditions contained in Buyer's purchase order or any other document that are different from or in addition to these Terms and Conditions are objected to, are rejected, and will not be binding on us. Buyer will be deemed to have agreed to these Terms and Conditions by issuing a purchase order number and upon receipt from us of a written acknowledgment of Buyer's placement of an order. Notwithstanding the foregoing, if we at Buyer's request, commence performance in any way prior to receipt by Buyer of our written acknowledgement, Buyer's acceptance of these Terms and Conditions will be deemed to have occurred on the date such performance commences. If for any reason, our Quotation is deemed an acceptance of an offer made by Buyer, such acceptance is expressly conditioned on Buyer's assent to these Terms and Conditions, which assent will be evidenced by the earlier of Buyer's acceptance of items delivered by us or any other performance by Buyer or by us. We will proceed to sell items only if Buyer assents to these Terms and Conditions.

Application Disclaimer

Products sold by us are not intended for use in life support or other medical devices or systems, life-critical applications, emergency response or safety related systems, or in connection with any product using nuclear power, or in the aircraft, aviation, aeronautical, aerospace, defense or related industries or for uses or in industries not otherwise provided in the product description. Any such use of products sold by us is at Customer's sole risk, and Customer agrees to indemnify and hold us harmless from and against any loss, claims, damages, liability, or cost (including court costs and attorney's fees) resulting from such use or sale by our Customer or any customer of our Customer. Due to the numerous factors affecting the operating range of radio frequency systems we specifically do not guarantee operating range. Customers are urged to contact a local Professional Installer for assistance in designing and installing any Products. We do not provide installation services or design services. Therefore any assistance or advice provided by one of our employees or representatives in selecting equipment is given on a best-effort basis, and should not be relied upon for final decision of product selection by Customer.

Call Monitoring

As a part of a commitment to continuous improvement, we utilize systems to monitor incoming and outgoing telephone calls with customers to ensure quality of service.

Confidentiality

Buyer agrees that all information furnished by or obtained from us in connection with the sale of items hereunder will be confidential, and Buyer agrees not to (i) disclose any such information to any other person, or (ii) use such information for any purpose, other than performing this contract.

FCC Part 15 and Part 97 Notice

For systems operating within the jurisdiction of the FCC, customer acknowledges that any amplification device it purchases is intended for use only in a transmission system certified under Part 15, Part 97 or other applicable section of the rules and regulations of the Federal Communications Commission.

International Orders

International orders may be subject to any applicable customs duties, VAT, and taxes in the country of destination, all of which are the responsibility of the customer. If this transaction involves an export under Export Administration Regulations, the products exported by us are exported in accordance with the current Export Administration Regulations. Diversion, use, export or re-export contrary to United States law is prohibited. The commodities, technology and/or software sold or distributed under these terms and conditions of sale may not be exported or re-exported to Cuba, Iran, Libya, Sudan, North Korea or Syria or to other countries, entities and persons that are ineligible under United States law to receive United States commodities, technology and/or software.

Jurisdiction and Venue

Customer agrees that any legal action brought against us shall be governed by the laws of the State of Massachusetts or State of Florida (respectively) without regard to its conflict of law principles. Customer agrees that the sole jurisdiction and venue for any litigation arising from any purchase shall be an appropriate federal or state court of competent jurisdiction located in Essex County, Massachusetts or Palm Beach County, Florida.

Limitation of Liability

In no event shall we, our Directors, Officers, Employees and Representatives be liable for indirect, special, incidental, consequential, punitive or other damages including but not limited to loss of use, loss of data, loss of business income or profits or breach of implied warranties of any kind arising out of the purchase, use or performance of the Products, whether or not it has been advised of the possibility of such damages. Some localities do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Remedies and Limitations on Remedies

In the event of any material breach of the warranty, we will, at our sole

option, credit Buyer's account or repair any defective goods or furnish a replacement part or goods, all subject to Buyer providing written notice of the alleged breach within the time required. The remedies set forth herein shall be the sole and exclusive remedies available to buyer so that our credit of Buyer's account or repair or replacement is a fulfillment of all our obligations. We shall not be liable for any special, consequential, incidental or punitive damages of any kind, nor under any circumstance shall we be liable for damages beyond the price of the goods purchased by Buyer, whether in contract, in tort or under any warranty or other use.

Notices

Any notice to us required or permitted hereunder will be deemed to have been effectively delivered if in writing and served by personal delivery to us or sent by registered or certified mail with return receipt requested, postage prepaid, to us at the address specified.

Order Acceptance

Your receipt of an email or other form of order confirmation does not constitute our acceptance of your order or a confirmation of an offer to sell. We reserve the right, without prior notification, to limit the order quantity on any item and/or refuse service to any customer. All orders are subject to review and acceptance by us. Verification of information may be required prior to the acceptance of any order.

Pricing and Specifications

All prices and specifications are subject to change without notice. We reserve the right to change pricing, products and specifications, or discontinue items at our sole discretion for any reason whatsoever including, but not limited to changing market conditions, product discontinuation, component unavailability, manufacturing cost changes and errors in advertisements.

Returns

Customers wishing to return products must first obtain a Return Material Authorization (RMA) number from a Customer Service representative. This number must be printed on the outside of the package in order for it to be received and processed. Merchandise must be shipped prepaid. We will determine if credit will be issued upon evaluation of the product and packaging after it's returned to us. Other details concerning returns are as follows:

Stock Item Returns

Items ordered in error must have a Return Material Authorization (RMA) number issued within 30 days of the original order. These parts are eligible for full credit only if the returned products and packaging are in mint and salable condition. A repackaging/restocking charge not to exceed 25% of the sale price may be charged on any products not returned unopened. Under no circumstances will credit be issued after 30 days from date of invoice or for orders exceeding \$500.00 in total value. All freight charges are the responsibility of the customer.

Custom Product and Tool Returns

Custom Products and tools are not returnable for any reason unless they are found to be defective.

Defective Item Returns

Defective items must have a Return Material Authorization (RMA) number called in prior to shipping.

Distributed Item Returns

Products distributed by L-com, Inc. carry the warranty of the respective manufacturer only. After 30 days from invoice all merchandise returns for distributed products must be handled directly with that manufacturer in accordance with their warranty.

Sales and Use Taxes

Any L-com orders shipped to or picked up in California, Florida, Massachusetts, Washington, Texas, Pennsylvania, New Jersey or Michigan will include applicable sales tax. The Customer must pay this tax to L-com unless the Customer provides a valid "Exempt or Resale Certificate" for the applicable state when establishing their account. Customer shall be solely responsible for all sales or use taxes, or other taxes, on orders shipped to any other state. Sales tax will be charged on product cost and shipping and handling where applicable and required by law.

Shipping and Processing

All orders are shipped FOB our plant in North Andover, MA or our plant in Boca Raton, FL, respectively. The minimum shipping and processing charge for domestic ground shipments is \$10.95.

Shortages

Claims for shortages must be reported within 5 business days of receiving the order, otherwise these orders will be deemed as complete.

Tolerances and Variations

Except in the particulars specified by Buyer and agreed to in writing by us, the goods being sold to Buyer will be produced in accordance with our standard practices. All goods, however, including those produced to meet an exact specification, will be subject to tolerance and variations consistent with good manufacturing practices in regard to dimension, weight, section, composition, mechanical and electrical properties; to normal variations in surface and internal conditions and in quality; and to deviations from tolerances and variations consistent with practical testing and inspection methods.

Export Compliance

Each party agrees to comply with all applicable governmental

regulations including, but not limited to, the requirements of Arms Export Control Act, 22 U.S.C.27512794, the International Traffic in Arms Regulations (ITAR), 22 C.F.R. 120 et seq., and the Export Administration Regulations, 15 C.F.R. 730774 as they relate to the import, export, re-export, transfer or re-transfer of information and/or Products and/or Buyer or Seller Property. Without limiting the foregoing, neither the Buyer nor the Seller shall disclose or deliver any information or Products and/or Buyer or Seller Property provided hereunder in any manner contrary to any applicable export or import laws and regulations. The Buyer and the Seller acknowledge that these laws and regulations impose restrictions on import, export and transfer to third countries of certain categories of information and products, and that authorizations or licenses from the applicable regulatory agency may be required before such information and Products and Buyer or Seller property can be disclosed or delivered hereunder, and that such authorizations or licenses may impose further restrictions on use and further disclosure or delivery of such information and Products and/or Buyer or Seller Property.

The Seller shall not be liable for delays or refusals by governmental authorities or other authorities to grant licenses or approvals, nor for suspension or revocation thereof, nor for changes in export classification. Buyer must deliver requested information, including requested end-user information, necessary for export licenses to be granted, and or necessary for the Seller to determine if a license or other type of authorization is required.

For all Custom orders, Buyer shall provide Seller with export classification information for all Buyer property and information (including Buyer drawings) delivered to Seller in relation to this order. Export classification information includes the applicable export control classification, the country of origin and, for hardware only, the Harmonized Tariff Code. For such Custom orders, Seller will supply Buyer with similar export classification information for Products and/or information for which Seller has design authority. Buyer and Seller will promptly notify the other upon a change in classification information.

Warranty

We warrant our manufactured products and assemblies for a period of one year from time of purchase. These products are warranted against defects in workmanship or materials under normal use. We cannot warrant our products in case of misuse, acts of God, or consequential damage. Alteration of product cancels all warranties. Under no circumstances will we be responsible for any damage beyond the replacement cost of the defective merchandise. We reserve the right to repair or replace any products that are returned under warranty. Products distributed by us carry the warranty of the respective manufacturer only. Goods manufactured by us to meet Buyer's instructions, specifications or requirements are subject to a plus or minus deviation of five percent (5%) in quantity. This warranty applies to the original purchaser only and is not transferable. This limited warranty covers normal use. The limited warranty does not cover damage incurred during shipment, caused by impact with other objects, dropping, immersion in liquid; service by anyone other than us, use not in accordance with instructions, accident, abuse, misuse, natural disasters such as flood, fire, earthquake or lightning, power surges and problems caused by use of power supplies not supplied by us. Warranty coverage will not apply in the event the serial number or brand-name has been removed, altered or defaced. EXCEPT AND TO THE EXTENT EXPRESSLY SET FORTH ABOVE, THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND WE EXPRESSLY DISCLAIM ALL WARRANTIES NOT STATED HEREIN. Some states do not allow the exclusion of implied warranties or limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

Privacy Policy

We collect the mail address, e-mail address, and phone information of those who communicate with us via written correspondence, e-mail, phone calls and information volunteered by the customer such as survey information and/or site registration. The information that you give us and information about your order may be combined with other personally identifiable information (such as demographic information and past purchase history) available from our records and other sources. This information will be used to make our future marketing efforts more efficient. This information may also be shared with other marketers to bring you offers of interest. If you prefer that we do not share your name and address with other marketers, please e-mail us at update@L-com.com or write us at the address below. L-com, Inc. Attn: Mailroom Manager, 45 Beechwood Drive, North Andover, MA 01845.

Trademarks and Copyright Notice

All trademarks referenced in this catalog or website may be the service mark, trademark, or registered trademark of the respective manufacturer. Copyright © 1985-2008 L-com, Inc. All rights reserved. L-com, the L-com Logo and Micropulse are trademarks or registered trademarks of L-com, Inc. in the United States and/or other countries and may not be used without permission of L-com, Inc. HyperAmp, HyperGain, HyperLink Logo, the Hyper-Man character and HyperLink Wireless Audio/Video logo are trademarks or registered trademarks in the United States and/or other countries and may not be used without the permission of L-com Inc.

Antennas	6-17
Accessories	17
Ceiling	17
Grid	8
Mobile Mount	16
Mounting Brackets	17
Omni	9
Panel	12, 13
Parabolic Dish	11
Patch	12, 13
Radome Covers	11
Range Extender	10
Rubber Duck	14
Sectorial Array	15
Sectorial Panel	15
Yagi	10

Audio/Video 134-159

Cable Assemblies	
3.5mm	150
Angled	136, 137, 140, 141
Armored DVI-D	141
Armored HDMI	137
BNC	148-150
DisplayPort	146
DVI	138-141
HDMI	135-137
KVM	144
RCA	145, 148
S-Video (SVHS)	145
SVGA/VGA	142-144, 147
TS (1/4")	155
XLR	155
Adapters, Couplers, Splitters	
3.5mm	150, 152
DisplayPort	146, 153
DVI	153
Gender Changers	152
HD15	152, 153
HDMI	153
RCA	145, 152
Right Angle	152
Connectors	
Field Termination	154
Mini DIN 4	152
TS (1/4")	152, 155
XLR	155
Bulk Cable	151, 193
VGA Extenders/Splitters	156
KVM Switches/Extenders	158-159
DVI/HDMI Extenders, Splitters	156
Digital Signage Products	156, 157
Rack Panels	147, 235, 236

Coaxial 160-199

Cable Assemblies - 50 Ohm	
Formable	172, 173
Low Loss 100-series	166, 167
Low Loss 195-series	167-172
Low Loss 200-series	167-170
Low Loss 240-series	167, 168, 170, 171
Low Loss 400-series	167-171, 174
Low Loss 600-series	167, 168, 170, 174
Low Loss 900-series	167, 168
RG142B	163
RG174	162-165
RG188	162-165
RG213	163, 165
RG223	163, 165
RG316	162-165
RG58	162-165
Semi-Rigid	172, 173
U.F.L. & 1.13 Mini Coax	166
Cable Assemblies - 75 Ohm	
RG179	175
RG187	175, 177
RG59	175-177
RG6	175, 177
Thinline	175-177
Cable Assemblies - Miscellaneous	
Lightning Protected	198
MIL-STD-1553B	178, 219, 222, 223
Test Leads	197
TRB	178, 219
Triaxial	223
Twinaxial	178, 222
Connectors	
50 and 75 Ohm	185-189

Lightning Protectors	198
Adapters, Couplers, Splitters	
Baluns	199
Interseries	180, 181
Kits	184, 197
Within Series	182, 183
Bulk Cable	
734/735 Type	193
1505/1506	193
Low-Loss	192
RG Series	192, 193
Tools	
Crimping	194, 195
Stripping	195
Wall Plates and Jacks	198
Kits	
Adapter	184, 197
Crimp Tool	194, 195
Terminators	196
Rack Panels	235, 242

D-Subminiature 80-103

Cable Assemblies	
Angled	88, 89
Armored	90
AT and Null Modem	86, 95
Deluxe	83, 84, 87-89, 91, 92
Deluxe Panel Mountable	91
Economy	82
Heavy Duty	84
High Density	92
LSZH Non-PVC	87
Premium	85, 86
Connectors	
Covers	94, 97
Crimp & Poke	100
Field Termination	97, 99, 154
Hoods	101, 102
Interface Modules	127
PCB	99, 100
Solder Cup	100
Waterproof	93
Adapters, Couplers, Splitters	
Adapter Kits	96, 97
Filtered	97
Gender Changers	96
Monitor	96
Right Angle Adapters	98
Serial-Null Modem	95
Socket Savers	96
Y Splitters	98
Bulk Cable	103
Greenlee Products	103
Hardware	102
Tools and Accessories	101-103
Loopbacks	97
Wall Plates	102
Rack Panels	236

Ethernet 40-79

Bulk Cable	49, 70-73
Cable Assemblies	42-49, 51, 52, 74, 76
Harsh Environment	49-54
Jacks	54, 56, 57, 59
Patch Panels	61, 66-68
Plugs	54, 64, 65
Switches	250-254
Surveillance Cameras	259

Ethernet Converters 246-249

Ethernet Switches	250-255
Network Storage Servers	255

Fiber Optic 200-215

Cable Assemblies	
APC/Simplex Single mode 9/125	212
Colored, Flex Boot, Bend-Insensitive	211
Military/Industrial	201
OM1 Multimode 62.5/125	204, 205
OM2 Multimode 50/125	206, 207
OM3 10 Gigabit Multimode 50/125	208, 209
OM4 100 Gigabit Multimode 50/125	210
Single mode 9/125	202, 203
Adapters, Couplers	203, 205, 212, 213
Bulk Cable	203, 205, 207, 209, 210
Cleaning Tools	214
Connectors	213

Pigtails	203, 205, 207, 209
Rack Panels	215, 234, 242
Splice Trays	215
Termination Enclosures	215
Test Kits	266-268

Firewire, DIN, SCSI, SATA 122-127

Cable Assemblies	
DIN and Mini DIN	126, 127
eSATA, SATA & Ultra ATA	123
Firewire	125
SCSI	124
Adapters, Couplers, Splitters	
DIN and Mini DIN	127
Firewire	125
SCSI	124
Rack Sub-Panels	239

IEEE-488 128-133

Cable Assemblies	
Deluxe	131
Molded	130
Premium	131
Connectors	133
Adapters	132, 133
Rack Panels	133
Switch Boxes	132

Lightning / Surge Protectors 34-37

AC/DC Lines	36
Coaxial	37
Current Loop Protectors	36
Ethernet	35
Load Cell/RTD	37
RS422/485/232, AISG	36
Telephone/DSL/T1	36
USB	37

Mil/Aero / MIL-STD-1553B 216-223

Adapters	221
Cable Assemblies	
Bulk	219, 222, 223
Triaxial	223
Twinaxial	219, 222
Connectors	220, 221
Relay Devices	218
Stub Data Bus Couplers	217, 218
Terminators	220
Terminal Bus Coupler Kits	218
TRS Data Bus Couplers	221

Mil/Aero Tools 224-225

Installing/Removal Tools	224, 225
Sealing Plugs	225

Patch Panels / Racks 226-245

Ethernet Patch Panels	61, 66-68, 237
Populated Rack Panels	234-237, 242
Power Cords	243
Power Strips/UPS Systems	244, 245
Rack Enclosures/Accessories	227-232
Relay Racks/Cabinets	229, 230, 233
Termination Panels	233
Universal Frames/Sub-panels	238-242

Power over Ethernet 38, 39

Power Supplies 243

RF Filters / Splitters 26-27

Bandpass Filters	27
Coax Signal Splitters	27
Diplexers	27

Serial Products 260-263

Device Servers	262
Line Drivers	261
Serial Converters	261

Security / Surveillance 256-259

Network Switch Boxes	257
Security Cameras	259

Surveillance Cameras / Systems 259

Telecom / Modular 40-79

Cable Assemblies	
50 Pin Telco/Octopus	74, 76
Angled	46, 47
Category 5e	43-49, 51
Category 6	42, 43, 46, 47

Extension Cables	76
Flat Silver Satin	55
Harsh Environment	49-54
M12 Assemblies	52
Shielded Category 5e	43, 44, 46-49
Shielded Category 6	42, 43, 46, 47
Y Splitters	77
Adapters, Couplers, Splitters	
Couplers	66-69
Covers	63, 65
Harmonicas	75
M12 Adapters	52, 53
T and Y Adapters	77, 79
Jacks	
Category 5e	56, 57
Category 6	56, 57
Category 3 and Telephone	57
Harsh Environment	50, 51, 54
Wall Plates	58, 59
Surface Mount Boxes	59, 60
Plugs	50, 64, 65
Bulk Cable	49, 70-73
Tools and Accessories	62, 63, 65
Patch Panels	61, 66-68

Test Equipment 264-269

Coaxial	265, 266
Fiber Optic	265, 268
Label Printers	269
Modular	265, 266
Network / Cable	267

UPS (Uninterruptible Power Supply) 244, 245

USB 104-121

Cable Assemblies	
3.0	105, 106
Angled	109-112
Armored	109
Deluxe	106
Latching	108
LSZH	105, 107, 108
Mini B/Micro B	107, 112, 117
Panel Mount	108, 113, 116
Premium	106, 107
Specialty	107, 117
Waterproof	114
Connectors	
Field Termination	115, 118
Hoods and Covers	118
Panel Mount	113-116
Adapters, Couplers, Splitters	
Molded	117
Panel Mount	113-116
Right Angle	117
Hubs, Converters, Cards	
Converter Cables	119
Isolators, Hubs	119, 120
Extenders	120, 121
Bulk Cable	118
Rack Panels	236

Weatherproof Enclosures 28-33

Accessories	33
Cooled / Heated	30, 31
DIN Rail	33
NID	33
Non-Powered	32, 33
PoE	30
Windowed	31

Wireless CPE / Access Points / Adapters 22-25

Access Points	23, 24
Adapters	23, 24
Dish Antenna Kits	23
MIMO Dual Polarized Antenna Kits	23
Routers / Client Bridges	24

WLAN Amplifiers 18-21

2.4 GHz	19, 20
3.5 GHz / 4.9 GHz / 5.8 GHz	21
900 MHz	21

Wireless

EnGenius	24
HyperLink	23
L-com	23
Ubiquiti	23

Modular Jacks

4-POSITION 4 CONTACT (HANDSET)

6-POSITION 4 CONTACT (RJ11)

6-POSITION 6 CONTACT (RJ12)



8-POSITION 8 CONTACT (RJ45)

8-POSITION 8 CONTACT KEYED (RJ45)

10-POSITION 10 CONTACT

USB Connectors

2.0 Type A Jack

2.0 Type A Plug

2.0 Type B Jack

2.0 Type B Plug

2.0 Micro Type B Jack

2.0 Micro Type B Plug




2.0 Mini Type B Jack (4 position)

2.0 Mini Type B Plug (4 position)

2.0 Mini Type B Jack (5 position)

2.0 Mini Type B Plug (5 position)



3.0 Type A Jack

3.0 Type A Plug

3.0 Type B Jack

3.0 Type B Plug

3.0 Micro Type B Jack

3.0 Micro Type B Plug


Mini DIN and DIN Connectors

Mini DIN 4

Mini DIN 6

Mini DIN 8

DIN 5

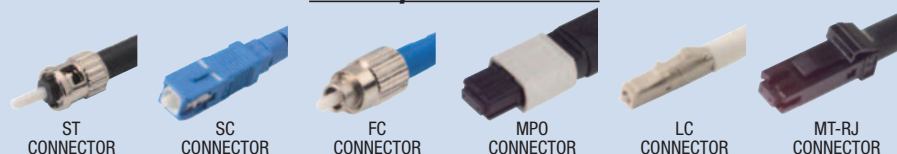Fiber Optic Connectors

ST CONNECTOR

SC CONNECTOR

FC CONNECTOR

MPO CONNECTOR

LC CONNECTOR

MT-RJ CONNECTOR

Coaxial Connectors

SMA PLUG

SMA JACK

SMB PLUG 50 Ohm

SMB JACK 50 Ohm

SMB PLUG 75 Ohm

SMB JACK 75 Ohm

SMC PLUG

SMC JACK

BNC PLUG 50 Ohm

BNC JACK 50 Ohm

BNC PLUG 75 Ohm

BNC JACK 75 Ohm

TNC PLUG

TNC JACK

RCA PLUG

RCA JACK

FME PLUG

FME JACK

"F" PLUG

"F" JACK

MMCX PLUG

MMCX JACK

RP-MMCX

MCX PLUG

MCX JACK

"N" PLUG

"N" JACK

UHF PLUG

UHF JACK

QMA PLUG

QMA JACK

TRB PLUG 78 Ohm

NMO

WAVERIDER® COMPATIBLE (MALE)

MC CARD (MALE)

Sony Ericsson® COMPATIBLE EDGE PC CARD**

ORINOCO® COMPATIBLE AP COMPATIBLE**

SIERRA WIRELESS AIRCARD® COMPATIBLE**

**See L-com.com for actual models this connector is compatible with.

* Images enlarged to show detail.

Note: Images on this page are for reference only and may not be to scale.

See all of our connectors online at L-com.com/ConnectorChart

SATA / eSATA Connectors




Serial ATA Latching Connector



Serial ATA Connector



External Serial ATA Connector

Firewire ConnectorsIEEE 1394
(Firewire)
TYPE 1IEEE 1394
(Firewire)
TYPE 2IEEE 1394b
(Firewire)
9 POSITION**Audio / Video Connectors**DVI-A DUAL LINK
(MALE)DVI-A DUAL LINK
(FEMALE)EVC
(MALE)EVC
(FEMALE)DVI-I DUAL LINK
(MALE)DVI-I DUAL LINK
(FEMALE)DFP
(MALE)DFP
(FEMALE)DVI-I SINGLE LINK
(MALE)DVI-I SINGLE LINK
(FEMALE)13W3
(MALE)13W3
(FEMALE)DVI-D DUAL LINK
(MALE)DVI-D DUAL LINK
(FEMALE)

DISPLAY PORT



MINI HDMI

DVI-D SINGLE LINK
(MALE)DVI-D SINGLE LINK
(FEMALE)

HDMI (MALE)



HDMI (FEMALE)

D-Subminiature Connectors

Shell Size 1



DB9F

Shell Size 2



DB15F

Shell Size 3



DB25F

Shell Size 4



DB37F

Shell Size 5



DB50F



HD15F



HD26F



HD44F



HD62F



HD78F

Other Common ConnectorsIEEE-488 - GPIB
(MALE)IEEE-488 - GPIB
(FEMALE)CENTRONICS PRINTER
INTERFACE
(MALE)CENTRONICS PRINTER
INTERFACE
(FEMALE)

50 CONTACT D-SUB (SCSI-1)

HIGH DENSITY 50 CONTACT
D-SUB (SCSI-2)

HPDB68 (SCSI-3)



.8mm CN68 (SCSI-5)

Note: Images on this page are for reference only and may not be to scale.

Methods of Payment: (Domestic C.O.D. ground only)

- L-com account

**Shipping Methods**

- Next Day Air Next Business Day by 10:30
- Second Day Air Two Business Days
- Ground 3-5 Business Days, Continental US Only

All orders are shipped FOB our plant in North Andover, MA or our plant in Boca Raton, FL, respectively.

NEW Call Center Hours: 8:00 A.M. - 8:00 P.M. ET (Including Tech Support)

Shipping and Processing

The **MINIMUM** shipping and processing charges are as follows:

- Domestic ground shipments: \$10.95
- Canadian ground shipments: \$16.95
- Domestic ground C.O.D.: \$21.95
- Outside the USA and Canada: \$25.00

Exact shipping charges will be added to your invoice.

Same day shipping

Orders placed before 4:00 ET ship the same day.

For priority service, please reference the codes below.


MAIL CODE:

CONTACT ID:

YOUR ACCOUNT
REPRESENTATIVE:

Wired and Wireless Networking Products for every Application

WIRELESS

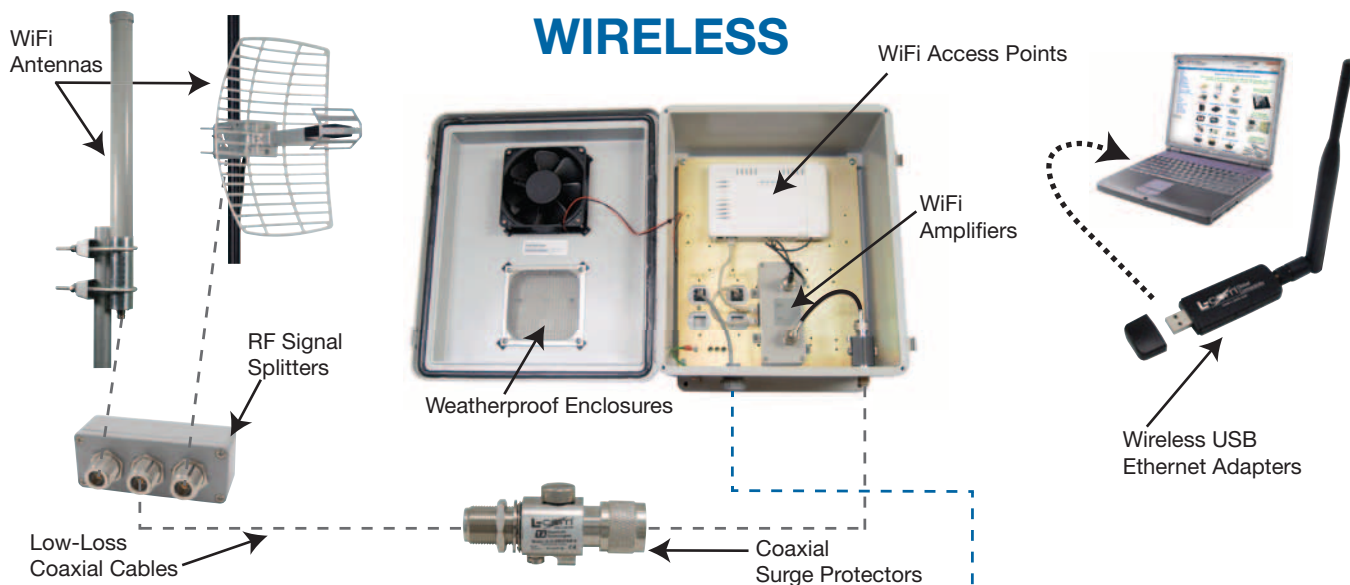

WIRED

