






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CONTACT	BRASS	GOLD
INSULATOR	PTFE	---
FERRULE	BRASS	NICKEL
GASKET	RUBBER	---
RETAINING RING	BRASS	NICKEL
SHELL	BRASS	NICKEL


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN: 5062: REDRAWN TO NEW SUPPLIER SPECS	10/5/10	D. CASTRO



RECOMMENDED
PIN CRIMP



RECOMMENDED
FERRULE CRIMP

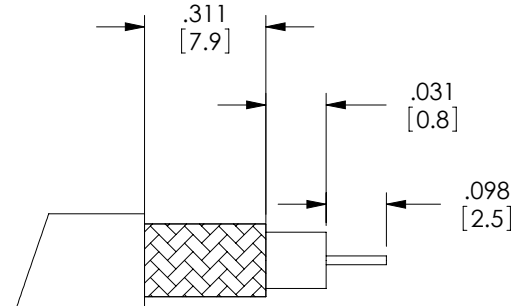

RECOMMENDED
CABLE STRIPPING

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
WITHSTAND VOLTAGE: 2500V
FREQUENCY RANGE: 0~6 GHz
VSWR: <1.50 @ 0~6 GHz
DURABILITY: > 500 CYCLE
CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY A. VAJANYI	6/24/03		
	CHECKED BY A. VAJANYI	6/24/03	CATEGORY COAXIAL	
	APPROVED BY P. PESA	6/24/03	PRODUCT DESCRIPTION CON,RP-SMA PLUG CRIMP LMR200	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. ARSP-1202
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: ARSP-1202.SLDDRW	REV. B
1AB01-044		SHEET 1 OF 1		