


Conduit Nipple

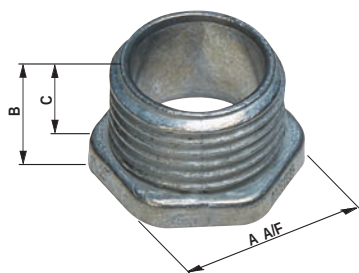

Use:

Conduit nipples are used in conjunction with locknuts to provide a short raceway between two outlet boxes or metal enclosures.

Material:

- Zinc Die-Cast

Standards:


UL 514B
CSA C22.2 No. 18.3-12

Certifications:

UL E155411 SP LR57925

Model Number	UPC (0-31857)	Trade Size	Product Dimensions (inches)			Retail Pack Quantity	Master Case Quantity
			A	B	C		
Polybag							
49202	492021	1/2"	0.93	0.59	0.44	1	25
49203	492038	3/4"	1.19	0.71	0.50	1	10
49204	492045	1"	1.39	0.84	0.62	1	25
49205	492052	1-1/4"	1.75	0.88	0.63	1	25
49206	492069	1-1/2"	2.13	0.91	0.63	1	25
49209	492090	2"	2.55	1.02	0.72	1	10
Boxed - Individual UPC							
02-57208	572082	2-1/2"	3.22	1.44	1.04	1	2

Conduit Locknut



Use:

Conduit locknuts are used for securing Rigid conduit, IMC and other threaded connectors to a steel outlet box or metal enclosure.

Material:

- Zinc-Plated Steel

Model Number	UPC (0-31857)	Trade Size	Product Dimensions (inches)			Retail Pack Quantity	Master Case Quantity
			A	B	C		
Polybag							
49101	491017	1/2"	1.12	0.09	1.00	2	100
47101	471019	1/2"	1.12	0.09	1.00	3	50
45101	451011	1/2"	1.12	0.09	1.00	20	20
48102	481025	3/4"	1.39	0.10	1.25	2	50
49102	491024	3/4"	1.39	0.10	1.25	2	100
45102	451028	3/4"	1.39	0.10	1.25	20	20
47103	471033	1"	1.70	0.13	1.56	1	50
49103	491031	1"	1.70	0.13	1.56	2	50
49104	491048	1-1/4"	2.04	0.13	1.91	1	50
47104	471040	1-1/4"	2.04	0.13	1.91	2	18
49105	491055	1-1/2"	2.36	0.13	2.16	1	25
47105	471057	1-1/2"	2.36	0.13	2.16	2	15
49106	491062	2"	2.87	0.13	2.68	1	25
47106	471064	2"	2.87	0.13	2.68	2	25
49107	491079	2-1/2"	3.52	0.16	3.25	1	10
49108	491086	3"	4.13	0.16	3.95	1	10
Bulk - No Individual UPC							
55101	551018	1/2"	1.12	0.09	1.00	100	10
55102	551025	3/4"	1.39	0.10	1.25	100	10
55103	551032	1"	1.70	0.13	1.56	100	10