

XG8000E

XG SERIES Commercial/Residential Portable Generators

A/C Rated Output Watts: 8000

A/C Maximum Output Watts: 10000

Model 6148

UPC Number: 696471061116

Emissions Certification: CARB



features

- GENERAC OHVI ENGINE
- ILLUMINATED CONTROL PANEL
- POWERBAR MONITORS WATT USAGE
- ENGINE CONTROLS LOCATED ON CONTROL PANEL
- FULL-WRAP, HEAVY DUTY FRAME TUBING
- NEVER-FLAT, RALLY-STYLE WHEELS
- HOUR METER WITH MAINTENANCE RESETS
- COVERED OUTLETS FOR PROTECTION FROM THE ELEMENTS
- LOW-OIL SHUTDOWN TO PREVENT ENGINE DAMAGE
- GFCI OUTLET PROTECTION

customer connections

Connection Outlets


A	4X5-20R.GFCI
B	1x14-30R

Circuit Breakers

M	(2) 20A
N	(2) 30A

Other Features

H	Power Bar
I	Illuminated Control Panel
J	Hour Meter
K	Off/On/Start Switch

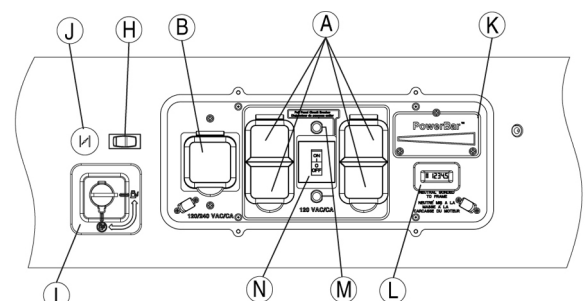

XG8000E

specifications

Product Series	XG8000E
Model	6148
Configuration/Emissions	CARB
A/C Rated Output Watts:	8000
A/C Maximum Output Watts:	10000
A/C Voltage	120/240 VAC
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	66.6/33.3
Max 120/240 VAC Amperage	83.3/41.6
Engine Displacement	410cc
Engine Type	OHVI
Engine RPM	3600
Recommended Oil	SAE 30
Lubrication Method	Full Pressure
Choke Type	On Control Panel
Fuel Shut Off	On Control Panel
Idle Control	No
Starting Method	Electric/Manual
Battery	Included
Battery Size	12VDC 10 Ahr
Low Oil Shutdown Method	Low Pressure

Start Switch Type	3-Position
Switch Location	On Control Panel
Single-Point Lifting Eye	N/A
Fuel Gauge	Built-in Tank
Fuel Tank Capacity (Gal)	9
Fuel Tank Capacity (Ltrs)	34.1
Run Time at 50% (Hours)	10.00
Cord Set	20' 30A
Handle Style	Folding
Wheel type	9.5" Solid Wheels
Maintenance Kit	Included
Warranty - Residential	2 Year
Warranty - Commercial	1 Year

dimensions and weights

Length (L)	31.5
Width (W)	25.5
Height (H)	28.0
Extended Length (EL)	48.5
Carton Length	31.8
Carton Width	20.5
Carton Height	27.5
Unit Weight (lbs)	235.0
Shipping Weight (lbs)	254.0

